

NEKO
THINK DESIGN
www.nekolighting.com

NEKO
THINK DESIGN

2023 Collection
www.nekolighting.com

2023

2023

NEKO
THINK DESIGN

NEKO LIGHTING AG
Kreuzstrasse 2
CH-8008 Zürich / Switzerland
+41 44 451 80 15
sales@nekolighting.com
www.nekolighting.com



NEKO
THINK DESIGN
www.nekolighting.com

NEKO vereint europäisches Denken und chinesische Effizienz

Die Schweizer Firma NEKO LIGHTING bietet seit 2013 effiziente und qualitativ hochwertige LED Architekturbeleuchtung zu einem attraktiven Preis-Leistungsverhältnis. Kombiniert werden europäisches Denken und chinesische Effizienz zur gemeinsamen Firmenphilosophie „Think Design“.

Eigentümer ist Sven Speissegger (Schweiz), welcher über eine langjährige und umfangreiche Erfahrung im Beleuchtungsmarkt verfügt.

Firmensitz und Zentrale des Unternehmens sind in der Schweiz. Aktuell betreibt NEKO eine eigene Produktions- und Beschichtungsanlage in China.

In Deutschland, Frankreich, England, Nordamerika/Canada, Peking und Shanghai befinden sich im NEKO Besitz Vertriebsstützpunkte. Eigene Lagerhaltung ist in Deutschland und China vorhanden.

NEKO Leuchten werden exklusiv über ein Distributorennetz in zwischen mehr als 90 Ländern weltweit vertrieben.

Von Beginn an produzierte NEKO nachhaltige LED Leuchten. Für die Produkte setzt NEKO ausschließlich hochwertige LED-Chips namenhafter Hersteller, z. B. Osram, Samsung, Citizen ein. Die verwendeten Treiber besitzen das ENEC-Zeichen.

Jedes NEKO Produkt für den Innenbereich hat eine Garantie von 5 Jahren (NEKO Produkte für den Außenbereich haben 3 Jahre Garantie). 2019 investierte NEKO in die Produktionsanlage und in die lichttechnischen Labore in China. Die Expansion erforderte größere Räume und einen neuen Standort für die Firma.

NEKO
THINK DESIGN
www.nekolighting.com

NEKO: the union of European thinking and Chinese efficiency

NEKO: the union of European thinking and Chinese efficiency. NEKO LIGHTING provides high quality as well as efficient LED-lighting solutions at a very competitive price/performance ratio since 2013. By uniting European thinking and Chinese efficiency NEKO created its corporate philosophy “Think Design”.

NEKO is owned by Sven Speissegger (Switzerland), with a long track record and extensive know-how in the lighting market.

NEKO with its registered and head office in Switzerland owns a production facility as well as a coating plant in China.

The corporation runs with NEKO owned offices in Germany, France, Great Britain, North America/Canada, Beijing and Shanghai.

NEKO lights are exclusively sold via a distributor network in more than 90 countries worldwide.

NEKO LED-lights were sustainably produced right from the beginning and are solely fitted with premium LED-Chips by renowned manufacturers such as Osram, Samsung and Citizen. All drivers installed come with ENEC-labeling.

Each and every NEKO interior lighting product with a 5-Year Warranty (exterior lighting products with a 3-Year Warranty). In 2019 NEKO expanded due to needing larger premises and a new site and invested in its production facility and lighting laboratories in China.

NEKO
THINK DESIGN
www.nekolighting.com

INDEX


MINUX Series

NEW



009-0010

SENSE 45 Series

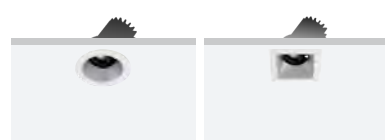

029-030

SENSE 68 Series



037-040

SENSE 100 Series


NEW



074

SENSE 125 Series


NEW

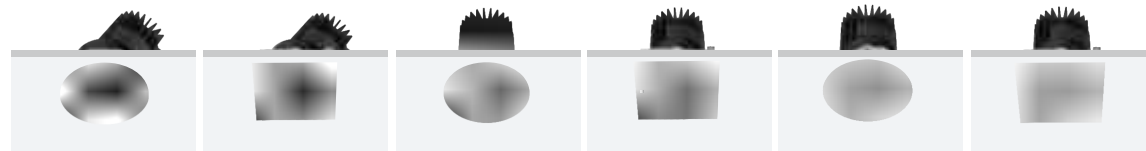

086

SENSE 150 Series


NEW

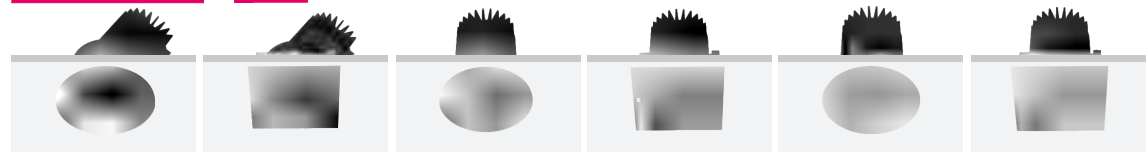

098

VISION Series


NEW

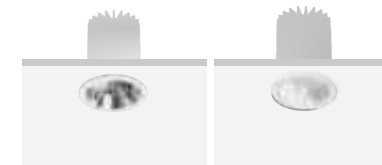

■ 103-104


TAKEO Pro Series

NEW

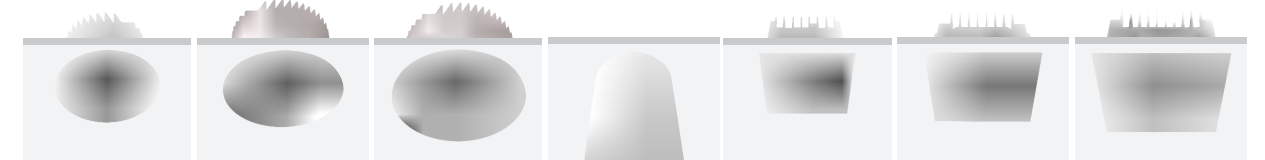


121-122

TAKEO Series

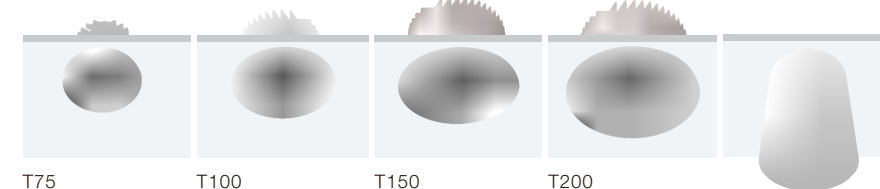

■ 135-138

■ 139-140

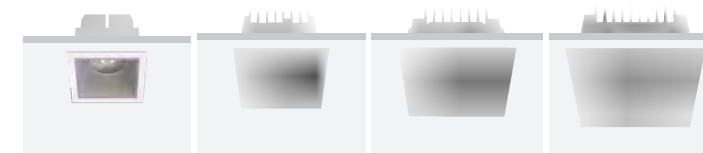

■147-148

NEKO Code Introduction

[Code_Prefix]-[Electrical-optical Info.]-[Color Info]-[Accessories]

******** - * ** *** *** * - * * - *

SSR1 - 9 30 28 13 D - W S - H

↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓

Acronym of Model CRI CCT Beam Angle Power Lighting Control Fixture Color Reflector / Decoration Ring Color Accessories

SSR1_0202812D_WS_LL

- SENSE100, Round Trim, Adjustable Version,
- CR190, CCT3000K, Beam 28D, 13W, DALI Control,
- White Trim, Specular 2nd Reflector,
- with Honeycomb.


SLS3-940WW25A-WM

- SENSE150, Square Trim, Wall Washer,
- CRI90, CCT4000K, Wall Washer, 25W, 1-10V Control,
- White Trim, Matt 2nd Reflector.


CLUB LED Module



M3
■ 153-154



M4
■ 155-156



M4 Pro
■ 157-164

CLUB Trim Series



TA5



TA6



TA7



TA8



TRF1



TRF1-IP44



TSA1




TSA1-IP44




TSA2



TSA3



TSA1D
■ 165-194



TSA2D



TSA3D


SKYJACK Series




SKYJACK A68
■ 197-198



SKYJACK D
■ 199-200



SKYJACK F
■ 201



SKYJACK A145
■ 203

KENZO Series



K1X30
■ 207

K1X55
■ 208

K1X70
■ 209-210

FUSION Fixed



FUSION FF1
■ 221



FUSION FF2
■ 223



FUSION FF3
■ 225



FUSION FX4
■ 227



FUSION FF5
■ 229



FUSION FF10
■ 231

FUSION IP65 Series

! NEW



FUSION FF2-IP65
■ 233



FUSION FF3-IP65
■ 234



FUSION FF5-IP65
■ 235



FUSION FF10-IP65
■ 236

FUSION Fixed Trimless



FUSION FFT5
■ 237



FUSION FFT10
■ 238

FUSION Adjustable



FUSION FA5
■ 239



FUSION FA10
■ 241

FUSION Wall Washer



FUSION FW5
■ 243



FUSION FW10
■ 245

FUSION General Light



FUSION FG5
■ 247



FUSION FG10
■ 248

FUSION Adjustable Spotlight



FUSION FS1
■ 253



FUSION FS2
■ 254




FUSION FS3
■ 255



FUSION FS6
■ 256



FUSION FF3 FS1
■ 257



FUSION FF6 FS2
■ 258

FUSION Fixed Higher Efficiency

! NEW



FUSION FFE1
■ 260



FUSION FFE3
■ 261




FUSION FFE5
■ 262



FUSION FFE10
■ 263


FUSION Linear System

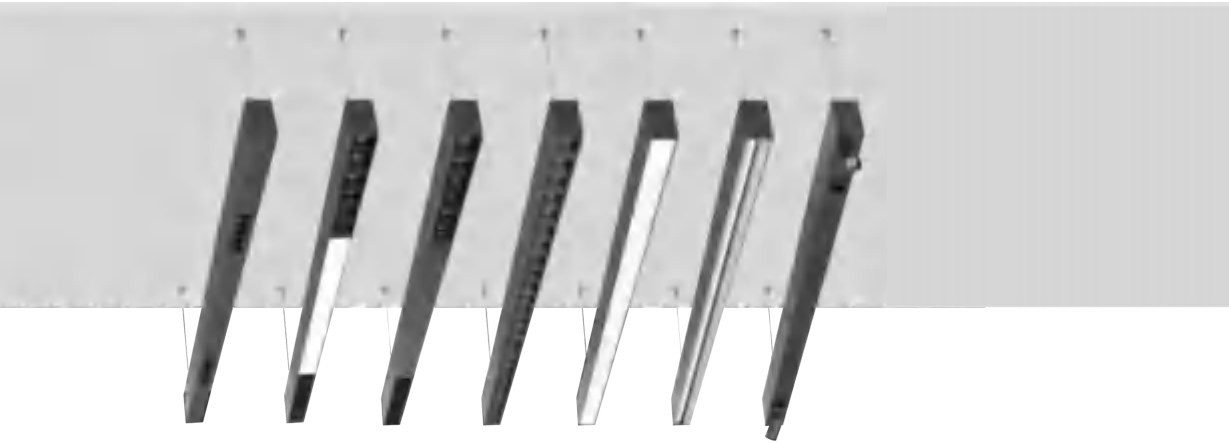

FUSION Linear System
■ 265-300

DASH 40 & DASH 50 Series

! NEW

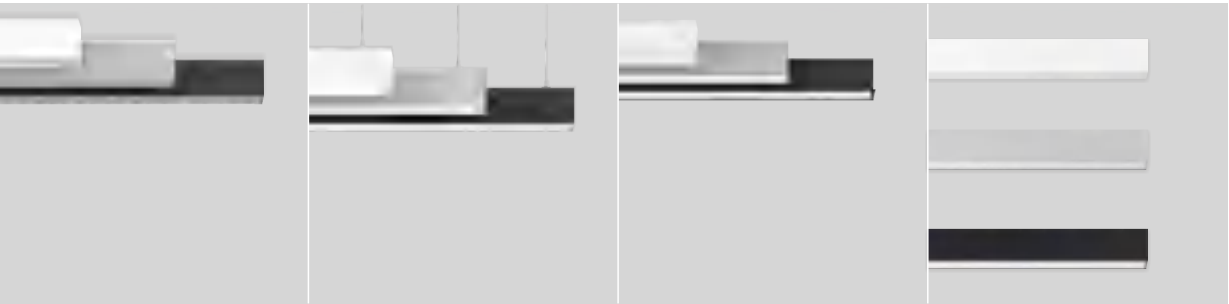

Surface Mounted Pendant Trim Recessed Wall Mounted
■ 301-326

SPACE 60 Linear System


! NEW



SPACE 60 Linear System
■ 327-338

MODULINE 26 Linear System

! NEW

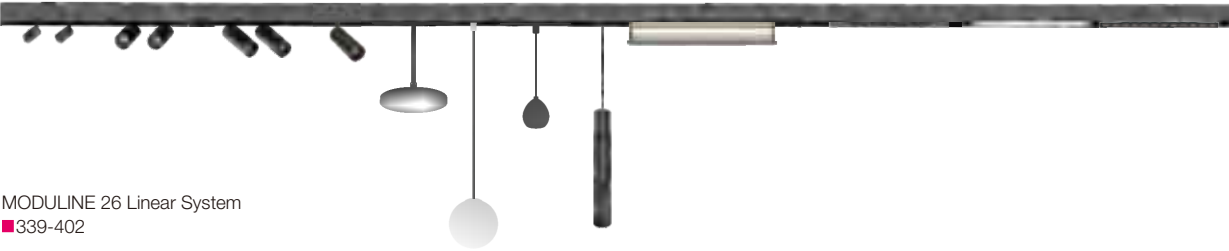

MODULINE 26 Linear System
■ 339-402

GAME Ceiling Light Series



GAME
■ 413-420

SUGAR Ceiling Light Series



SUGAR
■ 425-440

GINGER & PEPPER Series



GINGER 400 GINGER 600 PEPPER 400
■ 443-444 ■ 445 ■ 447-448

MINT Ceiling Light Series

! NEW



MINT 280
■ 449-452

SKY Family Ceiling Light




SKYDRIVER SDRC SKYDRIVER SDSC SKYJOY Single SJSC SKYJOY Double SJDC SKYLINE SL5C
■ 455 ■ 456 ■ 457-458 ■ 459-460 ■ 461

MIU Series



BREEZE Series

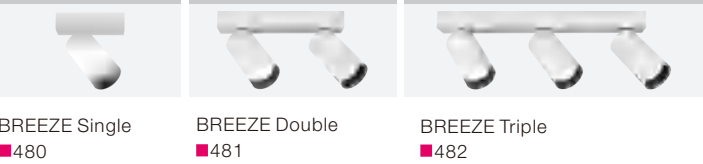


VIBES Series


! NEW



Ceiling Mounted PURE Series

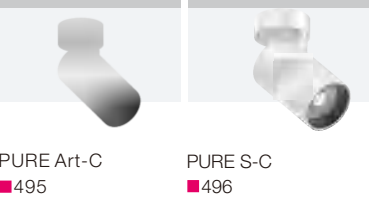

PURE Series Tracklight

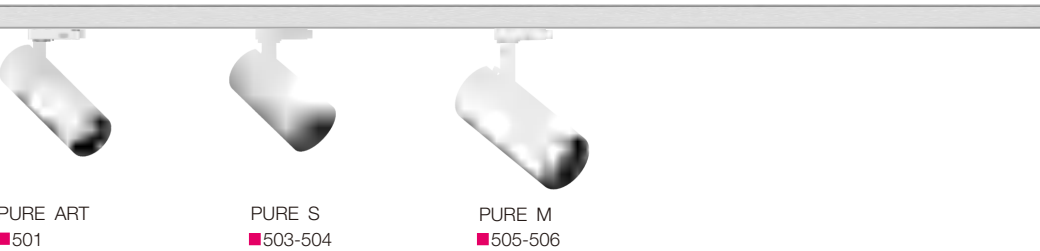


ROXY Series Tracklight



INLINE Series Tracklight




KOI Series Wall Light

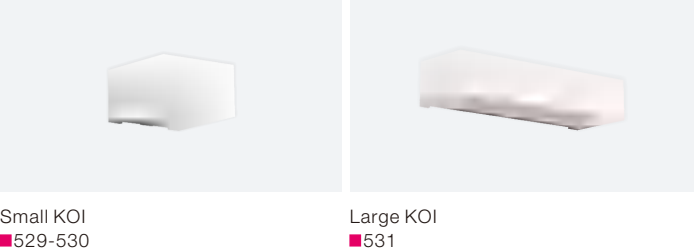


VANILLA Neon Flex Series

! NEW

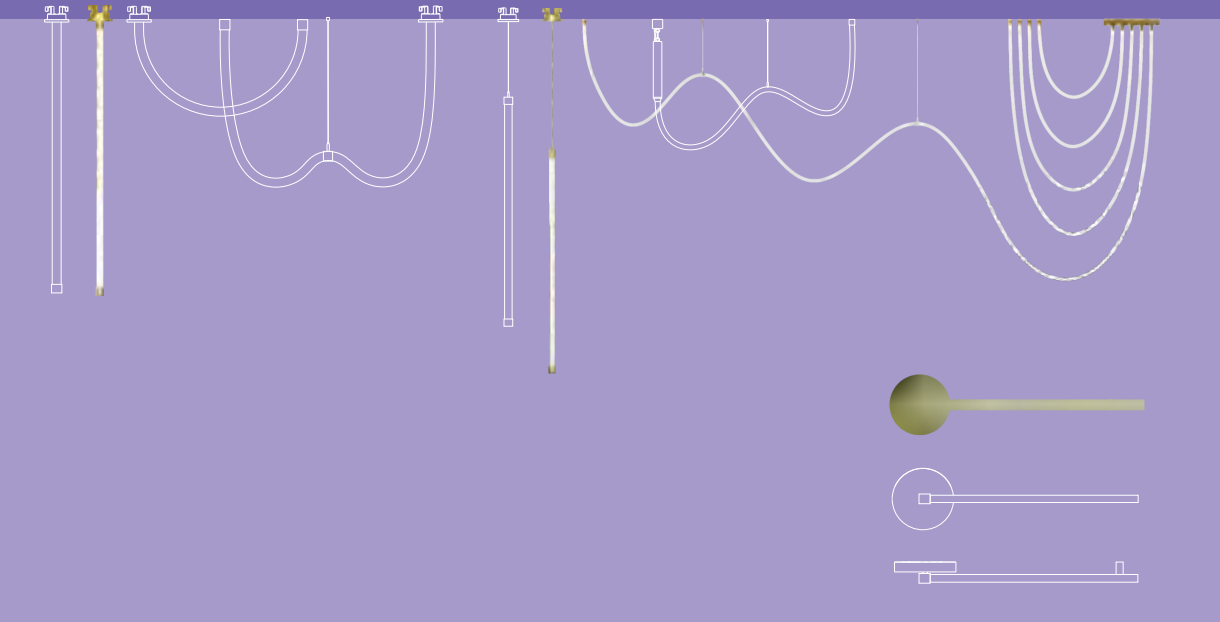

INDEX

SEAPOINT Series




SEAPOINT
■ 577

LAKEPOINT Series

! NEW




LAKEPOINT Fixed
■ 579



LAKEPOINT Adjustable
■ 581

CARMEL Series



SKYSURFER SSRC
■ 583



CARMEL Round
■ 585



CARMEL Square
■ 585

CLIFTON Series




CLIFTON
■ 587

RIVA Series

! NEW



RIVA Round
■ 589



RIVA Square
■ 591

CAMPSBAY Series



CAMPSBAY Single
■ 593



CAMPSBAY Double
■ 593

LAGOON Series



LAGOON
■ 595

CRUZ D Series


! NEW



CRUZ D
■ 597

CAPRI Series

! NEW



CAPRI
■ 599

BAY Series



BAY
■ 601

ASCONA Series



ASCONA
■ 603

NICE Series

! NEW



NICE 250S & NICE 250D
■ 605




NICE 500S & NICE 500D
■ 607

St.Tropez Series



St.Tropez
■ 609

Capetown-Recessed Series




Capetown Round-Recessed
■ 611



Capetown Square-Recessed
■ 611

Capetown-Surface Series



Capetown Round-Surface
■ 613



Capetown Square-Surface
■ 613

CALIFORNIA Series



CALIFORNIA 12
■ 615



CALIFORNIA 16
■ 615


DURBAN Series




DURBAN
■ 617

POSITANO Series

! NEW

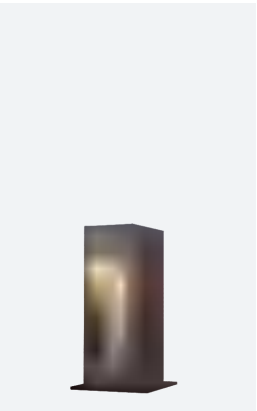


POSITANO 300
■ 619

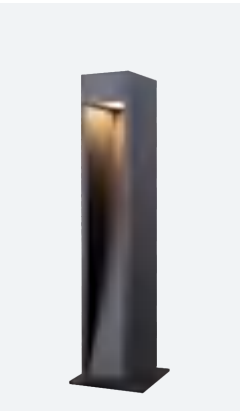


POSITANO 600
■ 619

PORTOFINO Series



PORTOFINO S
■ 621



PORTOFINO M
■ 621




PORTOFINO L
■ 621



PORTOFINO Adjustable
■ 623

AFTER7 Series



AFTER7 Mini
■ 625



AFTER7 Maxi
■ 626


TERARACE Series



TERARACE Micro
■ 627



TERARACE Nano
■ 628



TERARACE Mini
■ 629



TERARACE Maxi
■ 630





Model No.	MINUX 38		MINUX 44	MINUX 57	
Product Photo					
Dimension (mm)					
Cutout (mm)					
Wattage	6W		9W	13W	
CCT	2700K/ 3000K/ 4000K		2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	
CRI	>90		>90	>90	
Beam Angle	18°/ 38°/ 50°		20°/ 40°/ 50°	18°/ 36°/ 50°	
Lumen Output	450lm @CRI90 3000K		850lm @CRI90 3000K	1000lm @CRI90 3000K	
IP	IP54			IP54	
Dimming	On/ Off, Phase Dim, 0/1 -10V Dim, DALI Dim			On/ Off, Phase Dim, 0/1 -10V Dim, DALI Dim	
Accessory	 honeycomb			 honeycomb	
Trimless Version					
Reflector Color	Dark Light Matt White Black Gold			Dark Light Matt White Black Gold	
Trim Color	Standard: White Available: Black/ Customized			Standard: White Available: Black/ Customized	



White Reflector




Gold Reflector




6 W	8 W	12 V	500 mA	90	2700K	18° 38° 50°	500lm 500lm 500lm	420lm 420lm 420lm	MIF3-9271806N-WW MIF3-9273806N-WW MIF3-9275006N-WW
					3000K	18° 38° 50°	550lm 550lm 550lm	450lm 450lm 450lm	MIF3-9301806N-WW MIF3-9303806N-WW MIF3-9305006N-WW
					4000K	18° 38° 50°	600lm 600lm 600lm	500lm 500lm 500lm	MIF3-9401806N-WW MIF3-9403806N-WW MIF3-9405006N-WW
6 W	8 W	12 V	500 mA	90	2700K	18° 38° 50°	500lm 500lm 500lm	420lm 420lm 420lm	MIF3-9271806N-WG MIF3-9273806N-WG MIF3-9275006N-WG
					3000K	18° 38° 50°	550lm 550lm 550lm	450lm 450lm 450lm	MIF3-9301806N-WG MIF3-9303806N-WG MIF3-9305006N-WG
					4000K	18° 38° 50°	600lm 600lm 600lm	500lm 500lm 500lm	MIF3-9401806N-WG MIF3-9403806N-WG MIF3-9405006N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Trimless Version available




Trimless code for MIF3-9405006N-WM → MIT3-9405006N-WM



Preinstall Trimless code for MIF3-9405006N-WM → MIE3-9405006N-WM



6W	CRI90	2700K 3000K 4000K	18° 38° 50°	CITIZEN 50,000h@L80B10	UGR < 19	IP54	5 GUARANTEED	CB	CE	ETL Intertek
----	-------	-------------------------	-------------------	---------------------------	-------------	------	-----------------	----	----	-----------------



Matt Reflector



Black Reflector



Dark Light Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	12 V	500 mA	90	2700K	18° 38° 50°	500lm 500lm 500lm	420lm 420lm 420lm	MIF3-9271806N-WM MIF3-9273806N-WM MIF3-9275006N-WM
					3000K	18° 38° 50°	550lm 550lm 550lm	450lm 450lm 450lm	MIF3-9301806N-WM MIF3-9303806N-WM MIF3-9305006N-WM
					4000K	18° 38° 50°	600lm 600lm 600lm	500lm 500lm 500lm	MIF3-9401806N-WM MIF3-9403806N-WM MIF3-9405006N-WM
6 W	8 W	12 V	500 mA	90	2700K	18° 38° 50°	500lm 500lm 500lm	420lm 420lm 420lm	MIF3-9271806N-WB MIF3-9273806N-WB MIF3-9275006N-WB
					3000K	18° 38° 50°	550lm 550lm 550lm	450lm 450lm 450lm	MIF3-9301806N-WB MIF3-9303806N-WB MIF3-9305006N-WB
					4000K	18° 38° 50°	600lm 600lm 600lm	500lm 500lm 500lm	MIF3-9401806N-WB MIF3-9403806N-WB MIF3-9405006N-WB
6 W	8 W	12 V	500 mA	90	2700K	18° 38° 50°	500lm 500lm 500lm	420lm 420lm 420lm	MIF3-9271806N-WC MIF3-9273806N-WC MIF3-9275006N-WC
					3000K	18° 38° 50°	550lm 550lm 550lm	450lm 450lm 450lm	MIF3-9301806N-WC MIF3-9303806N-WC MIF3-9305006N-WC
					4000K	18° 38° 50°	600lm 600lm 600lm	500lm 500lm 500lm	MIF3-9401806N-WC MIF3-9403806N-WC MIF3-9405006N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory





Honeycomb

Code for MIF3-9305006N-WM with Honeycomb
MIF3-9305006N-WM-H



9W	CRI90	2700K 3000K 4000K	20° 40° 50°		UGR < 19	IP 54		CB	CE	
50,000h@L80B10										



Matt Reflector



Black Reflector



Dark Light Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	90	2700K	20° 40° 50°	950lm 950lm 950lm	800lm 800lm 800lm	MIF4-9272009N-WM MIF4-9274009N-WM MIF4-9275009N-WM
						3000K	20° 40° 50°	1000lm 1000lm 1000lm	MIF4-9302009N-WM MIF4-9304009N-WM MIF4-9305009N-WM
						4000K	20° 40° 50°	1050lm 1050lm 1050lm	MIF4-9402009N-WM MIF4-9404009N-WM MIF4-9405009N-WM
9 W	11 W	36 V	250 mA	90	2700K	20° 40° 50°	950lm 950lm 950lm	800lm 800lm 800lm	MIF4-9272009N-WB MIF4-9274009N-WB MIF4-9275009N-WB
						3000K	20° 40° 50°	1000lm 1000lm 1000lm	MIF4-9302009N-WB MIF4-9304009N-WB MIF4-9305009N-WB
						4000K	20° 40° 50°	1050lm 1050lm 1050lm	MIF4-9402009N-WB MIF4-9404009N-WB MIF4-9405009N-WB
9 W	11 W	36 V	250 mA	90	2700K	20° 40° 50°	950lm 950lm 950lm	800lm 800lm 800lm	MIF4-9272009N-WC MIF4-9274009N-WC MIF4-9275009N-WC
						3000K	20° 40° 50°	1000lm 1000lm 1000lm	MIF4-9302009N-WC MIF4-9304009N-WC MIF4-9305009N-WC
						4000K	20° 40° 50°	1050lm 1050lm 1050lm	MIF4-9402009N-WC MIF4-9404009N-WC MIF4-9405009N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Honeycomb

Code for MIF4-9305009N-WM with Honeycomb
MIF4-9305009N-WM-H



White Reflector




Gold Reflector




9 W	11 W	36 V	250 mA	90	2700K	20° 40° 50°	950lm 950lm 950lm	800lm 800lm 800lm	MIF4-9272009N-WW MIF4-9274009N-WW MIF4-9275009N-WW
						3000K	20° 40° 50°	1000lm 1000lm 1000lm	MIF4-9302009N-WW MIF4-9304009N-WW MIF4-9305009N-WW
						4000K	20° 40° 50°	1050lm 1050lm 1050lm	MIF4-9402009N-WW MIF4-9404009N-WW MIF4-9405009N-WW

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Trimless Version available



Trimless code for MIF4-9405009N-WM → MIT4-9405009N-WM





Preinstall Trimless code for MIF4-9405009N-WM → MIE4-9405009N-WM





13W	CRI90	2700K 3000K 4000K	18° 36° 50°		UGR < 19	IP54		CB	CE				
-----	-------	-------------------------	-------------------	--	----------	------	--	----	----	--	--	--	--



Matt Reflector



Black Reflector



Dark Light Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code						
13 W	15 W	36 V	350 mA	90	2700K	18°	1200lm	950lm	MIF5-9271813N-WM							
							36°	1200lm	950lm	MIF5-9273613N-WM						
							50°	1200lm	950lm	MIF5-9275013N-WM						
						3000K	18°	1300lm	1000lm	MIF5-9301813N-WM						
								36°	1300lm	1000lm	MIF5-9303613N-WM					
								50°	1300lm	1000lm	MIF5-9305013N-WM					
					4000K	18°	1400lm	1050lm	MIF5-9401813N-WM							
							36°	1400lm	1050lm	MIF5-9403613N-WM						
							50°	1400lm	1050lm	MIF5-9405013N-WM						
						13 W	15 W	36 V	350 mA	90	2700K	18°	1200lm	950lm	MIF5-9271813N-WB	
													36°	1200lm	950lm	MIF5-9273613N-WB
													50°	1200lm	950lm	MIF5-9275013N-WB
					3000K							18°	1300lm	1000lm	MIF5-9301813N-WB	
													36°	1300lm	1000lm	MIF5-9303613N-WB
													50°	1300lm	1000lm	MIF5-9305013N-WB
					4000K						18°	1400lm	1050lm	MIF5-9401813N-WB		
												36°	1400lm	1050lm	MIF5-9403613N-WB	
												50°	1400lm	1050lm	MIF5-9405013N-WB	
13 W	15 W	36 V	350 mA	90							2700K	18°	1200lm	950lm	MIF5-9271813N-WC	
													36°	1200lm	950lm	MIF5-9273613N-WC
													50°	1200lm	950lm	MIF5-9275013N-WC
					3000K	18°	1300lm	1000lm	MIF5-9301813N-WC							
							36°	1300lm	1000lm	MIF5-9303613N-WC						
							50°	1300lm	1000lm	MIF5-9305013N-WC						
					4000K	18°	1400lm	1050lm	MIF5-9401813N-WC							
							36°	1400lm	1050lm	MIF5-9403613N-WC						
							50°	1400lm	1050lm	MIF5-9405013N-WC						
						Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)										

Optional accessory



Honeycomb

Code for MIF5-9305013N-WM with Honeycomb
MIF5-9305013N-WM-H



White Reflector





Gold Reflector

13 W	15 W	36 V	350 mA	90	2700K	20°	1200lm	950lm	MIF5-9271813N-WW	
						40°	1200lm	950lm	MIF5-9273613N-WW	
						50°	1200lm	950lm	MIF5-9275013N-WW	
					3000K	20°	1300lm	1000lm	MIF5-9301813N-WW	
						40°	1300lm	1000lm	MIF5-9303613N-WW	
						50°	1300lm	1000lm	MIF5-9305013N-WW	
					4000K	20°	1400lm	1050lm	MIF5-9401813N-WW	
						40°	1400lm	1050lm	MIF5-9403613N-WW	
						50°	1400lm	1050lm	MIF5-9405013N-WW	
13 W	15 W	36 V	350 mA	90	2700K	20°	1200lm	950lm	MIF5-9271813N-WG	
						40°	1200lm	950lm	MIF5-9273613N-WG	
						50°	1200lm	950lm	MIF5-9275013N-WG	
					3000K	20°	1300lm	1000lm	MIF5-9301813N-WG	
						40°	1300lm	1000lm	MIF5-9303613N-WG	
						50°	1300lm	1000lm	MIF5-9305013N-WG	
					4000K	20°	1400lm	1050lm	MIF5-9401813N-WG	
						40°	1400lm	1050lm	MIF5-9403613N-WG	
						50°	1400lm	1050lm	MIF5-9405013N-WG	
Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)										


Trimless Version available



Trimless code for MIF5-9405013N-WM → MIT5-9405013N-WM




Preinstall Trimless code for MIF5-9405013N-WM → MIE5-9405013N-WM







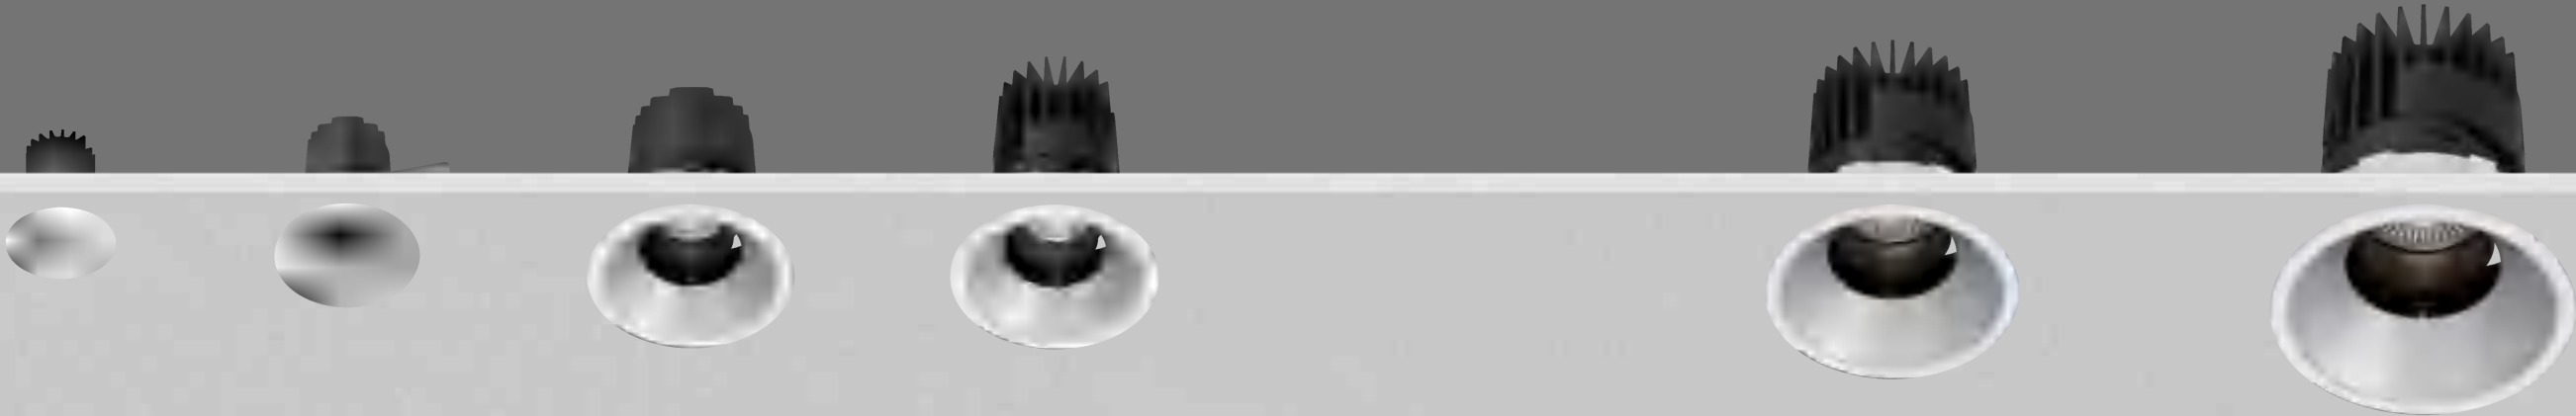

S45R1
4W 330lm-380lm



S68R1-G2
7.5W 620lm-720lm
11W 800lm-950lm



S100R1-G2
13W 1150lm-1450lm
18W 1700lm-2000lm



S100HR1-G2
25W 2000lm-2300lm



S125R1-G2
18W 1500lm-1800lm
25W 2100lm-2400lm



S150R1-G2
25W 2200lm-2500lm
38W 3400lm-3900lm




S45S1
4W 330lm-380lm




S68S1-G2
7.5W 600lm-720lm
11W 800lm-950lm



S100S1-G2
13W 1150lm-1450lm
18W 1700lm-2000lm



S100HS1-G2
25W 2000lm-2300lm



S125S1-G2
18W 1500lm-1800lm
25W 2100lm-2400lm



S150S1-G2
25W 2200lm-2500lm
38W 3400lm-3900lm





S100R7-G2

S100HR7-G2

S100R2-G2

S100HR2-G2

S125R2-G2

S150R2-G2



S100S2-G2

S100HS2-G2

S125S2-G2

S150S2-G2


13W 950lm-1100lm
18W 1300lm-1500lm



25W 1500lm-1900lm



13W 1000lm-1200lm
18W 1500lm-1700lm



25W 1900lm-2200lm



18W 1400lm-1600lm
25W 2000lm-2300lm



25W 2100lm-2400lm
38W 3100lm-3500lm



White








White



Black



Black

			
			
S100R3-G2	S100HR3-G2	S125R3-G2	S150R3-G2
			
S100S3-G2	S100HS3-G2	S125S3-G2	S150S3-G2
13W 650lm-750lm 18W 850lm-1000lm	25W 1000lm-1200lm	18W 850lm-1000lm 25W 1100lm-1300lm	25W 1100lm-1300lm 38W 1600lm-1800lm
			



White



White

















Black

















Black











Adjustable

Model No.	S45R1	S68R1-G2	S100R1-G2	S100HR1-G2	S125R1-G2	S150R1-G2	S45S1-G2	S68S1-G21	S100S1-G2	S100HS1-G2	S125S1-G2	S150S1-G2		
Product Photo														
Dimension (mm)														
Cutout (mm)														
Wattage	4W	8.5W / 7.5W / 11W	7W / 13W / 18W	25W	18W / 25W	25W / 38W	4W	8.5W / 7.5W / 11W	7W / 13W / 18W	25W	18W / 25W	25W / 38W		
CCT Optional	2700K / 3000K / 4000K	2700K / 3000K / 4000K Dim to Warm / Tunable White	2700K / 3000K / 4000K Tunable White	2700K / 3000K / 4000K	2700K / 3000K / 4000K Tunable White	2700K / 3000K / 4000K Tunable White	2700K / 3000K / 4000K	2700K / 3000K / 4000K Dim to Warm / Tunable White	2700K / 3000K / 4000K Tunable White	2700K / 3000K / 4000K	2700K / 3000K / 4000K Tunable White	2700K / 3000K / 4000K Tunable White		
CRI	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90		
Beam Angle	18° / 24° / 35° / 50°	12° / 18° / 30° / 40° / 55°	10° / 18° / 30° / 40° / 45°	18° / 30° / 40° / 45°	20° / 38° / 50°	18° / 36° / 50°	18° / 24° / 35° / 50°	12° / 18° / 30° / 40° / 55°	10° / 18° / 30° / 40° / 45°	18° / 30° / 40° / 45°	20° / 38° / 50°	18° / 36° / 50°		
Lumen Output	350lm @4W 3000K	800lm @11W 3000K	1800lm @18W 3000K	2100lm @25W 3000K	2200lm @25W 3000K	3600lm @38W 3000K	350lm @4W 3000K	800lm @11W 3000K	1800lm @18W 3000K	2100lm @25W 3000K	2200lm @25W 3000K	3600lm @38W 3000K		
IP	IP20	IP54					IP20	IP54						
Dimming	On / Off, Phase Dim, 0/1-10V Dim, DALI Dim						On / Off, Phase Dim, 0/1-10V Dim, DALI Dim							
Accessory	 Honeycomb	 Honeycomb	 Diffusion Cover	 Honeycomb	 Linear Spread Filter	 Diffusion Filter	 Honeycomb	 Honeycomb	 Honeycomb	 Diffusion Cover	 Honeycomb	 Linear Spread Filter	 Diffusion Filter	 Honeycomb
Trimless Version	Not Available	 					Not Available	 						
Reflector Color	 Matt  White  Black	 Specular  Dark Light  Matt  White  Black  Gold	 Specular  Dark Light  Matt  White  Black  Gold									 Matt  White  Black		
Trim Color	Standard: White Available: Black / Customized						Standard: White Available: Black / Customized							
														

Fixed

Model No.	S100R7-G2	S100HR7-G2	S100R2-G2	S100HR2-G2	S125R2-G2	S150R2-G2	S100S2-G2	S100HS2-G2	S125S2-G2	S150S2-G2
Product Photo										
Dimension (mm)										
Cutout (mm)										
Wattage	13W / 18W	25W	13W / 18W	25W	18W / 25W	25W / 38W	13W / 18W	25W	18W / 25W	25W / 38W
CCT	2700K/ 3000K/ 4000K Optional Dim to Warm/ Tunable White	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K Dim to Warm/ Tunable White	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K Tunable White	2700K/ 3000K/ 4000K Tunable White	2700K/ 3000K/ 4000K Dim to Warm/ Tunable White	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K Tunable White	2700K/ 3000K/ 4000K Tunable White
CRI	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90
Beam Angle	20°/ 36°/ 45°	20°/ 36°/ 45°	20°/ 36°/ 45°	20°/ 36°/ 45°	24°/ 36°/ 45°	24°/ 36°/ 45°	20°/ 36°/ 45°	20°/ 36°/ 45°	24°/ 36°/ 45°	24°/ 36°/ 45°
Lumen Output	1400lm @18W 3000K	1800lm @25W 3000K	1600lm @18W 3000K	2000lm @25W 3000K	2100lm @25W 3000K	3300lm @38W 3000K	1600lm @18W 3000K	2000lm @25W 3000K	2100lm @25W 3000K	3300lm @38W 3000K
IP	IP54						IP54			
Dimming	On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim						On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim			
Accessory										
Trimless Version										
Reflector Color	 Specular  Dark Light  Matt  White  Black  Gold						 Specular  Dark Light  Matt  White  Black  Gold			
Trim Color	Standard: White Available: Black/ Customized						Standard: White Available: Black/ Customized			
										

Wall Washer

Model No.	S100R3-G2	S100HR3-G2	S125R3-G2	S150R3-G2	S100S3-G2	S100HS3-G2	S125S3-G2	S150S3-G2
Product Photo								
Dimension (mm)								
Cutout (mm)								
Wattage	13W / 18W	25W	18W / 25W	25W / 38W	13W / 18W	25W	18W / 25W	25W / 38W
CCT Optional	2700K/ 3000K/ 4000K Dim to Warm/ Tunable White	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K Tunable White	2700K/ 3000K/ 4000K Tunable White	2700K/ 3000K/ 4000K Dim to Warm/ Tunable White	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K Tunable White	2700K/ 3000K/ 4000K Tunable White
CRI	>90	>90	>90	>90	>90	>90	>90	>90
Beam Angle	Wall Washer	Wall Washer	Wall Washer	Wall Washer	Wall Washer	Wall Washer	Wall Washer	Wall Washer
Lumen Output	900lm @18W 3000K	1100lm @25W 3000K	1200lm @25W 3000K	1700lm @38W 3000K	900lm @18W 3000K	1100lm @25W 3000K	1200lm @25W 3000K	1700lm @38W 3000K
IP	IP54				IP54			
Dimming	On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim				On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim			
Accessory								
Trimless Version								
Reflector Color								
Trim Color	Standard: White Available: Black/ Customized				Standard: White Available: Black/ Customized			
								

NEKO / SENSE 45 / S45R1
Adjustable LED Downlight

4W

CRI90

2700K

3000K

4000K

18°

24°

35°

50°

CREE

50,000h@L80B10

UGR

< 19

IP 20

5

GUARANTEED

CB

CE

45°

5-20mm

Ceiling Thickness

60

30°

35°

Ø55

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	12 V	350 mA	90	2700K	18°	480lm	330lm	SUR1-9271804N-WM	
						24°	480lm	330lm	SUR1-9272404N-WM	
						35°	480lm	330lm	SUR1-9273504N-WM	
						50°	480lm	330lm	SUR1-9275004N-WM	
					3000K	18°	500lm	350lm	SUR1-9301804N-WM	
						24°	500lm	350lm	SUR1-9302404N-WM	
						35°	500lm	350lm	SUR1-9303504N-WM	
						50°	500lm	350lm	SUR1-9305004N-WM	
					4000K	18°	550lm	380lm	SUR1-9401804N-WM	
						24°	550lm	380lm	SUR1-9402404N-WM	
						35°	550lm	380lm	SUR1-9403504N-WM	
						50°	550lm	380lm	SUR1-9405004N-WM	

Matt Reflector

White Reflector

Black Reflector

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory


Honeycomb

Code for SUR1-9302404N-WM with Honeycomb

SUR1-9302404N-WM-H



NEKO / SENSE 45 / S45S1
Adjustable LED Downlight



4W	CRI90	2700K 3000K 4000K	18° 24° 35° 50°	CREE 50,000h@L80B10	UGR < 19	IP 20	5 GUARANTEED	CB	CE				5-20mm Ceiling Thickness	60		355 55x55
----	-------	-------------------------	--------------------------	------------------------	-------------	-------	-----------------	----	----	--	--	--	-----------------------------	----	--	--------------



Matt Reflector



White Reflector



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	12 V	350 mA	90	2700K	18°	480lm	330lm	SUS1-9271804N-WM
						24°	480lm	330lm	SUS1-9272404N-WM
						35°	480lm	330lm	SUS1-9273504N-WM
						50°	480lm	330lm	SUS1-9275004N-WM
					3000K	18°	500lm	350lm	SUS1-9301804N-WM
						24°	500lm	350lm	SUS1-9302404N-WM
						35°	500lm	350lm	SUS1-9303504N-WM
						50°	500lm	350lm	SUS1-9305004N-WM
					4000K	18°	550lm	380lm	SUS1-9401804N-WM
						24°	550lm	380lm	SUS1-9402404N-WM
						35°	550lm	380lm	SUS1-9403504N-WM
						50°	550lm	380lm	SUS1-9405004N-WM
4 W	6 W	12 V	350 mA	90	2700K	18°	480lm	330lm	SUS1-9271804N-WW
						24°	480lm	330lm	SUS1-9272404N-WW
						35°	480lm	330lm	SUS1-9273504N-WW
						50°	480lm	330lm	SUS1-9275004N-WW
					3000K	18°	500lm	350lm	SUS1-9301804N-WW
						24°	500lm	350lm	SUS1-9302404N-WW
						35°	500lm	350lm	SUS1-9303504N-WW
						50°	500lm	350lm	SUS1-9305004N-WW
					4000K	18°	550lm	380lm	SUS1-9401804N-WW
						24°	550lm	380lm	SUS1-9402404N-WW
						35°	550lm	380lm	SUS1-9403504N-WW
						50°	550lm	380lm	SUS1-9405004N-WW
4 W	6 W	12 V	350 mA	90	2700K	18°	480lm	330lm	SUS1-9271804N-WB
						24°	480lm	330lm	SUS1-9272404N-WB
						35°	480lm	330lm	SUS1-9273504N-WB
						50°	480lm	330lm	SUS1-9275004N-WB
					3000K	18°	500lm	350lm	SUS1-9301804N-WB
						24°	500lm	350lm	SUS1-9302404N-WB
						35°	500lm	350lm	SUS1-9303504N-WB
						50°	500lm	350lm	SUS1-9305004N-WB
					4000K	18°	550lm	380lm	SUS1-9401804N-WB
						24°	550lm	380lm	SUS1-9402404N-WB
						35°	550lm	380lm	SUS1-9403504N-WB
						50°	550lm	380lm	SUS1-9405004N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)





Honeycomb

Code for SUS1-9302404N-WM with Honeycomb
SUS1-9302404N-WM-H

Ultra Tiny



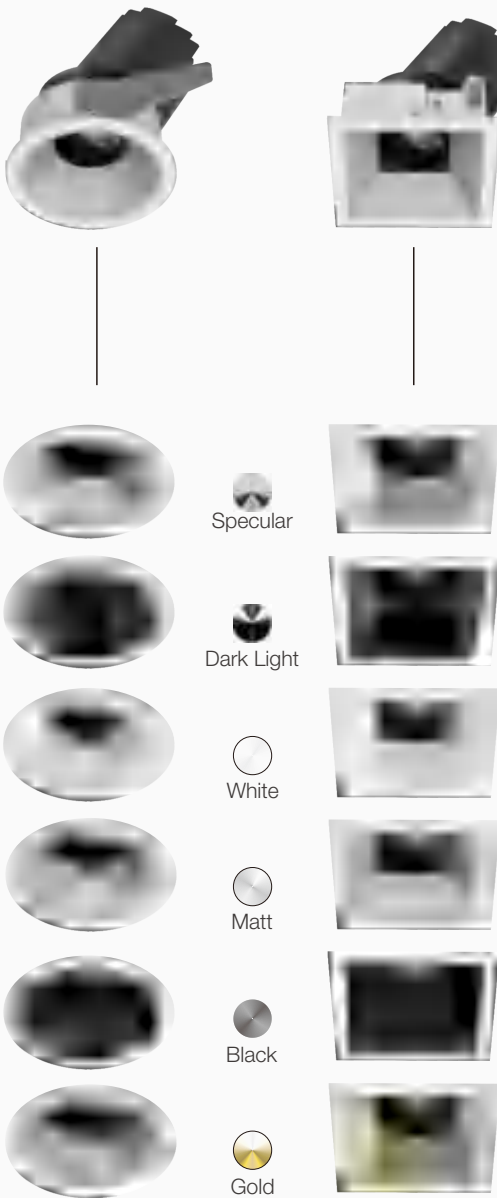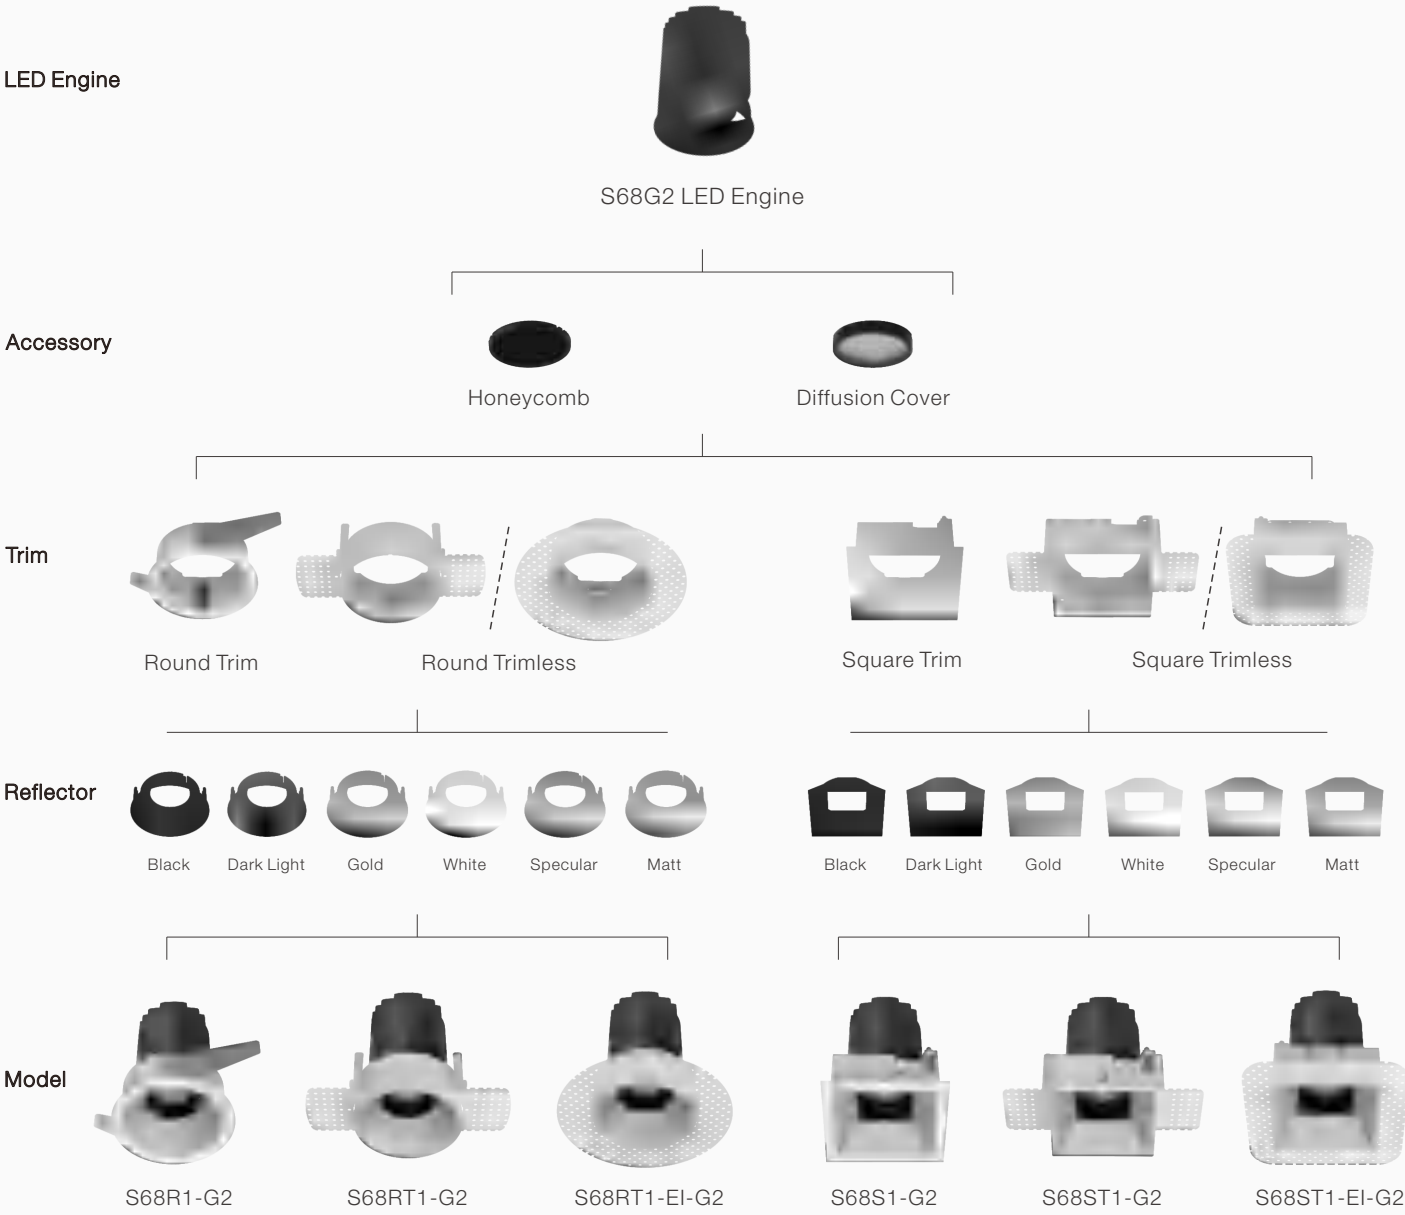

NEKO / SENSE 68 / S68R1-G2

Adjustable LED Downlight

NEW



See Details @www.nekolighting.com

7.5W
11W

CRI90

2700K
3000K
4000K

18°
30°
40°
55°

CITIZEN

50,000h@L80B10

UGR
< 19

IP54

5

GUARANTEED

CB

CE

RoHS

REACH

Intertek

68

70°

Metal Ceiling

5-20mm

Ceiling Thickness

97

355°

30°

Ø78



Specular Reflector



Matt Reflector



Black Reflector



Dark Light Reflector



White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STR1G2-9271808N-WS
						30°	850lm	620lm	STR1G2-9273008N-WS
						40°	850lm	620lm	STR1G2-9274008N-WS
						55°	850lm	620lm	STR1G2-9275508N-WS
					3000K	18°	900lm	650lm	STR1G2-9301808N-WS
						30°	900lm	650lm	STR1G2-9303008N-WS
						40°	900lm	650lm	STR1G2-9304008N-WS
						55°	900lm	650lm	STR1G2-9305508N-WS
					4000K	18°	1000lm	700lm	STR1G2-9401808N-WS
						30°	1000lm	700lm	STR1G2-9403008N-WS
						40°	1000lm	700lm	STR1G2-9404008N-WS
						55°	1000lm	700lm	STR1G2-9405508N-WS
11 W	13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STR1G2-9271811N-WS
						30°	1100lm	770lm	STR1G2-9273011N-WS
						40°	1100lm	770lm	STR1G2-9274011N-WS
						55°	1100lm	770lm	STR1G2-9275511N-WS
					3000K	18°	1200lm	800lm	STR1G2-9301811N-WS
						30°	1200lm	800lm	STR1G2-9303011N-WS
						40°	1200lm	800lm	STR1G2-9304011N-WS
						55°	1200lm	800lm	STR1G2-9305511N-WS
					4000K	18°	1300lm	850lm	STR1G2-9401811N-WS
						30°	1300lm	850lm	STR1G2-9403011N-WS
						40°	1300lm	850lm	STR1G2-9404011N-WS
						55°	1300lm	850lm	STR1G2-9405511N-WS
7.5 W	9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STR1G2-9271808N-WM
						30°	850lm	620lm	STR1G2-9273008N-WM
						40°	850lm	620lm	STR1G2-9274008N-WM
						55°	850lm	620lm	STR1G2-9275508N-WM
					3000K	18°	900lm	650lm	STR1G2-9301808N-WM
						30°	900lm	650lm	STR1G2-9303008N-WM
						40°	900lm	650lm	STR1G2-9304008N-WM
						55°	900lm	650lm	STR1G2-9305508N-WM
					4000K	18°	1000lm	700lm	STR1G2-9401808N-WM
						30°	1000lm	700lm	STR1G2-9403008N-WM
						40°	1000lm	700lm	STR1G2-9404008N-WM
						55°	1000lm	700lm	STR1G2-9405508N-WM
11 W	13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STR1G2-9271811N-WM
						30°	1100lm	770lm	STR1G2-9273011N-WM
						40°	1100lm	770lm	STR1G2-9274011N-WM
						55°	1100lm	770lm	STR1G2-9275511N-WM
					3000K	18°	1200lm	800lm	STR1G2-9301811N-WM
						30°	1200lm	800lm	STR1G2-9303011N-WM
						40°	1200lm	800lm	STR1G2-9304011N-WM
						55°	1200lm	800lm	STR1G2-9305511N-WM
					4000K	18°	1300lm	850lm	STR1G2-9401811N-WM
						30°	1300lm	850lm	STR1G2-9403011N-WM
						40°	1300lm	850lm	STR1G2-9404011N-WM
						55°	1300lm	850lm	STR1G2-9405511N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STR1G2-9271808N-WB
						30°	850lm	620lm	STR1G2-9273008N-WB
						40°	850lm	620lm	STR1G2-9274008N-WB
						55°	850lm	620lm	STR1G2-9275508N-WB
					3000K	18°	900lm	650lm	STR1G2-9301808N-WB
						30°	900lm	650lm	STR1G2-9303008N-WB
						40°	900lm	650lm	STR1G2-9304008N-WB
						55°	900lm	650lm	STR1G2-9305508N-WB
					4000K	18°	1000lm	700lm	STR1G2-9401808N-WB
						30°	1000lm	700lm	STR1G2-9403008N-WB
						40°	1000lm	700lm	STR1G2-9404008N-WB
						55°	1000lm	700lm	STR1G2-9405508N-WB
11 W	13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STR1G2-9271811N-WB
						30°	1100lm	770lm	STR1G2-9273011N-WB
						40°	1100lm	770lm	STR1G2-9274011N-WB
						55°	1100lm	770lm	STR1G2-9275511N-WB
					3000K	18°	1200lm	800lm	STR1G2-9301811N-WB
						30°	1200lm	800lm	STR1G2-9303011N-WB
						40°	1200lm	800lm	STR1G2-9304011N-WB
						55°	1200lm	800lm	STR1G2-9305511N-WB
					4000K	18°	1300lm	850lm	STR1G2-9401811N-WB
						30°	1300lm	850lm	STR1G2-9403011N-WB
						40°	1300lm	850lm	STR1G2-9404011N-WB
						55°	1300lm	850lm	STR1G2-9405511N-WB
7.5 W	9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STR1G2-9271808N-WC
						30°	850lm	620lm	STR1G2-9273008N-WC
						40°	850lm	620lm	STR1G2-9274008N-WC
						55°	850lm	620lm	STR1G2-9275508N-WC
					3000K	18°	900lm	650lm	STR1G2-9301808N-WC
						30°	900lm	650lm	STR1G2-9303008N-WC
						40°	900lm	650lm	STR1G2-9304008N-WC
						55°	900lm	650lm	STR1G2-9305508N-WC
					4000K	18°	1000lm	700lm	STR1G2-9401808N-WC
						30°	1000lm	700lm	STR1G2-9403008N-WC
						40°	1000lm	700lm	STR1G2-9404008N-WC
						55°	1000lm	700lm	STR1G2-9405508N-WC
11 W	13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STR1G2-9271811N-WC
						30°	1100lm	770lm	STR1G2-9273011N-WC
						40°	1100lm	770lm	STR1G2-9274011N-WC
						55°	1100lm	770lm	STR1G2-9275511N-WC
					3000K	18°	1200lm	800lm	STR1G2-9301811N-WC
						30°	1200lm	800lm	STR1G2-9303011N-WC
						40°	1200lm	800lm	STR1G2-9304011N-WC
						55°	1200lm	800lm	STR1G2-9305511N-WC
					4000K	18°	1300lm	850lm	STR1G2-9401811N-WC
						30°	1300lm	850lm	STR1G2-9403011N-WC
						40°	1300lm	850lm	STR1G2-9404011N-WC
						55°	1300lm	850lm	STR1G2-9405511N-WC
7.5 W	9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STR1G2-9271808N-WW
						30°	850lm	620lm	STR1G2-9273008N-WW
						40°	850lm	620lm	STR1G2-9274008N-WW
						55°	850lm	620lm	STR1G2-9275508N-WW
					3000K	18°	900lm	650lm	STR1G2-9301808N-WW
						30°	900lm	650lm	STR1G2-9303008N-WW
						40°	900lm	650lm	STR1G2-9304008N-WW
						55°	900lm	650lm	STR1G2-9305508N-WW
					4000K	18°	1000lm	700lm	STR1G2-9401808N-WW
						30°	1000lm	700lm	STR1G2-9403008N-WW
						40°	1000lm	700lm	STR1G2-9404008N-WW
						55°	1000lm	700lm	STR1G2-9405508N-WW
11 W	13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STR1G2-9271811N-WW
						30°	1100lm	770lm	STR1G2-9273011N-WW
						40°	1100lm	770lm	STR1G2-9274011N-WW
						55°	1100lm	770lm	STR1G2-9275511N-WW
					3000K	18°	1200lm	800lm	STR1G2-9301811N-WW
						30°	1200lm	800lm	STR1G2-9303011N-WW
						40°	1200lm	800lm	STR1G2-9304011N-WW
						55°	1200lm	800lm	STR1G2-9305511N-WW
					4000K	18°	1300lm	850lm	STR1G2-9401811N-WW
						30°	1300lm	850lm	STR1G2-9403011N-WW
						40°	1300lm	850lm	STR1G2-9404011N-WW
						55°	1300lm	850lm	STR1G2-9405511N-WW

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Code for STR1G2-9304008N-WM with Honeycomb
STR1G2-9304008N-WM-H

NEKO / SENSE 68 / S68R1-G2
Adjustable LED Downlight

NEW



See Details @www.nekolighting.com



Gold Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STR1G2-9271808N-WG
						30°	850lm	620lm	STR1G2-9273008N-WG
						40°	850lm	620lm	STR1G2-9274008N-WG
						55°	850lm	620lm	STR1G2-9275508N-WG
					3000K	18°	900lm	650lm	STR1G2-9301808N-WG
						30°	900lm	650lm	STR1G2-9303008N-WG
						40°	900lm	650lm	STR1G2-9304008N-WG
						55°	900lm	650lm	STR1G2-9305508N-WG
					4000K	18°	1000lm	700lm	STR1G2-9401808N-WG
						30°	1000lm	700lm	STR1G2-9403008N-WG
						40°	1000lm	700lm	STR1G2-9404008N-WG
						55°	1000lm	700lm	STR1G2-9405508N-WG
11 W	13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STR1G2-9271811N-WG
						30°	1100lm	770lm	STR1G2-9273011N-WG
						40°	1100lm	770lm	STR1G2-9274011N-WG
						55°	1100lm	770lm	STR1G2-9275511N-WG
					3000K	18°	1200lm	800lm	STR1G2-9301811N-WG
						30°	1200lm	800lm	STR1G2-9303011N-WG
						40°	1200lm	800lm	STR1G2-9304011N-WG
						55°	1200lm	800lm	STR1G2-9305511N-WG
					4000K	18°	1300lm	850lm	STR1G2-9401811N-WG
						30°	1300lm	850lm	STR1G2-9403011N-WG
						40°	1300lm	850lm	STR1G2-9404011N-WG
						55°	1300lm	850lm	STR1G2-9405511N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available



Trimless code for STR1G2-9304008N-WM → STR3G2-9304008N-WM



Trimless code for STR1G2-9304008N-WM → ETR1G2-9304008N-WM



Specular Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	12 V	500 mA	90	2700K	12°	670lm	350lm	STR1G2-9271206N-WS
						3000K	700lm	400lm	STR1G2-9301206N-WS
						4000K	750lm	450lm	STR1G2-9401206N-WS



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	12 V	500 mA	90	2700K	12°	670lm	350lm	STR1G2-9271206N-WM
						3000K	700lm	400lm	STR1G2-9301206N-WM
						4000K	750lm	450lm	STR1G2-9401206N-WM



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	12 V	500 mA	90	2700K	12°	670lm	350lm	STR1G2-9271206N-WB
						3000K	700lm	400lm	STR1G2-9301206N-WB
						4000K	750lm	450lm	STR1G2-9401206N-WB



Dark Light Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	12 V	500 mA	90	2700K	12°	670lm	350lm	STR1G2-9271206N-WC
						3000K	700lm	400lm	STR1G2-9301206N-WC
						4000K	750lm	450lm	STR1G2-9401206N-WC



white Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	12 V	500 mA	90	2700K	12°	670lm	350lm	STR1G2-9271206N-WW
						3000K	700lm	400lm	STR1G2-9301206N-WW
						4000K	750lm	450lm	STR1G2-9401206N-WW



Gold Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	12 V	500 mA	90	2700K	12°	670lm	350lm	STR1G2-9271206N-WG
						3000K	700lm	400lm	STR1G2-9301206N-WG
						4000K	750lm	450lm	STR1G2-9401206N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Code for STR1G2-9301206N-WM with Honeycomb
STR1G2-9301206N-WM-H

NEKO / SENSE 68 / S68S1-G2
Adjustable LED Downlight



See Details @www.nekolighting.com



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STS1G2-9271808N-W
						30°	850lm	620lm	STS1G2-9273008N-W
						40°	850lm	620lm	STS1G2-9274008N-W
						55°	850lm	620lm	STS1G2-9275508N-W
					3000K	18°	900lm	650lm	STS1G2-9301808N-W
						30°	900lm	650lm	STS1G2-9303008N-W
						40°	900lm	650lm	STS1G2-9304008N-W
						55°	900lm	650lm	STS1G2-9305508N-W
					4000K	18°	1000lm	700lm	STS1G2-9401808N-W
						30°	1000lm	700lm	STS1G2-9403008N-W
						40°	1000lm	700lm	STS1G2-9404008N-W
						55°	1000lm	700lm	STS1G2-9405508N-W
11 W	13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STS1G2-9271811N-W
						30°	1100lm	770lm	STS1G2-9273011N-W
						40°	1100lm	770lm	STS1G2-9274011N-W
						55°	1100lm	770lm	STS1G2-9275511N-W
					3000K	18°	1200lm	800lm	STS1G2-9301811N-W
						30°	1200lm	800lm	STS1G2-9303011N-W
						40°	1200lm	800lm	STS1G2-9304011N-W
						55°	1200lm	800lm	STS1G2-9305511N-W
					4000K	18°	1300lm	850lm	STS1G2-9401811N-W
						30°	1300lm	850lm	STS1G2-9403011N-W
						40°	1300lm	850lm	STS1G2-9404011N-W
						55°	1300lm	850lm	STS1G2-9405511N-W
7.5 W	9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STS1G2-9271808N-WM
						30°	850lm	620lm	STS1G2-9273008N-WM
						40°	850lm	620lm	STS1G2-9274008N-WM
						55°	850lm	620lm	STS1G2-9275508N-WM
					3000K	18°	900lm	650lm	STS1G2-9301808N-WM
						30°	900lm	650lm	STS1G2-9303008N-WM
						40°	900lm	650lm	STS1G2-9304008N-WM
						55°	900lm	650lm	STS1G2-9305508N-WM
					4000K	18°	1000lm	700lm	STS1G2-9401808N-WM
						30°	1000lm	700lm	STS1G2-9403008N-WM
						40°	1000lm	700lm	STS1G2-9404008N-WM
						55°	1000lm	700lm	STS1G2-9405508N-WM
11 W	13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STS1G2-9271811N-WM
						30°	1100lm	770lm	STS1G2-9273011N-WM
						40°	1100lm	770lm	STS1G2-9274011N-WM
						55°	1100lm	770lm	STS1G2-9275511N-WM
					3000K	18°	1200lm	800lm	STS1G2-9301811N-WM
						30°	1200lm	800lm	STS1G2-9303011N-WM
						40°	1200lm	800lm	STS1G2-9304011N-WM
						55°	1200lm	800lm	STS1G2-9305511N-WM
					4000K	18°	1300lm	850lm	STS1G2-9401811N-WM
						30°	1300lm	850lm	STS1G2-9403011N-WM
						40°	1300lm	850lm	STS1G2-9404011N-WM
						55°	1300lm	850lm	STS1G2-9405511N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Black Reflector



Dark Light Reflector



White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STS1G2-9271808N-WB
						30°	850lm	620lm	STS1G2-9273008N-WB
						40°	850lm	620lm	STS1G2-9274008N-WB
						55°	850lm	620lm	STS1G2-9275508N-WB
					3000K	18°	900lm	650lm	STS1G2-9301808N-WB
						30°	900lm	650lm	STS1G2-9303008N-WB
						40°	900lm	650lm	STS1G2-9304008N-WB
						55°	900lm	650lm	STS1G2-9305508N-WB
					4000K	18°	1000lm	700lm	STS1G2-9401808N-WB
						30°	1000lm	700lm	STS1G2-9403008N-WB
						40°	1000lm	700lm	STS1G2-9404008N-WB
						55°	1000lm	700lm	STS1G2-9405508N-WB
11 W	13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STS1G2-9271811N-WB
						30°	1100lm	770lm	STS1G2-9273011N-WB
						40°	1100lm	770lm	STS1G2-9274011N-WB
						55°	1100lm	770lm	STS1G2-9275511N-WB
					3000K	18°	1200lm	800lm	STS1G2-9301811N-WB
						30°	1200lm	800lm	STS1G2-9303011N-WB
						40°	1200lm	800lm	STS1G2-9304011N-WB
						55°	1200lm	800lm	STS1G2-9305511N-WB
					4000K	18°	1300lm	850lm	STS1G2-9401811N-WB
						30°	1300lm	850lm	STS1G2-9403011N-WB
						40°	1300lm	850lm	STS1G2-9404011N-WB
						55°	1300lm	850lm	STS1G2-9405511N-WB
7.5 W	9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STS1G2-9271808N-WC
						30°	850lm	620lm	STS1G2-9273008N-WC
						40°	850lm	620lm	STS1G2-9274008N-WC
						55°	850lm	620lm	STS1G2-9275508N-WC
					3000K	18°	900lm	650lm	STS1G2-9301808N-WC
						30°	900lm	650lm	STS1G2-9303008N-WC
						40°	900lm	650lm	STS1G2-9304008N-WC
						55°	900lm	650lm	STS1G2-9305508N-WC
					4000K	18°	1000lm	700lm	STS1G2-9401808N-WC
						30°	1000lm	700lm	STS1G2-9403008N-WC
						40°	1000lm	700lm	STS1G2-9404008N-WC
						55°	1000lm	700lm	STS1G2-9405508N-WC
11 W	13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STS1G2-9271811N-WC
						30°	1100lm	770lm	STS1G2-9273011N-WC
						40°	1100lm	770lm	STS1G2-9274011N-WC
						55°	1100lm	770lm	STS1G2-9275511N-WC
					3000K	18°	1200lm	800lm	STS1G2-9301811N-WC
						30°	1200lm	800lm	STS1G2-9303011N-WC
						40°	1200lm	800lm	STS1G2-9304011N-WC
						55°	1200lm	800lm	STS1G2-9305511N-WC
					4000K	18°	1300lm	850lm	STS1G2-9401811N-WC
						30°	1300lm	850lm	STS1G2-9403011N-WC
						40°	1300lm	850lm	STS1G2-9404011N-WC
						55°	1300lm	850lm	STS1G2-9405511N-WC
7.5 W	9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STS1G2-9271808N-WW
						30°	850lm	620lm	STS1G2-9273008N-WW
						40°	850lm	620lm	STS1G2-9274008N-WW
						55°	850lm	620lm	STS1G2-9275508N-WW
					3000K	18°	900lm	650lm	STS1G2-9301808N-WW
						30°	900lm	650lm	STS1G2-9303008N-WW
						40°	900lm	650lm	STS1G2-9304008N-WW
						55°	900lm	650lm	STS1G2-9305508N-WW
					4000K	18°	1000lm	700lm	STS1G2-9401808N-WW
						30°	1000lm	700lm	STS1G2-9403008N-WW
						40°	1000lm	700lm	STS1G2-9404008N-WW
						55°	1000lm	700lm	STS1G2-9405508N-WW
11 W	13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STS1G2-9271811N-WW
						30°	1100lm	770lm	STS1G2-9273011N-WW
						40°	1100lm	770lm	STS1G2-9274011N-WW
						55°	1100lm	770lm	STS1G2-9275511N-WW
					3000K	18°	1200lm	800lm	STS1G2-9301811N-WW
						30°	1200lm	800lm	STS1G2-9303011N-WW
						40°	1200lm	800lm	STS1G2-9304011N-WW
						55°	1200lm	800lm	STS1G2-9305511N-WW
					4000K	18°	1300lm	850lm	STS1G2-9401811N-WW
						30°	1300lm	850lm	STS1G2-9403011N-WW
						40°	1300lm	850lm	STS1G2-9404011N-WW
						55°	1300lm	850lm	STS1G2-9405511N-WW

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Code for STS1G2-9304008N-WM with Honeycomb
STS1G2-9304008N-WM-H


NEKO / SENSE 68 / S68S1-G2
Adjustable LED Downlight

!NEW



See Details @www.nekolighting.com

7.5W 11W	CRI90	2700K 3000K 4000K	18° 30° 40° 55°		UGR < 19	IP54		CB	CE		
-------------	-------	-------------------------	--------------------------	--	-------------	------	--	----	----	--	--



Gold Reflector



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	90	2700K	18°	850lm	620lm	STS1G2-9271808N-WG
						30°	850lm	620lm	STS1G2-9273008N-WG
						40°	850lm	620lm	STS1G2-9274008N-WG
						55°	850lm	620lm	STS1G2-9275508N-WG
					3000K	18°	900lm	650lm	STS1G2-9301808N-WG
						30°	900lm	650lm	STS1G2-9303008N-WG
						40°	900lm	650lm	STS1G2-9304008N-WG
						55°	900lm	650lm	STS1G2-9305508N-WG
					4000K	18°	1000lm	700lm	STS1G2-9401808N-WG
						30°	1000lm	700lm	STS1G2-9403008N-WG
						40°	1000lm	700lm	STS1G2-9404008N-WG
						55°	1000lm	700lm	STS1G2-9405508N-WG
11 W	13 W	31 V	350 mA	90	2700K	18°	1100lm	770lm	STS1G2-9271811N-WG
						30°	1100lm	770lm	STS1G2-9273011N-WG
						40°	1100lm	770lm	STS1G2-9274011N-WG
						55°	1100lm	770lm	STS1G2-9275511N-WG
					3000K	18°	1200lm	800lm	STS1G2-9301811N-WG
						30°	1200lm	800lm	STS1G2-9303011N-WG
						40°	1200lm	800lm	STS1G2-9304011N-WG
						55°	1200lm	800lm	STS1G2-9305511N-WG
					4000K	18°	1300lm	850lm	STS1G2-9401811N-WG
						30°	1300lm	850lm	STS1G2-9403011N-WG
						40°	1300lm	850lm	STS1G2-9404011N-WG
						55°	1300lm	850lm	STS1G2-9405511N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Trimless Version available




Trimless code for STS1G2-9304008N-WM → STS3G2-9304008N-WM



Trimless code for STS1G2-9304008N-WM → ETS1G2-9304008N-WM



6W	CRI90	2700K 3000K 4000K	12°		UGR < 19	IP54		CB	CE		
----	-------	-------------------------	-----	--	-------------	------	--	----	----	--	--



Specular Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	12 V	500 mA	90	2700K	12°	670lm	350lm	STS1G2-9271206N-WS
					3000K	12°	700lm	400lm	STS1G2-9301206N-WS
					4000K	12°	750lm	450lm	STS1G2-9401206N-WS



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	12 V	500 mA	90	2700K	12°	670lm	350lm	STS1G2-9271206N-WM
					3000K	12°	700lm	400lm	STS1G2-9301206N-WM
					4000K	12°	750lm	450lm	STS1G2-9401206N-WM



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	12 V	500 mA	90	2700K	12°	670lm	350lm	STS1G2-9271206N-WB
					3000K	12°	700lm	400lm	STS1G2-9301206N-WB
					4000K	12°	750lm	450lm	STS1G2-9401206N-WB



Dark Light Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	12 V	500 mA	90	2700K	12°	670lm	350lm	STS1G2-9271206N-WC
					3000K	12°	700lm	400lm	STS1G2-9301206N-WC
					4000K	12°	750lm	450lm	STS1G2-9401206N-WC



White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	12 V	500 mA	90	2700K	12°	670lm	350lm	STS1G2-9271206N-WW
					3000K	12°	700lm	400lm	STS1G2-9301206N-WW
					4000K	12°	750lm	450lm	STS1G2-9401206N-WW



Gold Reflector


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	12 V	500 mA	90	2700K	12°	670lm	350lm	STS1G2-9271206N-WG
					3000K	12°	700lm	400lm	STS1G2-9301206N-WG
					4000K	12°	750lm	450lm	STS1G2-9401206N-WG


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Code for STS1G2-9301206N-WM with Honeycomb
STS1G2-9301206N-WM-H

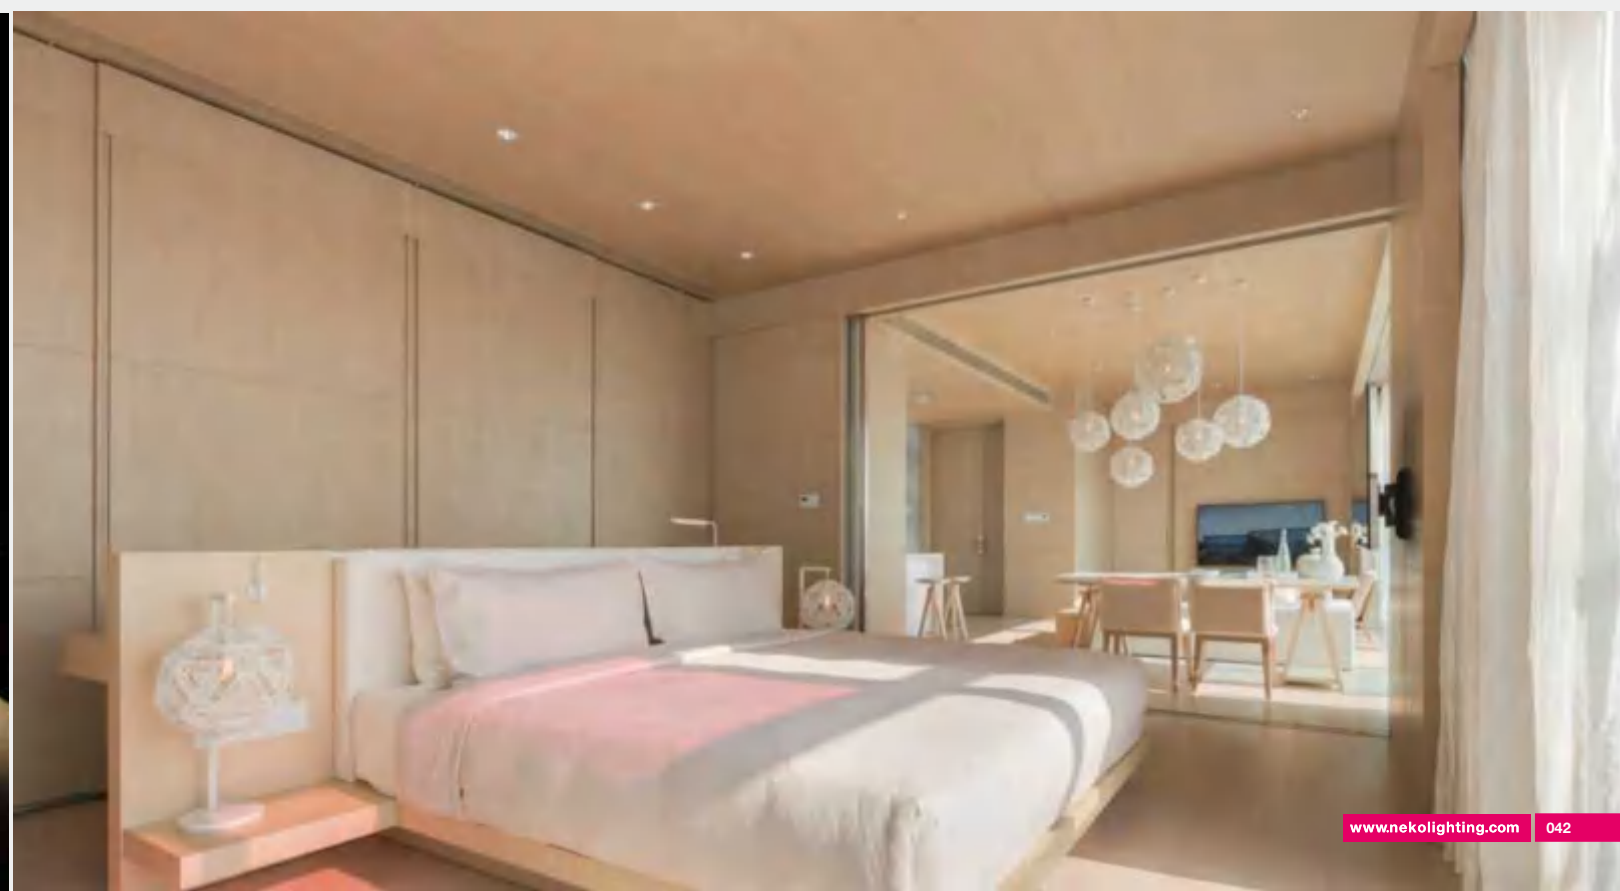

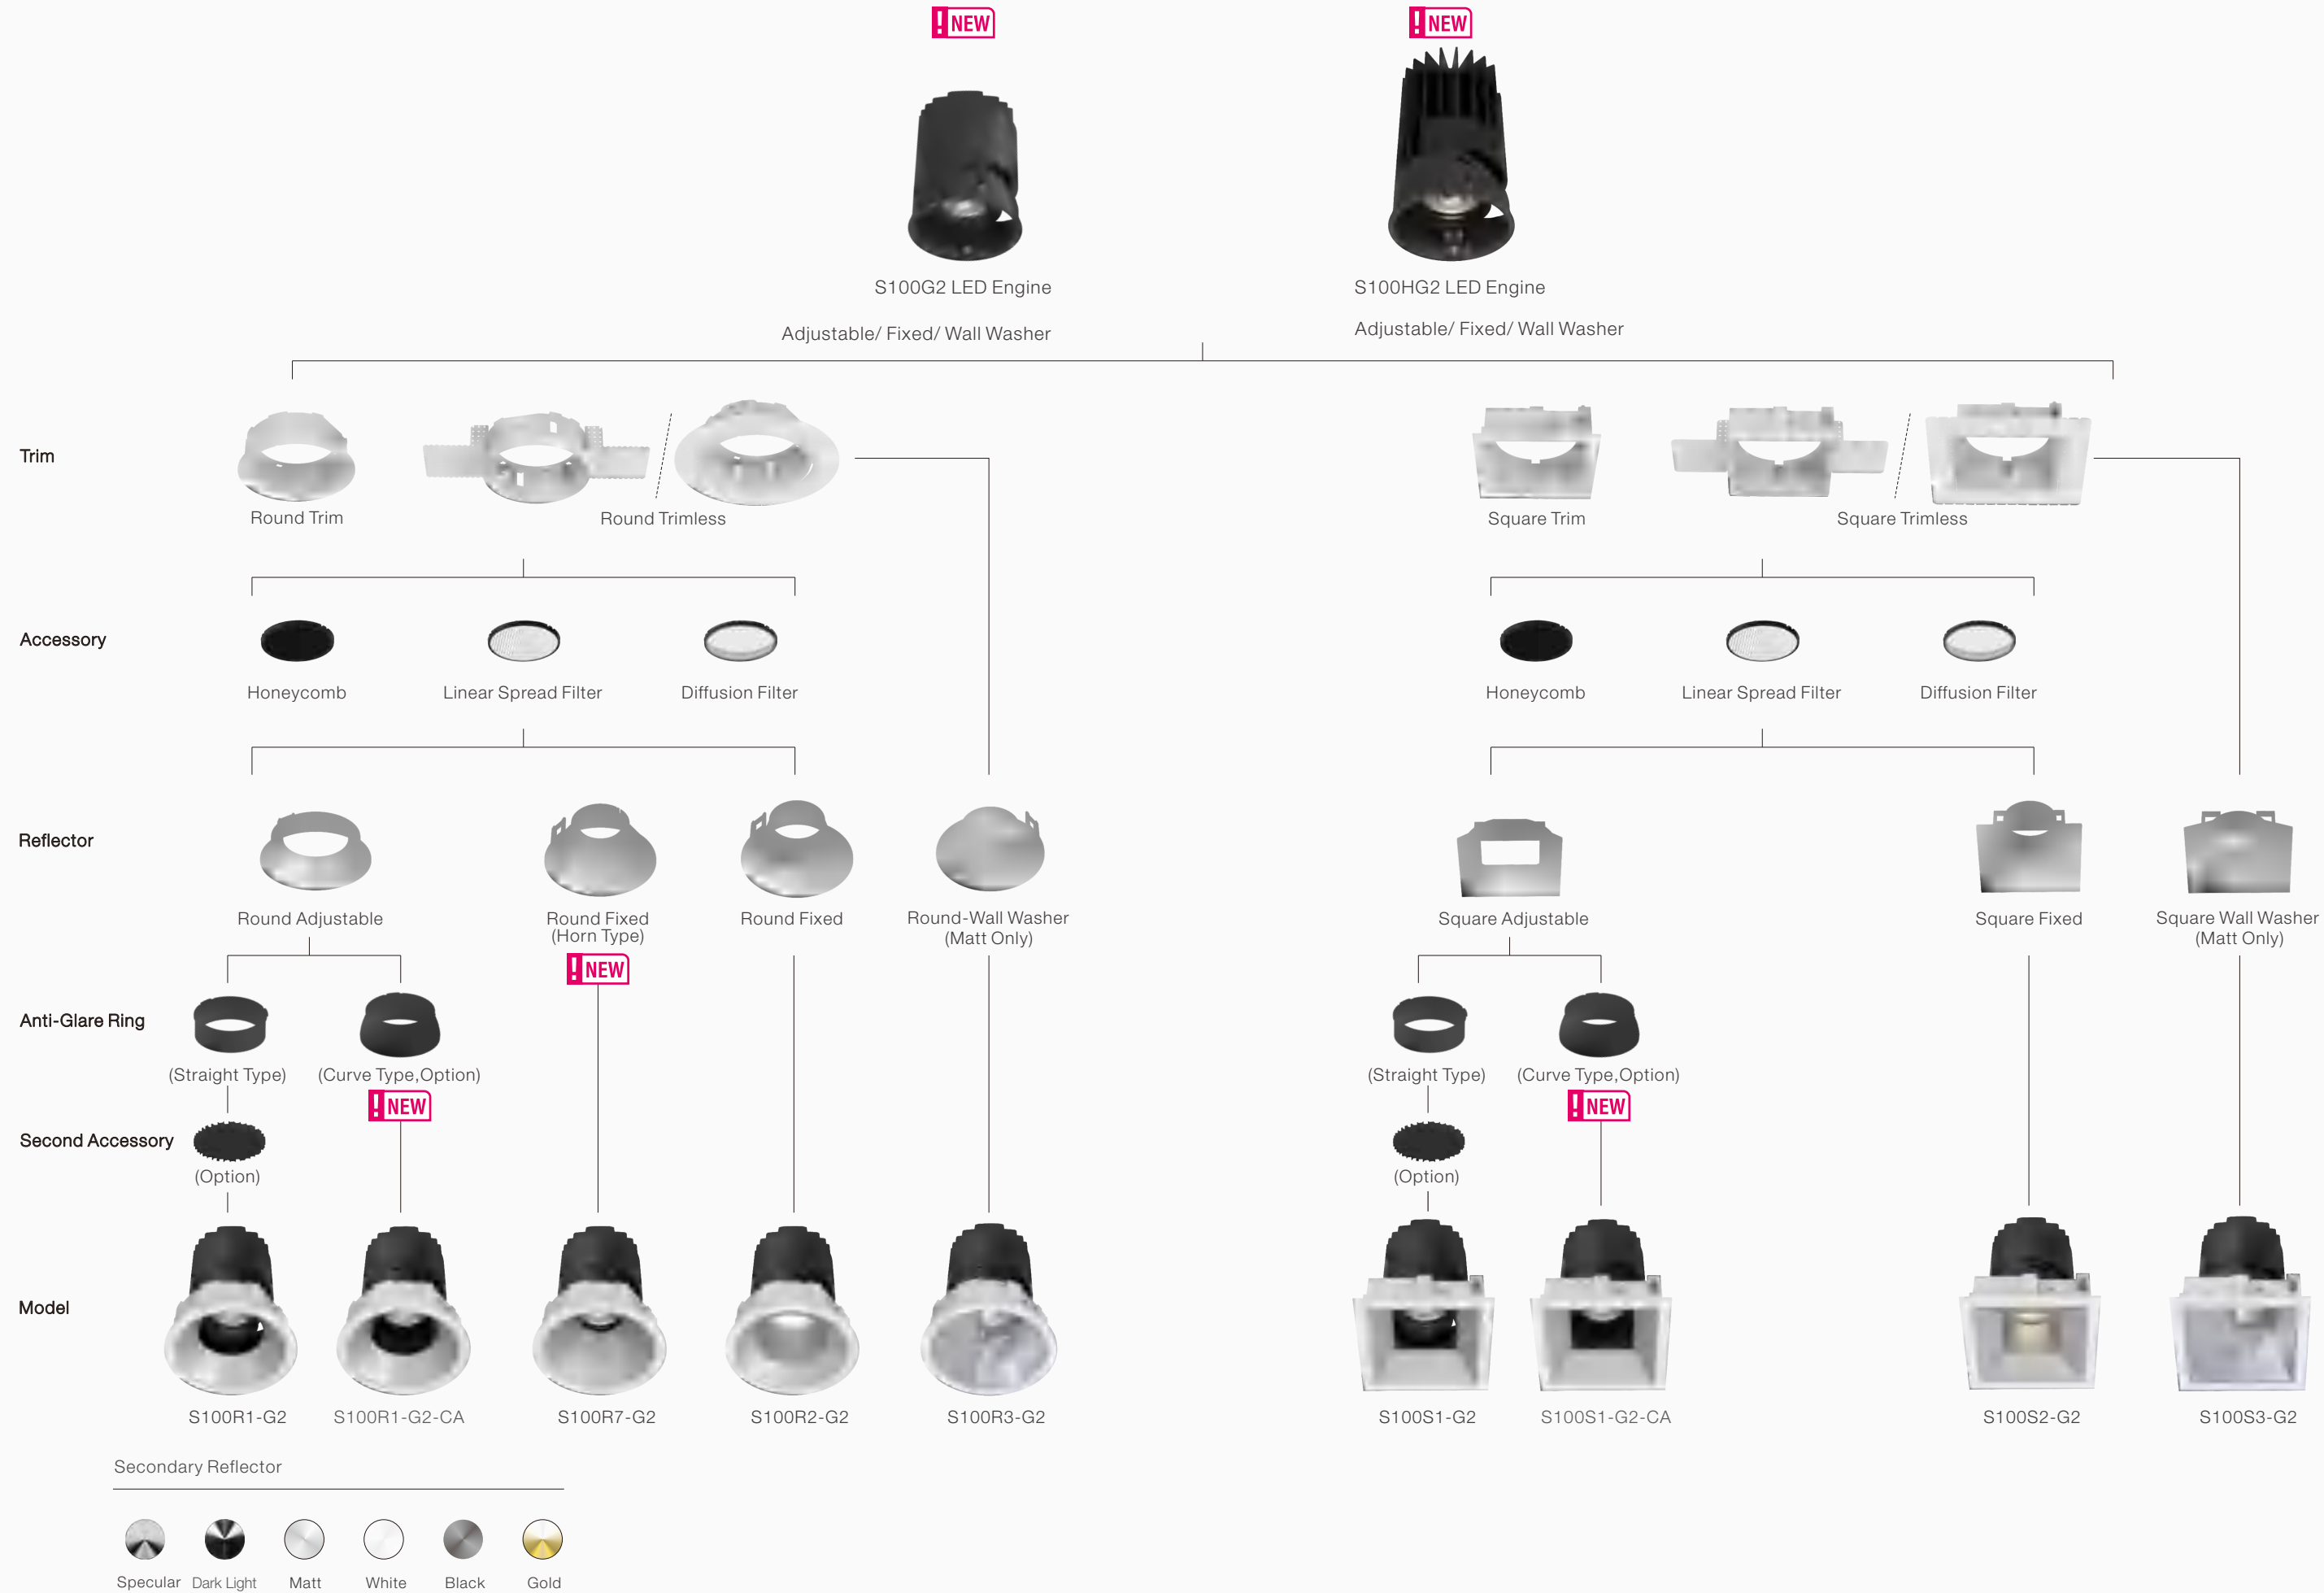

NEKO / SENSE 100 / S100R1-G2

Adjustable LED Downlight

NEW



See Details @www.nekolighting.com

13W
18W

CRI90

2700K

3000K

4000K

18°

30°

40°

45°

CITIZEN

50,000h@L80B10

UGR < 19

IP54


5

GUARANTEE

CB

CE

Intertek



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSR1G2-9271813N-WS
						30°	1400lm	1150lm	SSR1G2-9273013N-WS
						40°	1400lm	1150lm	SSR1G2-9274013N-WS
						45°	1400lm	1050lm	SSR1G2-9274513N-WS
					3000K	18°	1500lm	1150lm	SSR1G2-9301813N-WS
						30°	1500lm	1250lm	SSR1G2-9303013N-WS
						40°	1500lm	1250lm	SSR1G2-9304013N-WS
						45°	1500lm	1150lm	SSR1G2-9304513N-WS
					4000K	18°	1600lm	1250lm	SSR1G2-9401813N-WS
						30°	1600lm	1350lm	SSR1G2-9403013N-WS
						40°	1600lm	1350lm	SSR1G2-9404013N-WS
						45°	1600lm	1250lm	SSR1G2-9404513N-WS
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSR1G2-9271818N-WS
						30°	1900lm	1700lm	SSR1G2-9273018N-WS
						40°	1900lm	1700lm	SSR1G2-9274018N-WS
						45°	1900lm	1500lm	SSR1G2-9274518N-WS
					3000K	18°	2000lm	1600lm	SSR1G2-9301818N-WS
						30°	2000lm	1800lm	SSR1G2-9303018N-WS
						40°	2000lm	1800lm	SSR1G2-9304018N-WS
						45°	2000lm	1600lm	SSR1G2-9304518N-WS
					4000K	18°	2200lm	1700lm	SSR1G2-9401818N-WS
						30°	2200lm	1900lm	SSR1G2-9403018N-WS
						40°	2200lm	1900lm	SSR1G2-9404018N-WS
						45°	2200lm	1700lm	SSR1G2-9404518N-WS
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSR1G2-9271813N-WM
						30°	1400lm	1150lm	SSR1G2-9273013N-WM
						40°	1400lm	1150lm	SSR1G2-9274013N-WM
						45°	1400lm	1050lm	SSR1G2-9274513N-WM
					3000K	18°	1500lm	1150lm	SSR1G2-9301813N-WM
						30°	1500lm	1250lm	SSR1G2-9303013N-WM
						40°	1500lm	1250lm	SSR1G2-9304013N-WM
						45°	1500lm	1150lm	SSR1G2-9304513N-WM
					4000K	18°	1600lm	1250lm	SSR1G2-9401813N-WM
						30°	1600lm	1350lm	SSR1G2-9403013N-WM
						40°	1600lm	1350lm	SSR1G2-9404013N-WM
						45°	1600lm	1250lm	SSR1G2-9404513N-WM
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSR1G2-9271818N-WM
						30°	1900lm	1700lm	SSR1G2-9273018N-WM
						40°	1900lm	1700lm	SSR1G2-9274018N-WM
						45°	1900lm	1500lm	SSR1G2-9274518N-WM
					3000K	18°	2000lm	1600lm	SSR1G2-9301818N-WM
						30°	2000lm	1800lm	SSR1G2-9303018N-WM
						40°	2000lm	1800lm	SSR1G2-9304018N-WM
						45°	2000lm	1600lm	SSR1G2-9304518N-WM
					4000K	18°	2200lm	1700lm	SSR1G2-9401818N-WM
						30°	2200lm	1900lm	SSR1G2-9403018N-WM
						40°	2200lm	1900lm	SSR1G2-9404018N-WM
						45°	2200lm	1700lm	SSR1G2-9404518N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Black Reflector



Dark Light Reflector



White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSR1G2-9271813N-WB
						30°	1400lm	1150lm	SSR1G2-9273013N-WB
						40°	1400lm	1150lm	SSR1G2-9274013N-WB
						55°	1400lm	1050lm	SSR1G2-9274513N-WB
					3000K	18°	1500lm	1150lm	SSR1G2-9301813N-WB
						30°	1500lm	1250lm	SSR1G2-9303013N-WB
						40°	1500lm	1250lm	SSR1G2-9304013N-WB
						55°	1500lm	1150lm	SSR1G2-9304513N-WB
					4000K	18°	1600lm	1250lm	SSR1G2-9401813N-WB
						30°	1600lm	1350lm	SSR1G2-9403013N-WB
						40°	1600lm	1350lm	SSR1G2-9404013N-WB
						55°	1600lm	1250lm	SSR1G2-9404513N-WB
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSR1G2-9271818N-WB
						30°	1900lm	1700lm	SSR1G2-9273018N-WB
						40°	1900lm	1700lm	SSR1G2-9274018N-WB
						55°	1900lm	1500lm	SSR1G2-9274518N-WB
					3000K	18°	2000lm	1600lm	SSR1G2-9301818N-WB
						30°	2000lm	1800lm	SSR1G2-9303018N-WB
						40°	2000lm	1800lm	SSR1G2-9304018N-WB
						55°	2000lm	1600lm	SSR1G2-9304518N-WB
					4000K	18°	2200lm	1700lm	SSR1G2-9401818N-WB
						30°	2200lm	1900lm	SSR1G2-9403018N-WB
						40°	2200lm	1900lm	SSR1G2-9404018N-WB
						55°	2200lm	1700lm	SSR1G2-9404518N-WB
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSR1G2-9271813N-WC
						30°	1400lm	1150lm	SSR1G2-9273013N-WC
						40°	1400lm	1150lm	SSR1G2-9274013N-WC
						55°	1400lm	1050lm	SSR1G2-9274513N-WC
					3000K	18°	1500lm	1150lm	SSR1G2-9301813N-WC
						30°	1500lm	1250lm	SSR1G2-9303013N-WC
						40°	1500lm	1250lm	SSR1G2-9304013N-WC
						55°	1500lm	1150lm	SSR1G2-9304513N-WC
					4000K	18°	1600lm	1250lm	SSR1G2-9401813N-WC
						30°	1600lm	1350lm	SSR1G2-9403013N-WC
						40°	1600lm	1350lm	SSR1G2-9404013N-WC
						55°	1600lm	1250lm	SSR1G2-9404513N-WC
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSR1G2-9271818N-WC
						30°	1900lm	1700lm	SSR1G2-9273018N-WC
						40°	1900lm	1700lm	SSR1G2-9274018N-WC
						55°	1900lm	1500lm	SSR1G2-9274518N-WC
					3000K	18°	2000lm	1600lm	SSR1G2-9301818N-WC
						30°	2000lm	1800lm	SSR1G2-9303018N-WC
						40°	2000lm	1800lm	SSR1G2-9304018N-WC
						55°	2000lm	1600lm	SSR1G2-9304518N-WC
					4000K	18°	2200lm	1700lm	SSR1G2-9401818N-WC
						30°	2200lm	1900lm	SSR1G2-9403018N-WC
						40°	2200lm	1900lm	SSR1G2-9404018N-WC
						55°	2200lm	1700lm	SSR1G2-9404518N-WC
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSR1G2-9271813N-WW
						30°	1400lm	1150lm	SSR1G2-9273013N-WW
						40°	1400lm	1150lm	SSR1G2-9274013N-WW
						55°	1400lm	1050lm	SSR1G2-9274513N-WW
					3000K	18°	1500lm	1150lm	SSR1G2-9301813N-WW
						30°	1500lm	1250lm	SSR1G2-9303013N-WW
						40°	1500lm	1250lm	SSR1G2-9304013N-WW
						55°	1500lm	1150lm	SSR1G2-9304513N-WW
					4000K	18°	1600lm	1250lm	SSR1G2-9401813N-WW
						30°	1600lm	1350lm	SSR1G2-9403013N-WW
						40°	1600lm	1350lm	SSR1G2-9404013N-WW
						55°	1600lm	1250lm	SSR1G2-9404513N-WW
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSR1G2-9271818N-WW
						30°	1900lm	1700lm	SSR1G2-9273018N-WW
						40°	1900lm	1700lm	SSR1G2-9274018N-WW
						55°	1900lm	1500lm	SSR1G2-9274518N-WW
					3000K	18°	2000lm	1600lm	SSR1G2-9301818N-WW
						30°	2000lm	1800lm	SSR1G2-9303018N-WW
						40°	2000lm	1800lm	SSR1G2-9304018N-WW
						55°	2000lm	1600lm	SSR1G2-9304518N-WW
					4000K	18°	2200lm	1700lm	SSR1G2-9401818N-WW
						30°	2200lm	1900lm	SSR1G2-9403018N-WW
						40°	2200lm	1900lm	SSR1G2-9404018N-WW
						55°	2200lm	1700lm	SSR1G2-9404518N-WW

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory




Code for SSR1G2-9304018N-WM with Honeycomb
SSR1G2-9304018N-WM-H

NEKO / SENSE 100 / S100R1-G2
Adjustable LED Downlight



See Details @www.nekolighting.com

13W 18W	CRI90	2700K 3000K 4000K	18° 30° 40° 45°		UGR < 19	IP54		CB	CE		
------------	-------	-------------------------	--------------------------	--	-------------	------	--	----	----	--	--



Gold Reflector


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSR1G2-9271813N-WG
						30°	1400lm	1150lm	SSR1G2-9273013N-WG
						40°	1400lm	1150lm	SSR1G2-9274013N-WG
						45°	1400lm	1050lm	SSR1G2-9274513N-WG
					3000K	18°	1500lm	1150lm	SSR1G2-9301813N-WG
						30°	1500lm	1250lm	SSR1G2-9303013N-WG
						40°	1500lm	1250lm	SSR1G2-9304013N-WG
						45°	1500lm	1150lm	SSR1G2-9304513N-WG
					4000K	18°	1600lm	1250lm	SSR1G2-9401813N-WG
						30°	1600lm	1350lm	SSR1G2-9403013N-WG
						40°	1600lm	1350lm	SSR1G2-9404013N-WG
						45°	1600lm	1250lm	SSR1G2-9404513N-WG
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSR1G2-9271818N-WG
						30°	1900lm	1700lm	SSR1G2-9273018N-WG
						40°	1900lm	1700lm	SSR1G2-9274018N-WG
						45°	1900lm	1500lm	SSR1G2-9274518N-WG
					3000K	18°	2000lm	1600lm	SSR1G2-9301818N-WG
						30°	2000lm	1800lm	SSR1G2-9303018N-WG
						40°	2000lm	1800lm	SSR1G2-9304018N-WG
						45°	2000lm	1600lm	SSR1G2-9304518N-WG
					4000K	18°	2200lm	1700lm	SSR1G2-9401818N-WG
						30°	2200lm	1900lm	SSR1G2-9403018N-WG
						40°	2200lm	1900lm	SSR1G2-9404018N-WG
						45°	2200lm	1700lm	SSR1G2-9404518N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available




Trimless code for SSR1G2-9304013N-WM → SSR4G2-9304013N-WM



Trimless code for SSR1G2-9304013N-WM → ESR1G2-9304013N-WM



7W	CRI90	2700K 3000K 4000K	10°		UGR < 19	IP54		CB	CE		
----	-------	-------------------------	-----	--	-------------	------	--	----	----	--	--



Specular Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSR1G2-9271007N-WS
					3000K	10°	850lm	550lm	SSR1G2-9301007N-WS
					4000K	10°	900lm	600lm	SSR1G2-9401007N-WS



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSR1G2-9271007N-WM
					3000K	10°	850lm	550lm	SSR1G2-9301007N-WM
					4000K	10°	900lm	600lm	SSR1G2-9401007N-WM



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSR1G2-9271007N-WB
					3000K	10°	850lm	550lm	SSR1G2-9301007N-WB
					4000K	10°	900lm	600lm	SSR1G2-9401007N-WB



Dark Light Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSR1G2-9271007N-WC
					3000K	10°	850lm	550lm	SSR1G2-9301007N-WC
					4000K	10°	900lm	600lm	SSR1G2-9401007N-WC



white Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSR1G2-9271007N-WW
					3000K	10°	850lm	550lm	SSR1G2-9301007N-WW
					4000K	10°	900lm	600lm	SSR1G2-9401007N-WW



Gold Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSR1G2-9271007N-WG
					3000K	10°	850lm	550lm	SSR1G2-9301007N-WG
					4000K	10°	900lm	600lm	SSR1G2-9401007N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Code for SSR1G2-9301009N-WM with Honeycomb
SSR1G2-9301009N-WM-H

NEKO / SENSE 100H / **S100HR1-G2**
Adjustable LED Downlight



25W	CRI90	2700K 3000K 4000K	18° 30° 40° 45°		UGR < 19	IP54		CB	CE				1-25mm Ceiling Thickness	157 Ø110
-----	-------	-------------------------	--------------------------	--	----------	------	--	----	----	--	--	--	-----------------------------	-------------



Specular Reflector



Matt Reflector



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHR1G2-9271825N-WS
						30°	2400lm	2000lm	SHR1G2-9273025N-WS
						40°	2400lm	2000lm	SHR1G2-9274025N-WS
						45°	2400lm	1800lm	SHR1G2-9274525N-WS
					3000K	18°	2600lm	1900lm	SHR1G2-9301825N-WS
						30°	2600lm	2100lm	SHR1G2-9303025N-WS
						40°	2600lm	2100lm	SHR1G2-9304025N-WS
						45°	2600lm	1900lm	SHR1G2-9304525N-WS
					4000K	18°	2800lm	1900lm	SHR1G2-9401825N-WS
						30°	2800lm	2200lm	SHR1G2-9403025N-WS
						40°	2800lm	2200lm	SHR1G2-9404025N-WS
						45°	2800lm	1900lm	SHR1G2-9404525N-WS

25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHR1G2-9271825N-WM
						30°	2400lm	2000lm	SHR1G2-9273025N-WM
						40°	2400lm	2000lm	SHR1G2-9274025N-WM
						45°	2400lm	1800lm	SHR1G2-9274525N-WM
					3000K	18°	2600lm	1900lm	SHR1G2-9301825N-WM
						30°	2600lm	2100lm	SHR1G2-9303025N-WM
						40°	2600lm	2100lm	SHR1G2-9304025N-WM
						45°	2600lm	1900lm	SHR1G2-9304525N-WM
					4000K	18°	2800lm	1900lm	SHR1G2-9401825N-WM
						30°	2800lm	2200lm	SHR1G2-9403025N-WM
						40°	2800lm	2200lm	SHR1G2-9404025N-WM
						45°	2800lm	1900lm	SHR1G2-9404525N-WM

25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHR1G2-9271825N-WB
						30°	2400lm	2000lm	SHR1G2-9273025N-WB
						40°	2400lm	2000lm	SHR1G2-9274025N-WB
						45°	2400lm	1800lm	SHR1G2-9274525N-WB
					3000K	18°	2600lm	1900lm	SHR1G2-9301825N-WB
						30°	2600lm	2100lm	SHR1G2-9303025N-WB
						40°	2600lm	2100lm	SHR1G2-9304025N-WB
						45°	2600lm	1900lm	SHR1G2-9304525N-WB
					4000K	18°	2800lm	1900lm	SHR1G2-9401825N-WB
						30°	2800lm	2200lm	SHR1G2-9403025N-WB
						40°	2800lm	2200lm	SHR1G2-9404025N-WB
						45°	2800lm	1900lm	SHR1G2-9404525N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Honeycomb

Code for SHR1G2-9304025N-WM with Honeycomb
SHR1G2-9304025N-WM-**H**



Dark Light Reflector



White Reflector



Gold Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHR1G2-9271825N-WC
						30°	2400lm	2000lm	SHR1G2-9273025N-WC
						40°	2400lm	2000lm	SHR1G2-9274025N-WC
						45°	2400lm	1800lm	SHR1G2-9274525N-WC
					3000K	18°	2600lm	1900lm	SHR1G2-9301825N-WC
						30°	2600lm	2100lm	SHR1G2-9303025N-WC
						40°	2600lm	2100lm	SHR1G2-9304025N-WC
						45°	2600lm	1900lm	SHR1G2-9304525N-WC
					4000K	18°	2800lm	1900lm	SHR1G2-9401825N-WC
						30°	2800lm	2200lm	SHR1G2-9403025N-WC
						40°	2800lm	2200lm	SHR1G2-9404025N-WC
						45°	2800lm	1900lm	SHR1G2-9404525N-WC

25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHR1G2-9271825N-WW
						30°	2400lm	2000lm	SHR1G2-9273025N-WW
						40°	2400lm	2000lm	SHR1G2-9274025N-WW
						45°	2400lm	1800lm	SHR1G2-9274525N-WW
					3000K	18°	2600lm	1900lm	SHR1G2-9301825N-WW
						30°	2600lm	2100lm	SHR1G2-9303025N-WW
						40°	2600lm	2100lm	SHR1G2-9304025N-WW
						45°	2600lm	1900lm	SHR1G2-9304525N-WW
					4000K	18°	2800lm	1900lm	SHR1G2-9401825N-WW
						30°	2800lm	2200lm	SHR1G2-9403025N-WW
						40°	2800lm	2200lm	SHR1G2-9404025N-WW
						45°	2800lm	1900lm	SHR1G2-9404525N-WW



25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHR1G2-9271825N-WG
						30°	2400lm	2000lm	SHR1G2-9273025N-WG
						40°	2400lm	2000lm	SHR1G2-9274025N-WG
						45°	2400lm	1800lm	SHR1G2-9274525N-WG
					3000K	18°	2600lm	1900lm	SHR1G2-9301825N-WG
						30°	2600lm	2100lm	SHR1G2-9303025N-WG
						40°	2600lm	2100lm	SHR1G2-9304025N-WG
						45°	2600lm	1900lm	SHR1G2-9304525N-WG
					4000K	18°	2800lm	1900lm	SHR1G2-9401825N-WG
						30°	2800lm	2200lm	SHR1G2-9403025N-WG
						40°	2800lm	2200lm	SHR1G2-9404025N-WG
						45°	2800lm	1900lm	SHR1G2-9404525N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Trimless Version available



Trimless code for SHR1G2-9303525N-WM → SHR**4**G2-9303525N-WM



Trimless code for SHR1G2-9303525N-WM → EHR2G2-9303525N-WM




NEKO / SENSE 100 / S100S1-G2

Adjustable LED Downlight


NEW



See Details @www.nekolighting.com

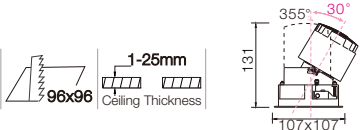

Specular Reflector



Matt Reflector



Black Reflector



Dark Light Reflector



White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSS1G2-9271813N-WS
						30°	1400lm	1150lm	SSS1G2-9273013N-WS
						40°	1400lm	1150lm	SSS1G2-9274013N-WS
						45°	1400lm	1050lm	SSS1G2-9274513N-WS
					3000K	18°	1500lm	1150lm	SSS1G2-9301813N-WS
						30°	1500lm	1250lm	SSS1G2-9303013N-WS
						40°	1500lm	1250lm	SSS1G2-9304013N-WS
						45°	1500lm	1150lm	SSS1G2-9304513N-WS
					4000K	18°	1600lm	1250lm	SSS1G2-9401813N-WS
						30°	1600lm	1350lm	SSS1G2-9403013N-WS
						40°	1600lm	1350lm	SSS1G2-9404013N-WS
						45°	1600lm	1250lm	SSS1G2-9404513N-WS
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSS1G2-9271818N-WS
						30°	1900lm	1700lm	SSS1G2-9273018N-WS
						40°	1900lm	1700lm	SSS1G2-9274018N-WS
						45°	1900lm	1500lm	SSS1G2-9274518N-WS
					3000K	18°	2000lm	1600lm	SSS1G2-9301818N-WS
						30°	2000lm	1800lm	SSS1G2-9303018N-WS
						40°	2000lm	1800lm	SSS1G2-9304018N-WS
						45°	2000lm	1600lm	SSS1G2-9304518N-WS
					4000K	18°	2200lm	1700lm	SSS1G2-9401818N-WS
						30°	2200lm	1900lm	SSS1G2-9403018N-WS
						40°	2200lm	1900lm	SSS1G2-9404018N-WS
						45°	2200lm	1700lm	SSS1G2-9404518N-WS
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSS1G2-9271813N-WM
						30°	1400lm	1150lm	SSS1G2-9273013N-WM
						40°	1400lm	1150lm	SSS1G2-9274013N-WM
						45°	1400lm	1050lm	SSS1G2-9274513N-WM
					3000K	18°	1500lm	1150lm	SSS1G2-9301813N-WM
						30°	1500lm	1250lm	SSS1G2-9303013N-WM
						40°	1500lm	1250lm	SSS1G2-9304013N-WM
						45°	1500lm	1150lm	SSS1G2-9304513N-WM
					4000K	18°	1600lm	1250lm	SSS1G2-9401813N-WM
						30°	1600lm	1350lm	SSS1G2-9403013N-WM
						40°	1600lm	1350lm	SSS1G2-9404013N-WM
						45°	1600lm	1250lm	SSS1G2-9404513N-WM
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSS1G2-9271818N-WM
						30°	1900lm	1700lm	SSS1G2-9273018N-WM
						40°	1900lm	1700lm	SSS1G2-9274018N-WM
						45°	1900lm	1500lm	SSS1G2-9274518N-WM
					3000K	18°	2000lm	1600lm	SSS1G2-9301818N-WM
						30°	2000lm	1800lm	SSS1G2-9303018N-WM
						40°	2000lm	1800lm	SSS1G2-9304018N-WM
						45°	2000lm	1600lm	SSS1G2-9304518N-WM
					4000K	18°	2200lm	1700lm	SSS1G2-9401818N-WM
						30°	2200lm	1900lm	SSS1G2-9403018N-WM
						40°	2200lm	1900lm	SSS1G2-9404018N-WM
						45°	2200lm	1700lm	SSS1G2-9404518N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSS1G2-9271813N-WB
						30°	1400lm	1150lm	SSS1G2-9273013N-WB
						40°	1400lm	1150lm	SSS1G2-9274013N-WB
						55°	1400lm	1050lm	SSS1G2-9274513N-WB
					3000K	18°	1500lm	1150lm	SSS1G2-9301813N-WB
						30°	1500lm	1250lm	SSS1G2-9303013N-WB
						40°	1500lm	1250lm	SSS1G2-9304013N-WB
						55°	1500lm	1150lm	SSS1G2-9304513N-WB
					4000K	18°	1600lm	1250lm	SSS1G2-9401813N-WB
						30°	1600lm	1350lm	SSS1G2-9403013N-WB
						40°	1600lm	1350lm	SSS1G2-9404013N-WB
						55°	1600lm	1250lm	SSS1G2-9404513N-WB
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSS1G2-9271818N-WB
						30°	1900lm	1700lm	SSS1G2-9273018N-WB
						40°	1900lm	1700lm	SSS1G2-9274018N-WB
						55°	1900lm	1500lm	SSS1G2-9274518N-WB
					3000K	18°	2000lm	1600lm	SSS1G2-9301818N-WB
						30°	2000lm	1800lm	SSS1G2-9303018N-WB
						40°	2000lm	1800lm	SSS1G2-9304018N-WB
						55°	2000lm	1600lm	SSS1G2-9304518N-WB
					4000K	18°	2200lm	1700lm	SSS1G2-9401818N-WB
						30°	2200lm	1900lm	SSS1G2-9403018N-WB
						40°	2200lm	1900lm	SSS1G2-9404018N-WB
						55°	2200lm	1700lm	SSS1G2-9404518N-WB
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSS1G2-9271813N-WC
						30°	1400lm	1150lm	SSS1G2-9273013N-WC
						40°	1400lm	1150lm	SSS1G2-9274013N-WC
						55°	1400lm	1050lm	SSS1G2-9274513N-WC
					3000K	18°	1500lm	1150lm	SSS1G2-9301813N-WC
						30°	1500lm	1250lm	SSS1G2-9303013N-WC
						40°	1500lm	1250lm	SSS1G2-9304013N-WC
						55°	1500lm	1150lm	SSS1G2-9304513N-WC
					4000K	18°	1600lm	1250lm	SSS1G2-9401813N-WC
						30°	1600lm	1350lm	SSS1G2-9403013N-WC
						40°	1600lm	1350lm	SSS1G2-9404013N-WC
						55°	1600lm	1250lm	SSS1G2-9404513N-WC
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSS1G2-9271818N-WC
						30°	1900lm	1700lm	SSS1G2-9273018N-WC
						40°	1900lm	1700lm	SSS1G2-9274018N-WC
						55°	1900lm	1500lm	SSS1G2-9274518N-WC
					3000K	18°	2000lm	1600lm	SSS1G2-9301818N-WC
						30°	2000lm	1800lm	SSS1G2-9303018N-WC
						40°	2000lm	1800lm	SSS1G2-9304018N-WC
						55°	2000lm	1600lm	SSS1G2-9304518N-WC
					4000K	18°	2200lm	1700lm	SSS1G2-9401818N-WC
						30°	2200lm	1900lm	SSS1G2-9403018N-WC
						40°	2200lm	1900lm	SSS1G2-9404018N-WC
						55°	2200lm	1700lm	SSS1G2-9404518N-WC
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSS1G2-9271813N-WW
						30°	1400lm	1150lm	SSS1G2-9273013N-WW
						40°	1400lm	1150lm	SSS1G2-9274013N-WW
						55°	1400lm	1050lm	SSS1G2-9274513N-WW
					3000K	18°	1500lm	1150lm	SSS1G2-9301813N-WW
						30°	1500lm	1250lm	SSS1G2-9303013N-WW
						40°	1500lm	1250lm	SSS1G2-9304013N-WW
						55°	1500lm	1150lm	SSS1G2-9304513N-WW
					4000K	18°	1600lm	1250lm	SSS1G2-9401813N-WW
						30°	1600lm	1350lm	SSS1G2-9403013N-WW
						40°	1600lm	1350lm	SSS1G2-9404013N-WW
						55°	1600lm	1250lm	SSS1G2-9404513N-WW
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSS1G2-9271818N-WW
						30°	1900lm	1700lm	SSS1G2-9273018N-WW
						40°	1900lm	1700lm	SSS1G2-9274018N-WW
						55°	1900lm	1500lm	SSS1G2-9274518N-WW
					3000K	18°	2000lm	1600lm	SSS1G2-9301818N-WW
						30°	2000lm	1800lm	SSS1G2-9303018N-WW
						40°	2000lm	1800lm	SSS1G2-9304018N-WW
						55°	2000lm	1600lm	SSS1G2-9304518N-WW
					4000K	18°	2200lm	1700lm	SSS1G2-9401818N-WW
						30°	2200lm	1900lm	SSS1G2-9403018N-WW
						40°	2200lm	1900lm	SSS1G2-9404018N-WW
						55°	2200lm	1700lm	SSS1G2-9404518N-WW

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Honeycomb

Code for SSS1G2-9304018N-WM with Honeycomb
SSS1G2-9304018N-WM-H

NEKO / SENSE 100 / S100S1-G2
Adjustable LED Downlight

NEW




13W 18W	CRI90	2700K 3000K 4000K	18° 30° 40° 45°		UGR < 19	IP54		CB	CE					
------------	-------	-------------------------	--------------------------	--	-------------	------	--	----	----	--	--	--	--	--

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1050lm	SSS1G2-9271813N-WG
						30°	1400lm	1150lm	SSS1G2-9273013N-WG
						40°	1400lm	1150lm	SSS1G2-9274013N-WG
						45°	1400lm	1050lm	SSS1G2-9274513N-WG
					3000K	18°	1500lm	1150lm	SSS1G2-9301813N-WG
						30°	1500lm	1250lm	SSS1G2-9303013N-WG
						40°	1500lm	1250lm	SSS1G2-9304013N-WG
						45°	1500lm	1150lm	SSS1G2-9304513N-WG
					4000K	18°	1600lm	1250lm	SSS1G2-9401813N-WG
						30°	1600lm	1350lm	SSS1G2-9403013N-WG
						40°	1600lm	1350lm	SSS1G2-9404013N-WG
						45°	1600lm	1250lm	SSS1G2-9404513N-WG
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	SSS1G2-9271818N-WG
						30°	1900lm	1700lm	SSS1G2-9273018N-WG
						40°	1900lm	1700lm	SSS1G2-9274018N-WG
						45°	1900lm	1500lm	SSS1G2-9274518N-WG
					3000K	18°	2000lm	1600lm	SSS1G2-9301818N-WG
						30°	2000lm	1800lm	SSS1G2-9303018N-WG
						40°	2000lm	1800lm	SSS1G2-9304018N-WG
						45°	2000lm	1600lm	SSS1G2-9304518N-WG
					4000K	18°	2200lm	1700lm	SSS1G2-9401818N-WG
						30°	2200lm	1900lm	SSS1G2-9403018N-WG
						40°	2200lm	1900lm	SSS1G2-9404018N-WG
						45°	2200lm	1700lm	SSS1G2-9404518N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available

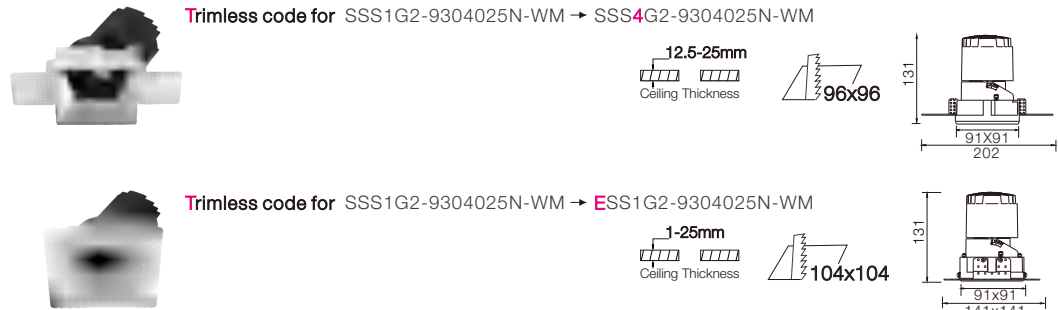

7W	CRI90	2700K 3000K 4000K	10°		UGR < 19	IP54		CB	CE					
----	-------	-------------------------	-----	--	-------------	------	--	----	----	--	--	--	--	--



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSS1G2-9271007N-WG
					3000K	10°	850lm	550lm	SSS1G2-9301007N-WG
					4000K	10°	900lm	600lm	SSS1G2-9401007N-WG



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSS1G2-9271007N-WM
					3000K	10°	850lm	550lm	SSS1G2-9301007N-WM
					4000K	10°	900lm	600lm	SSS1G2-9401007N-WM



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSS1G2-9271007N-WB
					3000K	10°	850lm	550lm	SSS1G2-9301007N-WB
					4000K	10°	900lm	600lm	SSS1G2-9401007N-WB



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSS1G2-9271007N-WC
					3000K	10°	850lm	550lm	SSS1G2-9301007N-WC
					4000K	10°	900lm	600lm	SSS1G2-9401007N-WC




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSS1G2-9271007N-WW
					3000K	10°	850lm	550lm	SSS1G2-9301007N-WW
					4000K	10°	900lm	600lm	SSS1G2-9401007N-WW



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	520lm	SSS1G2-9271007N-WG
					3000K	10°	850lm	550lm	SSS1G2-9301007N-WG
					4000K	10°	900lm	600lm	SSS1G2-9401007N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



NEKO / SENSE 100H / S100HS1-G2
Adjustable LED Downlight

NEW



25W	CRI90	2700K 3000K 4000K	18° 30° 40° 45°		UGR < 19	IP 54		CB	CE				1-25mm Ceiling Thickness	
-----	-------	-------------------------	--------------------------	--	----------	-------	--	----	----	--	--	--	-----------------------------	--



Specular Reflector



Matt Reflector



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHS1G2-9271825N-WS
						30°	2400lm	2000lm	SHS1G2-9273025N-WS
						40°	2400lm	2000lm	SHS1G2-9274025N-WS
						45°	2400lm	1800lm	SHS1G2-9274525N-WS
					3000K	18°	2600lm	1900lm	SHS1G2-9301825N-WS
						30°	2600lm	2100lm	SHS1G2-9303025N-WS
						40°	2600lm	2100lm	SHS1G2-9304025N-WS
						45°	2600lm	1900lm	SHS1G2-9304525N-WS
					4000K	18°	2800lm	1900lm	SHS1G2-9401825N-WS
						30°	2800lm	2200lm	SHS1G2-9403025N-WS
						40°	2800lm	2200lm	SHS1G2-9404025N-WS
						45°	2800lm	1900lm	SHS1G2-9404525N-WS
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHS1G2-9271825N-WM
						30°	2400lm	2000lm	SHS1G2-9273025N-WM
						40°	2400lm	2000lm	SHS1G2-9274025N-WM
						45°	2400lm	1800lm	SHS1G2-9274525N-WM
					3000K	18°	2600lm	1900lm	SHS1G2-9301825N-WM
						30°	2600lm	2100lm	SHS1G2-9303025N-WM
						40°	2600lm	2100lm	SHS1G2-9304025N-WM
						45°	2600lm	1900lm	SHS1G2-9304525N-WM
					4000K	18°	2800lm	1900lm	SHS1G2-9401825N-WM
						30°	2800lm	2200lm	SHS1G2-9403025N-WM
						40°	2800lm	2200lm	SHS1G2-9404025N-WM
						45°	2800lm	1900lm	SHS1G2-9404525N-WM
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHS1G2-9271825N-WB
						30°	2400lm	2000lm	SHS1G2-9273025N-WB
						40°	2400lm	2000lm	SHS1G2-9274025N-WB
						45°	2400lm	1800lm	SHS1G2-9274525N-WB
					3000K	18°	2600lm	1900lm	SHS1G2-9301825N-WB
						30°	2600lm	2100lm	SHS1G2-9303025N-WB
						40°	2600lm	2100lm	SHS1G2-9304025N-WB
						45°	2600lm	1900lm	SHS1G2-9304525N-WB
					4000K	18°	2800lm	1900lm	SHS1G2-9401825N-WB
						30°	2800lm	2200lm	SHS1G2-9403025N-WB
						40°	2800lm	2200lm	SHS1G2-9404025N-WB
						45°	2800lm	1900lm	SHS1G2-9404525N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Honeycomb

Code for SHS1G2-9304025N-WM with Honeycomb
SHS1G2-9304025N-WM-H



Dark Light Reflector



White Reflector



Gold Reflector


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHS1G2-9271825N-WC
						30°	2400lm	2000lm	SHS1G2-9273025N-WC
						40°	2400lm	2000lm	SHS1G2-9274025N-WC
						45°	2400lm	1800lm	SHS1G2-9274525N-WC
					3000K	18°	2600lm	1900lm	SHS1G2-9301825N-WC
						30°	2600lm	2100lm	SHS1G2-9303025N-WC
						40°	2600lm	2100lm	SHS1G2-9304025N-WC
						45°	2600lm	1900lm	SHS1G2-9304525N-WC
					4000K	18°	2800lm	1900lm	SHS1G2-9401825N-WC
						30°	2800lm	2200lm	SHS1G2-9403025N-WC
						40°	2800lm	2200lm	SHS1G2-9404025N-WC
						45°	2800lm	1900lm	SHS1G2-9404525N-WC

25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHS1G2-9271825N-WW
						30°	2400lm	2000lm	SHS1G2-9273025N-WW
						40°	2400lm	2000lm	SHS1G2-9274025N-WW
						45°	2400lm	1800lm	SHS1G2-9274525N-WW
					3000K	18°	2600lm	1900lm	SHS1G2-9301825N-WW
						30°	2600lm	2100lm	SHS1G2-9303025N-WW
						40°	2600lm	2100lm	SHS1G2-9304025N-WW
						45°	2600lm	1900lm	SHS1G2-9304525N-WW
					4000K	18°	2800lm	1900lm	SHS1G2-9401825N-WW
						30°	2800lm	2200lm	SHS1G2-9403025N-WW
						40°	2800lm	2200lm	SHS1G2-9404025N-WW
						45°	2800lm	1900lm	SHS1G2-9404525N-WW



25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHS1G2-9271825N-WG
						30°	2400lm	2000lm	SHS1G2-9273025N-WG
						40°	2400lm	2000lm	SHS1G2-9274025N-WG
						45°	2400lm	1800lm	SHS1G2-9274525N-WG
					3000K	18°	2600lm	1900lm	SHS1G2-9301825N-WG
						30°	2600lm	2100lm	SHS1G2-9303025N-WG
						40°	2600lm	2100lm	SHS1G2-9304025N-WG
						45°	2600lm	1900lm	SHS1G2-9304525N-WG
					4000K	18°	2800lm	1900lm	SHS1G2-9401825N-WG
						30°	2800lm	2200lm	SHS1G2-9403025N-WG
						40°	2800lm	2200lm	SHS1G2-9404025N-WG
						45°	2800lm	1900lm	SHS1G2-9404525N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Trimless Version available



Trimless code for SHS1G2-9304025N-WM → SHS4G2-9304025N-WM



Trimless code for SHS1G2-9304025N-WM → EHS1G2-9304025N-WM




NEKO / SENSE 100 / S100R7-G2
Fixed LED Downlight

NEW



See Details @www.nekolighting.com

13W 18W	CRI90	2700K 3000K 4000K	20° 36° 45°		UGR < 19	IP54		CB	CE		
------------	-------	-------------------------	-------------------	--	-------------	------	--	----	----	--	--



Black Reflector



Dark Light Reflector



White Reflector



Gold Reflector


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	800lm	SSR7G2-9272013N-WB
						36°	1400lm	950lm	SSR7G2-9273613N-WB
						45°	1400lm	950lm	SSR7G2-9274513N-WB
					3000K	20°	1500lm	850lm	SSR7G2-9302013N-WB
						36°	1500lm	1000lm	SSR7G2-9303613N-WB
						45°	1500lm	1000lm	SSR7G2-9304513N-WB
					4000K	20°	1600lm	950lm	SSR7G2-9402013N-WB
						36°	1600lm	1100lm	SSR7G2-9403613N-WB
						45°	1600lm	1100lm	SSR7G2-9404513N-WB
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1100lm	SSR7G2-9272018N-WB
						36°	1900lm	1300lm	SSR7G2-9273618N-WB
						45°	1900lm	1300lm	SSR7G2-9274518N-WB
					3000K	20°	2000lm	1200lm	SSR7G2-9302018N-WB
						36°	2000lm	1400lm	SSR7G2-9303618N-WB
						45°	2000lm	1400lm	SSR7G2-9304518N-WB
					4000K	20°	2200lm	1300lm	SSR7G2-9402018N-WB
						36°	2200lm	1500lm	SSR7G2-9403618N-WB
						45°	2200lm	1500lm	SSR7G2-9404518N-WB
13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	800lm	SSR7G2-9272013N-WC
						36°	1400lm	950lm	SSR7G2-9273613N-WC
						45°	1400lm	950lm	SSR7G2-9274513N-WC
					3000K	20°	1500lm	850lm	SSR7G2-9302013N-WC
						36°	1500lm	1000lm	SSR7G2-9303613N-WC
						45°	1500lm	1000lm	SSR7G2-9304513N-WC
					4000K	20°	1600lm	950lm	SSR7G2-9402013N-WC
						36°	1600lm	1100lm	SSR7G2-9403613N-WC
						45°	1600lm	1100lm	SSR7G2-9404513N-WC
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1100lm	SSR7G2-9272018N-WC
						36°	1900lm	1300lm	SSR7G2-9273618N-WC
						45°	1900lm	1300lm	SSR7G2-9274518N-WC
					3000K	20°	2000lm	1200lm	SSR7G2-9302018N-WC
						36°	2000lm	1400lm	SSR7G2-9303618N-WC
						45°	2000lm	1400lm	SSR7G2-9304518N-WC
					4000K	20°	2200lm	1300lm	SSR7G2-9402018N-WC
						36°	2200lm	1500lm	SSR7G2-9403618N-WC
						45°	2200lm	1500lm	SSR7G2-9404518N-WC
13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	800lm	SSR7G2-9272013N-WW
						36°	1400lm	950lm	SSR7G2-9273613N-WW
						45°	1400lm	950lm	SSR7G2-9274513N-WW
					3000K	20°	1500lm	850lm	SSR7G2-9302013N-WW
						36°	1500lm	1000lm	SSR7G2-9303613N-WW
						45°	1500lm	1000lm	SSR7G2-9304513N-WW
					4000K	20°	1600lm	950lm	SSR7G2-9402013N-WW
						36°	1600lm	1100lm	SSR7G2-9403613N-WW
						45°	1600lm	1100lm	SSR7G2-9404513N-WW
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1100lm	SSR7G2-9272018N-WW
						36°	1900lm	1300lm	SSR7G2-9273618N-WW
						45°	1900lm	1300lm	SSR7G2-9274518N-WW
					3000K	20°	2000lm	1200lm	SSR7G2-9302018N-WW
						36°	2000lm	1400lm	SSR7G2-9303618N-WW
						45°	2000lm	1400lm	SSR7G2-9304518N-WW
					4000K	20°	2200lm	1300lm	SSR7G2-9402018N-WW
						36°	2200lm	1500lm	SSR7G2-9403618N-WW
						45°	2200lm	1500lm	SSR7G2-9404518N-WW
13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	800lm	SSR7G2-9272013N-WG
						36°	1400lm	950lm	SSR7G2-9273613N-WG
						45°	1400lm	950lm	SSR7G2-9274513N-WG
					3000K	20°	1500lm	850lm	SSR7G2-9302013N-WG
						36°	1500lm	1000lm	SSR7G2-9303613N-WG
						45°	1500lm	1000lm	SSR7G2-9304513N-WG
					4000K	20°	1600lm	950lm	SSR7G2-9402013N-WG
						36°	1600lm	1100lm	SSR7G2-9403613N-WG
						45°	1600lm	1100lm	SSR7G2-9404513N-WG
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1100lm	SSR7G2-9272018N-WG
						36°	1900lm	1300lm	SSR7G2-9273618N-WG
						45°	1900lm	1300lm	SSR7G2-9274518N-WG
					3000K	20°	2000lm	1200lm	SSR7G2-9302018N-WG
						36°	2000lm	1400lm	SSR7G2-9303618N-WG
						45°	2000lm	1400lm	SSR7G2-9304518N-WG
					4000K	20°	2200lm	1300lm	SSR7G2-9402018N-WG
						36°	2200lm	1500lm	SSR7G2-9403618N-WG
						45°	2200lm	1500lm	SSR7G2-9404518N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available



Trimless code for SSR7G2-9304013N-WM → SSR8G2-9304013N-WM



Trimless code for SSR7G2-9304013N-WM → ESR7G2-9304013N-WM



Optional accessory



Honeycomb


Code for SSR7G2-9304018N-WM with Honeycomb
SSR7G2-9304018N-WM-H

NEKO / SENSE 100 / S100HR7-G2

Fixed LED Downlight

NEW



25W	CRI90	2700K 3000K 4000K	20° 36° 45°	 50,000h@L80B10	UGR < 19	IP 54		CB	CE					
-----	-------	-------------------------	-------------------	---	-------------	-------	---	----	----	---	---	---	---	---



Specular Reflector



Matt Reflector



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code					
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1500lm	SHR7G2-9272025N-WS					
						36°	2400lm	1700lm	SHR7G2-9273625N-WS					
						45°	2400lm	1700lm	SHR7G2-9274525N-WS					
					3000K	20°	2600lm	1600lm	SHR7G2-9302025N-WS					
						36°	2600lm	1800lm	SHR7G2-9303625N-WS					
						45°	2600lm	1800lm	SHR7G2-9304525N-WS					
					4000K	20°	2800lm	1700lm	SHR7G2-9402025N-WS					
						36°	2800lm	1900lm	SHR7G2-9403625N-WS					
						45°	2800lm	1900lm	SHR7G2-9404525N-WS					
					25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1500lm	SHR7G2-9272025N-WM
											36°	2400lm	1700lm	SHR7G2-9273625N-WM
45°	2400lm	1700lm	SHR7G2-9274525N-WM											
3000K	20°	2600lm	1600lm	SHR7G2-9302025N-WM										
	36°	2600lm	1800lm	SHR7G2-9303625N-WM										
	45°	2600lm	1800lm	SHR7G2-9304525N-WM										
4000K	20°	2800lm	1700lm	SHR7G2-9402025N-WM										
	36°	2800lm	1900lm	SHR7G2-9403625N-WM										
	45°	2800lm	1900lm	SHR7G2-9404525N-WM										
25 W	28 W	36 V	700 mA	90						2700K	20°	2400lm	1500lm	SHR7G2-9272025N-WB
											36°	2400lm	1700lm	SHR7G2-9273625N-WB
					45°	2400lm	1700lm	SHR7G2-9274525N-WB						
					3000K	20°	2600lm	1600lm	SHR7G2-9302025N-WB					
						36°	2600lm	1800lm	SHR7G2-9303625N-WB					
						45°	2600lm	1800lm	SHR7G2-9304525N-WB					
					4000K	20°	2800lm	1700lm	SHR7G2-9402025N-WB					
						36°	2800lm	1900lm	SHR7G2-9403625N-WB					
						45°	2800lm	1900lm	SHR7G2-9404525N-WB					

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Code for SHR7G2-9304525N-WM with Honeycomb
SHR7G2-9304525N-WM-H



Dark Light Reflector



White Reflector




Gold Reflector



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code					
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1500lm	SHR7G2-9272025N-WC					
						36°	2400lm	1700lm	SHR7G2-9273625N-WC					
						45°	2400lm	1700lm	SHR7G2-9274525N-WC					
					3000K	20°	2600lm	1600lm	SHR7G2-9302025N-WC					
						36°	2600lm	1800lm	SHR7G2-9303625N-WC					
						45°	2600lm	1800lm	SHR7G2-9304525N-WC					
					4000K	20°	2800lm	1700lm	SHR7G2-9402025N-WC					
						36°	2800lm	1900lm	SHR7G2-9403625N-WC					
						45°	2800lm	1900lm	SHR7G2-9404525N-WC					
					25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1500lm	SHR7G2-9272025N-WW
											36°	2400lm	1700lm	SHR7G2-9273625N-WW
45°	2400lm	1700lm	SHR7G2-9274525N-WW											
3000K	20°	2600lm	1600lm	SHR7G2-9302025N-WW										
	36°	2600lm	1800lm	SHR7G2-9303625N-WW										
	45°	2600lm	1800lm	SHR7G2-9304525N-WW										
4000K	20°	2800lm	1700lm	SHR7G2-9402025N-WW										
	36°	2800lm	1900lm	SHR7G2-9403625N-WW										
	45°	2800lm	1900lm	SHR7G2-9404525N-WW										
25 W	28 W	36 V	700 mA	90						2700K	20°	2400lm	1500lm	SHR7G2-9272025N-WG
											36°	2400lm	1700lm	SHR7G2-9273625N-WG
					45°	2400lm	1700lm	SHR7G2-9274525N-WG						
					3000K	20°	2600lm	1600lm	SHR7G2-9302025N-WG					
						36°	2600lm	1800lm	SHR7G2-9303625N-WG					
						45°	2600lm	1800lm	SHR7G2-9304525N-WG					
					4000K	20°	2800lm	1700lm	SHR7G2-9402025N-WG					
						36°	2800lm	1900lm	SHR7G2-9403625N-WG					
						45°	2800lm	1900lm	SHR7G2-9404525N-WG					

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Trimless Version available



Trimless code for SHR7G2-9304525N-WM → SHR8G2-9304525N-WM



Trimless code for SHR7G2-9304525N-WM → SHR7G2-9304525N-WM



NEKO / SENSE 100 / S100R2-G2
Fixed LED Downlight

NEW



See Details @www.nekolighting.com

13W 18W	CRI90	2700K 3000K 4000K	20° 36° 45°		UGR < 19	IP54		CB	CE					
------------	-------	-------------------------	-------------------	--	-------------	------	--	----	----	--	--	--	--	--

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSR2G2-9272013N-WS
						36°	1400lm	1000lm	SSR2G2-9273613N-WS
						45°	1400lm	1000lm	SSR2G2-9274513N-WS
					3000K	20°	1500lm	1000lm	SSR2G2-9302013N-WS
						36°	1500lm	1100lm	SSR2G2-9303613N-WS
						45°	1500lm	1100lm	SSR2G2-9304513N-WS
					4000K	20°	1600lm	1100lm	SSR2G2-9402013N-WS
						36°	1600lm	1200lm	SSR2G2-9403613N-WS
						45°	1600lm	1200lm	SSR2G2-9404513N-WS
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSR2G2-9272018N-WS
						36°	1900lm	1500lm	SSR2G2-9273618N-WS
						45°	1900lm	1500lm	SSR2G2-9274518N-WS
					3000K	20°	2000lm	1400lm	SSR2G2-9302018N-WS
						36°	2000lm	1600lm	SSR2G2-9303618N-WS
						45°	2000lm	1600lm	SSR2G2-9304518N-WS
					4000K	20°	2200lm	1500lm	SSR2G2-9402018N-WS
						36°	2200lm	1700lm	SSR2G2-9403618N-WS
						45°	2200lm	1700lm	SSR2G2-9404518N-WS
13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSR2G2-9272013N-WM
						36°	1400lm	1000lm	SSR2G2-9273613N-WM
						45°	1400lm	1000lm	SSR2G2-9274513N-WM
					3000K	20°	1500lm	1000lm	SSR2G2-9302013N-WM
						36°	1500lm	1100lm	SSR2G2-9303613N-WM
						45°	1500lm	1100lm	SSR2G2-9304513N-WM
					4000K	20°	1600lm	1100lm	SSR2G2-9402013N-WM
						36°	1600lm	1200lm	SSR2G2-9403613N-WM
						45°	1600lm	1200lm	SSR2G2-9404513N-WM
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSR2G2-9272018N-WM
						36°	1900lm	1500lm	SSR2G2-9273618N-WM
						45°	1900lm	1500lm	SSR2G2-9274518N-WM
					3000K	20°	2000lm	1400lm	SSR2G2-9302018N-WM
						36°	2000lm	1600lm	SSR2G2-9303618N-WM
						45°	2000lm	1600lm	SSR2G2-9304518N-WM
					4000K	20°	2200lm	1500lm	SSR2G2-9402018N-WM
						36°	2200lm	1700lm	SSR2G2-9403618N-WM
						45°	2200lm	1700lm	SSR2G2-9404518N-WM

Code Remark N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Code for SSR2G2-9303618N-WM with Honeycomb
SSR2G2-9303618N-WM-H



Black Reflector



Dark Light Reflector



White Reflector



White Reflector



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSR2G2-9272013N-WB
						36°	1400lm	1000lm	SSR2G2-9273613N-WB
						45°	1400lm	1000lm	SSR2G2-9274513N-WB
					3000K	20°	1500lm	1000lm	SSR2G2-9302013N-WB
						36°	1500lm	1100lm	SSR2G2-9303613N-WB
						45°	1500lm	1100lm	SSR2G2-9304513N-WB
					4000K	20°	1600lm	1100lm	SSR2G2-9402013N-WB
						36°	1600lm	1200lm	SSR2G2-9403613N-WB
						45°	1600lm	1200lm	SSR2G2-9404513N-WB
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSR2G2-9272018N-WB
						36°	1900lm	1500lm	SSR2G2-9273618N-WB
						45°	1900lm	1500lm	SSR2G2-9274518N-WB
					3000K	20°	2000lm	1400lm	SSR2G2-9302018N-WB
						36°	2000lm	1600lm	SSR2G2-9303618N-WB
						45°	2000lm	1600lm	SSR2G2-9304518N-WB
					4000K	20°	2200lm	1500lm	SSR2G2-9402018N-WB
						36°	2200lm	1700lm	SSR2G2-9403618N-WB
						45°	2200lm	1700lm	SSR2G2-9404518N-WB
13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSR2G2-9272013N-WC
						36°	1400lm	1000lm	SSR2G2-9273613N-WC
						45°	1400lm	1000lm	SSR2G2-9274513N-WC
					3000K	20°	1500lm	1000lm	SSR2G2-9302013N-WC
						36°	1500lm	1100lm	SSR2G2-9303613N-WC
						45°	1500lm	1100lm	SSR2G2-9304513N-WC
					4000K	20°	1600lm	1100lm	SSR2G2-9402013N-WC
						36°	1600lm	1200lm	SSR2G2-9403613N-WC
						45°	1600lm	1200lm	SSR2G2-9404513N-WC
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSR2G2-9272018N-WC
						36°	1900lm	1500lm	SSR2G2-9273618N-WC
						45°	1900lm	1500lm	SSR2G2-9274518N-WC
					3000K	20°	2000lm	1400lm	SSR2G2-9302018N-WC
						36°	2000lm	1600lm	SSR2G2-9303618N-WC
						45°	2000lm	1600lm	SSR2G2-9304518N-WC
					4000K	20°	2200lm	1500lm	SSR2G2-9402018N-WC
						36°	2200lm	1700lm	SSR2G2-9403618N-WC
						45°	2200lm	1700lm	SSR2G2-9404518N-WC
13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSR2G2-9272013N-WW
						36°	1400lm	1000lm	SSR2G2-9273613N-WW
						45°	1400lm	1000lm	SSR2G2-9274513N-WW
					3000K	20°	1500lm	1000lm	SSR2G2-9302013N-WW
						36°	1500lm	1100lm	SSR2G2-9303613N-WW
						45°	1500lm	1100lm	SSR2G2-9304513N-WW
					4000K	20°	1600lm	1100lm	SSR2G2-9402013N-WW
						36°	1600lm	1200lm	SSR2G2-9403613N-WW
						45°	1600lm	1200lm	SSR2G2-9404513N-WW
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSR2G2-9272018N-WW
						36°	1900lm	1500lm	SSR2G2-9273618N-WW
						45°	1900lm	1500lm	SSR2G2-9274518N-WW
					3000K	20°	2000lm	1400lm	SSR2G2-9302018N-WW
						36°	2000lm	1600lm	SSR2G2-9303618N-WW
						45°	2000lm	1600lm	SSR2G2-9304518N-WW
					4000K	20°	2200lm	1500lm	SSR2G2-9402018N-WW
						36°	2200lm	1700lm	SSR2G2-9403618N-WW
						45°	2200lm	1700lm	SSR2G2-9404518N-WW
13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSR2G2-9272013N-WG
						36°	1400lm	1000lm	SSR2G2-9273613N-WG
						45°	1400lm	1000lm	SSR2G2-9274513N-WG
					3000K	20°	1500lm	1000lm	SSR2G2-9302013N-WG
						36°	1500lm	1100lm	SSR2G2-9303613N-WG
						45°	1500lm	1100lm	SSR2G2-9304513N-WG
					4000K	20°	1600lm	1100lm	SSR2G2-9402013N-WG
						36°	1600lm	1200lm	SSR2G2-9403613N-WG
						45°	1600lm	1200lm	SSR2G2-9404513N-WG
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSR2G2-9272018N-WG
						36°	1900lm	1500lm	SSR2G2-9273618N-WG
						45°	1900lm	1500lm	SSR2G2-9274518N-WG
					3000K	20°	2000lm	1400lm	SSR2G2-9302018N-WG
						36°	2000lm	1600lm	SSR2G2-9303618N-WG
						45°	2000lm	1600lm	SSR2G2-9304518N-WG
					4000K	20°	2200lm	1500lm	SSR2G2-9402018N-WG
						36°	2200lm	1700lm	SSR2G2-9403618N-WG
						45°	2200lm	1700lm	SSR2G2-9404518N-WG

Code Remark N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Trimless Version available



Trimless code for SSR2G2-9303618N-WM → SSR5G2-9303618N-WM



Trimless code for SSR2G2-9303618N-WM → ESR2G2-9303618N-WM



NEKO / SENSE 100H / S100HR2-G2
Fixed LED Downlight

NEW



25W	CRI90	2700K 3000K 4000K	20° 36° 45°		UGR < 19	IP 54		CB	CE						
-----	-------	-------------------------	-------------------	--	----------	-------	--	----	----	--	--	--	--	--	--



Specular Reflector



Matt Reflector



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20° 36° 45°	2400lm 2400lm 2400lm	1700lm 1900lm 1900lm	SHR2G2-9272025N-WS SHR2G2-9273625N-WS SHR2G2-9274525N-WS
					3000K	20° 36° 45°	2600lm 2600lm 2600lm	1800lm 2000lm 2000lm	SHR2G2-9302025N-WS SHR2G2-9303625N-WS SHR2G2-9304525N-WS
					4000K	20° 36° 45°	2800lm 2800lm 2800lm	1900lm 2100lm 2100lm	SHR2G2-9402025N-WS SHR2G2-9403625N-WS SHR2G2-9404525N-WS
25 W	28 W	36 V	700 mA	90	2700K	20° 36° 45°	2400lm 2400lm 2400lm	1700lm 1900lm 1900lm	SHR2G2-9272025N-WM SHR2G2-9273625N-WM SHR2G2-9274525N-WM
					3000K	20° 36° 45°	2600lm 2600lm 2600lm	1800lm 2000lm 2000lm	SHR2G2-9302025N-WM SHR2G2-9303625N-WM SHR2G2-9304525N-WM
					4000K	20° 36° 45°	2800lm 2800lm 2800lm	1900lm 2100lm 2100lm	SHR2G2-9402025N-WM SHR2G2-9403625N-WM SHR2G2-9404525N-WM
25 W	28 W	36 V	700 mA	90	2700K	20° 36° 45°	2400lm 2400lm 2400lm	1700lm 1900lm 1900lm	SHR2G2-9272025N-WB SHR2G2-9273625N-WB SHR2G2-9274525N-WB
					3000K	20° 36° 45°	2600lm 2600lm 2600lm	1800lm 2000lm 2000lm	SHR2G2-9302025N-WB SHR2G2-9303625N-WB SHR2G2-9304525N-WB
					4000K	20° 36° 45°	2800lm 2800lm 2800lm	1900lm 2100lm 2100lm	SHR2G2-9402025N-WB SHR2G2-9403625N-WB SHR2G2-9404525N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Honeycomb

Code for SHR7G2-9304525N-WM with Honeycomb
SHR7G2-9304525N-WM-H



Dark Light Reflector



White Reflector




Gold Reflector




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20° 36° 45°	2400lm 2400lm 2400lm	1700lm 1900lm 1900lm	SHR2G2-9272025N-WC SHR2G2-9273625N-WC SHR2G2-9274525N-WC
					3000K	20° 36° 45°	2600lm 2600lm 2600lm	1800lm 2000lm 2000lm	SHR2G2-9302025N-WC SHR2G2-9303625N-WC SHR2G2-9304525N-WC
					4000K	20° 36° 45°	2800lm 2800lm 2800lm	1900lm 2100lm 2100lm	SHR2G2-9402025N-WC SHR2G2-9403625N-WC SHR2G2-9404525N-WC
25 W	28 W	36 V	700 mA	90	2700K	20° 36° 45°	2400lm 2400lm 2400lm	1700lm 1900lm 1900lm	SHR2G2-9272025N-WW SHR2G2-9273625N-WW SHR2G2-9274525N-WW
					3000K	20° 36° 45°	2600lm 2600lm 2600lm	1800lm 2000lm 2000lm	SHR2G2-9302025N-WW SHR2G2-9303625N-WW SHR2G2-9304525N-WW
					4000K	20° 36° 45°	2800lm 2800lm 2800lm	1900lm 2100lm 2100lm	SHR2G2-9402025N-WW SHR2G2-9403625N-WW SHR2G2-9404525N-WW
25 W	28 W	36 V	700 mA	90	2700K	20° 36° 45°	2400lm 2400lm 2400lm	1700lm 1900lm 1900lm	SHR2G2-9272025N-WG SHR2G2-9273625N-WG SHR2G2-9274525N-WG
					3000K	20° 36° 45°	2600lm 2600lm 2600lm	1800lm 2000lm 2000lm	SHR2G2-9302025N-WG SHR2G2-9303625N-WG SHR2G2-9304525N-WG
					4000K	20° 36° 45°	2800lm 2800lm 2800lm	1900lm 2100lm 2100lm	SHR2G2-9402025N-WG SHR2G2-9403625N-WG SHR2G2-9404525N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Trimless Version available



Trimless code for SHR2G2-9304525N-WM → SHR5G2-9304525N-WM



Trimless code for SHR2G2-9304525N-WM → EHR2G2-9304525N-WM



NEKO / SENSE 100 / S100S2-G2

Fixed LED Downlight

NEW



See Details @www.nekolighting.com

13W 18W	CRI90	2700K 3000K 4000K	20° 36° 45°		UGR < 19	IP54		CB	CE						
------------	-------	-------------------------	-------------------	--	-------------	------	--	----	----	--	--	--	--	--	--

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSS2G2-9272013N-WS
						36°	1400lm	1000lm	SSS2G2-9273613N-WS
						45°	1400lm	1000lm	SSS2G2-9274513N-WS
					3000K	20°	1500lm	1000lm	SSS2G2-9302013N-WS
						36°	1500lm	1100lm	SSS2G2-9303613N-WS
						45°	1500lm	1100lm	SSS2G2-9304513N-WS
					4000K	20°	1600lm	1100lm	SSS2G2-9402013N-WS
						36°	1600lm	1200lm	SSS2G2-9403613N-WS
						45°	1600lm	1200lm	SSS2G2-9404513N-WS
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSS2G2-9272018N-WS
						36°	1900lm	1500lm	SSS2G2-9273618N-WS
						45°	1900lm	1500lm	SSS2G2-9274518N-WS
					3000K	20°	2000lm	1400lm	SSS2G2-9302018N-WS
						36°	2000lm	1600lm	SSS2G2-9303618N-WS
						45°	2000lm	1600lm	SSS2G2-9304518N-WS
					4000K	20°	2200lm	1500lm	SSS2G2-9402018N-WS
						36°	2200lm	1700lm	SSS2G2-9403618N-WS
						45°	2200lm	1700lm	SSS2G2-9404518N-WS
13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSS2G2-9272013N-WM
						36°	1400lm	1000lm	SSS2G2-9273613N-WM
						45°	1400lm	1000lm	SSS2G2-9274513N-WM
					3000K	20°	1500lm	1000lm	SSS2G2-9302013N-WM
						36°	1500lm	1100lm	SSS2G2-9303613N-WM
						45°	1500lm	1100lm	SSS2G2-9304513N-WM
					4000K	20°	1600lm	1100lm	SSS2G2-9402013N-WM
						36°	1600lm	1200lm	SSS2G2-9403613N-WM
						45°	1600lm	1200lm	SSS2G2-9404513N-WM
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSS2G2-9272018N-WM
						36°	1900lm	1500lm	SSS2G2-9273618N-WM
						45°	1900lm	1500lm	SSS2G2-9274518N-WM
					3000K	20°	2000lm	1400lm	SSS2G2-9302018N-WM
						36°	2000lm	1600lm	SSS2G2-9303618N-WM
						45°	2000lm	1600lm	SSS2G2-9304518N-WM
					4000K	20°	2200lm	1500lm	SSS2G2-9402018N-WM
						36°	2200lm	1700lm	SSS2G2-9403618N-WM
						45°	2200lm	1700lm	SSS2G2-9404518N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Honeycomb

Code for SSS2G2-9303618N-WM with Honeycomb
SSS2G2-9303618N-WM-H



Black Reflector



Dark Light Reflector



White Reflector



White Reflector



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSS2G2-9272013N-WB
						36°	1400lm	1000lm	SSS2G2-9273613N-WB
						45°	1400lm	1000lm	SSS2G2-9274513N-WB
					3000K	20°	1500lm	1000lm	SSS2G2-9302013N-WB
						36°	1500lm	1100lm	SSS2G2-9303613N-WB
						45°	1500lm	1100lm	SSS2G2-9304513N-WB
					4000K	20°	1600lm	1100lm	SSS2G2-9402013N-WB
						36°	1600lm	1200lm	SSS2G2-9403613N-WB
						45°	1600lm	1200lm	SSS2G2-9404513N-WB
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSS2G2-9272018N-WB
						36°	1900lm	1500lm	SSS2G2-9273618N-WB
						45°	1900lm	1500lm	SSS2G2-9274518N-WB
					3000K	20°	2000lm	1400lm	SSS2G2-9302018N-WB
						36°	2000lm	1600lm	SSS2G2-9303618N-WB
						45°	2000lm	1600lm	SSS2G2-9304518N-WB
					4000K	20°	2200lm	1500lm	SSS2G2-9402018N-WB
						36°	2200lm	1700lm	SSS2G2-9403618N-WB
						45°	2200lm	1700lm	SSS2G2-9404518N-WB
13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSS2G2-9272013N-WC
						36°	1400lm	1000lm	SSS2G2-9273613N-WC
						45°	1400lm	1000lm	SSS2G2-9274513N-WC
					3000K	20°	1500lm	1000lm	SSS2G2-9302013N-WC
						36°	1500lm	1100lm	SSS2G2-9303613N-WC
						45°	1500lm	1100lm	SSS2G2-9304513N-WC
					4000K	20°	1600lm	1100lm	SSS2G2-9402013N-WC
						36°	1600lm	1200lm	SSS2G2-9403613N-WC
						45°	1600lm	1200lm	SSS2G2-9404513N-WC
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSS2G2-9272018N-WC
						36°	1900lm	1500lm	SSS2G2-9273618N-WC
						45°	1900lm	1500lm	SSS2G2-9274518N-WC
					3000K	20°	2000lm	1400lm	SSS2G2-9302018N-WC
						36°	2000lm	1600lm	SSS2G2-9303618N-WC
						45°	2000lm	1600lm	SSS2G2-9304518N-WC
					4000K	20°	2200lm	1500lm	SSS2G2-9402018N-WC
						36°	2200lm	1700lm	SSS2G2-9403618N-WC
						45°	2200lm	1700lm	SSS2G2-9404518N-WC
13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSS2G2-9272013N-WW
						36°	1400lm	1000lm	SSS2G2-9273613N-WW
						45°	1400lm	1000lm	SSS2G2-9274513N-WW
					3000K	20°	1500lm	1000lm	SSS2G2-9302013N-WW
						36°	1500lm	1100lm	SSS2G2-9303613N-WW
						45°	1500lm	1100lm	SSS2G2-9304513N-WW
					4000K	20°	1600lm	1100lm	SSS2G2-9402013N-WW
						36°	1600lm	1200lm	SSS2G2-9403613N-WW
						45°	1600lm	1200lm	SSS2G2-9404513N-WW
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSS2G2-9272018N-WW
						36°	1900lm	1500lm	SSS2G2-9273618N-WW
						45°	1900lm	1500lm	SSS2G2-9274518N-WW
					3000K	20°	2000lm	1400lm	SSS2G2-9302018N-WW
						36°	2000lm	1600lm	SSS2G2-9303618N-WW
						45°	2000lm	1600lm	SSS2G2-9304518N-WW
					4000K	20°	2200lm	1500lm	SSS2G2-9402018N-WW
						36°	2200lm	1700lm	SSS2G2-9403618N-WW
						45°	2200lm	1700lm	SSS2G2-9404518N-WW
13 W	15 W	36 V	350 mA	90	2700K	20°	1400lm	950lm	SSS2G2-9272013N-WG
						36°	1400lm	1000lm	SSS2G2-9273613N-WG
						45°	1400lm	1000lm	SSS2G2-9274513N-WG
					3000K	20°	1500lm	1000lm	SSS2G2-9302013N-WG
						36°	1500lm	1100lm	SSS2G2-9303613N-WG
						45°	1500lm	1100lm	SSS2G2-9304513N-WG
					4000K	20°	1600lm	1100lm	SSS2G2-9402013N-WG
						36°	1600lm	1200lm	SSS2G2-9403613N-WG
						45°	1600lm	1200lm	SSS2G2-9404513N-WG
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1300lm	SSS2G2-9272018N-WG
						36°	1900lm	1500lm	SSS2G2-9273618N-WG
						45°	1900lm	1500lm	SSS2G2-9274518N-WG
					3000K	20°	2000lm	1400lm	SSS2G2-9302018N-WG
						36°	2000lm	1600lm	SSS2G2-9303618N-WG
						45°	2000lm	1600lm	SSS2G2-9304518N-WG
					4000K	20°	2200lm	1500lm	SSS2G2-9402018N-WG
						36°	2200lm	1700lm	SSS2G2-9403618N-WG
						45°	2200lm	1700lm	SSR2G2-9404518N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Trimless Version available



Trimless code for SSS2G2-9303618N-WM → SSS5G2-9303618N-WM




Trimless code for SSS2G2-9303618N-WM → ESS2G2-9303618N-WM



NEKO / SENSE 100H / S100HS2-G2
Fixed LED Downlight

NEW



25W	CRI90	2700K 3000K 4000K	20° 36° 45°	 50,000h@L80B10	UGR < 19	IP 54		CB	CE			 96x96	 1-25mm Ceiling Thickness	 157 107x107
-----	-------	-------------------------	-------------------	--	----------	-------	---	----	----	---	---	--	---	--



Specular Reflector



Matt Reflector



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20° 36° 45°	2400lm 2400lm 2400lm	1700lm 1900lm 1900lm	SHS2G2-9272025N-WS SHS2G2-9273625N-WS SHS2G2-9274525N-WS
					3000K	20° 36° 45°	2600lm 2600lm 2600lm	1800lm 2000lm 2000lm	SHS2G2-9302025N-WS SHS2G2-9303625N-WS SHS2G2-9304525N-WS
					4000K	20° 36° 45°	2800lm 2800lm 2800lm	1900lm 2100lm 2100lm	SHS2G2-9402025N-WS SHS2G2-9403625N-WS SHS2G2-9404525N-WS
25 W	28 W	36 V	700 mA	90	2700K	20° 36° 45°	2400lm 2400lm 2400lm	1700lm 1900lm 1900lm	SHS2G2-9272025N-WM SHS2G2-9273625N-WM SHS2G2-9274525N-WM
					3000K	20° 36° 45°	2600lm 2600lm 2600lm	1800lm 2000lm 2000lm	SHS2G2-9302025N-WM SHS2G2-9303625N-WM SHS2G2-9304525N-WM
					4000K	20° 36° 45°	2800lm 2800lm 2800lm	1900lm 2100lm 2100lm	SHS2G2-9402025N-WM SHS2G2-9403625N-WM SHS2G2-9404525N-WM
25 W	28 W	36 V	700 mA	90	2700K	20° 36° 45°	2400lm 2400lm 2400lm	1700lm 1900lm 1900lm	SHS2G2-9272025N-WB SHS2G2-9273625N-WB SHS2G2-9274525N-WB
					3000K	20° 36° 45°	2600lm 2600lm 2600lm	1800lm 2000lm 2000lm	SHS2G2-9302025N-WB SHS2G2-9303625N-WB SHS2G2-9304525N-WB
					4000K	20° 36° 45°	2800lm 2800lm 2800lm	1900lm 2100lm 2100lm	SHS2G2-9402025N-WB SHS2G2-9403625N-WB SHS2G2-9404525N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Honeycomb

Code for SHS2G2-9304525N-WM with Honeycomb
SHS2G2-9304525N-WM-H



Dark Light Reflector



White Reflector




Gold Reflector



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20° 36° 45°	2400lm 2400lm 2400lm	1700lm 1900lm 1900lm	SHS2G2-9272025N-WC SHS2G2-9273625N-WC SHS2G2-9274525N-WC
					3000K	20° 36° 45°	2600lm 2600lm 2600lm	1800lm 2000lm 2000lm	SHS2G2-9302025N-WC SHS2G2-9303625N-WC SHS2G2-9304525N-WC
					4000K	20° 36° 45°	2800lm 2800lm 2800lm	1900lm 2100lm 2100lm	SHS2G2-9402025N-WC SHS2G2-9403625N-WC SHS2G2-9404525N-WC
25 W	28 W	36 V	700 mA	90	2700K	20° 36° 45°	2400lm 2400lm 2400lm	1700lm 1900lm 1900lm	SHS2G2-9272025N-WW SHS2G2-9273625N-WW SHS2G2-9274525N-WW
					3000K	20° 36° 45°	2600lm 2600lm 2600lm	1800lm 2000lm 2000lm	SHS2G2-9302025N-WW SHS2G2-9303625N-WW SHS2G2-9304525N-WW
					4000K	20° 36° 45°	2800lm 2800lm 2800lm	1900lm 2100lm 2100lm	SHS2G2-9402025N-WW SHS2G2-9403625N-WW SHS2G2-9404525N-WW
25 W	28 W	36 V	700 mA	90	2700K	20° 36° 45°	2400lm 2400lm 2400lm	1700lm 1900lm 1900lm	SHS2G2-9272025N-WG SHS2G2-9273625N-WG SHS2G2-9274525N-WG
					3000K	20° 36° 45°	2600lm 2600lm 2600lm	1800lm 2000lm 2000lm	SHS2G2-9302025N-WG SHS2G2-9303625N-WG SHS2G2-9304525N-WG
					4000K	20° 36° 45°	2800lm 2800lm 2800lm	1900lm 2100lm 2100lm	SHS2G2-9402025N-WG SHS2G2-9403625N-WG SHS2G2-9404525N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Trimless Version available



Trimless code for SHS2G2-9304525N-WM → SHS5G2-9304525N-WM



Trimless code for SHS2G2-9304525N-WM → EHS2G2-9304525N-WM





NEKO / SENSE 100 / S100R3-G2

Wall Washer LED Downlight

NEW



NEKO / SENSE 100H / S100HR3-G2

Wall Washer LED Downlight

NEW





LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	Wall Washer	1400lm	650lm	SSR3G2-927WW13N-WM	
							3000K Wall Washer	1500lm	680lm	SSR3G2-930WW13N-WM
							4000K Wall Washer	1600lm	750lm	SSR3G2-940WW13N-WM
18 W	21 W	36 V	500 mA	90	2700K	Wall Washer	1900lm	850lm	SSR3G2-927WW18N-WM	
							3000K Wall Washer	2000lm	900lm	SSR3G2-930WW18N-WM
							4000K Wall Washer	2200lm	1000lm	SSR3G2-940WW18N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Matt Reflector

Trimless Version available



	LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
	25 W	28 W	36 V	700 mA	90	2700K	Wall Washer	2400lm	1000lm	SHR3G2-927WW25N-WM	
						3000K	Wall Washer	2600lm	1100lm	SHR3G2-930WW25N-WM	
						4000K	Wall Washer	2800lm	1200lm	SHR3G2-940WW25N-WM	
Code Remark N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)											

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Matt Reflector

Trimless Version available



NEKO / SENSE 100 / S100S3 G2

Wall Washer LED Downlight

NEW



See Details @www.nekolighting.com



NEKO / SENSE 100H / S100HS3-G2

Wall Washer LED Downlight

NEW




LED Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	Wall Washer	1400lm	650lm	SSS3G2-927WW13N-WM
					3000K	Wall Washer	1500lm	680lm	SSS3G2-930WW13N-WM
					4000K	Wall Washer	1600lm	750lm	SSS3G2-940WW13N-WM
18 W	21 W	36 V	500 mA	90	2700K	Wall Washer	1900lm	850lm	SSS3G2-927WW18N-WM
					3000K	Wall Washer	2000lm	900lm	SSS3G2-930WW18N-WM
					4000K	Wall Washer	2200lm	1000lm	SSS3G2-940WW18N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)




Matt Reflector


Trimless Version available



Trimless code for SSS3G2-930WW13N-WM → SSS6G2-930WW13N-WM



Trimless code for SSS3G2-930WW13N-WM → ESS3G2-930WW13N-WM




LED Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	Wall Washer	2400lm	1000lm	SHS3G2-927WW25N-WM
					3000K	Wall Washer	2600lm	1100lm	SHS3G2-930WW25N-WM
					4000K	Wall Washer	2800lm	1200lm	SHS3G2-940WW25N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Matt Reflector


Trimless Version available





Trimless code for SHS3G2-930WW13N-WM → SHS6G2-930WW13N-WM



Trimless code for SHS3G2-930WW13N-WM → EHS3G2-930WW13N-WM



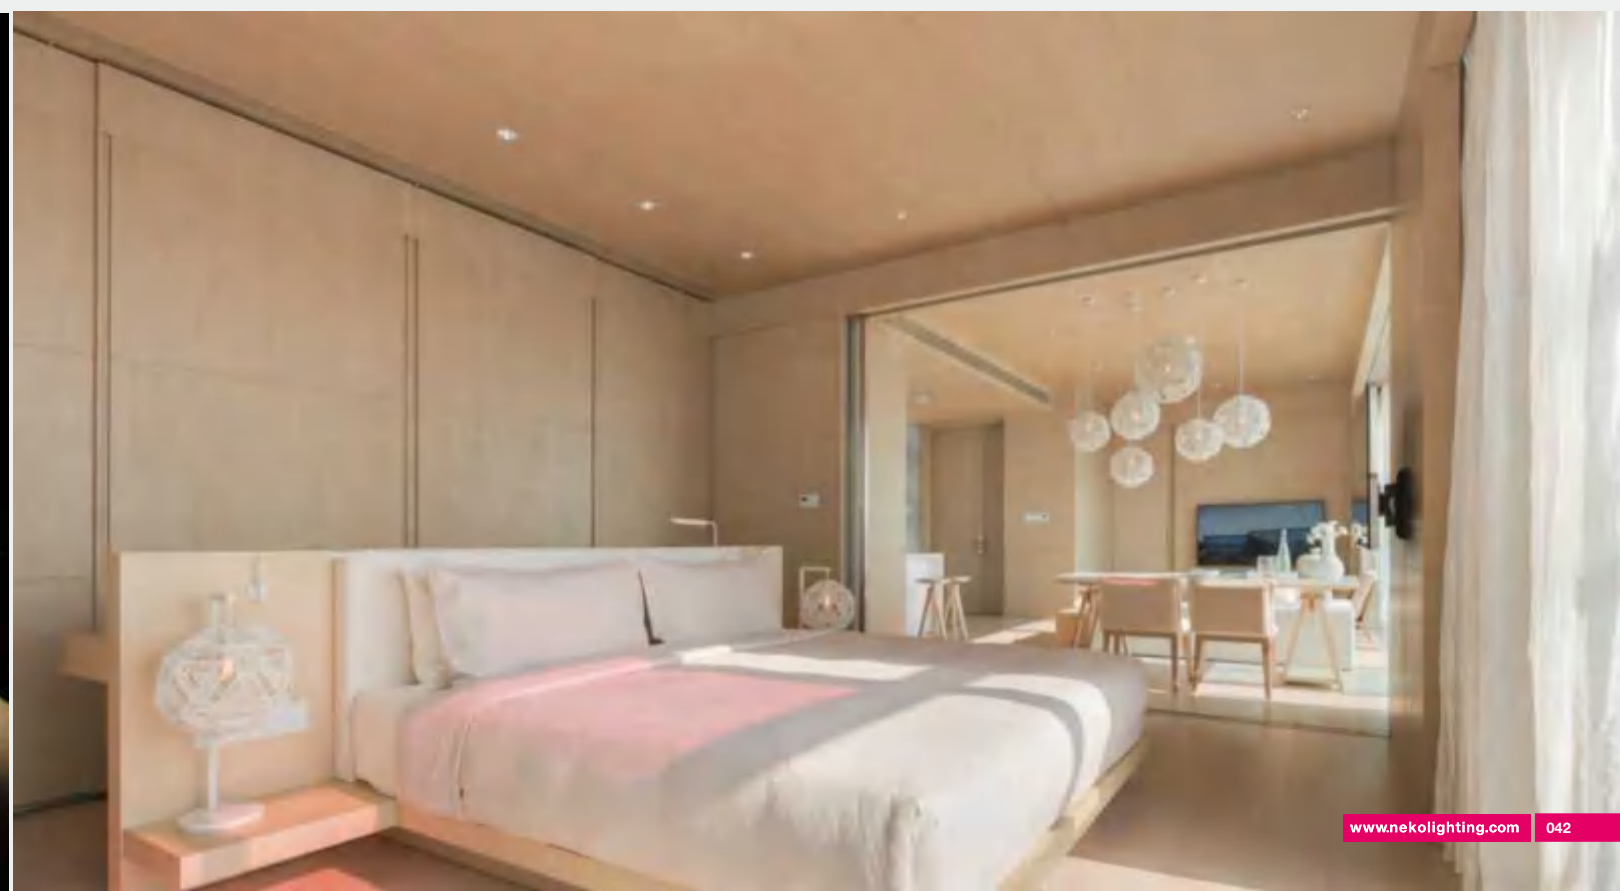

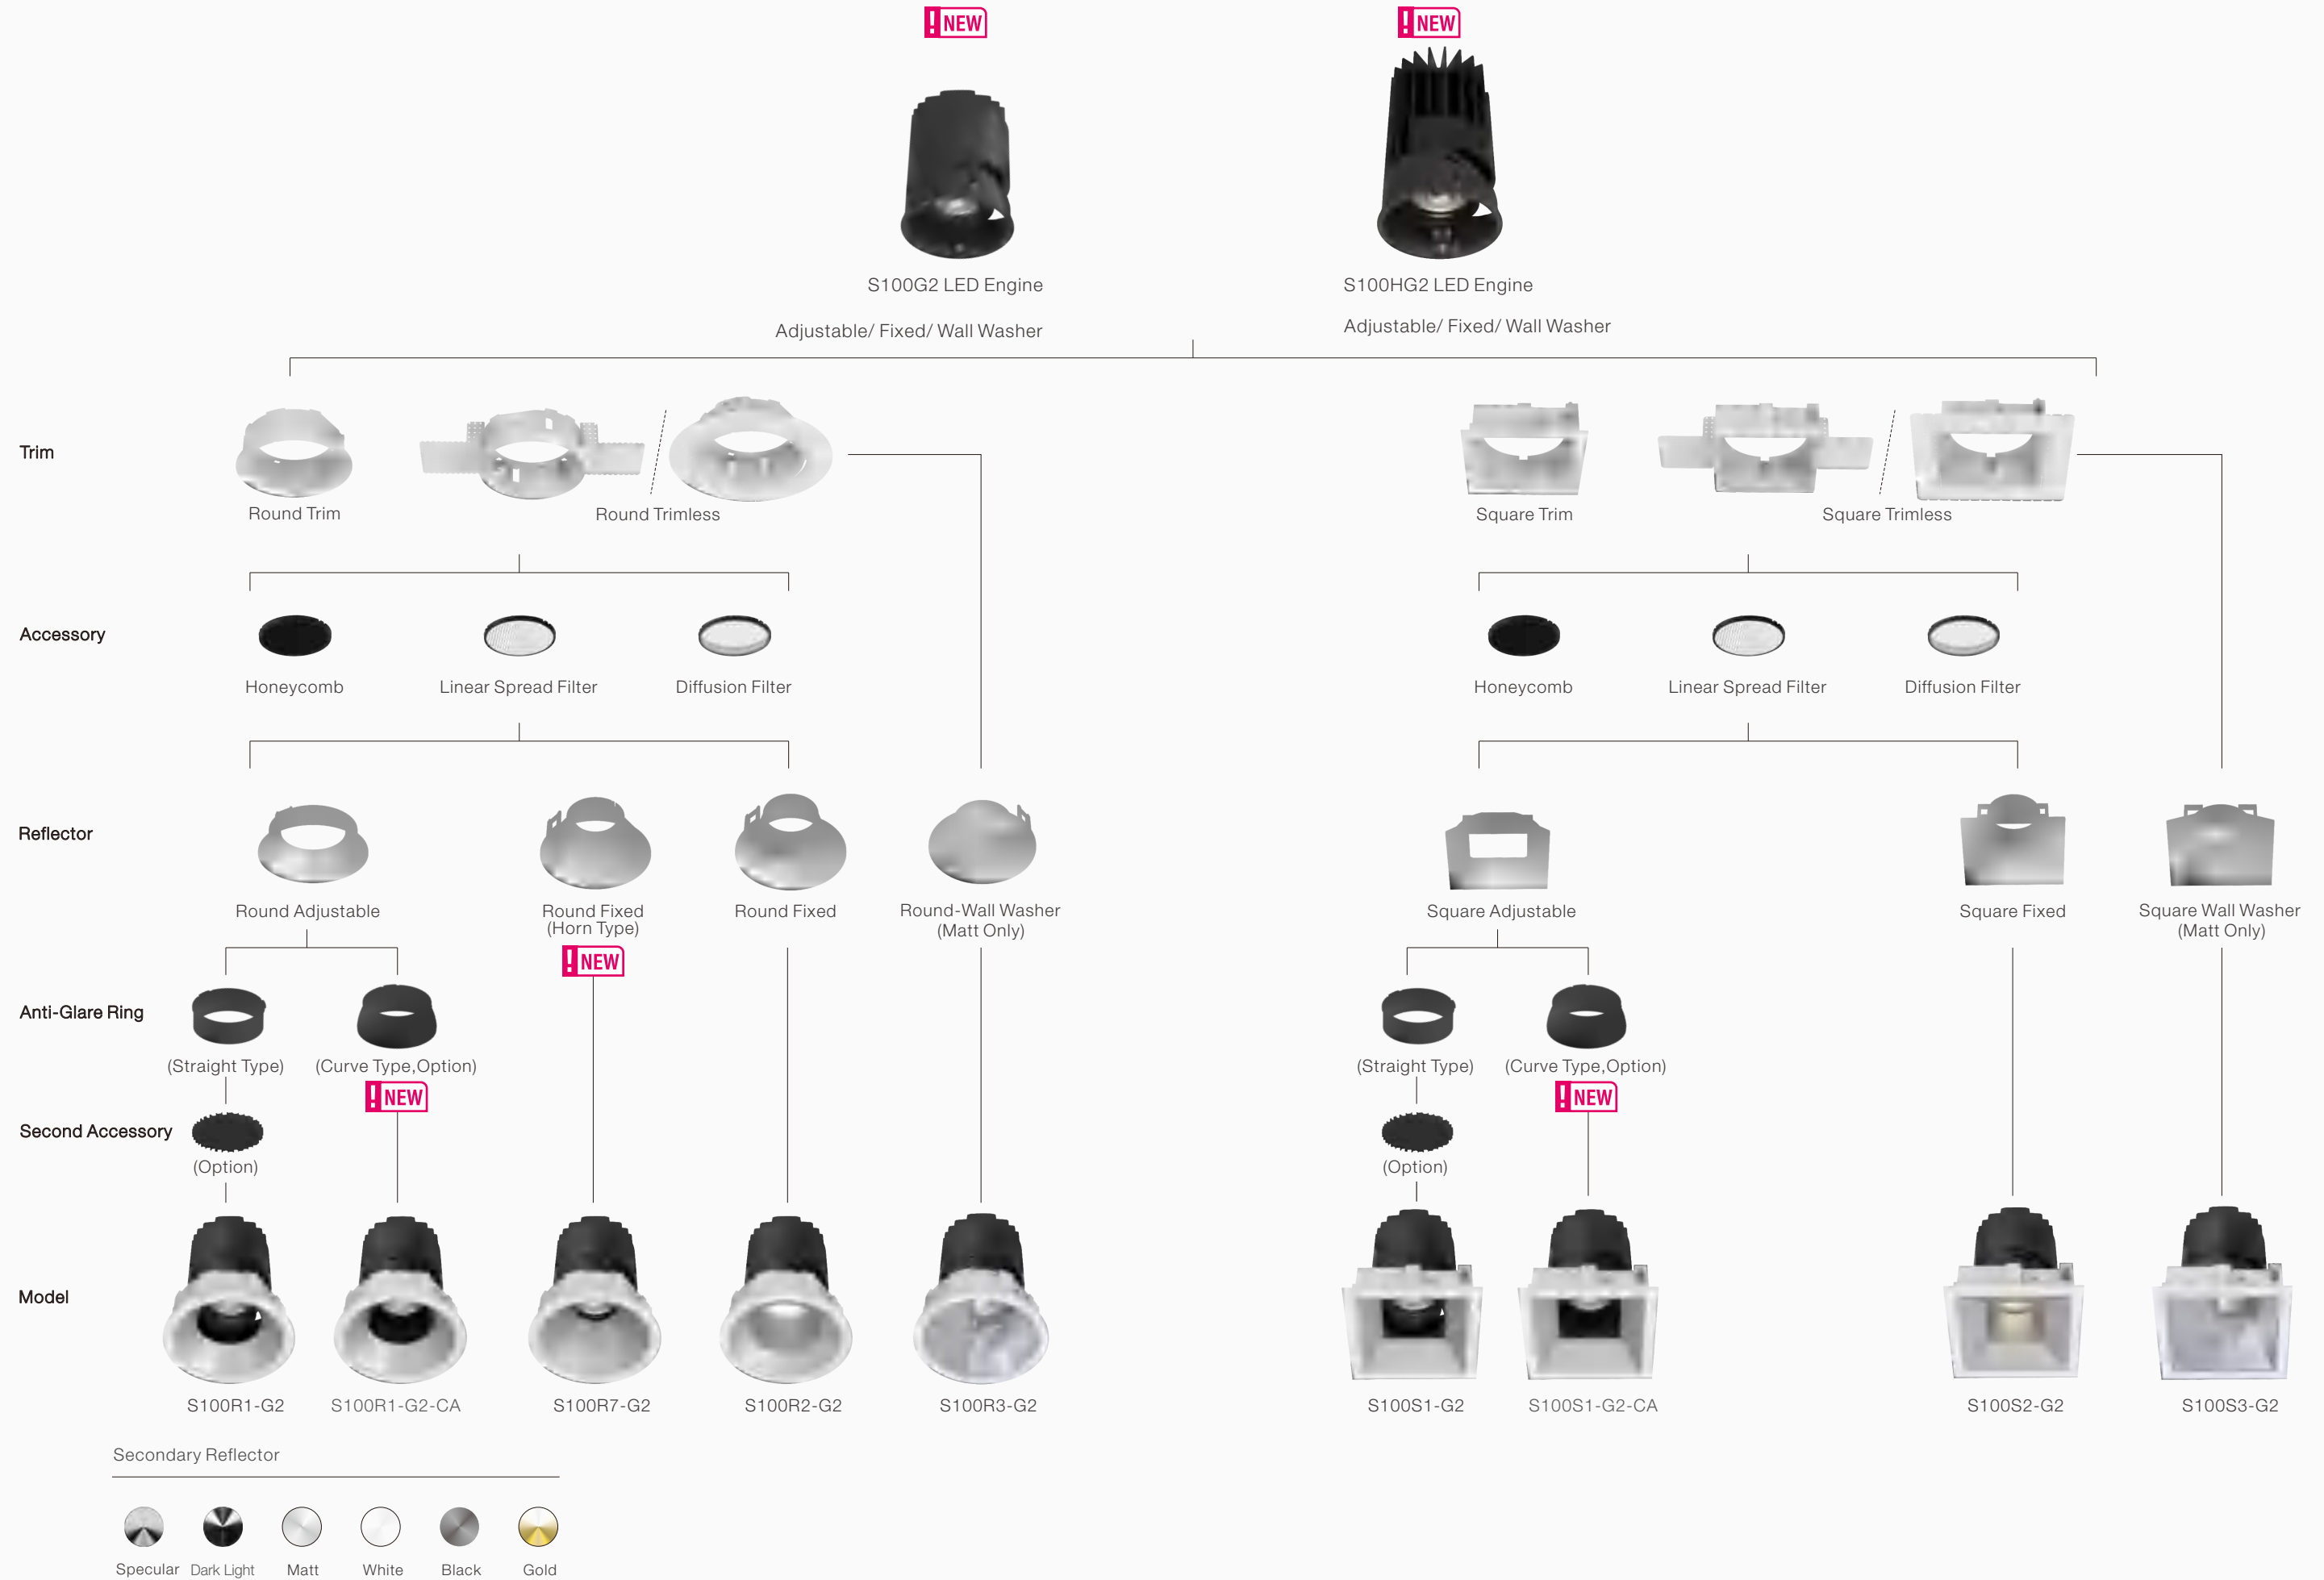


NEKO / SENSE 100 / S100R1-G2
Adjustable LED Downlight

NEW



See Details @www.nekolighting.com

13W 18W	CRI90	2700K 3000K 4000K	18° 30° 40° 45°		UGR < 19	IP54		CB	CE		
------------	-------	-------------------------	--------------------------	--	----------	------	--	----	----	--	--



Specular Reflector



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1500lm	1050lm	SSR1G2-9271813N-WS
						30°	1500lm	1100lm	SSR1G2-9273013N-WS
						40°	1500lm	1100lm	SSR1G2-9274013N-WS
						45°	1500lm	1050lm	SSR1G2-9274513N-WS
					3000K	18°	1600lm	1150lm	SSR1G2-9301813N-WS
						30°	1600lm	1200lm	SSR1G2-9303013N-WS
						40°	1600lm	1200lm	SSR1G2-9304013N-WS
						45°	1600lm	1150lm	SSR1G2-9304513N-WS
					4000K	18°	1700lm	1200lm	SSR1G2-9401813N-WS
						30°	1700lm	1300lm	SSR1G2-9403013N-WS
						40°	1700lm	1300lm	SSR1G2-9404013N-WS
						45°	1700lm	1200lm	SSR1G2-9404513N-WS
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1400lm	SSR1G2-9271818N-WS
						30°	1900lm	1600lm	SSR1G2-9273018N-WS
						40°	1900lm	1600lm	SSR1G2-9274018N-WS
						45°	1900lm	1400lm	SSR1G2-9274518N-WS
					3000K	18°	2000lm	1500lm	SSR1G2-9301818N-WS
						30°	2000lm	1700lm	SSR1G2-9303018N-WS
						40°	2000lm	1700lm	SSR1G2-9304018N-WS
						45°	2000lm	1500lm	SSR1G2-9304518N-WS
					4000K	18°	2200lm	1700lm	SSR1G2-9401818N-WS
						30°	2200lm	1800lm	SSR1G2-9403018N-WS
						40°	2200lm	1800lm	SSR1G2-9404018N-WS
						45°	2200lm	1700lm	SSR1G2-9404518N-WS
13 W	15 W	36 V	350 mA	90	2700K	18°	1500lm	1050lm	SSR1G2-9271813N-WM
						30°	1500lm	1100lm	SSR1G2-9273013N-WM
						40°	1500lm	1100lm	SSR1G2-9274013N-WM
						45°	1500lm	1050lm	SSR1G2-9274513N-WM
					3000K	18°	1600lm	1150lm	SSR1G2-9301813N-WM
						30°	1600lm	1200lm	SSR1G2-9303013N-WM
						40°	1600lm	1200lm	SSR1G2-9304013N-WM
						45°	1600lm	1150lm	SSR1G2-9304513N-WM
					4000K	18°	1700lm	1200lm	SSR1G2-9401813N-WM
						30°	1700lm	1300lm	SSR1G2-9403013N-WM
						40°	1700lm	1300lm	SSR1G2-9404013N-WM
						45°	1700lm	1200lm	SSR1G2-9404513N-WM
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1400lm	SSR1G2-9271818N-WM
						30°	1900lm	1600lm	SSR1G2-9273018N-WM
						40°	1900lm	1600lm	SSR1G2-9274018N-WM
						45°	1900lm	1400lm	SSR1G2-9274518N-WM
					3000K	18°	2000lm	1500lm	SSR1G2-9301818N-WM
						30°	2000lm	1700lm	SSR1G2-9303018N-WM
						40°	2000lm	1700lm	SSR1G2-9304018N-WM
						45°	2000lm	1500lm	SSR1G2-9304518N-WM
					4000K	18°	2200lm	1700lm	SSR1G2-9401818N-WM
						30°	2200lm	1800lm	SSR1G2-9403018N-WM
						40°	2200lm	1800lm	SSR1G2-9404018N-WM
						45°	2200lm	1700lm	SSR1G2-9404518N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Black Reflector



Dark Light Reflector



White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1500lm	1050lm	SSR1G2-9271813N-WB
						30°	1500lm	1100lm	SSR1G2-9273013N-WB
						40°	1500lm	1100lm	SSR1G2-9274013N-WB
						55°	1500lm	1050lm	SSR1G2-9274513N-WB
					3000K	18°	1600lm	1150lm	SSR1G2-9301813N-WB
						30°	1600lm	1200lm	SSR1G2-9303013N-WB
						40°	1600lm	1200lm	SSR1G2-9304013N-WB
						55°	1600lm	1150lm	SSR1G2-9304513N-WB
					4000K	18°	1700lm	1200lm	SSR1G2-9401813N-WB
						30°	1700lm	1300lm	SSR1G2-9403013N-WB
						40°	1700lm	1300lm	SSR1G2-9404013N-WB
						55°	1700lm	1200lm	SSR1G2-9404513N-WB
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1400lm	SSR1G2-9271818N-WB
						30°	1900lm	1600lm	SSR1G2-9273018N-WB
						40°	1900lm	1600lm	SSR1G2-9274018N-WB
						55°	1900lm	1400lm	SSR1G2-9274518N-WB
					3000K	18°	2000lm	1500lm	SSR1G2-9301818N-WB
						30°	2000lm	1700lm	SSR1G2-9303018N-WB
						40°	2000lm	1700lm	SSR1G2-9304018N-WB
						55°	2000lm	1500lm	SSR1G2-9304518N-WB
					4000K	18°	2200lm	1700lm	SSR1G2-9401818N-WB
						30°	2200lm	1800lm	SSR1G2-9403018N-WB
						40°	2200lm	1800lm	SSR1G2-9404018N-WB
						55°	2200lm	1700lm	SSR1G2-9404518N-WB
13 W	15 W	36 V	350 mA	90	2700K	18°	1500lm	1050lm	SSR1G2-9271813N-WC
						30°	1500lm	1100lm	SSR1G2-9273013N-WC
						40°	1500lm	1100lm	SSR1G2-9274013N-WC
						55°	1500lm	1050lm	SSR1G2-9274513N-WC
					3000K	18°	1600lm	1150lm	SSR1G2-9301813N-WC
						30°	1600lm	1200lm	SSR1G2-9303013N-WC
						40°	1600lm	1200lm	SSR1G2-9304013N-WC
						55°	1600lm	1150lm	SSR1G2-9304513N-WC
					4000K	18°	1700lm	1200lm	SSR1G2-9401813N-WC
						30°	1700lm	1300lm	SSR1G2-9403013N-WC
						40°	1700lm	1300lm	SSR1G2-9404013N-WC
						55°	1700lm	1200lm	SSR1G2-9404513N-WC
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1400lm	SSR1G2-9271818N-WC
						30°	1900lm	1600lm	SSR1G2-9273018N-WC
						40°	1900lm	1600lm	SSR1G2-9274018N-WC
						55°	1900lm	1400lm	SSR1G2-9274518N-WC
					3000K	18°	2000lm	1500lm	SSR1G2-9301818N-WC
						30°	2000lm	1700lm	SSR1G2-9303018N-WC
						40°	2000lm	1700lm	SSR1G2-9304018N-WC
						55°	2000lm	1500lm	SSR1G2-9304518N-WC
					4000K	18°	2200lm	1700lm	SSR1G2-9401818N-WC
						30°	2200lm	1800lm	SSR1G2-9403018N-WC
						40°	2200lm	1800lm	SSR1G2-9404018N-WC
						55°	2200lm	1700lm	SSR1G2-9404518N-WC
13 W	15 W	36 V	350 mA	90	2700K	18°	1500lm	1050lm	SSR1G2-9271813N-WW
						30°	1500lm	1100lm	SSR1G2-9273013N-WW
						40°	1500lm	1100lm	SSR1G2-9274013N-WW
						55°	1500lm	1050lm	SSR1G2-9274513N-WW
					3000K	18°	1600lm	1150lm	SSR1G2-9301813N-WW
						30°	1600lm	1200lm	SSR1G2-9303013N-WW
						40°	1600lm	1200lm	SSR1G2-9304013N-WW
						55°	1600lm	1150lm	SSR1G2-9304513N-WW
					4000K	18°	1700lm	1200lm	SSR1G2-9401813N-WW
						30°	1700lm	1300lm	SSR1G2-9403013N-WW
						40°	1700lm	1300lm	SSR1G2-9404013N-WW
						55°	1700lm	1200lm	SSR1G2-9404513N-WW
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1400lm	SSR1G2-9271818N-WW
						30°	1900lm	1600lm	SSR1G2-9273018N-WW
						40°	1900lm	1600lm	SSR1G2-9274018N-WW
						55°	1900lm	1400lm	SSR1G2-9274518N-WW
					3000K	18°	2000lm	1500lm	SSR1G2-9301818N-WW
						30°	2000lm	1700lm	SSR1G2-9303018N-WW
						40°	2000lm	1700lm	SSR1G2-9304018N-WW
						55°	2000lm	1500lm	SSR1G2-9304518N-WW
					4000K	18°	2200lm	1700lm	SSR1G2-9401818N-WW
						30°	2200lm	1800lm	SSR1G2-9403018N-WW
						40°	2200lm	1800lm	SSR1G2-9404018N-WW
						55°	2200lm	1700lm	SSR1G2-9404518N-WW

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Code for SSR1G2-9304018N-WM with Honeycomb
SSR1G2-9304018N-WM-H


NEKO / SENSE 100 / S100R1-G2
Adjustable LED Downlight

!NEW



See Details @www.nekolighting.com

13W 18W	CRI90	2700K 3000K 4000K	18° 30° 40° 45°		UGR < 19	IP54		CB	CE		
------------	-------	-------------------------	--------------------------	--	-------------	------	--	----	----	--	--



Gold Reflector


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1500lm	1050lm	SSR1G2-9271813N-WG
						30°	1500lm	1100lm	SSR1G2-9273013N-WG
						40°	1500lm	1100lm	SSR1G2-9274013N-WG
						45°	1500lm	1050lm	SSR1G2-9274513N-WG
					3000K	18°	1600lm	1150lm	SSR1G2-9301813N-WG
						30°	1600lm	1200lm	SSR1G2-9303013N-WG
						40°	1600lm	1200lm	SSR1G2-9304013N-WG
						45°	1600lm	1150lm	SSR1G2-9304513N-WG
					4000K	18°	1700lm	1200lm	SSR1G2-9401813N-WG
						30°	1700lm	1300lm	SSR1G2-9403013N-WG
						40°	1700lm	1300lm	SSR1G2-9404013N-WG
						45°	1700lm	1200lm	SSR1G2-9404513N-WG
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1400lm	SSR1G2-9271818N-WG
						30°	1900lm	1600lm	SSR1G2-9273018N-WG
						40°	1900lm	1600lm	SSR1G2-9274018N-WG
						45°	1900lm	1400lm	SSR1G2-9274518N-WG
					3000K	18°	2000lm	1500lm	SSR1G2-9301818N-WG
						30°	2000lm	1700lm	SSR1G2-9303018N-WG
						40°	2000lm	1700lm	SSR1G2-9304018N-WG
						45°	2000lm	1500lm	SSR1G2-9304518N-WG
					4000K	18°	2200lm	1700lm	SSR1G2-9401818N-WG
						30°	2200lm	1800lm	SSR1G2-9403018N-WG
						40°	2200lm	1800lm	SSR1G2-9404018N-WG
						45°	2200lm	1700lm	SSR1G2-9404518N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available




Trimless code for SSR1G2-9304013N-WM → SSR4G2-9304013N-WM



Trimless code for SSR1G2-9304013N-WM → ESR1G2-9304013N-WM



7W	CRI90	2700K 3000K 4000K	10°		UGR < 19	IP54		CB	CE		
----	-------	-------------------------	-----	--	-------------	------	--	----	----	--	--



Specular Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	480lm	SSR1G2-9271007N-WS
					3000K	10°	850lm	500lm	SSR1G2-9301007N-WS
					4000K	10°	900lm	550lm	SSR1G2-9401007N-WS



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	480lm	SSR1G2-9271007N-WM
					3000K	10°	850lm	500lm	SSR1G2-9301007N-WM
					4000K	10°	900lm	550lm	SSR1G2-9401007N-WM



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	480lm	SSR1G2-9271007N-WB
					3000K	10°	850lm	500lm	SSR1G2-9301007N-WB
					4000K	10°	900lm	550lm	SSR1G2-9401007N-WB



Dark Light Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	480lm	SSR1G2-9271007N-WC
					3000K	10°	850lm	500lm	SSR1G2-9301007N-WC
					4000K	10°	900lm	550lm	SSR1G2-9401007N-WC



white Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	480lm	SSR1G2-9271007N-WW
					3000K	10°	850lm	500lm	SSR1G2-9301007N-WW
					4000K	10°	900lm	550lm	SSR1G2-9401007N-WW



Gold Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	480lm	SSR1G2-9271007N-WG
					3000K	10°	850lm	500lm	SSR1G2-9301007N-WG
					4000K	10°	900lm	550lm	SSR1G2-9401007N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Code for SSR1G2-9301009N-WM with Honeycomb
SSR1G2-9301009N-WM-H

NEKO / SENSE 100H / **S100HR1-G2**
Adjustable LED Downlight



Dark Light Reflector



White Reflector



Gold Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code		
25 W	28 W	36 V	700 mA	90	2700K	18°	3000K	2400lm	1800lm	SHR1G2-9271825N-WC		
								30°	2400lm	2000lm	SHR1G2-9273025N-WC	
								40°	2400lm	2000lm	SHR1G2-9274025N-WC	
								45°	2400lm	1800lm	SHR1G2-9274525N-WC	
						30°		18°	2600lm	1900lm	SHR1G2-9301825N-WC	
								30°	2600lm	2100lm	SHR1G2-9303025N-WC	
								40°	2600lm	2100lm	SHR1G2-9304025N-WC	
								45°	2600lm	1900lm	SHR1G2-9304525N-WC	
						4000K	18°	2800lm	1900lm	SHR1G2-9401825N-WC		
							30°	2800lm	2200lm	SHR1G2-9403025N-WC		
							40°	2800lm	2200lm	SHR1G2-9404025N-WC		
							45°	2800lm	1900lm	SHR1G2-9404525N-WC		

25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHR1G2-9271825 N -WW	
						30°	2400lm	2000lm	SHR1G2-9273025 N -WW	
						40°	2400lm	2000lm	SHR1G2-9274025 N -WW	
						3000K	45°	2400lm	1800lm	SHR1G2-9274525 N -WW
							18°	2600lm	1900lm	SHR1G2-9301825 N -WW
							30°	2600lm	2100lm	SHR1G2-9303025 N -WW
							40°	2600lm	2100lm	SHR1G2-9304025 N -WW
						4000K	45°	2600lm	1900lm	SHR1G2-9304525 N -WW
							18°	2800lm	1900lm	SHR1G2-9401825 N -WW
							30°	2800lm	2200lm	SHR1G2-9403025 N -WW
							40°	2800lm	2200lm	SHR1G2-9404025 N -WW
							45°	2800lm	1900lm	SHR1G2-9404525 N -WW

25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHR1G2-9271825 N -WG	
						30°	2400lm	2000lm	SHR1G2-9273025 N -WG	
						40°	2400lm	2000lm	SHR1G2-9274025 N -WG	
						3000K	45°	2400lm	1800lm	SHR1G2-9274525 N -WG
							18°	2600lm	1900lm	SHR1G2-9301825 N -WG
							30°	2600lm	2100lm	SHR1G2-9303025 N -WG
							40°	2600lm	2100lm	SHR1G2-9304025 N -WG
						4000K	45°	2600lm	1900lm	SHR1G2-9304525 N -WG
							18°	2800lm	1900lm	SHR1G2-9401825 N -WG
							30°	2800lm	2200lm	SHR1G2-9403025 N -WG
							40°	2800lm	2200lm	SHR1G2-9404025 N -WG
							45°	2800lm	1900lm	SHR1G2-9404525 N -WG

Code Remark: **N**=N(No Driver) **F**=F(ON-OFF) **P**=P(Phase Dim) **A**=A(1-10V Dim) **D**=D(DALI Dim)

25W

CRI90

2700K
3000K
4000K

18°
30°
40°
45°


50,000h@L80B10

UGR
< 19

IP54

CB

CE



Specular Reflector



Matt Reflector



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code	
25 W	28 W	36 V	700 mA	90	2700K	18°	3000K	2400lm	1800lm	SHR1G2-9271825 N -WS	
								30°	2400lm	2000lm	SHR1G2-9273025 N -WS
								40°	2400lm	2000lm	SHR1G2-9274025 N -WS
								45°	2400lm	1800lm	SHR1G2-9274525 N -WS
						30°		2600lm	1900lm	SHR1G2-9301825 N -WS	
								2600lm	2100lm	SHR1G2-9303025 N -WS	
								2600lm	2100lm	SHR1G2-9304025 N -WS	
								2600lm	1900lm	SHR1G2-9304525 N -WS	
						40°	4000K	2800lm	1900lm	SHR1G2-9401825 N -WS	
								2800lm	2200lm	SHR1G2-9403025 N -WS	
								2800lm	2200lm	SHR1G2-9404025 N -WS	
								45°	2800lm	1900lm	SHR1G2-9404525 N -WS

25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHR1G2-9271825 N -WM	
						30°	2400lm	2000lm	SHR1G2-9273025 N -WM	
						40°	2400lm	2000lm	SHR1G2-9274025 N -WM	
						3000K	45°	2400lm	1800lm	SHR1G2-9274525 N -WM
							18°	2600lm	1900lm	SHR1G2-9301825 N -WM
							30°	2600lm	2100lm	SHR1G2-9303025 N -WM
							40°	2600lm	2100lm	SHR1G2-9304025 N -WM
						4000K	45°	2600lm	1900lm	SHR1G2-9304525 N -WM
							18°	2800lm	1900lm	SHR1G2-9401825 N -WM
							30°	2800lm	2200lm	SHR1G2-9403025 N -WM
							40°	2800lm	2200lm	SHR1G2-9404025 N -WM
						45°	2800lm	1900lm	SHR1G2-9404525 N -WM	

25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHR1G2-9271825 N -WB	
						30°	2400lm	2000lm	SHR1G2-9273025 N -WB	
						40°	2400lm	2000lm	SHR1G2-9274025 N -WB	
						3000K	45°	2400lm	1800lm	SHR1G2-9274525 N -WB
							18°	2600lm	1900lm	SHR1G2-9301825 N -WB
							30°	2600lm	2100lm	SHR1G2-9303025 N -WB
							40°	2600lm	2100lm	SHR1G2-9304025 N -WB
						4000K	45°	2600lm	1900lm	SHR1G2-9304525 N -WB
							18°	2800lm	1900lm	SHR1G2-9401825 N -WB
							30°	2800lm	2200lm	SHR1G2-9403025 N -WB
							40°	2800lm	2200lm	SHR1G2-9404025 N -WB
							45°	2800lm	1900lm	SHR1G2-9404525 N -WB


Code Remark: **N**=N(No Driver) **F**=F(ON-OFF) **P**=P(Phase Dim) **A**=A(1-10V Dim) **D**=D(DALI Dim)

Optional accessory




Code for SHR1G2-9304025N-WM with Honeycomb
SHR1G2-9304025N-WM-**H**

Trimless Version available



Trimless code for SHR1G2-9303525N-WM → SHR**4**G2-9303525N-WM



Trimless code for SHR1G2-9303525N-WM → EHR2G2-9303525N-WM



NEKO / SENSE 100 / S100S1-G2

Adjustable LED Downlight

NEW



See Details @www.nekolighting.com



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1500lm	1050lm	SSS1G2-9271813N-WB
						30°	1500lm	1100lm	SSS1G2-9273013N-WB
						40°	1500lm	1100lm	SSS1G2-9274013N-WB
						45°	1500lm	1050lm	SSS1G2-9274513N-WB
					3000K	18°	1600lm	1150lm	SSS1G2-9301813N-WB
						30°	1600lm	1200lm	SSS1G2-9303013N-WB
						40°	1600lm	1200lm	SSS1G2-9304013N-WB
						45°	1600lm	1150lm	SSS1G2-9304513N-WB
					4000K	18°	1700lm	1200lm	SSS1G2-9401813N-WB
						30°	1700lm	1300lm	SSS1G2-9403013N-WB
						40°	1700lm	1300lm	SSS1G2-9404013N-WB
						45°	1700lm	1200lm	SSS1G2-9404513N-WB
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1400lm	SSS1G2-9271818N-WB
						30°	1900lm	1600lm	SSS1G2-9273018N-WB
						40°	1900lm	1600lm	SSS1G2-9274018N-WB
						45°	1900lm	1400lm	SSS1G2-9274518N-WB
					3000K	18°	2000lm	1500lm	SSS1G2-9301818N-WB
						30°	2000lm	1700lm	SSS1G2-9303018N-WB
						40°	2000lm	1700lm	SSS1G2-9304018N-WB
						45°	2000lm	1500lm	SSS1G2-9304518N-WB
					4000K	18°	2200lm	1700lm	SSS1G2-9401818N-WB
						30°	2200lm	1800lm	SSS1G2-9403018N-WB
						40°	2200lm	1800lm	SSS1G2-9404018N-WB
						45°	2200lm	1700lm	SSS1G2-9404518N-WB
13 W	15 W	36 V	350 mA	90	2700K	18°	1500lm	1050lm	SSS1G2-9271813N-WM
						30°	1500lm	1100lm	SSS1G2-9273013N-WM
						40°	1500lm	1100lm	SSS1G2-9274013N-WM
						45°	1500lm	1050lm	SSS1G2-9274513N-WM
					3000K	18°	1600lm	1150lm	SSS1G2-9301813N-WM
						30°	1600lm	1200lm	SSS1G2-9303013N-WM
						40°	1600lm	1200lm	SSS1G2-9304013N-WM
						45°	1600lm	1150lm	SSS1G2-9304513N-WM
					4000K	18°	1700lm	1200lm	SSS1G2-9401813N-WM
						30°	1700lm	1300lm	SSS1G2-9403013N-WM
						40°	1700lm	1300lm	SSS1G2-9404013N-WM
						45°	1700lm	1200lm	SSS1G2-9404513N-WM
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1400lm	SSS1G2-9271818N-WM
						30°	1900lm	1600lm	SSS1G2-9273018N-WM
						40°	1900lm	1600lm	SSS1G2-9274018N-WM
						45°	1900lm	1400lm	SSS1G2-9274518N-WM
					3000K	18°	2000lm	1500lm	SSS1G2-9301818N-WM
						30°	2000lm	1700lm	SSS1G2-9303018N-WM
						40°	2000lm	1700lm	SSS1G2-9304018N-WM
						45°	2000lm	1500lm	SSS1G2-9304518N-WM
					4000K	18°	2200lm	1700lm	SSS1G2-9401818N-WM
						30°	2200lm	1800lm	SSS1G2-9403018N-WM
						40°	2200lm	1800lm	SSS1G2-9404018N-WM
						45°	2200lm	1700lm	SSS1G2-9404518N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Black Reflector



Dark Light Reflector



White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1500lm	1050lm	SSS1G2-9271813N-WB
						30°	1500lm	1100lm	SSS1G2-9273013N-WB
						40°	1500lm	1100lm	SSS1G2-9274013N-WB
						55°	1500lm	1050lm	SSS1G2-9274513N-WB
					3000K	18°	1600lm	1150lm	SSS1G2-9301813N-WB
						30°	1600lm	1200lm	SSS1G2-9303013N-WB
						40°	1600lm	1200lm	SSS1G2-9304013N-WB
						55°	1600lm	1150lm	SSS1G2-9304513N-WB
					4000K	18°	1700lm	1200lm	SSS1G2-9401813N-WB
						30°	1700lm	1300lm	SSS1G2-9403013N-WB
						40°	1700lm	1300lm	SSS1G2-9404013N-WB
						55°	1700lm	1200lm	SSS1G2-9404513N-WB
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1400lm	SSS1G2-9271818N-WB
						30°	1900lm	1600lm	SSS1G2-9273018N-WB
						40°	1900lm	1600lm	SSS1G2-9274018N-WB
						55°	1900lm	1400lm	SSS1G2-9274518N-WB
					3000K	18°	2000lm	1500lm	SSS1G2-9301818N-WB
						30°	2000lm	1700lm	SSS1G2-9303018N-WB
						40°	2000lm	1700lm	SSS1G2-9304018N-WB
						55°	2000lm	1500lm	SSS1G2-9304518N-WB
					4000K	18°	2200lm	1700lm	SSS1G2-9401818N-WB
						30°	2200lm	1800lm	SSS1G2-9403018N-WB
						40°	2200lm	1800lm	SSS1G2-9404018N-WB
						55°	2200lm	1700lm	SSS1G2-9404518N-WB
13 W	15 W	36 V	350 mA	90	2700K	18°	1500lm	1050lm	SSS1G2-9271813N-WC
						30°	1500lm	1100lm	SSS1G2-9273013N-WC
						40°	1500lm	1100lm	SSS1G2-9274013N-WC
						55°	1500lm	1050lm	SSS1G2-9274513N-WC
					3000K	18°	1600lm	1150lm	SSS1G2-9301813N-WC
						30°	1600lm	1200lm	SSS1G2-9303013N-WC
						40°	1600lm	1200lm	SSS1G2-9304013N-WC
						55°	1600lm	1150lm	SSS1G2-9304513N-WC
					4000K	18°	1700lm	1200lm	SSS1G2-9401813N-WC
						30°	1700lm	1300lm	SSS1G2-9403013N-WC
						40°	1700lm	1300lm	SSS1G2-9404013N-WC
						55°	1700lm	1200lm	SSS1G2-9404513N-WC
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1400lm	SSS1G2-9271818N-WC
						30°	1900lm	1600lm	SSS1G2-9273018N-WC
						40°	1900lm	1600lm	SSS1G2-9274018N-WC
						55°	1900lm	1400lm	SSS1G2-9274518N-WC
					3000K	18°	2000lm	1500lm	SSS1G2-9301818N-WC
						30°	2000lm	1700lm	SSS1G2-9303018N-WC
						40°	2000lm	1700lm	SSS1G2-9304018N-WC
						55°	2000lm	1500lm	SSS1G2-9304518N-WC
					4000K	18°	2200lm	1700lm	SSS1G2-9401818N-WC
						30°	2200lm	1800lm	SSS1G2-9403018N-WC
						40°	2200lm	1800lm	SSS1G2-9404018N-WC
						55°	2200lm	1700lm	SSS1G2-9404518N-WC
13 W	15 W	36 V	350 mA	90	2700K	18°	1500lm	1050lm	SSS1G2-9271813N-WW
						30°	1500lm	1100lm	SSS1G2-9273013N-WW
						40°	1500lm	1100lm	SSS1G2-9274013N-WW
						55°	1500lm	1050lm	SSS1G2-9274513N-WW
					3000K	18°	1600lm	1150lm	SSS1G2-9301813N-WW
						30°	1600lm	1200lm	SSS1G2-9303013N-WW
						40°	1600lm	1200lm	SSS1G2-9304013N-WW
						55°	1600lm	1150lm	SSS1G2-9304513N-WW
					4000K	18°	1700lm	1200lm	SSS1G2-9401813N-WW
						30°	1700lm	1300lm	SSS1G2-9403013N-WW
						40°	1700lm	1300lm	SSS1G2-9404013N-WW
						55°	1700lm	1200lm	SSS1G2-9404513N-WW
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1400lm	SSS1G2-9271818N-WW
						30°	1900lm	1600lm	SSS1G2-9273018N-WW
						40°	1900lm	1600lm	SSS1G2-9274018N-WW
						55°	1900lm	1400lm	SSS1G2-9274518N-WW
					3000K	18°	2000lm	1500lm	SSS1G2-9301818N-WW
						30°	2000lm	1700lm	SSS1G2-9303018N-WW
						40°	2000lm	1700lm	SSS1G2-9304018N-WW
						55°	2000lm	1500lm	SSS1G2-9304518N-WW
					4000K	18°	2200lm	1700lm	SSS1G2-9401818N-WW
						30°	2200lm	1800lm	SSS1G2-9403018N-WW
						40°	2200lm	1800lm	SSS1G2-9404018N-WW
						55°	2200lm	1700lm	SSS1G2-9404518N-WW

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Honeycomb

Code for SSS1G2-9304018N-WM with Honeycomb
SSS1G2-9304018N-WM-H

NEKO / SENSE 100 / S100S1-G2
Adjustable LED Downlight

!NEW



13W 18W	CRI90	2700K 3000K 4000K	18° 30° 40° 45°		UGR < 19	IP54		CB	CE				
------------	-------	-------------------------	--------------------------	--	-------------	------	--	----	----	--	--	--	--



Gold Reflector



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1500lm	1050lm	SSS1G2-9271813N-WG
						30°	1500lm	1100lm	SSS1G2-9273013N-WG
						40°	1500lm	1100lm	SSS1G2-9274013N-WG
						45°	1500lm	1050lm	SSS1G2-9274513N-WG
					3000K	18°	1600lm	1150lm	SSS1G2-9301813N-WG
						30°	1600lm	1200lm	SSS1G2-9303013N-WG
						40°	1600lm	1200lm	SSS1G2-9304013N-WG
						45°	1600lm	1150lm	SSS1G2-9304513N-WG
					4000K	18°	1700lm	1200lm	SSS1G2-9401813N-WG
						30°	1700lm	1300lm	SSS1G2-9403013N-WG
						40°	1700lm	1300lm	SSS1G2-9404013N-WG
						45°	1700lm	1200lm	SSS1G2-9404513N-WG
18 W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1400lm	SSS1G2-9271818N-WG
						30°	1900lm	1600lm	SSS1G2-9273018N-WG
						40°	1900lm	1600lm	SSS1G2-9274018N-WG
						45°	1900lm	1400lm	SSS1G2-9274518N-WG
					3000K	18°	2000lm	1500lm	SSS1G2-9301818N-WG
						30°	2000lm	1700lm	SSS1G2-9303018N-WG
						40°	2000lm	1700lm	SSS1G2-9304018N-WG
						45°	2000lm	1500lm	SSS1G2-9304518N-WG
					4000K	18°	2200lm	1700lm	SSS1G2-9401818N-WG
						30°	2200lm	1800lm	SSS1G2-9403018N-WG
						40°	2200lm	1800lm	SSS1G2-9404018N-WG
						45°	2200lm	1700lm	SSS1G2-9404518N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Trimless Version available




Trimless code for SSS1G2-9304025N-WM → SSS4G2-9304025N-WM

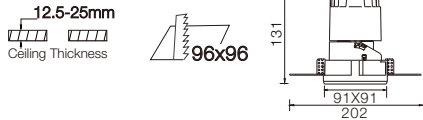

Trimless code for SSS1G2-9304025N-WM → ESS1G2-9304025N-WM



7W	CRI90	2700K 3000K 4000K	10°		UGR < 19	IP54		CB	CE		
----	-------	-------------------------	-----	--	-------------	------	--	----	----	--	--



Specular Reflector



Matt Reflector



Black Reflector



Dark Light Reflector



white Reflector



Gold Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	480lm	SSS1G2-9271007N-WS
					3000K	10°	850lm	500lm	SSS1G2-9301007N-WS
					4000K	10°	900lm	550lm	SSS1G2-9401007N-WS

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	480lm	SSS1G2-9271007N-WM
					3000K	10°	850lm	500lm	SSS1G2-9301007N-WM
					4000K	10°	900lm	550lm	SSS1G2-9401007N-WM

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	480lm	SSS1G2-9271007N-WB
					3000K	10°	850lm	500lm	SSS1G2-9301007N-WB
					4000K	10°	900lm	550lm	SSS1G2-9401007N-WB

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	480lm	SSS1G2-9271007N-WC
					3000K	10°	850lm	500lm	SSS1G2-9301007N-WC
					4000K	10°	900lm	550lm	SSS1G2-9401007N-WC

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	480lm	SSS1G2-9271007N-WW
					3000K	10°	850lm	500lm	SSS1G2-9301007N-WW
					4000K	10°	900lm	550lm	SSS1G2-9401007N-WW

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	10°	800lm	480lm	SSS1G2-9271007N-WG
					3000K	10°	850lm	500lm	SSS1G2-9301007N-WG
					4000K	10°	900lm	550lm	SSS1G2-9401007N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Code for SSS1G2-9301007N-WM with Honeycomb
SSS1G2-9301007N-WM-H

NEKO / SENSE 100H / S100HS1-G2
Adjustable LED Downlight

NEW



25W	CRI90	2700K 3000K 4000K	18° 30° 40° 45°		UGR < 19	IP54		CB	CE				1-25mm Ceiling Thickness	
-----	-------	-------------------------	--------------------------	--	----------	------	--	----	----	--	--	--	-----------------------------	--



Specular Reflector



Matt Reflector



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHS1G2-9271825N-WS
						30°	2400lm	2000lm	SHS1G2-9273025N-WS
						40°	2400lm	2000lm	SHS1G2-9274025N-WS
						45°	2400lm	1800lm	SHS1G2-9274525N-WS
					3000K	18°	2600lm	1900lm	SHS1G2-9301825N-WS
						30°	2600lm	2100lm	SHS1G2-9303025N-WS
						40°	2600lm	2100lm	SHS1G2-9304025N-WS
						45°	2600lm	1900lm	SHS1G2-9304525N-WS
					4000K	18°	2800lm	1900lm	SHS1G2-9401825N-WS
						30°	2800lm	2200lm	SHS1G2-9403025N-WS
						40°	2800lm	2200lm	SHS1G2-9404025N-WS
						45°	2800lm	1900lm	SHS1G2-9404525N-WS
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHS1G2-9271825N-WM
						30°	2400lm	2000lm	SHS1G2-9273025N-WM
						40°	2400lm	2000lm	SHS1G2-9274025N-WM
						45°	2400lm	1800lm	SHS1G2-9274525N-WM
					3000K	18°	2600lm	1900lm	SHS1G2-9301825N-WM
						30°	2600lm	2100lm	SHS1G2-9303025N-WM
						40°	2600lm	2100lm	SHS1G2-9304025N-WM
						45°	2600lm	1900lm	SHS1G2-9304525N-WM
					4000K	18°	2800lm	1900lm	SHS1G2-9401825N-WM
						30°	2800lm	2200lm	SHS1G2-9403025N-WM
						40°	2800lm	2200lm	SHS1G2-9404025N-WM
						45°	2800lm	1900lm	SHS1G2-9404525N-WM
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHS1G2-9271825N-WB
						30°	2400lm	2000lm	SHS1G2-9273025N-WB
						40°	2400lm	2000lm	SHS1G2-9274025N-WB
						45°	2400lm	1800lm	SHS1G2-9274525N-WB
					3000K	18°	2600lm	1900lm	SHS1G2-9301825N-WB
						30°	2600lm	2100lm	SHS1G2-9303025N-WB
						40°	2600lm	2100lm	SHS1G2-9304025N-WB
						45°	2600lm	1900lm	SHS1G2-9304525N-WB
					4000K	18°	2800lm	1900lm	SHS1G2-9401825N-WB
						30°	2800lm	2200lm	SHS1G2-9403025N-WB
						40°	2800lm	2200lm	SHS1G2-9404025N-WB
						45°	2800lm	1900lm	SHS1G2-9404525N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Honeycomb

Code for SHS1G2-9304025N-WM with Honeycomb
SHS1G2-9304025N-WM-H



Dark Light Reflector



White Reflector



Gold Reflector


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHS1G2-9271825N-WC
						30°	2400lm	2000lm	SHS1G2-9273025N-WC
						40°	2400lm	2000lm	SHS1G2-9274025N-WC
						45°	2400lm	1800lm	SHS1G2-9274525N-WC
					3000K	18°	2600lm	1900lm	SHS1G2-9301825N-WC
						30°	2600lm	2100lm	SHS1G2-9303025N-WC
						40°	2600lm	2100lm	SHS1G2-9304025N-WC
						45°	2600lm	1900lm	SHS1G2-9304525N-WC
					4000K	18°	2800lm	1900lm	SHS1G2-9401825N-WC
						30°	2800lm	2200lm	SHS1G2-9403025N-WC
						40°	2800lm	2200lm	SHS1G2-9404025N-WC
						45°	2800lm	1900lm	SHS1G2-9404525N-WC

25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHS1G2-9271825N-WW
						30°	2400lm	2000lm	SHS1G2-9273025N-WW
						40°	2400lm	2000lm	SHS1G2-9274025N-WW
						45°	2400lm	1800lm	SHS1G2-9274525N-WW
					3000K	18°	2600lm	1900lm	SHS1G2-9301825N-WW
						30°	2600lm	2100lm	SHS1G2-9303025N-WW
						40°	2600lm	2100lm	SHS1G2-9304025N-WW
						45°	2600lm	1900lm	SHS1G2-9304525N-WW
					4000K	18°	2800lm	1900lm	SHS1G2-9401825N-WW
						30°	2800lm	2200lm	SHS1G2-9403025N-WW
						40°	2800lm	2200lm	SHS1G2-9404025N-WW
						45°	2800lm	1900lm	SHS1G2-9404525N-WW



25 W	28 W	36 V	700 mA	90	2700K	18°	2400lm	1800lm	SHS1G2-9271825N-WG
						30°	2400lm	2000lm	SHS1G2-9273025N-WG
						40°	2400lm	2000lm	SHS1G2-9274025N-WG
						45°	2400lm	1800lm	SHS1G2-9274525N-WG
					3000K	18°	2600lm	1900lm	SHS1G2-9301825N-WG
						30°	2600lm	2100lm	SHS1G2-9303025N-WG
						40°	2600lm	2100lm	SHS1G2-9304025N-WG
						45°	2600lm	1900lm	SHS1G2-9304525N-WG
					4000K	18°	2800lm	1900lm	SHS1G2-9401825N-WG
						30°	2800lm	2200lm	SHS1G2-9403025N-WG
						40°	2800lm	2200lm	SHS1G2-9404025N-WG
						45°	2800lm	1900lm	SHS1G2-9404525N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Trimless Version available



Trimless code for SHS1G2-9304025N-WM → SHS4G2-9304025N-WM



Trimless code for SHS1G2-9304025N-WM → EHS1G2-9304025N-WM




NEKO / SENSE 100 / S100R7-G2
Fixed LED Downlight

!NEW



See Details @www.nekolighting.com

13W 18W	CRI90	2700K 3000K 4000K	25° 32° 38° 50°		UGR < 19	IP54		CB	CE		
------------	-------	-------------------------	--------------------------	--	-------------	------	--	----	----	--	--



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	25°	1500lm	850lm	SSR7G2-9272513N-WS
						38°	1500lm	900lm	SSR7G2-9273813N-WS
						50°	1500lm	850lm	SSR7G2-9275013N-WS
					3000K	25°	1600lm	900lm	SSR7G2-9302513N-WS
						38°	1600lm	1000lm	SSR7G2-9303813N-WS
						50°	1600lm	900lm	SSR7G2-9305013N-WS
					4000K	25°	1700lm	1000lm	SSR7G2-9402513N-WS
						38°	1700lm	1100lm	SSR7G2-9403813N-WS
						50°	1700lm	1000lm	SSR7G2-9405013N-WS
18 W	21 W	36 V	500 mA	90	2700K	25°	1900lm	1250lm	SSR7G2-9272518N-WS
						38°	1900lm	1350lm	SSR7G2-9273818N-WS
						50°	1900lm	1250lm	SSR7G2-9275018N-WS
					3000K	25°	2000lm	1350lm	SSR7G2-9302518N-WS
						38°	2000lm	1450lm	SSR7G2-9303818N-WS
						50°	2000lm	1350lm	SSR7G2-9305018N-WS
					4000K	25°	2200lm	1450lm	SSR7G2-9402518N-WS
						38°	2200lm	1600lm	SSR7G2-9403818N-WS
						50°	2200lm	1450lm	SSR7G2-9405018N-WS
13 W	15 W	36 V	350 mA	90	2700K	25°	1500lm	850lm	SSR7G2-9272513N-WM
						38°	1500lm	900lm	SSR7G2-9273813N-WM
						50°	1500lm	850lm	SSR7G2-9275013N-WM
					3000K	25°	1600lm	900lm	SSR7G2-9302513N-WM
						38°	1600lm	1000lm	SSR7G2-9303813N-WM
						50°	1600lm	900lm	SSR7G2-9305013N-WM
					4000K	25°	1700lm	1000lm	SSR7G2-9402513N-WM
						38°	1700lm	1100lm	SSR7G2-9403813N-WM
						50°	1700lm	1000lm	SSR7G2-9405013N-WM
18 W	21 W	36 V	500 mA	90	2700K	25°	1900lm	1250lm	SSR7G2-9272518N-WM
						38°	1900lm	1350lm	SSR7G2-9273818N-WM
						50°	1900lm	1250lm	SSR7G2-9275018N-WM
					3000K	25°	2000lm	1350lm	SSR7G2-9302518N-WM
						38°	2000lm	1450lm	SSR7G2-9303818N-WM
						50°	2000lm	1350lm	SSR7G2-9305018N-WM
					4000K	25°	2200lm	1450lm	SSR7G2-9402518N-WM
						38°	2200lm	1600lm	SSR7G2-9403818N-WM
						50°	2200lm	1450lm	SSR7G2-9405018N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Code for SSR7G2-9304018N-WM with Honeycomb
SSR7G2-9304018N-WM-H



Black Reflector



Dark Light Reflector



White Reflector



Gold Reflector



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	25°	1500lm	850lm	SSR7G2-9272513N-WB
						38°	1500lm	900lm	SSR7G2-9273813N-WB
						50°	1500lm	850lm	SSR7G2-9275013N-WB
					3000K	25°	1600lm	900lm	SSR7G2-9302513N-WB
						38°	1600lm	1000lm	SSR7G2-9303813N-WB
						50°	1600lm	900lm	SSR7G2-9305013N-WB
					4000K	25°	1700lm	1000lm	SSR7G2-9402513N-WB
						38°	1700lm	1100lm	SSR7G2-9403813N-WB
						50°	1700lm	1000lm	SSR7G2-9405013N-WB
18 W	21 W	36 V	500 mA	90	2700K	25°	1900lm	1250lm	SSR7G2-9272518N-WB
						38°	1900lm	1350lm	SSR7G2-9273818N-WB
						50°	1900lm	1250lm	SSR7G2-9275018N-WB
					3000K	25°	2000lm	1350lm	SSR7G2-9302518N-WB
						38°	2000lm	1450lm	SSR7G2-9303818N-WB
						50°	2000lm	1350lm	SSR7G2-9305018N-WB
					4000K	25°	2200lm	1450lm	SSR7G2-9402518N-WB
						38°	2200lm	1600lm	SSR7G2-9403818N-WB
						50°	2200lm	1450lm	SSR7G2-9405018N-WB
13 W	15 W	36 V	350 mA	90	2700K	25°	1500lm	850lm	SSR7G2-9272513N-WC
						38°	1500lm	900lm	SSR7G2-9273813N-WC
						50°	1500lm	850lm	SSR7G2-9275013N-WC
					3000K	25°	1600lm	900lm	SSR7G2-9302513N-WC
						38°	1600lm	1000lm	SSR7G2-9303813N-WC
						50°	1600lm	900lm	SSR7G2-9305013N-WC
					4000K	25°	1700lm	1000lm	SSR7G2-9402513N-WC
						38°	1700lm	1100lm	SSR7G2-9403813N-WC
						50°	1700lm	1000lm	SSR7G2-9405013N-WC
18 W	21 W	36 V	500 mA	90	2700K	25°	1900lm	1250lm	SSR7G2-9272518N-WC
						38°	1900lm	1350lm	SSR7G2-9273818N-WC
						50°	1900lm	1250lm	SSR7G2-9275018N-WC
					3000K	25°	2000lm	1350lm	SSR7G2-9302518N-WC
						38°	2000lm	1450lm	SSR7G2-9303818N-WC
						50°	2000lm	1350lm	SSR7G2-9305018N-WC
					4000K	25°	2200lm	1450lm	SSR7G2-9402518N-WC
						38°	2200lm	1600lm	SSR7G2-9403818N-WC
						50°	2200lm	1450lm	SSR7G2-9405018N-WC
13 W	15 W	36 V	350 mA	90	2700K	25°	1500lm	850lm	SSR7G2-9272513N-WW
						38°	1500lm	900lm	SSR7G2-9273813N-WW
						50°	1500lm	850lm	SSR7G2-9275013N-WW
					3000K	25°	1600lm	900lm	SSR7G2-9302513N-WW
						38°	1600lm	1000lm	SSR7G2-9303813N-WW
						50°	1600lm	900lm	SSR7G2-9305013N-WW
					4000K	25°	1700lm	1000lm	SSR7G2-9402513N-WW
						38°	1700lm	1100lm	SSR7G2-9403813N-WW
						50°	1700lm	1000lm	SSR7G2-9405013N-WW
18 W	21 W	36 V	500 mA	90	2700K	25°	1900lm	1250lm	SSR7G2-9272518N-WW
						38°	1900lm	1350lm	SSR7G2-9273818N-WW
						50°	1900lm	1250lm	SSR7G2-9275018N-WW
					3000K	25°	2000lm	1350lm	SSR7G2-9302518N-WW
						38°	2000lm	1450lm	SSR7G2-9303818N-WW
						50°	2000lm	1350lm	SSR7G2-9305018N-WW
					4000K	25°	2200lm	1450lm	SSR7G2-9402518N-WW
						38°	2200lm	1600lm	SSR7G2-9403818N-WW
						50°	2200lm	1450lm	SSR7G2-9405018N-WW
13 W	15 W	36 V	350 mA	90	2700K	25°	1500lm	850lm	SSR7G2-9272513N-WG
						38°	1500lm	900lm	SSR7G2-9273813N-WG
						50°	1500lm	850lm	SSR7G2-9275013N-WG
					3000K	25°	1600lm	900lm	SSR7G2-9302513N-WG
						38°	1600lm	1000lm	SSR7G2-9303813N-WG
						50°	1600lm	900lm	SSR7G2-9305013N-WG
					4000K	25°	1700lm	1000lm	SSR7G2-9402513N-WG
						38°	1700lm	1100lm	SSR7G2-9403813N-WG
						50°	1700lm	1000lm	SSR7G2-9405013N-WG
18 W	21 W	36 V	500 mA	90	2700K	25°	1900lm	1250lm	SSR7G2-9272518N-WG
						38°	1900lm	1350lm	SSR7G2-9273818N-WG
						50°	1900lm	1250lm	SSR7G2-9275018N-WG
					3000K	25°	2000lm	1350lm	SSR7G2-9302518N-WG
						38°	2000lm	1450lm	SSR7G2-9303818N-WG
						50°	2000lm	1350lm	SSR7G2-9305018N-WG
					4000K	25°	2200lm	1450lm	SSR7G2-9402518N-WG
						38°	2200lm	1600lm	SSR7G2-9403818N-WG
						50°	2200lm	1450lm	SSR7G2-9405018N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Trimless Version available



Trimless code for SSR7G2-9304013N-WM → SSR8G2-9304013N-WM



Trimless code for SSR7G2-9304013N-WM → ESR7G2-9304013N-WM



NEKO / SENSE 100 / S100HR7-G2
Fixed LED Downlight

!NEW



25W

CRI90

2700K

3000K

4000K

20°

36°

45°

CITIZEN

50,000h@L80B10

UGR < 19

IP 54

5

GUARANTEED

CB

CE

100

1-25mm

Ceiling Thickness

157

Ø110



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1500lm	SHR7G2-9272025N-WS
						36°	2400lm	1700lm	SHR7G2-9273625N-WS
						45°	2400lm	1700lm	SHR7G2-9274525N-WS
					3000K	20°	2600lm	1600lm	SHR7G2-9302025N-WS
						36°	2600lm	1800lm	SHR7G2-9303625N-WS
						45°	2600lm	1800lm	SHR7G2-9304525N-WS
					4000K	20°	2800lm	1700lm	SHR7G2-9402025N-WS
						36°	2800lm	1900lm	SHR7G2-9403625N-WS
						45°	2800lm	1900lm	SHR7G2-9404525N-WS
					2700K	20°	2400lm	1500lm	SHR7G2-9272025N-WM
						36°	2400lm	1700lm	SHR7G2-9273625N-WM
						45°	2400lm	1700lm	SHR7G2-9274525N-WM
					3000K	20°	2600lm	1600lm	SHR7G2-9302025N-WM
						36°	2600lm	1800lm	SHR7G2-9303625N-WM
						45°	2600lm	1800lm	SHR7G2-9304525N-WM
					4000K	20°	2800lm	1700lm	SHR7G2-9402025N-WM
						36°	2800lm	1900lm	SHR7G2-9403625N-WM
						45°	2800lm	1900lm	SHR7G2-9404525N-WM
					2700K	20°	2400lm	1500lm	SHR7G2-9272025N-WB
						36°	2400lm	1700lm	SHR7G2-9273625N-WB
						45°	2400lm	1700lm	SHR7G2-9274525N-WB
					3000K	20°	2600lm	1600lm	SHR7G2-9302025N-WB
						36°	2600lm	1800lm	SHR7G2-9303625N-WB
						45°	2600lm	1800lm	SHR7G2-9304525N-WB
					4000K	20°	2800lm	1700lm	SHR7G2-9402025N-WB
						36°	2800lm	1900lm	SHR7G2-9403625N-WB
						45°	2800lm	1900lm	SHR7G2-9404525N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory




Code for SHR7G2-9304525N-WM with Honeycomb
SHR7G2-9304525N-WM-H







LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	1500lm	SHR7G2-9272025N-WC
						36°	2400lm	1700lm	SHR7G2-9273625N-WC
						45°	2400lm	1700lm	SHR7G2-9274525N-WC
					3000K	20°	2600lm	1600lm	SHR7G2-9302025N-WC
						36°	2600lm	1800lm	SHR7G2-9303625N-WC
						45°	2600lm	1800lm	SHR7G2-9304525N-WC
					4000K	20°	2800lm	1700lm	SHR7G2-9402025N-WC
						36°	2800lm	1900lm	SHR7G2-9403625N-WC
						45°	2800lm	1900lm	SHR7G2-9404525N-WC
					2700K	20°	2400lm	1500lm	SHR7G2-9272025N-WW
						36°	2400lm	1700lm	SHR7G2-9273625N-WW
						45°	2400lm	1700lm	SHR7G2-9274525N-WW
					3000K	20°	2600lm	1600lm	SHR7G2-9302025N-WW
						36°	2600lm	1800lm	SHR7G2-9303625N-WW
						45°	2600lm	1800lm	SHR7G2-9304525N-WW
					4000K	20°	2800lm	1700lm	SHR7G2-9402025N-WW
						36°	2800lm	1900lm	SHR7G2-9403625N-WW
						45°	2800lm	1900lm	SHR7G2-9404525N-WW
					2700K	20°	2400lm	1500lm	SHR7G2-9272025N-WG
						36°	2400lm	1700lm	SHR7G2-9273625N-WG
						45°	2400lm	1700lm	SHR7G2-9274525N-WG
					3000K	20°	2600lm	1600lm	SHR7G2-9302025N-WG
						36°	2600lm	1800lm	SHR7G2-9303625N-WG
						45°	2600lm	1800lm	SHR7G2-9304525N-WG
					4000K	20°	2800lm	1700lm	SHR7G2-9402025N-WG
						36°	2800lm	1900lm	SHR7G2-9403625N-WG
						45°	2800lm	1900lm	SHR7G2-9404525N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available



Trimless code for SHR7G2-9304525N-WM → SHR8G2-9304525N-WM



Trimless code for SHR7G2-9304525N-WM → EHR7G2-9304525N-WM

NEKO / SENSE 100 / S100R2-G2
Fixed LED Downlight

NEW



See Details @www.nekolighting.com

13W 18W	CRI90	2700K 3000K 4000K	25° 32° 38° 50°		UGR < 19	IP54		CB	CE					
------------	-------	-------------------------	--------------------------	--	-------------	------	--	----	----	--	--	--	--	--

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	25°	1500lm	950lm	SSR2G2-9272513N-WS
						38°	1500lm	1000lm	SSR2G2-9273813N-WS
						50°	1500lm	950lm	SSR2G2-9275013N-WS
					3000K	25°	1600lm	1050lm	SSR2G2-9302513N-WS
						38°	1600lm	1100lm	SSR2G2-9303813N-WS
						50°	1600lm	1050lm	SSR2G2-9305013N-WS
					4000K	25°	1700lm	1100lm	SSR2G2-9402513N-WS
						38°	1700lm	1200lm	SSR2G2-9403813N-WS
						50°	1700lm	1100lm	SSR2G2-9405013N-WS
18 W	21 W	36 V	500 mA	90	2700K	25°	1900lm	1350lm	SSR2G2-9272518N-WS
						38°	1900lm	1450lm	SSR2G2-9273818N-WS
						50°	1900lm	1350lm	SSR2G2-9275018N-WS
					3000K	25°	2000lm	1450lm	SSR2G2-9302518N-WS
						38°	2000lm	1550lm	SSR2G2-9303818N-WS
						50°	2000lm	1450lm	SSR2G2-9305018N-WS
					4000K	25°	2200lm	1550lm	SSR2G2-9402518N-WS
						38°	2200lm	1700lm	SSR2G2-9403818N-WS
						50°	2200lm	1550lm	SSR2G2-9405018N-WS
13 W	15 W	36 V	350 mA	90	2700K	25°	1500lm	950lm	SSR2G2-9272513N-WM
						38°	1500lm	1000lm	SSR2G2-9273813N-WM
						50°	1500lm	950lm	SSR2G2-9275013N-WM
					3000K	25°	1600lm	1050lm	SSR2G2-9302513N-WM
						38°	1600lm	1100lm	SSR2G2-9303813N-WM
						50°	1600lm	1050lm	SSR2G2-9305013N-WM
					4000K	25°	1700lm	1100lm	SSR2G2-9402513N-WM
						38°	1700lm	1200lm	SSR2G2-9403813N-WM
						50°	1700lm	1100lm	SSR2G2-9405013N-WM
18 W	21 W	36 V	500 mA	90	2700K	25°	1900lm	1350lm	SSR2G2-9272518N-WM
						38°	1900lm	1450lm	SSR2G2-9273818N-WM
						50°	1900lm	1350lm	SSR2G2-9275018N-WM
					3000K	25°	2000lm	1450lm	SSR2G2-9302518N-WM
						38°	2000lm	1550lm	SSR2G2-9303818N-WM
						50°	2000lm	1450lm	SSR2G2-9305018N-WM
					4000K	25°	2200lm	1550lm	SSR2G2-9402518N-WM
						38°	2200lm	1700lm	SSR2G2-9403818N-WM
						50°	2200lm	1550lm	SSR2G2-9405018N-WM

Code Remark N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Code for SSR2G2-9303618N-WM with Honeycomb
SSR2G2-9303618N-WM-H



Black Reflector



Dark Light Reflector



White Reflector



White Reflector



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	25°	1500lm	950lm	SSR2G2-9272513N-WB
						38°	1500lm	1000lm	SSR2G2-9273813N-WB
						50°	1500lm	950lm	SSR2G2-9275013N-WB
					3000K	25°	1600lm	1050lm	SSR2G2-9302513N-WB
						38°	1600lm	1100lm	SSR2G2-9303813N-WB
						50°	1600lm	1050lm	SSR2G2-9305013N-WB
					4000K	25°	1700lm	1100lm	SSR2G2-9402513N-WB
						38°	1700lm	1200lm	SSR2G2-9403813N-WB
						50°	1700lm	1100lm	SSR2G2-9405013N-WB
18 W	21 W	36 V	500 mA	90	2700K	25°	1900lm	1350lm	SSR2G2-9272518N-WB
						38°	1900lm	1450lm	SSR2G2-9273818N-WB
						50°	1900lm	1350lm	SSR2G2-9275018N-WB
					3000K	25°	2000lm	1450lm	SSR2G2-9302518N-WB
						38°	2000lm	1550lm	SSR2G2-9303818N-WB
						50°	2000lm	1450lm	SSR2G2-9305018N-WB
					4000K	25°	2200lm	1550lm	SSR2G2-9402518N-WB
						38°	2200lm	1700lm	SSR2G2-9403818N-WB
						50°	2200lm	1550lm	SSR2G2-9405018N-WB
13 W	15 W	36 V	350 mA	90	2700K	25°	1500lm	950lm	SSR2G2-9272513N-WC
						38°	1500lm	1000lm	SSR2G2-9273813N-WC
						50°	1500lm	950lm	SSR2G2-9275013N-WC
					3000K	25°	1600lm	1050lm	SSR2G2-9302513N-WC
						38°	1600lm	1100lm	SSR2G2-9303813N-WC
						50°	1600lm	1050lm	SSR2G2-9305013N-WC
					4000K	25°	1700lm	1100lm	SSR2G2-9402513N-WC
						38°	1700lm	1200lm	SSR2G2-9403813N-WC
						50°	1700lm	1100lm	SSR2G2-9405013N-WC
18 W	21 W	36 V	500 mA	90	2700K	25°	1900lm	1350lm	SSR2G2-9272518N-WC
						38°	1900lm	1450lm	SSR2G2-9273818N-WC
						50°	1900lm	1350lm	SSR2G2-9275018N-WC
					3000K	25°	2000lm	1450lm	SSR2G2-9302518N-WC
						38°	2000lm	1550lm	SSR2G2-9303818N-WC
						50°	2000lm	1450lm	SSR2G2-9305018N-WC
					4000K	25°	2200lm	1550lm	SSR2G2-9402518N-WC
						38°	2200lm	1700lm	SSR2G2-9403818N-WC
						50°	2200lm	1550lm	SSR2G2-9405018N-WC
13 W	15 W	36 V	350 mA	90	2700K	25°	1500lm	950lm	SSR2G2-9272513N-WW
						38°	1500lm	1000lm	SSR2G2-9273813N-WW
						50°	1500lm	950lm	SSR2G2-9275013N-WW
					3000K	25°	1600lm	1050lm	SSR2G2-9302513N-WW
						38°	1600lm	1100lm	SSR2G2-9303813N-WW
						50°	1600lm	1050lm	SSR2G2-9305013N-WW
					4000K	25°	1700lm	1100lm	SSR2G2-9402513N-WW
						38°	1700lm	1200lm	SSR2G2-9403813N-WW
						50°	1700lm	1100lm	SSR2G2-9405013N-WW
18 W	21 W	36 V	500 mA	90	2700K	25°	1900lm	1350lm	SSR2G2-9272518N-WW
						38°	1900lm	1450lm	SSR2G2-9273818N-WW
						50°	1900lm	1350lm	SSR2G2-9275018N-WW
					3000K	25°	2000lm	1450lm	SSR2G2-9302518N-WW
						38°	2000lm	1550lm	SSR2G2-9303818N-WW
						50°	2000lm	1450lm	SSR2G2-9305018N-WW
					4000K	25°	2200lm	1550lm	SSR2G2-9402518N-WW
						38°	2200lm	1700lm	SSR2G2-9403818N-WW
						50°	2200lm	1550lm	SSR2G2-9405018N-WW
13 W	15 W	36 V	350 mA	90	2700K	25°	1500lm	950lm	SSR2G2-9272513N-WG
						38°	1500lm	1000lm	SSR2G2-9273813N-WG
						50°	1500lm	950lm	SSR2G2-9275013N-WG
					3000K	25°	1600lm	1050lm	SSR2G2-9302513N-WG
						38°	1600lm	1100lm	SSR2G2-9303813N-WG
						50°	1600lm	1050lm	SSR2G2-9305013N-WG
					4000K	25°	1700lm	1100lm	SSR2G2-9402513N-WG
						38°	1700lm	1200lm	SSR2G2-9403813N-WG
						50°	1700lm	1100lm	SSR2G2-9405013N-WG
18 W	21 W	36 V	500 mA	90	2700K	25°	1900lm	1350lm	SSR2G2-9272518N-WG
						38°	1900lm	1450lm	SSR2G2-9273818N-WG
						50°	1900lm	1350lm	SSR2G2-9275018N-WG
					3000K	25°	2000lm	1450lm	SSR2G2-9302518N-WG
						38°	2000lm	1550lm	SSR2G2-9303818N-WG
						50°	2000lm	1450lm	SSR2G2-9305018N-WG
					4000K	25°	2200lm	1550lm	SSR2G2-9402518N-WG
						38°	2200lm	1700lm	SSR2G2-9403818N-WG
						50°	2200lm	1550lm	SSR2G2-9405018N-WG

Code Remark N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Trimless Version available



Trimless code for SSR2G2-9303618N-WM → SSR5G2-9303618N-WM



Trimless code for SSR2G2-9303618N-WM → ESR2G2-9303618N-WM



NEKO / SENSE 100H / S100HR2-G2
Fixed LED Downlight

NEW



25W	CRI90	2700K 3000K 4000K	20° 36° 45°		UGR < 19	IP 54		CB	CE						
-----	-------	-------------------------	-------------------	--	----------	-------	--	----	----	--	--	--	--	--	--



Specular Reflector



Matt Reflector



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20° 36° 45°	2400lm 2400lm 2400lm	1700lm 1900lm 1900lm	SHR2G2-9272025N-WS SHR2G2-9273625N-WS SHR2G2-9274525N-WS
					3000K	20° 36° 45°	2600lm 2600lm 2600lm	1800lm 2000lm 2000lm	SHR2G2-9302025N-WS SHR2G2-9303625N-WS SHR2G2-9304525N-WS
					4000K	20° 36° 45°	2800lm 2800lm 2800lm	1900lm 2100lm 2100lm	SHR2G2-9402025N-WS SHR2G2-9403625N-WS SHR2G2-9404525N-WS
25 W	28 W	36 V	700 mA	90	2700K	20° 36° 45°	2400lm 2400lm 2400lm	1700lm 1900lm 1900lm	SHR2G2-9272025N-WM SHR2G2-9273625N-WM SHR2G2-9274525N-WM
					3000K	20° 36° 45°	2600lm 2600lm 2600lm	1800lm 2000lm 2000lm	SHR2G2-9302025N-WM SHR2G2-9303625N-WM SHR2G2-9304525N-WM
					4000K	20° 36° 45°	2800lm 2800lm 2800lm	1900lm 2100lm 2100lm	SHR2G2-9402025N-WM SHR2G2-9403625N-WM SHR2G2-9404525N-WM
25 W	28 W	36 V	700 mA	90	2700K	20° 36° 45°	2400lm 2400lm 2400lm	1700lm 1900lm 1900lm	SHR2G2-9272025N-WB SHR2G2-9273625N-WB SHR2G2-9274525N-WB
					3000K	20° 36° 45°	2600lm 2600lm 2600lm	1800lm 2000lm 2000lm	SHR2G2-9302025N-WB SHR2G2-9303625N-WB SHR2G2-9304525N-WB
					4000K	20° 36° 45°	2800lm 2800lm 2800lm	1900lm 2100lm 2100lm	SHR2G2-9402025N-WB SHR2G2-9403625N-WB SHR2G2-9404525N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Code for SHR7G2-9304525N-WM with Honeycomb
SHR7G2-9304525N-WM-H



Dark Light Reflector



White Reflector




Gold Reflector




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20° 36° 45°	2400lm 2400lm 2400lm	1700lm 1900lm 1900lm	SHR2G2-9272025N-WC SHR2G2-9273625N-WC SHR2G2-9274525N-WC
					3000K	20° 36° 45°	2600lm 2600lm 2600lm	1800lm 2000lm 2000lm	SHR2G2-9302025N-WC SHR2G2-9303625N-WC SHR2G2-9304525N-WC
					4000K	20° 36° 45°	2800lm 2800lm 2800lm	1900lm 2100lm 2100lm	SHR2G2-9402025N-WC SHR2G2-9403625N-WC SHR2G2-9404525N-WC
25 W	28 W	36 V	700 mA	90	2700K	20° 36° 45°	2400lm 2400lm 2400lm	1700lm 1900lm 1900lm	SHR2G2-9272025N-WW SHR2G2-9273625N-WW SHR2G2-9274525N-WW
					3000K	20° 36° 45°	2600lm 2600lm 2600lm	1800lm 2000lm 2000lm	SHR2G2-9302025N-WW SHR2G2-9303625N-WW SHR2G2-9304525N-WW
					4000K	20° 36° 45°	2800lm 2800lm 2800lm	1900lm 2100lm 2100lm	SHR2G2-9402025N-WW SHR2G2-9403625N-WW SHR2G2-9404525N-WW
25 W	28 W	36 V	700 mA	90	2700K	20° 36° 45°	2400lm 2400lm 2400lm	1700lm 1900lm 1900lm	SHR2G2-9272025N-WG SHR2G2-9273625N-WG SHR2G2-9274525N-WG
					3000K	20° 36° 45°	2600lm 2600lm 2600lm	1800lm 2000lm 2000lm	SHR2G2-9302025N-WG SHR2G2-9303625N-WG SHR2G2-9304525N-WG
					4000K	20° 36° 45°	2800lm 2800lm 2800lm	1900lm 2100lm 2100lm	SHR2G2-9402025N-WG SHR2G2-9403625N-WG SHR2G2-9404525N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Trimless Version available



Trimless code for SHR2G2-9304525N-WM → SHR5G2-9304525N-WM



Trimless code for SHR2G2-9304525N-WM → EHR2G2-9304525N-WM



NEKO / SENSE 100 / S100S2-G2
Fixed LED Downlight

NEW



See Details @www.nekolighting.com

13W 18W	CRI90	2700K 3000K 4000K	25° 32° 38° 50°		UGR < 19	IP54		CB	CE				1-25mm Ceiling Thickness	
------------	-------	-------------------------	--------------------------	--	-------------	------	--	----	----	--	--	--	-----------------------------	--



Specular Reflector



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	25°	1500lm	950lm	SSS2G2-9272513N-WS
						38°	1500lm	1000lm	SSS2G2-9273813N-WS
						50°	1500lm	950lm	SSS2G2-9275013N-WS
					3000K	25°	1600lm	1050lm	SSS2G2-9302513N-WS
						38°	1600lm	1100lm	SSS2G2-9303813N-WS
						50°	1600lm	1050lm	SSS2G2-9305013N-WS
					4000K	25°	1700lm	1100lm	SSS2G2-9402513N-WS
						38°	1700lm	1200lm	SSS2G2-9403813N-WS
						50°	1700lm	1100lm	SSS2G2-9405013N-WS
18 W	21 W	36 V	500 mA	90	2700K	25°	1900lm	1350lm	SSS2G2-9272518N-WS
						38°	1900lm	1450lm	SSS2G2-9273818N-WS
						50°	1900lm	1350lm	SSS2G2-9275018N-WS
					3000K	25°	2000lm	1450lm	SSS2G2-9302518N-WS
						38°	2000lm	1550lm	SSS2G2-9303818N-WS
						50°	2000lm	1450lm	SSS2G2-9305018N-WS
					4000K	25°	2200lm	1550lm	SSS2G2-9402518N-WS
						38°	2200lm	1700lm	SSS2G2-9403818N-WS
						50°	2200lm	1550lm	SSS2G2-9405018N-WS
13 W	15 W	36 V	350 mA	90	2700K	25°	1500lm	950lm	SSS2G2-9272513N-WM
						38°	1500lm	1000lm	SSS2G2-9273813N-WM
						50°	1500lm	950lm	SSS2G2-9275013N-WM
					3000K	25°	1600lm	1050lm	SSS2G2-9302513N-WM
						38°	1600lm	1100lm	SSS2G2-9303813N-WM
						50°	1600lm	1050lm	SSS2G2-9305013N-WM
					4000K	25°	1700lm	1100lm	SSS2G2-9402513N-WM
						38°	1700lm	1200lm	SSS2G2-9403813N-WM
						50°	1700lm	1100lm	SSS2G2-9405013N-WM
18 W	21 W	36 V	500 mA	90	2700K	25°	1900lm	1350lm	SSS2G2-9272518N-WM
						38°	1900lm	1450lm	SSS2G2-9273818N-WM
						50°	1900lm	1350lm	SSS2G2-9275018N-WM
					3000K	25°	2000lm	1450lm	SSS2G2-9302518N-WM
						38°	2000lm	1550lm	SSS2G2-9303818N-WM
						50°	2000lm	1450lm	SSS2G2-9305018N-WM
					4000K	25°	2200lm	1550lm	SSS2G2-9402518N-WM
						38°	2200lm	1700lm	SSS2G2-9403818N-WM
						50°	2200lm	1550lm	SSS2G2-9405018N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Code for SSS2G2-9303618N-WM with Honeycomb
SSS2G2-9303618N-WM-H



Black Reflector



Dark Light Reflector



White Reflector



White Reflector



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	25°	1500lm	950lm	SSS2G2-9272513N-WB
						38°	1500lm	1000lm	SSS2G2-9273813N-WB
						50°	1500lm	950lm	SSS2G2-9275013N-WB
					3000K	25°	1600lm	1050lm	SSS2G2-9302513N-WB
						38°	1600lm	1100lm	SSS2G2-9303813N-WB
						50°	1600lm	1050lm	SSS2G2-9305013N-WB
					4000K	25°	1700lm	1100lm	SSS2G2-9402513N-WB
						38°	1700lm	1200lm	SSS2G2-9403813N-WB
						50°	1700lm	1100lm	SSS2G2-9405013N-WB
18 W	21 W	36 V	500 mA	90	2700K	25°	1900lm	1350lm	SSS2G2-9272518N-WB
						38°	1900lm	1450lm	SSS2G2-9273818N-WB
						50°	1900lm	1350lm	SSS2G2-9275018N-WB
					3000K	25°	2000lm	1450lm	SSS2G2-9302518N-WB
						38°	2000lm	1550lm	SSS2G2-9303818N-WB
						50°	2000lm	1450lm	SSS2G2-9305018N-WB
					4000K	25°	2200lm	1550lm	SSS2G2-9402518N-WB
						38°	2200lm	1700lm	SSS2G2-9403818N-WB
						50°	2200lm	1550lm	SSS2G2-9405018N-WB
13 W	15 W	36 V	350 mA	90	2700K	25°	1500lm	950lm	SSS2G2-9272513N-WC
						38°	1500lm	1000lm	SSS2G2-9273813N-WC
						50°	1500lm	950lm	SSS2G2-9275013N-WC
					3000K	25°	1600lm	1050lm	SSS2G2-9302513N-WC
						38°	1600lm	1100lm	SSS2G2-9303813N-WC
						50°	1600lm	1050lm	SSS2G2-9305013N-WC
					4000K	25°	1700lm	1100lm	SSS2G2-9402513N-WC
						38°	1700lm	1200lm	SSS2G2-9403813N-WC
						50°	1700lm	1100lm	SSS2G2-9405013N-WC
18 W	21 W	36 V	500 mA	90	2700K	25°	1900lm	1350lm	SSS2G2-9272518N-WC
						38°	1900lm	1450lm	SSS2G2-9273818N-WC
						50°	1900lm	1350lm	SSS2G2-9275018N-WC
					3000K	25°	2000lm	1450lm	SSS2G2-9302518N-WC
						38°	2000lm	1550lm	SSS2G2-9303818N-WC
						50°	2000lm	1450lm	SSS2G2-9305018N-WC
					4000K	25°	2200lm	1550lm	SSS2G2-9402518N-WC
						38°	2200lm	1700lm	SSS2G2-9403818N-WC
						50°	2200lm	1550lm	SSS2G2-9405018N-WC
13 W	15 W	36 V	350 mA	90	2700K	25°	1500lm	950lm	SSS2G2-9272513N-WW
						38°	1500lm	1000lm	SSS2G2-9273813N-WW
						50°	1500lm	950lm	SSS2G2-9275013N-WW
					3000K	25°	1600lm	1050lm	SSS2G2-9302513N-WW
						38°	1600lm	1100lm	SSS2G2-9303813N-WW
						50°	1600lm	1050lm	SSS2G2-9305013N-WW
					4000K	25°	1700lm	1100lm	SSS2G2-9402513N-WW
						38°	1700lm	1200lm	SSS2G2-9403813N-WW
						50°	1700lm	1100lm	SSS2G2-9405013N-WW
18 W	21 W	36 V	500 mA	90	2700K	25°	1900lm	1350lm	SSS2G2-9272518N-WW
						38°	1900lm	1450lm	SSS2G2-9273818N-WW
						50°	1900lm	1350lm	SSS2G2-9275018N-WW
					3000K	25°	2000lm	1450lm	SSS2G2-9302518N-WW
						38°	2000lm	1550lm	SSS2G2-9303818N-WW
						50°	2000lm	1450lm	SSS2G2-9305018N-WW
					4000K	25°	2200lm	1550lm	SSS2G2-9402518N-WW
						38°	2200lm	1700lm	SSS2G2-9403818N-WW
						50°	2200lm	1550lm	SSS2G2-9405018N-WW
13 W	15 W	36 V	350 mA	90	2700K	25°	1500lm	950lm	SSS2G2-9272513N-WG
						38°	1500lm	1000lm	SSS2G2-9273813N-WG
						50°	1500lm	950lm	SSS2G2-9275013N-WG
					3000K	25°	1600lm	1050lm	SSS2G2-9302513N-WG
						38°	1600lm	1100lm	SSS2G2-9303813N-WG
						50°	1600lm	1050lm	SSS2G2-9305013N-WG
					4000K	25°	1700lm	1100lm	SSS2G2-9402513N-WG
						38°	1700lm	1200lm	SSS2G2-9403813N-WG
						50°	1700lm	1100lm	SSS2G2-9405013N-WG
18 W	21 W	36 V	500 mA	90	2700K	25°	1900lm	1350lm	SSS2G2-9272518N-WG
						38°	1900lm	1450lm	SSS2G2-9273818N-WG
						50°	1900lm	1350lm	SSS2G2-9275018N-WG
					3000K	25°	2000lm	1450lm	SSS2G2-9302518N-WG
						38°	2000lm	1550lm	SSS2G2-9303818N-WG
						50°	2000lm	1450lm	SSS2G2-9305018N-WG
					4000K	25°	2200lm	1550lm	SSS2G2-9402518N-WG
						38°	2200lm	1700lm	SSS2G2-9403818N-WG
						50°	2200lm	1550lm	SSR2G2-9405018N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Trimless Version available



Trimless code for SSS2G2-9303618N-WM → SSS5G2-9303618N-WM




Trimless code for SSS2G2-9303618N-WM → ESS2G2-9303618N-WM



NEKO / SENSE 100H / S100HS2-G2
Fixed LED Downlight

NEW



25W	CRI90	2700K 3000K 4000K	20° 36° 45°	 50,000h@L80B10	UGR < 19	IP 54		CB	CE					
-----	-------	-------------------------	-------------------	--	----------	-------	---	----	----	---	---	--	---	---



Specular Reflector



Matt Reflector



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20° 36° 45°	2400lm 2400lm 2400lm	1700lm 1900lm 1900lm	SHS2G2-9272025N-WS SHS2G2-9273625N-WS SHS2G2-9274525N-WS
					3000K	20° 36° 45°	2600lm 2600lm 2600lm	1800lm 2000lm 2000lm	SHS2G2-9302025N-WS SHS2G2-9303625N-WS SHS2G2-9304525N-WS
					4000K	20° 36° 45°	2800lm 2800lm 2800lm	1900lm 2100lm 2100lm	SHS2G2-9402025N-WS SHS2G2-9403625N-WS SHS2G2-9404525N-WS
25 W	28 W	36 V	700 mA	90	2700K	20° 36° 45°	2400lm 2400lm 2400lm	1700lm 1900lm 1900lm	SHS2G2-9272025N-WM SHS2G2-9273625N-WM SHS2G2-9274525N-WM
					3000K	20° 36° 45°	2600lm 2600lm 2600lm	1800lm 2000lm 2000lm	SHS2G2-9302025N-WM SHS2G2-9303625N-WM SHS2G2-9304525N-WM
					4000K	20° 36° 45°	2800lm 2800lm 2800lm	1900lm 2100lm 2100lm	SHS2G2-9402025N-WM SHS2G2-9403625N-WM SHS2G2-9404525N-WM
25 W	28 W	36 V	700 mA	90	2700K	20° 36° 45°	2400lm 2400lm 2400lm	1700lm 1900lm 1900lm	SHS2G2-9272025N-WB SHS2G2-9273625N-WB SHS2G2-9274525N-WB
					3000K	20° 36° 45°	2600lm 2600lm 2600lm	1800lm 2000lm 2000lm	SHS2G2-9302025N-WB SHS2G2-9303625N-WB SHS2G2-9304525N-WB
					4000K	20° 36° 45°	2800lm 2800lm 2800lm	1900lm 2100lm 2100lm	SHS2G2-9402025N-WB SHS2G2-9403625N-WB SHS2G2-9404525N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Code for SHS2G2-9304525N-WM with Honeycomb
SHS2G2-9304525N-WM-H



Dark Light Reflector



White Reflector




Gold Reflector



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	20° 36° 45°	2400lm 2400lm 2400lm	1700lm 1900lm 1900lm	SHS2G2-9272025N-WC SHS2G2-9273625N-WC SHS2G2-9274525N-WC
					3000K	20° 36° 45°	2600lm 2600lm 2600lm	1800lm 2000lm 2000lm	SHS2G2-9302025N-WC SHS2G2-9303625N-WC SHS2G2-9304525N-WC
					4000K	20° 36° 45°	2800lm 2800lm 2800lm	1900lm 2100lm 2100lm	SHS2G2-9402025N-WC SHS2G2-9403625N-WC SHS2G2-9404525N-WC
25 W	28 W	36 V	700 mA	90	2700K	20° 36° 45°	2400lm 2400lm 2400lm	1700lm 1900lm 1900lm	SHS2G2-9272025N-WW SHS2G2-9273625N-WW SHS2G2-9274525N-WW
					3000K	20° 36° 45°	2600lm 2600lm 2600lm	1800lm 2000lm 2000lm	SHS2G2-9302025N-WW SHS2G2-9303625N-WW SHS2G2-9304525N-WW
					4000K	20° 36° 45°	2800lm 2800lm 2800lm	1900lm 2100lm 2100lm	SHS2G2-9402025N-WW SHS2G2-9403625N-WW SHS2G2-9404525N-WW
25 W	28 W	36 V	700 mA	90	2700K	20° 36° 45°	2400lm 2400lm 2400lm	1700lm 1900lm 1900lm	SHS2G2-9272025N-WG SHS2G2-9273625N-WG SHS2G2-9274525N-WG
					3000K	20° 36° 45°	2600lm 2600lm 2600lm	1800lm 2000lm 2000lm	SHS2G2-9302025N-WG SHS2G2-9303625N-WG SHS2G2-9304525N-WG
					4000K	20° 36° 45°	2800lm 2800lm 2800lm	1900lm 2100lm 2100lm	SHS2G2-9402025N-WG SHS2G2-9403625N-WG SHS2G2-9404525N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Trimless Version available



Trimless code for SHS2G2-9304525N-WM → SHS5G2-9304525N-WM



Trimless code for SHS2G2-9304525N-WM → EHS2G2-9304525N-WM







See Details @www.nekolighting.com





LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	Wall Washer	1400lm	650lm	SSR3G2-927WW13N-WM	
					3000K	Wall Washer	1500lm	680lm	SSR3G2-930WW13N-WM	
					4000K	Wall Washer	1600lm	750lm	SSR3G2-940WW13N-WM	
18 W	21 W	36 V	500 mA	90	2700K	Wall Washer	1900lm	850lm	SSR3G2-927WW18N-WM	
					3000K	Wall Washer	2000lm	900lm	SSR3G2-930WW18N-WM	
					4000K	Wall Washer	2200lm	1000lm	SSR3G2-940WW18N-WM	

Code Remark:
N=N(No Driver)
F=F(ON-OFF)
P=P(Phase Dim)
A=A(1-10V Dim)
D=D(DALI Dim)

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Matt Reflector

Trimless Version available



LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
	25 W	28 W	36 V	700 mA	90	2700K	Wall Washer	2400lm	1000lm	SHR3G2-927WW25N-WM
						3000K	Wall Washer	2600lm	1100lm	SHR3G2-930WW25N-WM
						4000K	Wall Washer	2800lm	1200lm	SHR3G2-940WW25N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)										

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Matt Reflector

Trimless Version available



NEKO / SENSE 100 / S100S3 G2

Wall Washer LED Downlight

NEW



See Details @www.nekolighting.com



NEKO / SENSE 100H / S100HS3-G2

Wall Washer LED Downlight

NEW



13W
18W

CRI90

2700K
3000K
4000K

CITIZEN
50,000h@L80B10

IP54

5 YEAR
GUARANTEE

CB

CE

1-25mm
Ceiling Thickness

131

107x107

25W

CRI90

2700K
3000K
4000K

CITIZEN
50,000h@L80B10

IP54

5 YEAR
GUARANTEE

CB

CE

1-25mm
Ceiling Thickness

157

107x107

LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	Wall Washer	1400lm	650lm	SSS3G2-927WW13N-WM	
					3000K	Wall Washer	1500lm	680lm	SSS3G2-930WW13N-WM	
					4000K	Wall Washer	1600lm	750lm	SSS3G2-940WW13N-WM	
18 W	21 W	36 V	500 mA	90	2700K	Wall Washer	1900lm	850lm	SSS3G2-927WW18N-WM	
					3000K	Wall Washer	2000lm	900lm	SSS3G2-930WW18N-WM	
					4000K	Wall Washer	2200lm	1000lm	SSS3G2-940WW18N-WM	
Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)										

LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	Wall Washer	2400lm	1000lm	SHS3G2-927WW25N-WM	
					3000K	Wall Washer	2600lm	1100lm	SHS3G2-930WW25N-WM	
					4000K	Wall Washer	2800lm	1200lm	SHS3G2-940WW25N-WM	

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)										



Matt Reflector



Matt Reflector

Trimless Version available

Trimless code for SSS3G2-930WW13N-WM → SSS6G2-930WW13N-WM

12.5-25mm
Ceiling Thickness

96x96

131

91x91
202

Trimless code for SSS3G2-930WW13N-WM → ESS3G2-930WW13N-WM

1-25mm
Ceiling Thickness

104x104

131

91x91
141x141

Trimless Version available

Trimless code for SHS3G2-930WW13N-WM → SHS6G2-930WW13N-WM

12.5-25mm
Ceiling Thickness

96x96

157

91x91
202

Trimless code for SHS3G2-930WW13N-WM → EHS3G2-930WW13N-WM

1-25mm
Ceiling Thickness

104x104

157

91x91
141x141




NEKO / SENSE 125 / S125R1-G2
Adjustable LED Downlight



See Details @www.nekolighting.com

18W 25W	CRI90	2700K 3000K 4000K	20° 38° 50°		UGR < 19	IP54		CB	CE		
------------	-------	-------------------------	-------------------	--	-------------	------	--	----	----	--	--



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMR1G2-9272018N-W
						38°	1900lm	1500lm	SMR1G2-9273818N-W
						50°	1900lm	1300lm	SMR1G2-9275018N-W
					3000K	20°	2000lm	1600lm	SMR1G2-9302018N-W
						38°	2000lm	1600lm	SMR1G2-9303818N-W
						50°	2000lm	1400lm	SMR1G2-9305018N-W
					4000K	20°	2200lm	1700lm	SMR1G2-9402018N-W
						38°	2200lm	1700lm	SMR1G2-9403818N-W
						50°	2200lm	1500lm	SMR1G2-9405018N-W
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMR1G2-9272025N-W
						38°	2400lm	2100lm	SMR1G2-9273825N-W
						50°	2400lm	1900lm	SMR1G2-9275025N-W
					3000K	20°	2600lm	2200lm	SMR1G2-9302025N-W
						38°	2600lm	2200lm	SMR1G2-9303825N-W
						50°	2600lm	2000lm	SMR1G2-9305025N-W
					4000K	20°	2800lm	2400lm	SMR1G2-9402025N-W
						38°	2800lm	2400lm	SMR1G2-9403825N-W
						50°	2800lm	2200lm	SMR1G2-9405025N-W
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMR1G2-9272018N-WM
						38°	1900lm	1500lm	SMR1G2-9273818N-WM
						50°	1900lm	1300lm	SMR1G2-9275018N-WM
					3000K	20°	2000lm	1600lm	SMR1G2-9302018N-WM
						38°	2000lm	1600lm	SMR1G2-9303818N-WM
						50°	2000lm	1400lm	SMR1G2-9305018N-WM
					4000K	20°	2200lm	1700lm	SMR1G2-9402018N-WM
						38°	2200lm	1700lm	SMR1G2-9403818N-WM
						50°	2200lm	1500lm	SMR1G2-9405018N-WM
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMR1G2-9272025N-WM
						38°	2400lm	2100lm	SMR1G2-9273825N-WM
						50°	2400lm	1900lm	SMR1G2-9275025N-WM
					3000K	20°	2600lm	2200lm	SMR1G2-9302025N-WM
						38°	2600lm	2200lm	SMR1G2-9303825N-WM
						50°	2600lm	2000lm	SMR1G2-9305025N-WM
					4000K	20°	2800lm	2400lm	SMR1G2-9402025N-WM
						38°	2800lm	2400lm	SMR1G2-9403825N-WM
						50°	2800lm	2200lm	SMR1G2-9405025N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Code for SMR1G2-9405025N-WM with Honeycomb
SMR1G2-9405025N-WM-H



Black Reflector



Dark Light Reflector



White Reflector



Gold Reflector




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMR1G2-9272018N-WB
						38°	1900lm	1500lm	SMR1G2-9273818N-WB
						50°	1900lm	1300lm	SMR1G2-9275018N-WB
					3000K	20°	2000lm	1600lm	SMR1G2-9302018N-WB
						38°	2000lm	1600lm	SMR1G2-9303818N-WB
						50°	2000lm	1400lm	SMR1G2-9305018N-WB
					4000K	20°	2200lm	1700lm	SMR1G2-9402018N-WB
						38°	2200lm	1700lm	SMR1G2-9403818N-WB
						50°	2200lm	1500lm	SMR1G2-9405018N-WB
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMR1G2-9272025N-WB
						38°	2400lm	2100lm	SMR1G2-9273825N-WB
						50°	2400lm	1900lm	SMR1G2-9275025N-WB
					3000K	20°	2600lm	2200lm	SMR1G2-9302025N-WB
						38°	2600lm	2200lm	SMR1G2-9303825N-WB
						50°	2600lm	2000lm	SMR1G2-9305025N-WB
					4000K	20°	2800lm	2400lm	SMR1G2-9402025N-WB
						38°	2800lm	2400lm	SMR1G2-9403825N-WB
						50°	2800lm	2200lm	SMR1G2-9405025N-WB
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMR1G2-9272018N-WC
						38°	1900lm	1500lm	SMR1G2-9273818N-WC
						50°	1900lm	1300lm	SMR1G2-9275018N-WC
					3000K	20°	2000lm	1600lm	SMR1G2-9302018N-WC
						38°	2000lm	1600lm	SMR1G2-9303818N-WC
						50°	2000lm	1400lm	SMR1G2-9305018N-WC
					4000K	20°	2200lm	1700lm	SMR1G2-9402018N-WC
						38°	2200lm	1700lm	SMR1G2-9403818N-WC
						50°	2200lm	1500lm	SMR1G2-9405018N-WC
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMR1G2-9272025N-WC
						38°	2400lm	2100lm	SMR1G2-9273825N-WC
						50°	2400lm	1900lm	SMR1G2-9275025N-WC
					3000K	20°	2600lm	2200lm	SMR1G2-9302025N-WC
						38°	2600lm	2200lm	SMR1G2-9303825N-WC
						50°	2600lm	2000lm	SMR1G2-9305025N-WC
					4000K	20°	2800lm	2400lm	SMR1G2-9402025N-WC
						38°	2800lm	2400lm	SMR1G2-9403825N-WC
						50°	2800lm	2200lm	SMR1G2-9405025N-WC
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMR1G2-9272018N-WW
						38°	1900lm	1500lm	SMR1G2-9273818N-WW
						50°	1900lm	1300lm	SMR1G2-9275018N-WW
					3000K	20°	2000lm	1600lm	SMR1G2-9302018N-WW
						38°	2000lm	1600lm	SMR1G2-9303818N-WW
						50°	2000lm	1400lm	SMR1G2-9305018N-WW
					4000K	20°	2200lm	1700lm	SMR1G2-9402018N-WW
						38°	2200lm	1700lm	SMR1G2-9403818N-WW
						50°	2200lm	1500lm	SMR1G2-9405018N-WW
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMR1G2-9272025N-WW
						38°	2400lm	2100lm	SMR1G2-9273825N-WW
						50°	2400lm	1900lm	SMR1G2-9275025N-WW
					3000K	20°	2600lm	2200lm	SMR1G2-9302025N-WW
						38°	2600lm	2200lm	SMR1G2-9303825N-WW
						50°	2600lm	2000lm	SMR1G2-9305025N-WW
					4000K	20°	2800lm	2400lm	SMR1G2-9402025N-WW
						38°	2800lm	2400lm	SMR1G2-9403825N-WW
						50°	2800lm	2200lm	SMR1G2-9405025N-WW
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMR1G2-9272018N-WG
						38°	1900lm	1500lm	SMR1G2-9273818N-WG
						50°	1900lm	1300lm	SMR1G2-9275018N-WG
					3000K	20°	2000lm	1600lm	SMR1G2-9302018N-WG
						38°	2000lm	1600lm	SMR1G2-9303818N-WG
						50°	2000lm	1400lm	SMR1G2-9305018N-WG
					4000K	20°	2200lm	1700lm	SMR1G2-9402018N-WG
						38°	2200lm	1700lm	SMR1G2-9403818N-WG
						50°	2200lm	1500lm	SMR1G2-9405018N-WG
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMR1G2-9272025N-WG
						38°	2400lm	2100lm	SMR1G2-9273825N-WG
						50°	2400lm	1900lm	SMR1G2-9275025N-WG
					3000K	20°	2600lm	2200lm	SMR1G2-9302025N-WG
						38°	2600lm	2200lm	SMR1G2-9303825N-WG
						50°	2600lm	2000lm	SMR1G2-9305025N-WG
					4000K	20°	2800lm	2400lm	SMR1G2-9402025N-WG
						38°	2800lm	2400lm	SMR1G2-9403825N-WG
						50°	2800lm	2200lm	SMR1G2-9405025N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Trimless Version available



Trimless code for SMR1G2-9305025N-WM → SMR4G2-9304025N-WM



Trimless code for SMR1G2-9305025N-WM → EMR1G2-9305025N-WM



NEKO / SENSE 125 / S125S1-G2

Adjustable LED Downlight

NEW



See Details @www.nekolighting.com

18W 25W	CRI90	2700K 3000K 4000K	20° 38° 50°		UGR < 19	IP54		CB	CE				1-30mm Ceiling Thickness	159	
------------	-------	-------------------------	-------------------	--	-------------	------	--	----	----	--	--	--	-----------------------------	-----	--

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMS1G2-9272018N-WS
						38°	1900lm	1500lm	SMS1G2-9273818N-WS
						50°	1900lm	1300lm	SMS1G2-9275018N-WS
					3000K	20°	2000lm	1600lm	SMS1G2-9302018N-WS
						38°	2000lm	1600lm	SMS1G2-9303818N-WS
						50°	2000lm	1400lm	SMS1G2-9305018N-WS
					4000K	20°	2200lm	1700lm	SMS1G2-9402018N-WS
						38°	2200lm	1700lm	SMS1G2-9403818N-WS
						50°	2200lm	1500lm	SMS1G2-9405018N-WS
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMS1G2-9272025N-WS
						38°	2400lm	2100lm	SMS1G2-9273825N-WS
						50°	2400lm	1900lm	SMS1G2-9275025N-WS
					3000K	20°	2600lm	2200lm	SMS1G2-9302025N-WS
						38°	2600lm	2200lm	SMS1G2-9303825N-WS
						50°	2600lm	2000lm	SMS1G2-9305025N-WS
					4000K	20°	2800lm	2400lm	SMS1G2-9402025N-WS
						38°	2800lm	2400lm	SMS1G2-9403825N-WS
						50°	2800lm	2200lm	SMS1G2-9405025N-WS
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMS1G2-9272018N-WM
						38°	1900lm	1500lm	SMS1G2-9273818N-WM
						50°	1900lm	1300lm	SMS1G2-9275018N-WM
					3000K	20°	2000lm	1600lm	SMS1G2-9302018N-WM
						38°	2000lm	1600lm	SMS1G2-9303818N-WM
						50°	2000lm	1400lm	SMS1G2-9305018N-WM
					4000K	20°	2200lm	1700lm	SMS1G2-9402018N-WM
						38°	2200lm	1700lm	SMS1G2-9403818N-WM
						50°	2200lm	1500lm	SMS1G2-9405018N-WM
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMS1G2-9272025N-WM
						38°	2400lm	2100lm	SMS1G2-9273825N-WM
						50°	2400lm	1900lm	SMS1G2-9275025N-WM
					3000K	20°	2600lm	2200lm	SMS1G2-9302025N-WM
						38°	2600lm	2200lm	SMS1G2-9303825N-WM
						50°	2600lm	2000lm	SMS1G2-9305025N-WM
					4000K	20°	2800lm	2400lm	SMS1G2-9402025N-WM
						38°	2800lm	2400lm	SMS1G2-9403825N-WM
						50°	2800lm	2200lm	SMS1G2-9405025N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Code for SMS1G2-9405025N-WM with Honeycomb
SMS1G2-9405025N-WM-H



Black Reflector



Dark Light Reflector



White Reflector



Gold Reflector



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMS1G2-9272018N-WB
						38°	1900lm	1500lm	SMS1G2-9273818N-WB
						50°	1900lm	1300lm	SMS1G2-9275018N-WB
					3000K	20°	2000lm	1600lm	SMS1G2-9302018N-WB
						38°	2000lm	1600lm	SMS1G2-9303818N-WB
						50°	2000lm	1400lm	SMS1G2-9305018N-WB
					4000K	20°	2200lm	1700lm	SMS1G2-9402018N-WB
						38°	2200lm	1700lm	SMS1G2-9403818N-WB
						50°	2200lm	1500lm	SMS1G2-9405018N-WB
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMS1G2-9272025N-WB
						38°	2400lm	2100lm	SMS1G2-9273825N-WB
						50°	2400lm	1900lm	SMS1G2-9275025N-WB
					3000K	20°	2600lm	2200lm	SMS1G2-9302025N-WB
						38°	2600lm	2200lm	SMS1G2-9303825N-WB
						50°	2600lm	2000lm	SMS1G2-9305025N-WB
					4000K	20°	2800lm	2400lm	SMS1G2-9402025N-WB
						38°	2800lm	2400lm	SMS1G2-9403825N-WB
						50°	2800lm	2200lm	SMS1G2-9405025N-WB
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMS1G2-9272018N-WC
						38°	1900lm	1500lm	SMS1G2-9273818N-WC
						50°	1900lm	1300lm	SMS1G2-9275018N-WC
					3000K	20°	2000lm	1600lm	SMS1G2-9302018N-WC
						38°	2000lm	1600lm	SMS1G2-9303818N-WC
						50°	2000lm	1400lm	SMS1G2-9305018N-WC
					4000K	20°	2200lm	1700lm	SMS1G2-9402018N-WC
						38°	2200lm	1700lm	SMS1G2-9403818N-WC
						50°	2200lm	1500lm	SMS1G2-9405018N-WC
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMS1G2-9272025N-WC
						38°	2400lm	2100lm	SMS1G2-9273825N-WC
						50°	2400lm	1900lm	SMS1G2-9275025N-WC
					3000K	20°	2600lm	2200lm	SMS1G2-9302025N-WC
						38°	2600lm	2200lm	SMS1G2-9303825N-WC
						50°	2600lm	2000lm	SMS1G2-9305025N-WC
					4000K	20°	2800lm	2400lm	SMS1G2-9402025N-WC
						38°	2800lm	2400lm	SMS1G2-9403825N-WC
						50°	2800lm	2200lm	SMS1G2-9405025N-WC
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMS1G2-9272018N-WW
						38°	1900lm	1500lm	SMS1G2-9273818N-WW
						50°	1900lm	1300lm	SMS1G2-9275018N-WW
					3000K	20°	2000lm	1600lm	SMS1G2-9302018N-WW
						38°	2000lm	1600lm	SMS1G2-9303818N-WW
						50°	2000lm	1400lm	SMS1G2-9305018N-WW
					4000K	20°	2200lm	1700lm	SMS1G2-9402018N-WW
						38°	2200lm	1700lm	SMS1G2-9403818N-WW
						50°	2200lm	1500lm	SMS1G2-9405018N-WW
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMS1G2-9272025N-WW
						38°	2400lm	2100lm	SMS1G2-9273825N-WW
						50°	2400lm	1900lm	SMS1G2-9275025N-WW
					3000K	20°	2600lm	2200lm	SMS1G2-9302025N-WW
						38°	2600lm	2200lm	SMS1G2-9303825N-WW
						50°	2600lm	2000lm	SMS1G2-9305025N-WW
					4000K	20°	2800lm	2400lm	SMS1G2-9402025N-WW
						38°	2800lm	2400lm	SMS1G2-9403825N-WW
						50°	2800lm	2200lm	SMS1G2-9405025N-WW
18 W	21 W	36 V	500 mA	90	2700K	20°	1900lm	1500lm	SMS1G2-9272018N-WG
						38°	1900lm	1500lm	SMS1G2-9273818N-WG
						50°	1900lm	1300lm	SMS1G2-9275018N-WG
					3000K	20°	2000lm	1600lm	SMS1G2-9302018N-WG
						38°	2000lm	1600lm	SMS1G2-9303818N-WG
						50°	2000lm	1400lm	SMS1G2-9305018N-WG
					4000K	20°	2200lm	1700lm	SMS1G2-9402018N-WG
						38°	2200lm	1700lm	SMS1G2-9403818N-WG
						50°	2200lm	1500lm	SMS1G2-9405018N-WG
25 W	28 W	36 V	700 mA	90	2700K	20°	2400lm	2100lm	SMS1G2-9272025N-WG
						38°	2400lm	2100lm	SMS1G2-9273825N-WG
						50°	2400lm	1900lm	SMS1G2-9275025N-WG
					3000K	20°	2600lm	2200lm	SMS1G2-9302025N-WG
						38°	2600lm	2200lm	SMS1G2-9303825N-WG
						50°	2600lm	2000lm	SMS1G2-9305025N-WG
					4000K	20°	2800lm	2400lm	SMS1G2-9402025N-WG
						38°	2800lm	2400lm	SMS1G2-9403825N-WG
						50°	2800lm	2200lm	SMS1G2-9405025N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Trimless Version available



Trimless code for SMS1G2-9305025N-WM → SMS4G2-9304025N-WM



Trimless code for SMS1G2-9305025N-WM → EMS1G2-9305025N-WM




NEKO / SENSE 125 / S125R2-G2
Fixed LED Downlight

NEW



See Details @www.nekolighting.com

18W 25W	CRI90	2700K 3000K 4000K	24° 36° 45°		UGR < 19	IP54		CB	CE		
------------	-------	-------------------------	-------------------	--	-------------	------	--	----	----	--	--



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1400lm	SMR2G2-9272018N-WS
						36°	1900lm	1400lm	SMR2G2-9273618N-WS
						45°	1900lm	1200lm	SMR2G2-9274518N-WS
					3000K	24°	2000lm	1500lm	SMR2G2-9302018N-WS
						36°	2000lm	1500lm	SMR2G2-9303618N-WS
						45°	2000lm	1300lm	SMR2G2-9304518N-WS
					4000K	24°	2200lm	1600lm	SMR2G2-9402018N-WS
						36°	2200lm	1600lm	SMR2G2-9403618N-WS
						45°	2200lm	1400lm	SMR2G2-9404518N-WS
25 W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2000lm	SMR2G2-9272025N-WS
						36°	2400lm	2000lm	SMR2G2-9273525N-WS
						45°	2400lm	1800lm	SMR2G2-9274525N-WS
					3000K	24°	2600lm	2100lm	SMR2G2-9302025N-WS
						36°	2600lm	2100lm	SMR2G2-9303625N-WS
						45°	2600lm	1900lm	SMR2G2-9304525N-WS
					4000K	24°	2800lm	2300lm	SMR2G2-9402025N-WS
						36°	2800lm	2300lm	SMR2G2-9403625N-WS
						45°	2800lm	2050lm	SMR2G2-9404525N-WS
18 W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1400lm	SMR2G2-9272018N-WM
						36°	1900lm	1400lm	SMR2G2-9273618N-WM
						45°	1900lm	1200lm	SMR2G2-9274518N-WM
					3000K	24°	2000lm	1500lm	SMR2G2-9302018N-WM
						36°	2000lm	1500lm	SMR2G2-9303618N-WM
						45°	2000lm	1300lm	SMR2G2-9304518N-WM
					4000K	24°	2200lm	1600lm	SMR2G2-9402018N-WM
						36°	2200lm	1600lm	SMR2G2-9403618N-WM
						45°	2200lm	1400lm	SMR2G2-9404518N-WM
25 W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2000lm	SMR2G2-9272025N-WM
						36°	2400lm	2000lm	SMR2G2-9273525N-WM
						45°	2400lm	1800lm	SMR2G2-9274525N-WM
					3000K	24°	2600lm	2100lm	SMR2G2-9302025N-WM
						36°	2600lm	2100lm	SMR2G2-9303625N-WM
						45°	2600lm	1900lm	SMR2G2-9304525N-WM
					4000K	24°	2800lm	2300lm	SMR2G2-9402025N-WM
						36°	2800lm	2300lm	SMR2G2-9403625N-WM
						45°	2800lm	2050lm	SMR2G2-9404525N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Code for SMR2G2-9404525N-WM with Honeycomb
SMR2G2-9404525N-WM-H



Black Reflector



Dark Light Reflector



White Reflector




Gold Reflector



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1400lm	SMR2G2-9272018N-WB
						36°	1900lm	1400lm	SMR2G2-9273618N-WB
						45°	1900lm	1200lm	SMR2G2-9274518N-WB
					3000K	24°	2000lm	1500lm	SMR2G2-9302018N-WB
						36°	2000lm	1500lm	SMR2G2-9303618N-WB
						45°	2000lm	1300lm	SMR2G2-9304518N-WB
					4000K	24°	2200lm	1600lm	SMR2G2-9402018N-WB
						36°	2200lm	1600lm	SMR2G2-9403618N-WB
						45°	2200lm	1400lm	SMR2G2-9404518N-WB
25 W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2000lm	SMR2G2-9272025N-WB
						36°	2400lm	2000lm	SMR2G2-9273525N-WB
						45°	2400lm	1800lm	SMR2G2-9274525N-WB
					3000K	24°	2600lm	2100lm	SMR2G2-9302025N-WB
						36°	2600lm	2100lm	SMR2G2-9303625N-WB
						45°	2600lm	1900lm	SMR2G2-9304525N-WB
					4000K	24°	2800lm	2300lm	SMR2G2-9402025N-WB
						36°	2800lm	2300lm	SMR2G2-9403625N-WB
						45°	2800lm	2050lm	SMR2G2-9404525N-WB
18 W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1400lm	SMR2G2-9272018N-WC
						36°	1900lm	1400lm	SMR2G2-9273618N-WC
						45°	1900lm	1200lm	SMR2G2-9274518N-WC
					3000K	24°	2000lm	1500lm	SMR2G2-9302018N-WC
						36°	2000lm	1500lm	SMR2G2-9303618N-WC
						45°	2000lm	1300lm	SMR2G2-9304518N-WC
					4000K	24°	2200lm	1600lm	SMR2G2-9402018N-WC
						36°	2200lm	1600lm	SMR2G2-9403618N-WC
						45°	2200lm	1400lm	SMR2G2-9404518N-WC
25 W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2000lm	SMR2G2-9272025N-WC
						36°	2400lm	2000lm	SMR2G2-9273525N-WC
						45°	2400lm	1800lm	SMR2G2-9274525N-WC
					3000K	24°	2600lm	2100lm	SMR2G2-9302025N-WC
						36°	2600lm	2100lm	SMR2G2-9303625N-WC
						45°	2600lm	1900lm	SMR2G2-9304525N-WC
					4000K	24°	2800lm	2300lm	SMR2G2-9402025N-WC
						36°	2800lm	2300lm	SMR2G2-9403625N-WC
						45°	2800lm	2050lm	SMR2G2-9404525N-WC
18 W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1500lm	SMR2G2-9272018N-WW
						36°	1900lm	1500lm	SMR2G2-9273618N-WW
						45°	1900lm	1300lm	SMR2G2-9274518N-WW
					3000K	24°	2000lm	1600lm	SMR2G2-9302018N-WW
						36°	2000lm	1600lm	SMR2G2-9303618N-WW
						45°	2000lm	1400lm	SMR2G2-9304518N-WW
					4000K	24°	2200lm	1700lm	SMR2G2-9402018N-WW
						36°	2200lm	1700lm	SMR2G2-9403618N-WW
						45°	2200lm	1500lm	SMR2G2-9404518N-WW
25 W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2100lm	SMR2G2-9272025N-WW
						36°	2400lm	2100lm	SMR2G2-9273525N-WW
						45°	2400lm	1900lm	SMR2G2-9274525N-WW
					3000K	24°	2600lm	2200lm	SMR2G2-9302025N-WW
						36°	2600lm	2200lm	SMR2G2-9303625N-WW
						45°	2600lm	2000lm	SMR2G2-9304525N-WW
					4000K	24°	2800lm	2400lm	SMR2G2-9402025N-WW
						36°	2800lm	2400lm	SMR2G2-9403625N-WW
						45°	2800lm	2200lm	SMR2G2-9404525N-WW
18 W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1500lm	SMR2G2-9272018N-WG
						36°	1900lm	1500lm	SMR2G2-9273618N-WG
						45°	1900lm	1300lm	SMR2G2-9274518N-WG
					3000K	24°	2000lm	1600lm	SMR2G2-9302018N-WG
						36°	2000lm	1600lm	SMR2G2-9303618N-WG
						45°	2000lm	1400lm	SMR2G2-9304518N-WG
					4000K	24°	2200lm	1700lm	SMR2G2-9402018N-WG
						36°	2200lm	1700lm	SMR2G2-9403618N-WG
						45°	2200lm	1500lm	SMR2G2-9404518N-WG
25 W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2100lm	SMR2G2-9272025N-WG
						36°	2400lm	2100lm	SMR2G2-9273525N-WG
						45°	2400lm	1900lm	SMR2G2-9274525N-WG
					3000K	24°	2600lm	2200lm	SMR2G2-9302025N-WG
						36°	2600lm	2200lm	SMR2G2-9303625N-WG
						45°	2600lm	2000lm	SMR2G2-9304525N-WG
					4000K	24°	2800lm	2400lm	SMR2G2-9402025N-WG
						36°	2800lm	2400lm	SMR2G2-9403625N-WG
						45°	2800lm	2200lm	SMR2G2-9404525N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Trimless Version available



Trimless code for SMR2G2-9304525N-WM → SMR5G2-9304525N-WM



Trimless code for SMR2G2-9304525N-WM → EMR2G2-9304525N-WM





18W 25W	CRI90	2700K 3000K 4000K	24° 36° 45°	CITIZEN 50,000h@L80B10	UGR < 19	IP54	5 YEARS GUARANTEE	CB	CE				155	
------------	-------	-------------------------	-------------------	----------------------------------	-------------	------	----------------------	----	----	--	--	--	-----	--



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code	
18 W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1400lm	SMS2G2-9272018N-WS	
						36°	1900lm	1400lm	SMS2G2-9273618N-WS	
						45°	1900lm	1200lm	SMS2G2-9274518N-WS	
						3000K	24°	2000lm	1500lm	SMS2G2-9302018N-WS
							36°	2000lm	1500lm	SMS2G2-9303618N-WS
							45°	2000lm	1300lm	SMS2G2-9304518N-WS
						4000K	24°	2200lm	1600lm	SMS2G2-9402018N-WS
							36°	2200lm	1600lm	SMS2G2-9403618N-WS
							45°	2200lm	1400lm	SMS2G2-9404518N-WS
25 W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2000lm	SMS2G2-9272025N-WS	
						36°	2400lm	2000lm	SMS2G2-9273525N-WS	
						45°	2400lm	1800lm	SMS2G2-9274525N-WS	
						3000K	24°	2600lm	2100lm	SMS2G2-9302025N-WS
							36°	2600lm	2100lm	SMS2G2-9303625N-WS
							45°	2600lm	1900lm	SMS2G2-9304525N-WS
						4000K	24°	2800lm	2300lm	SMS2G2-9402025N-WS
							36°	2800lm	2300lm	SMS2G2-9403625N-WS
							45°	2800lm	2050lm	SMS2G2-9404525N-WS
18 W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1400lm	SMS2G2-9272018N-WM	
						36°	1900lm	1400lm	SMS2G2-9273618N-WM	
						45°	1900lm	1200lm	SMS2G2-9274518N-WM	
						3000K	24°	2000lm	1500lm	SMS2G2-9302018N-WM
							36°	2000lm	1500lm	SMS2G2-9303618N-WM
							45°	2000lm	1300lm	SMS2G2-9304518N-WM
						4000K	24°	2200lm	1600lm	SMS2G2-9402018N-WM
							36°	2200lm	1600lm	SMS2G2-9403618N-WM
							45°	2200lm	1400lm	SMS2G2-9404518N-WM
25 W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2000lm	SMS2G2-9272025N-WM	
						36°	2400lm	2000lm	SMS2G2-9273525N-WM	
						45°	2400lm	1800lm	SMS2G2-9274525N-WM	
						3000K	24°	2600lm	2100lm	SMS2G2-9302025N-WM
							36°	2600lm	2100lm	SMS2G2-9303625N-WM
							45°	2600lm	1900lm	SMS2G2-9304525N-WM
						4000K	24°	2800lm	2300lm	SMS2G2-9402025N-WM
							36°	2800lm	2300lm	SMS2G2-9403625N-WM
							45°	2800lm	2050lm	SMS2G2-9404525N-WM



Honeycomb



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1400lm	SMS2G2-9272018	N-WB
						36°	1900lm	1400lm	SMS2G2-9273618	N-WB
						45°	1900lm	1200lm	SMS2G2-9274518	N-WB
					3000K	24°	2000lm	1500lm	SMS2G2-9302018	N-WB
						36°	2000lm	1500lm	SMS2G2-9303618	N-WB
						45°	2000lm	1300lm	SMS2G2-9304518	N-WB
					4000K	24°	2200lm	1600lm	SMS2G2-9402018	N-WB
						36°	2200lm	1600lm	SMS2G2-9403618	N-WB
						45°	2200lm	1400lm	SMS2G2-9404518	N-WB
25 W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2000lm	SMS2G2-9272025	N-WB
						36°	2400lm	2000lm	SMS2G2-9273525	N-WB
						45°	2400lm	1800lm	SMS2G2-9274525	N-WB
					3000K	24°	2600lm	2100lm	SMS2G2-9302025	N-WB
						36°	2600lm	2100lm	SMS2G2-9303625	N-WB
						45°	2600lm	1900lm	SMS2G2-9304525	N-WB
					4000K	24°	2800lm	2300lm	SMS2G2-9402025	N-WB
						36°	2800lm	2300lm	SMS2G2-9403625	N-WB
						45°	2800lm	2050lm	SMS2G2-9404525	N-WB
18 W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1400lm	SMS2G2-9272018	N-WC
						36°	1900lm	1400lm	SMS2G2-9273618	N-WC
						45°	1900lm	1200lm	SMS2G2-9274518	N-WC
					3000K	24°	2000lm	1500lm	SMS2G2-9302018	N-WC
						36°	2000lm	1500lm	SMS2G2-9303618	N-WC
						45°	2000lm	1300lm	SMS2G2-9304518	N-WC
					4000K	24°	2200lm	1600lm	SMS2G2-9402018	N-WC
						36°	2200lm	1600lm	SMS2G2-9403618	N-WC
						45°	2200lm	1400lm	SMS2G2-9404518	N-WC
25 W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2000lm	SMS2G2-9272025	N-WC
						36°	2400lm	2000lm	SMS2G2-9273525	N-WC
						45°	2400lm	1800lm	SMS2G2-9274525	N-WC
					3000K	24°	2600lm	2100lm	SMS2G2-9302025	N-WC
						36°	2600lm	2100lm	SMS2G2-9303625	N-WC
						45°	2600lm	1900lm	SMS2G2-9304525	N-WC
					4000K	24°	2800lm	2300lm	SMS2G2-9402025	N-WC
						36°	2800lm	2300lm	SMS2G2-9403625	N-WC
						45°	2800lm	2050lm	SMS2G2-9404525	N-WC
18 W	21 W	36 V	500 mA	90	2700K	24°	1900lm	1500lm	SMS2G2-9272018	N-WW
						36°	1900lm	1500lm	SMS2G2-9273618	N-WW
						45°	1900lm	1300lm	SMS2G2-9274518	N-WW
					3000K	24°	2000lm	1600lm	SMS2G2-9302018	N-WW
						36°	2000lm	1600lm	SMS2G2-9303618	N-WW
						45°	2000lm	1400lm	SMS2G2-9304518	N-WW
					4000K	24°	2200lm	1700lm	SMS2G2-9402018	N-WW
						36°	2200lm	1700lm	SMS2G2-9403618	N-WW
						45°	2200lm	1500lm	SMS2G2-9404518	N-WW
25 W	28 W	36 V	700 mA	90	2700K	24°	2400lm	2100lm	SMS2G2-9272025	N-WW
						36°	2400lm	2100lm	SMS2G2-9273525	N-WW
						45°	2400lm			



12.5-25mm
Ceiling Thickness

3N-WM

122x122

159

120x120

200x200



5N-WM

130x130

159

120x120

167x167

NEKO / SENSE 125 / S125R3-G2

Wall Washer LED Downlight

NEW



See Details @www.nekolighting.com



Matt Reflector




LED Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	90	2700K	Wall Washer	1900lm	850lm	SMR3G2-927WW18N-WM
					3000K	Wall Washer	2000lm	900lm	SMR3G2-930WW18N-WM
					4000K	Wall Washer	2200lm	1000lm	SMR3G2-940WW18N-WM
25 W	28 W	36 V	700 mA	90	2700K	Wall Washer	2400lm	1100lm	SMR3G2-927WW25N-WM
					3000K	Wall Washer	2600lm	1200lm	SMR3G2-930WW25N-WM
					4000K	Wall Washer	2800lm	1300lm	SMR3G2-940WW25N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Trimless Version available



Trimless code for SMR3G2-930WW18N-WM → SMR6G2-930WW18N-WM




Trimless code for SMR3G2-930WW18N-WM → EMR3G2-930WW18N-WM



NEKO / SENSE 125 / S125S3-G2

Wall Washer LED Downlight

NEW

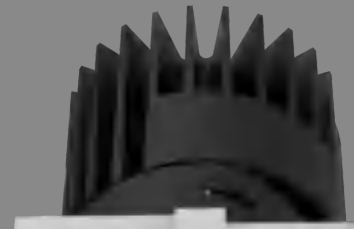

See Details @www.nekolighting.com




Matt Reflector



LED Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	90	2700K	Wall Washer	1900lm	850lm	SMS3G2-927WW18N-WM
					3000K	Wall Washer	2000lm	900lm	SMS3G2-930WW18N-WM
					4000K	Wall Washer	2200lm	1000lm	SMS3G2-940WW18N-WM
25 W	28 W	36 V	700 mA	90	2700K	Wall Washer	2400lm	1100lm	SMS3G2-927WW25N-WM
					3000K	Wall Washer	2600lm	1200lm	SMS3G2-930WW25N-WM
					4000K	Wall Washer	2800lm	1300lm	SMS3G2-940WW25N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version available



Trimless code for SMS3G2-930WW18N-WM → SMS6G2-930WW18N-WM



Trimless code for SMS3G2-930WW18N-WM → EMS3G2-930WW18N-WM





NEKO / SENSE 150 / S150R1-G2


Adjustable LED Downlight

NEW




See Details @www.nekolighting.com

25W 38W	CRI90	2700K 3000K 4000K	18° 36° 50°		UGR < 19	IP54		CB	CE		
------------	-------	-------------------------	-------------------	--	-------------	------	--	----	----	--	--



Specular Reflector



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLR1G2-9271825N-W
						36°	2500lm	2300lm	SLR1G2-9273625N-W
						50°	2500lm	1800lm	SLR1G2-9275025N-W
					3000K	18°	2700lm	2200lm	SLR1G2-9301825N-W
						36°	2700lm	2400lm	SLR1G2-9303625N-W
						50°	2700lm	1900lm	SLR1G2-9305025N-W
					4000K	18°	2900lm	2400lm	SLR1G2-9401825N-W
						36°	2900lm	2600lm	SLR1G2-9403625N-W
						50°	2900lm	2100lm	SLR1G2-9405025N-W
38 W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLR1G2-9271838N-W
						36°	3500lm	3400lm	SLR1G2-9273638N-W
						50°	3500lm	2650lm	SLR1G2-9275038N-W
					3000K	18°	3700lm	3300lm	SLR1G2-9301838N-W
						36°	3700lm	3600lm	SLR1G2-9303638N-W
						50°	3700lm	2800lm	SLR1G2-9305038N-W
					4000K	18°	4000lm	3600lm	SLR1G2-9401838N-W
						36°	4000lm	3900lm	SLR1G2-9403638N-W
						50°	4000lm	3000lm	SLR1G2-9405038N-W
25 W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLR1G2-9271825N-WM
						36°	2500lm	2300lm	SLR1G2-9273625N-WM
						50°	2500lm	1800lm	SLR1G2-9275025N-WM
					3000K	18°	2700lm	2200lm	SLR1G2-9301825N-WM
						36°	2700lm	2400lm	SLR1G2-9303625N-WM
						50°	2700lm	1900lm	SLR1G2-9305025N-WM
					4000K	18°	2900lm	2400lm	SLR1G2-9401825N-WM
						36°	2900lm	2600lm	SLR1G2-9403625N-WM
						50°	2900lm	2100lm	SLR1G2-9405025N-WM
38 W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLR1G2-9271838N-WM
						36°	3500lm	3400lm	SLR1G2-9273638N-WM
						50°	3500lm	2650lm	SLR1G2-9275038N-WM
					3000K	18°	3700lm	3300lm	SLR1G2-9301838N-WM
						36°	3700lm	3600lm	SLR1G2-9303638N-WM
						50°	3700lm	2800lm	SLR1G2-9305038N-WM
					4000K	18°	4000lm	3600lm	SLR1G2-9401838N-WM
						36°	4000lm	3900lm	SLR1G2-9403638N-WM
						50°	4000lm	3000lm	SLR1G2-9405038N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Code for SLR1G2-9405025N-WM with Honeycomb
SLR1G2-9405025N-WM-H



Black Reflector



Dark Light Reflector



White Reflector




Gold Reflector



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLR1G2-9271825N-WB
						36°	2500lm	2300lm	SLR1G2-9273625N-WB
						50°	2500lm	1800lm	SLR1G2-9275025N-WB
					3000K	18°	2700lm	2200lm	SLR1G2-9301825N-WB
						36°	2700lm	2400lm	SLR1G2-9303625N-WB
						50°	2700lm	1900lm	SLR1G2-9305025N-WB
					4000K	18°	2900lm	2400lm	SLR1G2-9401825N-WB
						36°	2900lm	2600lm	SLR1G2-9403625N-WB
						50°	2900lm	2100lm	SLR1G2-9405025N-WB
38 W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLR1G2-9271838N-WB
						36°	3500lm	3400lm	SLR1G2-9273638N-WB
						50°	3500lm	2650lm	SLR1G2-9275038N-WB
					3000K	18°	3700lm	3300lm	SLR1G2-9301838N-WB
						36°	3700lm	3600lm	SLR1G2-9303638N-WB
						50°	3700lm	2800lm	SLR1G2-9305038N-WB
					4000K	18°	4000lm	3600lm	SLR1G2-9401838N-WB
						36°	4000lm	3900lm	SLR1G2-9403638N-WB
						50°	4000lm	3000lm	SLR1G2-9405038N-WB
25 W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLR1G2-9271825N-WC
						36°	2500lm	2300lm	SLR1G2-9273625N-WC
						50°	2500lm	1800lm	SLR1G2-9275025N-WC
					3000K	18°	2700lm	2200lm	SLR1G2-9301825N-WC
						36°	2700lm	2400lm	SLR1G2-9303625N-WC
						50°	2700lm	1900lm	SLR1G2-9305025N-WC
					4000K	18°	2900lm	2400lm	SLR1G2-9401825N-WC
						36°	2900lm	2600lm	SLR1G2-9403625N-WC
						50°	2900lm	2100lm	SLR1G2-9405025N-WC
38 W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLR1G2-9271838N-WC
						36°	3500lm	3400lm	SLR1G2-9273638N-WC
						50°	3500lm	2650lm	SLR1G2-9275038N-WC
					3000K	18°	3700lm	3300lm	SLR1G2-9301838N-WC
						36°	3700lm	3600lm	SLR1G2-9303638N-WC
						50°	3700lm	2800lm	SLR1G2-9305038N-WC
					4000K	18°	4000lm	3600lm	SLR1G2-9401838N-WC
						36°	4000lm	3900lm	SLR1G2-9403638N-WC
						50°	4000lm	3000lm	SLR1G2-9405038N-WC
25 W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLR1G2-9271825N-WW
						36°	2500lm	2300lm	SLR1G2-9273625N-WW
						50°	2500lm	1800lm	SLR1G2-9275025N-WW
					3000K	18°	2700lm	2200lm	SLR1G2-9301825N-WW
						36°	2700lm	2400lm	SLR1G2-9303625N-WW
						50°	2700lm	1900lm	SLR1G2-9305025N-WW
					4000K	18°	2900lm	2400lm	SLR1G2-9401825N-WW
						36°	2900lm	2600lm	SLR1G2-9403625N-WW
						50°	2900lm	2100lm	SLR1G2-9405025N-WW
38 W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLR1G2-9271838N-WW
						36°	3500lm	3400lm	SLR1G2-9273638N-WW
						50°	3500lm	2650lm	SLR1G2-9275038N-WW
					3000K	18°	3700lm	3300lm	SLR1G2-9301838N-WW
						36°	3700lm	3600lm	SLR1G2-9303638N-WW
						50°	3700lm	2800lm	SLR1G2-9305038N-WW
					4000K	18°	4000lm	3600lm	SLR1G2-9401838N-WW
						36°	4000lm	3900lm	SLR1G2-9403638N-WW
						50°	4000lm	3000lm	SLR1G2-9405038N-WW
25 W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLR1G2-9271825N-WG
						36°	2500lm	2300lm	SLR1G2-9273625N-WG
						50°	2500lm	1800lm	SLR1G2-9275025N-WG
					3000K	18°	2700lm	2200lm	SLR1G2-9301825N-WG
						36°	2700lm	2400lm	SLR1G2-9303625N-WG
						50°	2700lm	1900lm	SLR1G2-9305025N-WG
					4000K	18°	2900lm	2400lm	SLR1G2-9401825N-WG
						36°	2900lm	2600lm	SLR1G2-9403625N-WG
						50°	2900lm	2100lm	SLR1G2-9405025N-WG
38 W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLR1G2-9271838N-WG
						36°	3500lm	3400lm	SLR1G2-9273638N-WG
						50°	3500lm	2650lm	SLR1G2-9275038N-WG
					3000K	18°	3700lm	3300lm	SLR1G2-9301838N-WG
						36°	3700lm	3600lm	SLR1G2-9303638N-WG
						50°	3700lm	2800lm	SLR1G2-9305038N-WG
					4000K	18°	4000lm	3600lm	SLR1G2-9401838N-WG
						36°	4000lm	3900lm	SLR1G2-9403638N-WG
						50°	4000lm	3000lm	SLR1G2-9405038N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Trimless Version available



Trimless code for SLR1G2-9305025N-WM → SLR4G2-9305025N-WM



Trimless code for SLR1G2-9305025N-WM → ELR1G2-9305025N-WM



NEKO / SENSE 150 / S150S1-G2
Adjustable LED Downlight


NEW



See Details @www.nekolighting.com



25W 38W	CRI90	2700K 3000K 4000K	18° 36° 50°		UGR < 19	IP54		CB	CE		
------------	-------	-------------------------	-------------------	--	-------------	------	--	----	----	--	--

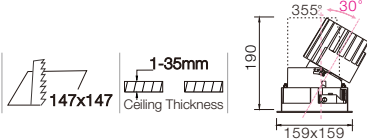

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLS1G2-9271825N-W
						36°	2500lm	2300lm	SLS1G2-9273625N-W
						50°	2500lm	1800lm	SLS1G2-9275025N-W
					3000K	18°	2700lm	2200lm	SLS1G2-9301825N-W
						36°	2700lm	2400lm	SLS1G2-9303625N-W
						50°	2700lm	1900lm	SLS1G2-9305025N-W
					4000K	18°	2900lm	2400lm	SLS1G2-9401825N-W
						36°	2900lm	2600lm	SLS1G2-9403625N-W
						50°	2900lm	2100lm	SLS1G2-9405025N-W
38 W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLS1G2-9271838N-W
						36°	3500lm	3400lm	SLS1G2-9273638N-W
						50°	3500lm	2650lm	SLS1G2-9275038N-W
					3000K	18°	3700lm	3300lm	SLS1G2-9301838N-W
						36°	3700lm	3600lm	SLS1G2-9303638N-W
						50°	3700lm	2800lm	SLS1G2-9305038N-W
					4000K	18°	4000lm	3600lm	SLS1G2-9401838N-W
						36°	4000lm	3900lm	SLS1G2-9403638N-W
						50°	4000lm	3000lm	SLS1G2-9405038N-W
25 W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLS1G2-9271825N-W
						36°	2500lm	2300lm	SLS1G2-9273625N-W
						50°	2500lm	1800lm	SLS1G2-9275025N-W
					3000K	18°	2700lm	2200lm	SLS1G2-9301825N-W
						36°	2700lm	2400lm	SLS1G2-9303625N-W
						50°	2700lm	1900lm	SLS1G2-9305025N-W
					4000K	18°	2900lm	2400lm	SLS1G2-9401825N-W
						36°	2900lm	2600lm	SLS1G2-9403625N-W
						50°	2900lm	2100lm	SLS1G2-9405025N-W
38 W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLS1G2-9271838N-W
						36°	3500lm	3400lm	SLS1G2-9273638N-W
						50°	3500lm	2650lm	SLS1G2-9275038N-W
					3000K	18°	3700lm	3300lm	SLS1G2-9301838N-W
						36°	3700lm	3600lm	SLS1G2-9303638N-W
						50°	3700lm	2800lm	SLS1G2-9305038N-W
					4000K	18°	4000lm	3600lm	SLS1G2-9401838N-W
						36°	4000lm	3900lm	SLS1G2-9403638N-W
						50°	4000lm	3000lm	SLS1G2-9405038N-W
25 W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLS1G2-9271825N-W
						36°	2500lm	2300lm	SLS1G2-9273625N-W
						50°	2500lm	1800lm	SLS1G2-9275025N-W
					3000K	18°	2700lm	2200lm	SLS1G2-9301825N-W
						36°	2700lm	2400lm	SLS1G2-9303625N-W
						50°	2700lm	1900lm	SLS1G2-9305025N-W
					4000K	18°	2900lm	2400lm	SLS1G2-9401825N-W
						36°	2900lm	2600lm	SLS1G2-9403625N-W
						50°	2900lm	2100lm	SLS1G2-9405025N-W
38 W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLS1G2-9271838N-W
						36°	3500lm	3400lm	SLS1G2-9273638N-W
						50°	3500lm	2650lm	SLS1G2-9275038N-W
					3000K	18°	3700lm	3300lm	SLS1G2-9301838N-W
						36°	3700lm	3600lm	SLS1G2-9303638N-W
						50°	3700lm	2800lm	SLS1G2-9305038N-W
					4000K	18°	4000lm	3600lm	SLS1G2-9401838N-W
						36°	4000lm	3900lm	SLS1G2-9403638N-W
						50°	4000lm	3000lm	SLS1G2-9405038N-W

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Code for SLS1G2-9405025N-WM with Honeycomb
SLS1G2-9405025N-WM-H



Black Reflector



Dark Light Reflector



White Reflector




Gold Reflector



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLS1G2-9271825N-W
						36°	2500lm	2300lm	SLS1G2-9273625N-W
						50°	2500lm	1800lm	SLS1G2-9275025N-W
					3000K	18°	2700lm	2200lm	SLS1G2-9301825N-W
						36°	2700lm	2400lm	SLS1G2-9303625N-W
						50°	2700lm	1900lm	SLS1G2-9305025N-W
					4000K	18°	2900lm	2400lm	SLS1G2-9401825N-W
						36°	2900lm	2600lm	SLS1G2-9403625N-W
						50°	2900lm	2100lm	SLS1G2-9405025N-W
38 W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLS1G2-9271838N-W
						36°	3500lm	3400lm	SLS1G2-9273638N-W
						50°	3500lm	2650lm	SLS1G2-9275038N-W
					3000K	18°	3700lm	3300lm	SLS1G2-9301838N-W
						36°	3700lm	3600lm	SLS1G2-9303638N-W
						50°	3700lm	2800lm	SLS1G2-9305038N-W
					4000K	18°	4000lm	3600lm	SLS1G2-9401838N-W
						36°	4000lm	3900lm	SLS1G2-9403638N-W
						50°	4000lm	3000lm	SLS1G2-9405038N-W
25 W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLS1G2-9271825N-W
						36°	2500lm	2300lm	SLS1G2-9273625N-W
						50°	2500lm	1800lm	SLS1G2-9275025N-W
					3000K	18°	2700lm	2200lm	SLS1G2-9301825N-W
						36°	2700lm	2400lm	SLS1G2-9303625N-W
						50°	2700lm	1900lm	SLS1G2-9305025N-W
					4000K	18°	2900lm	2400lm	SLS1G2-9401825N-W
						36°	2900lm	2600lm	SLS1G2-9403625N-W
						50°	2900lm	2100lm	SLS1G2-9405025N-W
38 W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLS1G2-9271838N-W
						36°	3500lm	3400lm	SLS1G2-9273638N-W
						50°	3500lm	2650lm	SLS1G2-9275038N-W
					3000K	18°	3700lm	3300lm	SLS1G2-9301838N-W
						36°	3700lm	3600lm	SLS1G2-9303638N-W
						50°	3700lm	2800lm	SLS1G2-9305038N-W
					4000K	18°	4000lm	3600lm	SLS1G2-9401838N-W
						36°	4000lm	3900lm	SLS1G2-9403638N-W
						50°	4000lm	3000lm	SLS1G2-9405038N-W
25 W	28 W	36 V	700 mA	90	2700K	18°	2500lm	2100lm	SLS1G2-9271825N-W
						36°	2500lm	2300lm	SLS1G2-9273625N-W
						50°	2500lm	1800lm	SLS1G2-9275025N-W
					3000K	18°	2700lm	2200lm	SLS1G2-9301825N-W
						36°	2700lm	2400lm	SLS1G2-9303625N-W
						50°	2700lm	1900lm	SLS1G2-9305025N-W
					4000K	18°	2900lm	2400lm	SLS1G2-9401825N-W
						36°	2900lm	2600lm	SLS1G2-9403625N-W
						50°	2900lm	2100lm	SLS1G2-9405025N-W
38 W	42 W	36 V	1050 mA	90	2700K	18°	3500lm	3100lm	SLS1G2-9271838N-W
						36°	3500lm	3400lm	SLS1G2-9273638N-W
						50°	3500lm	2650lm	SLS1G2-9275038N-W
					3000K	18°	3700lm	3300lm	SLS1G2-9301838N-W
						36°	3700lm	3600lm	SLS1G2-9303638N-W
						50°	3700lm	2800lm	SLS1G2-9305038N-W
					4000K	18°	4000lm	3600lm	SLS1G2-9401838N-W
						36°	4000lm	3900lm	SLS1G2-9403638N-W
						50°	4000lm	3000lm	SLS1G2-9405038N-W

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Trimless Version available



Trimless code for SLS1G2-9305025N-WM → SLS4G2-9305025N-WM



Trimless code for SLS1G2-9305025N-WM → ELS1G2-9305025N-WM




NEKO / SENSE 150 / S150R2-G2
Fixed LED Downlight

NEW



See Details @www.nekolighting.com

25W 38W	CRI90	2700K 3000K 4000K	24° 36° 45°		UGR < 19	IP54		CB	CE		
------------	-------	-------------------------	-------------------	--	-------------	------	--	----	----	--	--



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLR2G2-9272425N-W
						36°	2500lm	2100lm	SLR2G2-9273625N-W
						45°	2500lm	1700lm	SLR2G2-9274525N-W
					3000K	24°	2700lm	2200lm	SLR2G2-9302425N-W
						36°	2700lm	2200lm	SLR2G2-9303625N-W
						45°	2700lm	1800lm	SLR2G2-9304525N-W
					4000K	24°	2900lm	2400lm	SLR2G2-9402425N-W
						36°	2900lm	2400lm	SLR2G2-9403625N-W
						45°	2900lm	1900lm	SLR2G2-9404525N-W
38 W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLR2G2-9272438N-W
						36°	3500lm	3100lm	SLR2G2-9273638N-W
						45°	3500lm	2500lm	SLR2G2-9274538N-W
					3000K	24°	3700lm	3300lm	SLR2G2-9302438N-W
						36°	3700lm	3300lm	SLR2G2-9303638N-W
						45°	3700lm	2600lm	SLR2G2-9304538N-W
					4000K	24°	4000lm	3600lm	SLR2G2-9402438N-W
						36°	4000lm	3600lm	SLR2G2-9403638N-W
						45°	4000lm	2800lm	SLR2G2-9404538N-W
25 W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLR2G2-9272425N-WM
						36°	2500lm	2100lm	SLR2G2-9273625N-WM
						45°	2500lm	1700lm	SLR2G2-9274525N-WM
					3000K	24°	2700lm	2200lm	SLR2G2-9302425N-WM
						36°	2700lm	2200lm	SLR2G2-9303625N-WM
						45°	2700lm	1800lm	SLR2G2-9304525N-WM
					4000K	24°	2900lm	2400lm	SLR2G2-9402425N-WM
						36°	2900lm	2400lm	SLR2G2-9403625N-WM
						45°	2900lm	1900lm	SLR2G2-9404525N-WM
38 W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLR2G2-9272438N-WM
						36°	3500lm	3100lm	SLR2G2-9273638N-WM
						45°	3500lm	2500lm	SLR2G2-9274538N-WM
					3000K	24°	3700lm	3300lm	SLR2G2-9302438N-WM
						36°	3700lm	3300lm	SLR2G2-9303638N-WM
						45°	3700lm	2600lm	SLR2G2-9304538N-WM
					4000K	24°	4000lm	3600lm	SLR2G2-9402438N-WM
						36°	4000lm	3600lm	SLR2G2-9403638N-WM
						45°	4000lm	2800lm	SLR2G2-9404538N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Code for SLR2G2-9404525N-WM with Honeycomb
SLR2G2-9404525N-WM-H



Black Reflector



Dark Light Reflector



White Reflector




Gold Reflector



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLR2G2-9272425N-WB
						36°	2500lm	2100lm	SLR2G2-9273625N-WB
						45°	2500lm	1700lm	SLR2G2-9274525N-WB
					3000K	24°	2700lm	2200lm	SLR2G2-9302425N-WB
						36°	2700lm	2200lm	SLR2G2-9303625N-WB
						45°	2700lm	1800lm	SLR2G2-9304525N-WB
					4000K	24°	2900lm	2400lm	SLR2G2-9402425N-WB
						36°	2900lm	2400lm	SLR2G2-9403625N-WB
						45°	2900lm	1900lm	SLR2G2-9404525N-WB
38 W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLR2G2-9272438N-WB
						36°	3500lm	3100lm	SLR2G2-9273638N-WB
						45°	3500lm	2500lm	SLR2G2-9274538N-WB
					3000K	24°	3700lm	3300lm	SLR2G2-9302438N-WB
						36°	3700lm	3300lm	SLR2G2-9303638N-WB
						45°	3700lm	2600lm	SLR2G2-9304538N-WB
					4000K	24°	4000lm	3600lm	SLR2G2-9402438N-WB
						36°	4000lm	3600lm	SLR2G2-9403638N-WB
						45°	4000lm	2800lm	SLR2G2-9404538N-WB
25 W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLR2G2-9272425N-WC
						36°	2500lm	2100lm	SLR2G2-9273625N-WC
						45°	2500lm	1700lm	SLR2G2-9274525N-WC
					3000K	24°	2700lm	2200lm	SLR2G2-9302425N-WC
						36°	2700lm	2200lm	SLR2G2-9303625N-WC
						45°	2700lm	1800lm	SLR2G2-9304525N-WC
					4000K	24°	2900lm	2400lm	SLR2G2-9402425N-WC
						36°	2900lm	2400lm	SLR2G2-9403625N-WC
						45°	2900lm	1900lm	SLR2G2-9404525N-WC
38 W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLR2G2-9272438N-WC
						36°	3500lm	3100lm	SLR2G2-9273638N-WC
						45°	3500lm	2500lm	SLR2G2-9274538N-WC
					3000K	24°	3700lm	3300lm	SLR2G2-9302438N-WC
						36°	3700lm	3300lm	SLR2G2-9303638N-WC
						45°	3700lm	2600lm	SLR2G2-9304538N-WC
					4000K	24°	4000lm	3600lm	SLR2G2-9402438N-WC
						36°	4000lm	3600lm	SLR2G2-9403638N-WC
						45°	4000lm	2800lm	SLR2G2-9404538N-WC
25 W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLR2G2-9272425N-WW
						36°	2500lm	2100lm	SLR2G2-9273625N-WW
						45°	2500lm	1700lm	SLR2G2-9274525N-WW
					3000K	24°	2700lm	2200lm	SLR2G2-9302425N-WW
						36°	2700lm	2200lm	SLR2G2-9303625N-WW
						45°	2700lm	1800lm	SLR2G2-9304525N-WW
					4000K	24°	2900lm	2400lm	SLR2G2-9402425N-WW
						36°	2900lm	2400lm	SLR2G2-9403625N-WW
						45°	2900lm	1900lm	SLR2G2-9404525N-WW
38 W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLR2G2-9272438N-WW
						36°	3500lm	3100lm	SLR2G2-9273638N-WW
						45°	3500lm	2500lm	SLR2G2-9274538N-WW
					3000K	24°	3700lm	3300lm	SLR2G2-9302438N-WW
						36°	3700lm	3300lm	SLR2G2-9303638N-WW
						45°	3700lm	2600lm	SLR2G2-9304538N-WW
					4000K	24°	4000lm	3600lm	SLR2G2-9402438N-WW
						36°	4000lm	3600lm	SLR2G2-9403638N-WW
						45°	4000lm	2800lm	SLR2G2-9404538N-WW
25 W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLR2G2-9272425N-WG
						36°	2500lm	2100lm	SLR2G2-9273625N-WG
						45°	2500lm	1700lm	SLR2G2-9274525N-WG
					3000K	24°	2700lm	2200lm	SLR2G2-9302425N-WG
						36°	2700lm	2200lm	SLR2G2-9303625N-WG
						45°	2700lm	1800lm	SLR2G2-9304525N-WG
					4000K	24°	2900lm	2400lm	SLR2G2-9402425N-WG
						36°	2900lm	2400lm	SLR2G2-9403625N-WG
						45°	2900lm	1900lm	SLR2G2-9404525N-WG
38 W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLR2G2-9272438N-WG
						36°	3500lm	3100lm	SLR2G2-9273638N-WG
						45°	3500lm	2500lm	SLR2G2-9274538N-WG
					3000K	24°	3700lm	3300lm	SLR2G2-9302438N-WG
						36°	3700lm	3300lm	SLR2G2-9303638N-WG
						45°	3700lm	2600lm	SLR2G2-9304538N-WG
					4000K	24°	4000lm	3600lm	SLR2G2-9402438N-WG
						36°	4000lm	3600lm	SLR2G2-9403638N-WG
						45°	4000lm	2800lm	SLR2G2-9404538N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Trimless Version available



Trimless code for SLR2G2-9304525N-WM → SLR5G2-9304525N-WM



Trimless code for SLR2G2-9304525N-WM → ELR2G2-9304525N-WM



NEKO / SENSE 150 / **S150S2-G2**
Fixed LED Downlight

! NEW



See Details @www.nekolighting.com



25W 38W	CRI90	2700K 3000K 4000K	24° 36° 45°		UGR < 19	IP54		CB	CE				1-35mm Ceiling Thickness	190	
------------	-------	-------------------------	-------------------	--	-------------	------	--	----	----	--	--	--	-----------------------------	-----	--

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLS2G2-9272425N-W
						36°	2500lm	2100lm	SLS2G2-9273625N-W
						45°	2500lm	1700lm	SLS2G2-9274525N-W
					3000K	24°	2700lm	2200lm	SLS2G2-9302425N-W
						36°	2700lm	2200lm	SLS2G2-9303625N-W
						45°	2700lm	1800lm	SLS2G2-9304525N-W
					4000K	24°	2900lm	2400lm	SLS2G2-9402425N-W
						36°	2900lm	2400lm	SLS2G2-9403625N-W
						45°	2900lm	1900lm	SLS2G2-9404525N-W
38 W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLS2G2-9272438N-W
						36°	3500lm	3100lm	SLS2G2-9273638N-W
						45°	3500lm	2500lm	SLS2G2-9274538N-W
					3000K	24°	3700lm	3300lm	SLS2G2-9302438N-W
						36°	3700lm	3300lm	SLS2G2-9303638N-W
						45°	3700lm	2600lm	SLS2G2-9304538N-W
					4000K	24°	4000lm	3600lm	SLS2G2-9402438N-W
						36°	4000lm	3600lm	SLS2G2-9403638N-W
						45°	4000lm	2800lm	SLS2G2-9404538N-W
25 W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLS2G2-9272425N-WM
						36°	2500lm	2100lm	SLS2G2-9273625N-WM
						45°	2500lm	1700lm	SLS2G2-9274525N-WM
					3000K	24°	2700lm	2200lm	SLS2G2-9302425N-WM
						36°	2700lm	2200lm	SLS2G2-9303625N-WM
						45°	2700lm	1800lm	SLS2G2-9304525N-WM
					4000K	24°	2900lm	2400lm	SLS2G2-9402425N-WM
						36°	2900lm	2400lm	SLS2G2-9403625N-WM
						45°	2900lm	1900lm	SLS2G2-9404525N-WM
38 W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLS2G2-9272438N-WM
						36°	3500lm	3100lm	SLS2G2-9273638N-WM
						45°	3500lm	2500lm	SLS2G2-9274538N-WM
					3000K	24°	3700lm	3300lm	SLS2G2-9302438N-WM
						36°	3700lm	3300lm	SLS2G2-9303638N-WM
						45°	3700lm	2600lm	SLS2G2-9304538N-WM
					4000K	24°	4000lm	3600lm	SLS2G2-9402438N-WM
						36°	4000lm	3600lm	SLS2G2-9403638N-WM
						45°	4000lm	2800lm	SLS2G2-9404538N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessory



Code for SLS2G2-9404525N-WM with Honeycomb
SLS2G2-9404525N-WM-H



Black Reflector



Dark Light Reflector



White Reflector




Gold Reflector



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLS2G2-9272425N-WB
						36°	2500lm	2100lm	SLS2G2-9273625N-WB
						45°	2500lm	1700lm	SLS2G2-9274525N-WB
					3000K	24°	2700lm	2200lm	SLS2G2-9302425N-WB
						36°	2700lm	2200lm	SLS2G2-9303625N-WB
						45°	2700lm	1800lm	SLS2G2-9304525N-WB
					4000K	24°	2900lm	2400lm	SLS2G2-9402425N-WB
						36°	2900lm	2400lm	SLS2G2-9403625N-WB
						45°	2900lm	1900lm	SLS2G2-9404525N-WB
38 W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLS2G2-9272438N-WB
						36°	3500lm	3100lm	SLS2G2-9273638N-WB
						45°	3500lm	2500lm	SLS2G2-9274538N-WB
					3000K	24°	3700lm	3300lm	SLS2G2-9302438N-WB
						36°	3700lm	3300lm	SLS2G2-9303638N-WB
						45°	3700lm	2600lm	SLS2G2-9304538N-WB
					4000K	24°	4000lm	3600lm	SLS2G2-9402438N-WB
						36°	4000lm	3600lm	SLS2G2-9403638N-WB
						45°	4000lm	2800lm	SLS2G2-9404538N-WB
25 W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLS2G2-9272425N-WC
						36°	2500lm	2100lm	SLS2G2-9273625N-WC
						45°	2500lm	1700lm	SLS2G2-9274525N-WC
					3000K	24°	2700lm	2200lm	SLS2G2-9302425N-WC
						36°	2700lm	2200lm	SLS2G2-9303625N-WC
						45°	2700lm	1800lm	SLS2G2-9304525N-WC
					4000K	24°	2900lm	2400lm	SLS2G2-9402425N-WC
						36°	2900lm	2400lm	SLS2G2-9403625N-WC
						45°	2900lm	1900lm	SLS2G2-9404525N-WC
38 W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLS2G2-9272438N-WC
						36°	3500lm	3100lm	SLS2G2-9273638N-WC
						45°	3500lm	2500lm	SLS2G2-9274538N-WC
					3000K	24°	3700lm	3300lm	SLS2G2-9302438N-WC
						36°	3700lm	3300lm	SLS2G2-9303638N-WC
						45°	3700lm	2600lm	SLS2G2-9304538N-WC
					4000K	24°	4000lm	3600lm	SLS2G2-9402438N-WC
						36°	4000lm	3600lm	SLS2G2-9403638N-WC
						45°	4000lm	2800lm	SLS2G2-9404538N-WC
25 W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLS2G2-9272425N-WW
						36°	2500lm	2100lm	SLS2G2-9273625N-WW
						45°	2500lm	1700lm	SLS2G2-9274525N-WW
					3000K	24°	2700lm	2200lm	SLS2G2-9302425N-WW
						36°	2700lm	2200lm	SLS2G2-9303625N-WW
						45°	2700lm	1800lm	SLS2G2-9304525N-WW
					4000K	24°	2900lm	2400lm	SLS2G2-9402425N-WW
						36°	2900lm	2400lm	SLS2G2-9403625N-WW
						45°	2900lm	1900lm	SLS2G2-9404525N-WW
38 W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLS2G2-9272438N-WW
						36°	3500lm	3100lm	SLS2G2-9273638N-WW
						45°	3500lm	2500lm	SLS2G2-9274538N-WW
					3000K	24°	3700lm	3300lm	SLS2G2-9302438N-WW
						36°	3700lm	3300lm	SLS2G2-9303638N-WW
						45°	3700lm	2600lm	SLS2G2-9304538N-WW
					4000K	24°	4000lm	3600lm	SLS2G2-9402438N-WW
						36°	4000lm	3600lm	SLS2G2-9403638N-WW
						45°	4000lm	2800lm	SLS2G2-9404538N-WW
25 W	28 W	36 V	700 mA	90	2700K	24°	2500lm	2100lm	SLS2G2-9272425N-WG
						36°	2500lm	2100lm	SLS2G2-9273625N-WG
						45°	2500lm	1700lm	SLS2G2-9274525N-WG
					3000K	24°	2700lm	2200lm	SLS2G2-9302425N-WG
						36°	2700lm	2200lm	SLS2G2-9303625N-WG
						45°	2700lm	1800lm	SLS2G2-9304525N-WG
					4000K	24°	2900lm	2400lm	SLS2G2-9402425N-WG
						36°	2900lm	2400lm	SLS2G2-9403625N-WG
						45°	2900lm	1900lm	SLS2G2-9404525N-WG
38 W	42 W	36 V	1050 mA	90	2700K	24°	3500lm	3100lm	SLS2G2-9272438N-WG
						36°	3500lm	3100lm	SLS2G2-9273638N-WG
						45°	3500lm	2500lm	SLS2G2-9274538N-WG
					3000K	24°	3700lm	3300lm	SLS2G2-9302438N-WG
						36°	3700lm	3300lm	SLS2G2-9303638N-WG
						45°	3700lm	2600lm	SLS2G2-9304538N-WG
					4000K	24°	4000lm	3600lm	SLS2G2-9402438N-WG
						36°	4000lm	3600lm	SLS2G2-9403638N-WG
						45°	4000lm	2800lm	SLS2G2-9404538N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Trimless Version available



Trimless code for SLS2G2-9304525N-WM → SLS5G2-9304525N-WM



Trimless code for SLS2G2-9304525N-WM → ELRS2G2-9304525N-WM



NEKO / SENSE 150 / S150R3-G2

Wall Washer LED Downlight

NEW



See Details @www.nekolighting.com

25W
38W

CRI90

2700K
3000K
4000K

50,000h@L80B10

IP54

CB

CE


1-35mm

Ceiling Thickness

NEKO / SENSE 150 / S150S3-G2

Wall Washer LED Downlight

NEW

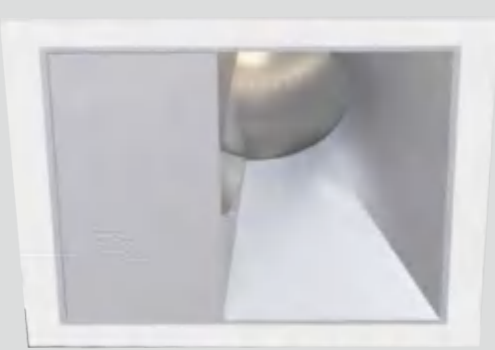

See Details @www.nekolighting.com

25W
38W

CRI90

2700K
3000K
4000K

50,000h@L80B10

IP54

CB

CE

1-35mm

Ceiling Thickness



LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	Wall Washer	2500lm	1100lm	SLR3G2-927WW25N-WM	
					3000K	Wall Washer	2700lm	1200lm	SLR3G2-930WW25N-WM	
					4000K	Wall Washer	2900lm	1300lm	SLR3G2-940WW25N-WM	
38 W	42 W	36 V	1050 mA	90	2700K	Wall Washer	3500lm	1600lm	SLR3G2-927WW38N-WM	
					3000K	Wall Washer	3700lm	1700lm	SLR3G2-930WW38N-WM	
					4000K	Wall Washer	4000lm	1800lm	SLR3G2-940WW38N-WM	

Code Remark:
N=N(No Driver)
F=F(ON-OFF)
P=P(Phase Dim)
A=A(1-10V Dim)
D=D(DALI Dim)



LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	Wall Washer	2500lm	1100lm	SLS3G2-927WW25N-WM	
					3000K	Wall Washer	2700lm	1200lm	SLS3G2-930WW25N-WM	
					4000K	Wall Washer	2900lm	1300lm	SLS3G2-940WW25N-WM	
38 W	42 W	36 V	1050 mA	90	2700K	Wall Washer	3500lm	1600lm	SLS3G2-927WW38N-WM	
					3000K	Wall Washer	3700lm	1700lm	SLS3G2-930WW38N-WM	
					4000K	Wall Washer	4000lm	1800lm	SLS3G2-940WW38N-WM	

Code Remark:

N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Matt Reflector



Matt Reflector

Trimless Version available

Trimless code for SLR3G2-930WW25N-WM → SLR6G2-930WW25N-WM

12.5-25mm

Ceiling Thickness

Trimless code for SLR3G2-930WW25N-WM → ELR3G2-930WW25N-WM

1-35mm

Ceiling Thickness



Trimless Version available

Trimless code for SLS3G2-930WW25N-WM → SLS6G2-930WW25N-WM

12.5-25mm


Ceiling Thickness


Trimless code for SLS3G2-930WW25N-WM → ELS3G2-930WW25N-WM

1-35mm

Ceiling Thickness



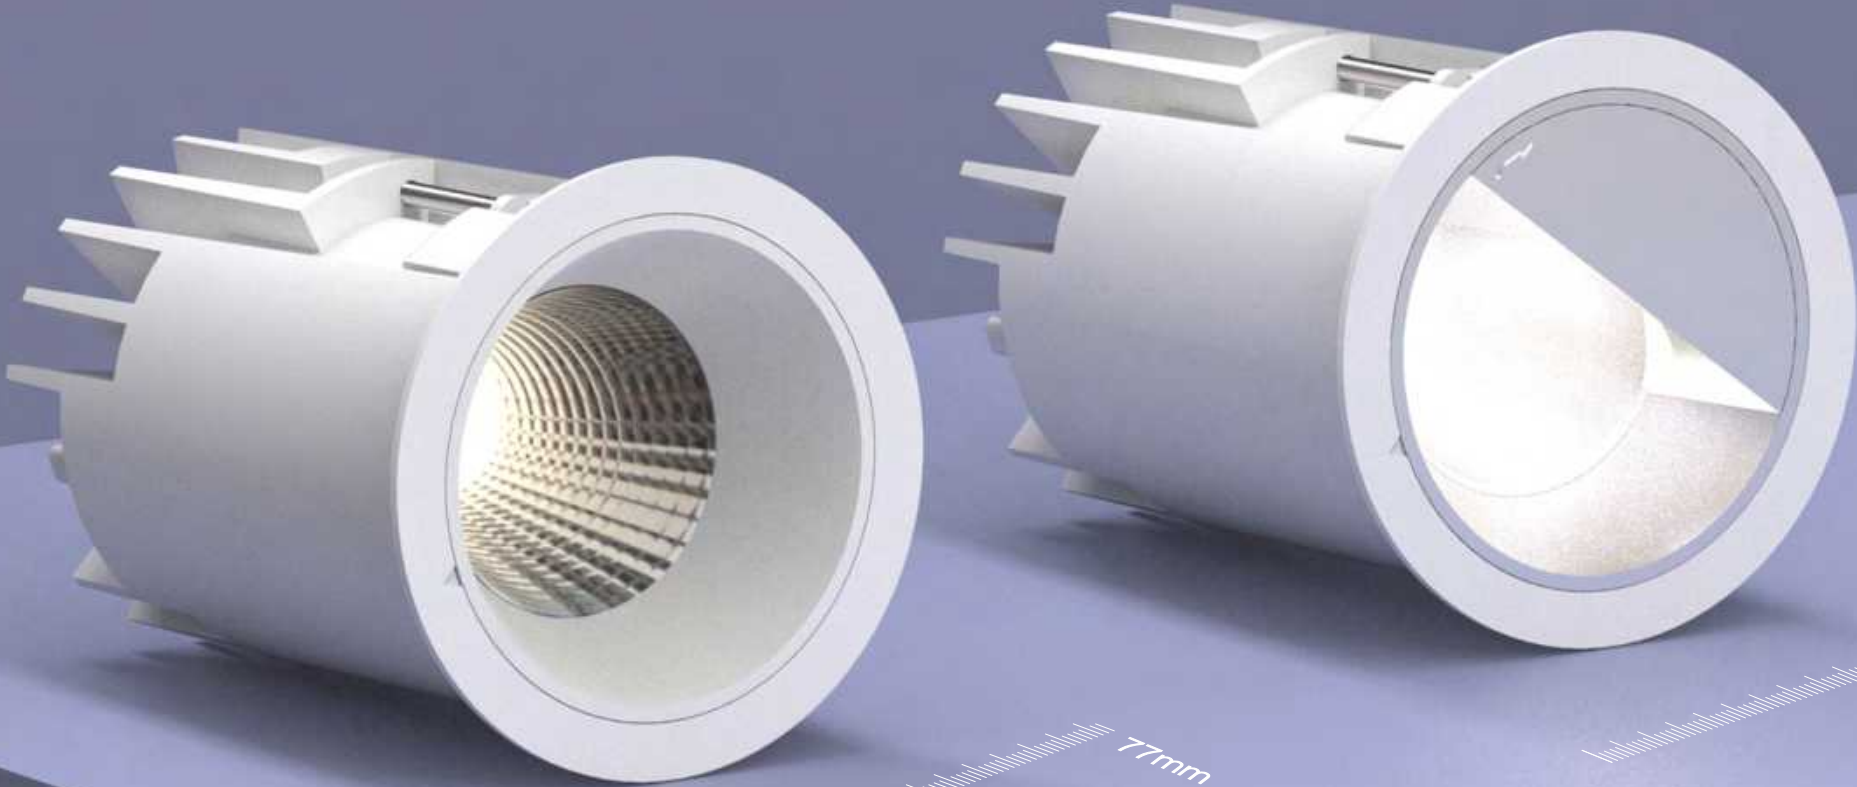

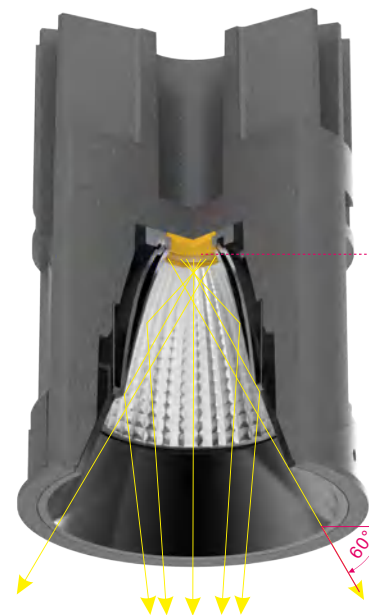

COB Super Deep Recessed

Shielding Angle:60°

13W 18W	CRI90	2700K 3000K 4000K	18° 40°		UGR < 19	IP 20		CB	CE			1-32mm Ceiling Thickness	100 Ø77
------------	-------	-------------------------	------------	--	----------	-------	--	----	----	--	--	-----------------------------	------------



Specular Reflector



Matt Reflector



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1100lm	VF68-9271813N-WS	
						40°	1400lm	1100lm	VF68-9274013N-WS	
					3000K	18°	1500lm	1200lm	VF68-9301813N-WS	
						40°	1500lm	1200lm	VF68-9304013N-WS	
					4000K	18°	1600lm	1300lm	VF68-9401813N-WS	
					40°	1600lm	1300lm	VF68-9404013N-WS		
18W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	VF68-9271818N-WS	
						40°	1900lm	1500lm	VF68-9274018N-WS	
					3000K	18°	2000lm	1600lm	VF68-9301818N-WS	
						40°	2000lm	1600lm	VF68-9304018N-WS	
					4000K	18°	2200lm	1700lm	VF68-9401818N-WS	
					40°	2200lm	1700lm	VF68-9404018N-WS		
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1100lm	VF68-9271813N-WM	
						40°	1400lm	1100lm	VF68-9274013N-WM	
					3000K	18°	1500lm	1200lm	VF68-9301813N-WM	
						40°	1500lm	1200lm	VF68-9304013N-WM	
					4000K	18°	1600lm	1300lm	VF68-9401813N-WM	
					40°	1600lm	1300lm	VF68-9404013N-WM		
18W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	VF68-9271818N-WM	
						40°	1900lm	1500lm	VF68-9274018N-WM	
					3000K	18°	2000lm	1600lm	VF68-9301818N-WM	
						40°	2000lm	1600lm	VF68-9304018N-WM	
					4000K	18°	2200lm	1700lm	VF68-9401818N-WM	
					40°	2200lm	1700lm	VF68-9404018N-WM		
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1100lm	VF68-9271813N-WB	
						40°	1400lm	1100lm	VF68-9274013N-WB	
					3000K	18°	1500lm	1200lm	VF68-9301813N-WB	
						40°	1500lm	1200lm	VF68-9304013N-WB	
					4000K	18°	1600lm	1300lm	VF68-9401813N-WB	
					40°	1600lm	1300lm	VF68-9404013N-WB		
18W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	VF68-9271818N-WB	
						40°	1900lm	1500lm	VF68-9274018N-WB	
					3000K	18°	2000lm	1600lm	VF68-9301818N-WB	
						40°	2000lm	1600lm	VF68-9304018N-WB	
					4000K	18°	2200lm	1700lm	VF68-9401818N-WB	
					40°	2200lm	1700lm	VF68-9404018N-WB		

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Chrome Black Reflector



White Reflector




Gold Reflector

13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1100lm	VF68-9271813N-WC
						40°	1400lm	1100lm	VF68-9274013N-WC
					3000K	18°	1500lm	1200lm	VF68-9301813N-WC
						40°	1500lm	1200lm	VF68-9304013N-WC
					4000K	18°	1600lm	1300lm	VF68-9401813N-WC
					40°	1600lm	1300lm	VF68-9404013N-WC	
18W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	VF68-9271818N-WC
						40°	1900lm	1500lm	VF68-9274018N-WC
					3000K	18°	2000lm	1600lm	VF68-9301818N-WC
						40°	2000lm	1600lm	VF68-9304018N-WC
					4000K	18°	2200lm	1700lm	VF68-9401818N-WC
					40°	2200lm	1700lm	VF68-94040138N-WC	
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1100lm	VF68-9271813N-WWV
						40°	1400lm	1100lm	VF68-9274013N-WWV
					3000K	18°	1500lm	1200lm	VF68-9301813N-WWV
						40°	1500lm	1200lm	VF68-9304013N-WWV
					4000K	18°	1600lm	1300lm	VF68-9401813N-WWV
					40°	1600lm	1300lm	VF68-9404013N-WWV	
18W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	VF68-9271818N-WWV
						40°	1900lm	1500lm	VF68-9274018N-WWV
					3000K	18°	2000lm	1600lm	VF68-9301818N-WWV
						40°	2000lm	1600lm	VF68-9304018N-WWV
					4000K	18°	2200lm	1700lm	VF68-9401818N-WWV
					40°	2200lm	1700lm	VF68-9404018N-WWV	
13 W	15 W	36 V	350 mA	90	2700K	18°	1400lm	1100lm	VF68-9271813N-WG
						40°	1400lm	1100lm	VF68-9274013N-WG
					3000K	18°	1500lm	1200lm	VF68-9301813N-WG
						40°	1500lm	1200lm	VF68-9304013N-WG
					4000K	18°	1600lm	1300lm	VF68-9401813N-WG
					40°	1600lm	1300lm	VF68-9404013N-WG	
18W	21 W	36 V	500 mA	90	2700K	18°	1900lm	1500lm	VF68-9271818N-WG
						40°	1900lm	1500lm	VF68-9274018N-WG
					3000K	18°	2000lm	1600lm	VF68-9301818N-WG
						40°	2000lm	1600lm	VF68-9304018N-WG
					4000K	18°	2200lm	1700lm	VF68-9401818N-WG
					40°	2200lm	1700lm	VF68-9404018N-WG	

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / VISION / VW68
Wall Washer Downlight

! NEW

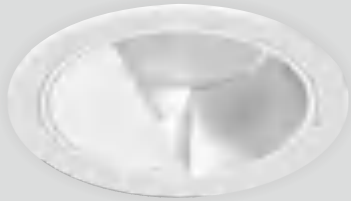

13W
18W

CRI90

2700K
3000K
4000K

CITIZEN
50,000h@L80B10

UGR
< 19

IP 20

5
YEAR
GUARANTEE


CB

CE

ETL
Intertek

68

1-32mm
Ceiling Thickness

100
Ø77



Matt Reflector

LED	Power	System power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	Wall Washer	1400lm	780lm	VW68-927WW13N-WM	
					3000K	Wall Washer	1500lm	820lm	VW68-930WW13N-WM	
					4000K	Wall Washer	1600lm	870lm	VW68-940WW13N-WM	
18 W	21 W	36 V	500 mA	90	2700K	Wall Washer	1900lm	1050lm	VW68-927WW18N-WM	
					3000K	Wall Washer	2000lm	1100lm	VW68-930WW18N-WM	
					4000K	Wall Washer	2200lm	1170lm	VW68-940WW18N-WM	

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)





NEKO / TAKEO Pro & TAKEO

Fixed LED Downlight

Project: Office, Netherlands




NEKO/ TAKEO Pro & TAKEO
Fixed LED Downlight
Interchangeable Design
Super Eye Comfort
UGR<19
IP54
High Efficiency

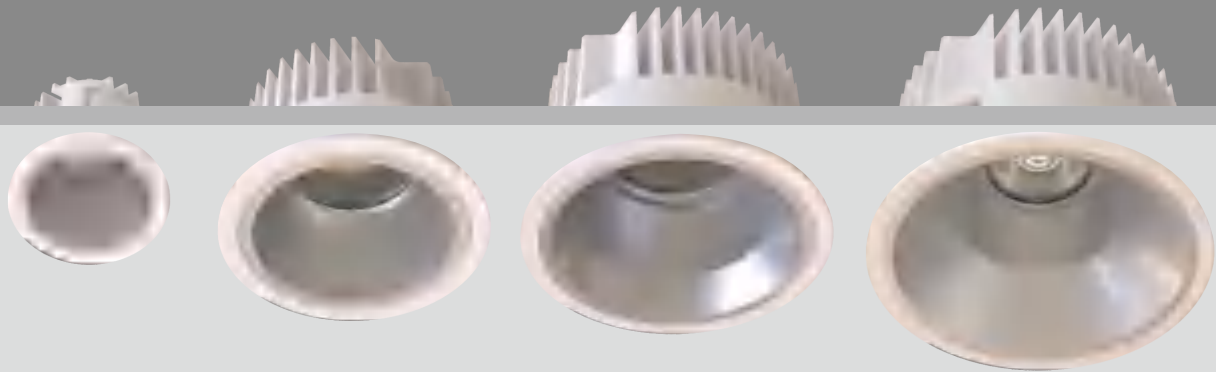


3"

TAKEO T75
7.5W 750lm-800lm
11W 950lm-1050lm




4"

TAKEO T100
9W 1100lm-1200lm
13W 1500lm-1600lm
18W 1900lm-2100lm



6"

TAKEO T150
18W 2300lm-2500lm
25W 3100lm-3400lm



8"



TAKEO T200
25W 2900lm-3100lm
38W 4400lm-4800lm
52W 5400lm-5900lm

! NEW

TAKEO T100 Pro
8.5W 1200lm-1300lm
12W 1600lm-1700lm
17W 2250lm-2400lm


TAKEO T150 Pro
17W 2600lm-2800lm
24W 3500lm-3800lm

TAKEO T200 Pro
24W 3500lm-3800lm
36W 5000lm-5300lm
51W 6300lm-6700lm

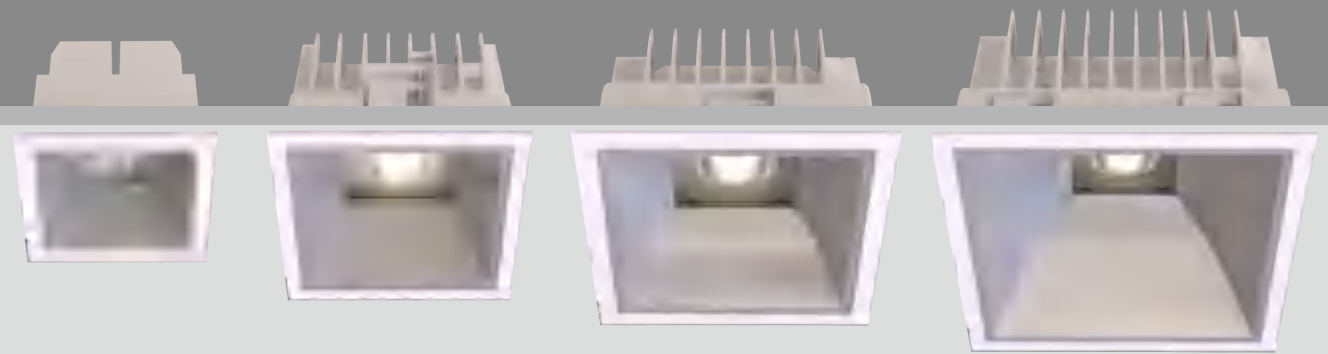


3"

TAKEO TS68
7.5W 700lm-750lm
11W 900lm-950lm




4"

TAKEO TS100
9W 900lm-1000lm
13W 1200lm-1300lm



6"

TAKEO TS150
18W 1800lm-2000lm
25W 2400lm-2600lm



8"

TAKEO TS200
25W 2300lm-2500lm
38W 3300lm-3600lm

! NEW

TAKEO TS100 Pro
8.5W 1000lm-1100lm
12W 1350lm-1500lm

TAKEO TS150 Pro
17W 2050lm-2200lm
24W 2800lm-3000lm


TAKEO TS200 Pro
24W 2800lm-3000lm
36W 3900lm-4200lm




White



Black















White



Black

TAKEO Pro & TAKEO

LED DOWNLIGHT SYSTEM

Model No.	T75	T100 / T100 Pro	T150 / T150 Pro	T200 / T200 Pro	T150-C / T150 Pro-C		TS68	TS100 / TS100 Pro	TS150 / TS150 Pro	TS200 / TS200 Pro
Product Photo										
Dimension (mm)										
Cutout (mm)					Ceiling Mounted					
TAKEO TAKEO Pro	7.5W/ 11W	9W/ 13W/ 18W 8.5W/ 12W/ 17W	18W/ 25W 17W/ 24W	25W/ 38W/ 52W 24W/ 36W/ 51W	18W/ 25W 17W/ 24W		7.5W/ 11W	9W/ 13W 8.5W/ 12W	18W/ 25W 17W/ 24W	25W/ 38W 24W/ 36W
CCT	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K Dim to Warm/ Tunable White	2700K/ 3000K/ 4000K Tunable White	2700K/ 3000K/ 4000K Tunable White	2700K/ 3000K/ 4000K		2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K Dim to Warm/ Tunable White	2700K/ 3000K/ 4000K Tunable White	2700K/ 3000K/ 4000K Tunable White
CRI	>90	>90	>90	>90	>90		>80/ >90	>90	>90	>90
Beam Angle	30°/ 50°	30°/ 50°	30°/ 60°(65°)	18°/ 30°/ 60°(65°)	30°/ 60°(65°)		25°/60°	60°	70°	70°
Lumen Output TAKEO TAKEO Pro	950lm @CRI80 3000K	1900lm @CRI80 3000K 2250lm @CRI80 3000K	3100lm @CRI80 3000K 3500lm @CRI80 3000K	5400lm @CRI80 3000K 6300lm @CRI80 3000K	3100lm @CRI80 3000K 3500lm @CRI80 3000K		900lm @CRI80 3000K	1200lm @CRI80 3000K 1350lm @CRI80 3000K	2400lm @CRI80 3000K 2800lm @CRI80 3000K	3100lm @CRI80 3000K 3900lm @CRI80 3000K
Reflector Color	 Matt  White  Black				 Matt  White  Black					
housing Color	White/ Black				White/ Black					
IP	IP54				IP20		IP54			
Dimming	On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim				On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim					
Accessory										


NEKO / TAKEO Pro / T100 Pro

Fixed LED Downlight

Super Eye Comfort

Higher Efficiency

NEW

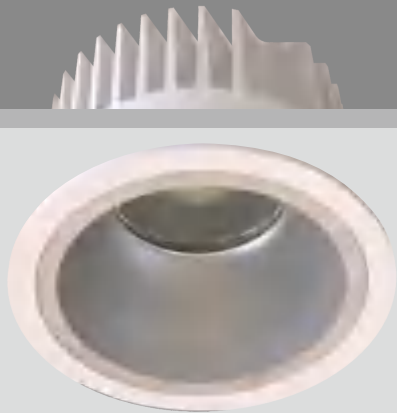

Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8.5 W	10 W	34 V	250 mA	80	2700K	30°	1300lm	1150lm	TS4-8273009N-WB
						50°	1300lm	1050lm	TS4-8275009N-WB
					3000K	30°	1400lm	1200lm	TS4-8303009N-WB
						50°	1400lm	1100lm	TS4-8305009N-WB
					4000K	30°	1500lm	1300lm	TS4-8403009N-WB
						50°	1500lm	1200lm	TS4-8405009N-WB
12 W	14 W	34 V	350 mA	80	2700K	30°	1800lm	1500lm	TS4-8273012N-WB
						50°	1800lm	1400lm	TS4-8275012N-WB
					3000K	30°	1900lm	1600lm	TS4-8303012N-WB
						50°	1900lm	1500lm	TS4-8305012N-WB
					4000K	30°	2050lm	1700lm	TS4-8403012N-WB
						50°	2050lm	1600lm	TS4-8405012N-WB
17 W	20 W	36 V	500 mA	80	2700K	30°	2500lm	2150lm	TS4-8273017N-WB
						50°	2500lm	1900lm	TS4-8275017N-WB
					3000K	30°	2600lm	2250lm	TS4-8303017N-WB
						50°	2600lm	2000lm	TS4-8305017N-WB
					4000K	30°	2800lm	2400lm	TS4-8403017N-WB
						50°	2800lm	2200lm	TS4-8405017N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

8.5W
12W
17W

CRI80
CRI90

2700K
3000K
4000K

30°
50°

50,000h@L80B10

UGR
< 19

IP54

CB

CE

SDCM < 2



Matt Reflector



White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8.5 W	10 W	34 V	250 mA	80	2700K	30°	1300lm	1150lm	TS4-8273009N-WM
						50°	1300lm	1050lm	TS4-8275009N-WM
					3000K	30°	1400lm	1200lm	TS4-8303009N-WM
						50°	1400lm	1100lm	TS4-8305009N-WM
					4000K	30°	1500lm	1300lm	TS4-8403009N-WM
						50°	1500lm	1200lm	TS4-8405009N-WM
12 W	14 W	34 V	350 mA	80	2700K	30°	1800lm	1500lm	TS4-8273012N-WM
						50°	1800lm	1400lm	TS4-8275012N-WM
					3000K	30°	1900lm	1600lm	TS4-8303012N-WM
						50°	1900lm	1500lm	TS4-8305012N-WM
					4000K	30°	2050lm	1700lm	TS4-8403012N-WM
						50°	2050lm	1600lm	TS4-8405012N-WM
17 W	20 W	36 V	500 mA	80	2700K	30°	2500lm	2150lm	TS4-8273017N-WM
						50°	2500lm	1900lm	TS4-8275017N-WM
					3000K	30°	2600lm	2250lm	TS4-8303017N-WM
						50°	2600lm	2000lm	TS4-8305017N-WM
					4000K	30°	2800lm	2400lm	TS4-8403017N-WM
						50°	2800lm	2200lm	TS4-8405017N-WM
8.5 W	10 W	34 V	250 mA	80	2700K	30°	1300lm	1150lm	TS4-8273009N-WW
						50°	1300lm	1050lm	TS4-8275009N-WW
					3000K	30°	1400lm	1200lm	TS4-8303009N-WW
						50°	1400lm	1100lm	TS4-8305009N-WW
					4000K	30°	1500lm	1300lm	TS4-8403009N-WW
						50°	1500lm	1200lm	TS4-8405009N-WW
12 W	14 W	34 V	350 mA	80	2700K	30°	1800lm	1500lm	TS4-8273012N-WW
						50°	1800lm	1400lm	TS4-8275012N-WW
					3000K	30°	1900lm	1600lm	TS4-8303012N-WW
						50°	1900lm	1500lm	TS4-8305012N-WW
					4000K	30°	2050lm	1700lm	TS4-8403012N-WW
						50°	2050lm	1600lm	TS4-8405012N-WW
17 W	20 W	36 V	500 mA	80	2700K	30°	2500lm	2150lm	TS4-8273017N-WW
						50°	2500lm	1900lm	TS4-8275017N-WW
					3000K	30°	2600lm	2250lm	TS4-8303017N-WW
						50°	2600lm	2000lm	TS4-8305017N-WW
					4000K	30°	2800lm	2400lm	TS4-8403017N-WW
						50°	2800lm	2200lm	TS4-8405017N-WW

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Super Eye Comfort
Higher Efficiency

NEW



17W 24W	CRI80 CRI90	2700K 3000K 4000K	30° 65°	 50,000h@L80B10	UGR < 19	IP54	 GUARANTEE	CB	CE	 Intertek	SDCM < 2
------------	----------------	-------------------------	------------	---	-------------	------	--	----	----	---	----------

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code	
17 W	19 W	36 V	500 mA	80	2700K	30°	3000lm	2450lm	TM4-8273017	N-WM	
						65°	3000lm	2000lm	TM4-8276517	N-WM	
						3000K	30°	3200lm	2600lm	TM4-8303017	N-WM
						65°	3200lm	2100lm	TM4-8306517	N-WM	
						4000K	30°	3500lm	2800lm	TM4-8403017	N-WM
						65°	3500lm	2300lm	TM4-8406517	N-WM	
24 W	26 W	36 V	700 mA	80	2700K	30°	4000lm	3300lm	TM4-8273024	N-WM	
						65°	4000lm	2700lm	TM4-8276524	N-WM	
						3000K	30°	4200lm	3500lm	TM4-8303024	N-WM
						65°	4200lm	2850lm	TM4-8306524	N-WM	
						4000K	30°	4500lm	3800lm	TM4-8403024	N-WM
						65°	4500lm	3000lm	TM4-8406524	N-WM	



Matt Reflector

17 W	19 W	36 V	500 mA	80	2700K	30° 65°	3000lm 3000lm	2450lm 2000lm	TM4-8273017N-WW TM4-8276517N-WW
					3000K	30° 65°	3200lm 3200lm	2600lm 2100lm	TM4-8303017N-WW TM4-8306517N-WW
					4000K	30° 65°	3500lm 3500lm	2800lm 2300lm	TM4-8403017N-WW TM4-8406517N-WW
24 W	26 W	36 V	700 mA	80	2700K	30° 65°	4000lm 4000lm	3300lm 2700lm	TM4-8273024N-WW TM4-8276524N-WW
					3000K	30° 65°	4200lm 4200lm	3500lm 2850lm	TM4-8303024N-WW TM4-8306524N-WW
					4000K	30° 65°	4500lm 4500lm	3800lm 3000lm	TM4-8403024N-WW TM4-8406524N-WW



White Reflector

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code					
17 W	19 W	36 V	500 mA	80	2700K	30°	3000lm	2450lm	TM4-8273017N-WB					
						65°	3000lm	2000lm	TM4-8276517N-WB					
					3000K	30°	3200lm	2600lm	TM4-8303017N-WB					
						65°	3200lm	2100lm	TM4-8306517N-WB					
					4000K	30°	3500lm	2800lm	TM4-8403017N-WB					
						65°	3500lm	2300lm	TM4-8406517N-WB					
					24 W	26 W	36 V	700 mA	80	2700K	30°	4000lm	3300lm	TM4-8273024N-WB
											65°	4000lm	2700lm	TM4-8276524N-WB
3000K	30°	4200lm	3500lm	TM4-8303024N-WB										
	65°	4200lm	2850lm	TM4-8306524N-WB										
4000K	30°	4500lm	3800lm	TM4-8403024N-WB										
	65°	4500lm	3000lm	TM4-8406524N-WB										

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / TAKEO Pro / T200 Pro

Fixed LED Downlight

Super Eye Comfort

Higher Efficiency

NEW



24W 36W 51W	CRI80 CRI90	2700K 3000K 4000K	18° 30° 65°	 50,000h@L80B10	UGR < 19	IP54		CB	CE		SDCM < 2				
-------------------	----------------	-------------------------	-------------------	--	-------------	------	---	----	----	---	----------	---	---	---	---



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W	26 W	34 V	700 mA	80	2700K	18° 30° 65°	4200lm 4200lm 4200lm	3200lm 3300lm 2700lm	TL4-8271824N-WM TL4-8273024N-WM TL4-8276524N-WM
					3000K	18° 30° 65°	4400lm 4400lm 4400lm	3400lm 3500lm 2900lm	TL4-8301824N-WM TL4-8303024N-WM TL4-8306524N-WM
					4000K	18° 30° 65°	4700lm 4700lm 4700lm	3700lm 3800lm 3100lm	TL4-8401824N-WM TL4-8403024N-WM TL4-8406524N-WM
36 W	40 W	34 V	1050 mA	80	2700K	18° 30° 65°	5600lm 5600lm 5600lm	4600lm 4800lm 4000lm	TL4-8271836N-WM TL4-8273036N-WM TL4-8276536N-WM
					3000K	18° 30° 65°	6000lm 6000lm 6000lm	4800lm 5000lm 4200lm	TL4-8301836N-WM TL4-8303036N-WM TL4-8306536N-WM
					4000K	18° 30° 65°	6500lm 6500lm 6500lm	5100lm 5300lm 4500lm	TL4-8401836N-WM TL4-8403036N-WM TL4-8406536N-WM
51 W	55 W	36 V	1400 mA	80	2700K	18° 30° 65°	7000lm 7000lm 7000lm	5700lm 6000lm 5000lm	TL4-8271851N-WM TL4-8273051N-WM TL4-8276551N-WM
					3000K	18° 30° 65°	7400lm 7400lm 7400lm	5900lm 6300lm 5200lm	TL4-8301851N-WM TL4-8303051N-WM TL4-8306551N-WM
					4000K	18° 30° 65°	8000lm 8000lm 8000lm	6300lm 6700lm 5500lm	TL4-8401851N-WM TL4-8403051N-WM TL4-8406551N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



White Reflector



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W	26 W	34 V	700 mA	80	2700K	18° 30° 65°	4200lm 4200lm 4200lm	3200lm 3300lm 2700lm	TL4-8271824N-WW TL4-8273024N-WW TL4-8276524N-WW
					3000K	18° 30° 65°	4400lm 4400lm 4400lm	3400lm 3500lm 2900lm	TL4-8301824N-WW TL4-8303024N-WW TL4-8306524N-WW
					4000K	18° 30° 65°	4700lm 4700lm 4700lm	3700lm 3800lm 3100lm	TL4-8401824N-WW TL4-8403024N-WW TL4-8406524N-WW
36 W	40 W	34 V	1050 mA	80	2700K	18° 30° 65°	5600lm 5600lm 5600lm	4600lm 4800lm 4000lm	TL4-8271836N-WW TL4-8273036N-WW TL4-8276536N-WW
					3000K	18° 30° 65°	6000lm 6000lm 6000lm	4800lm 5000lm 4200lm	TL4-8301836N-WW TL4-8303036N-WW TL4-8306536N-WW
					4000K	18° 30° 65°	6500lm 6500lm 6500lm	5100lm 5300lm 4500lm	TL4-8401836N-WW TL4-8403036N-WW TL4-8406536N-WW
51 W	55 W	36 V	1400 mA	80	2700K	18° 30° 65°	7000lm 7000lm 7000lm	5700lm 6000lm 5000lm	TL4-8271851N-WW TL4-8273051N-WW TL4-8276551N-WW
					3000K	18° 30° 65°	7400lm 7400lm 7400lm	5900lm 6300lm 5200lm	TL4-8301851N-WW TL4-8303051N-WW TL4-8306551N-WW
					4000K	18° 30° 65°	8000lm 8000lm 8000lm	6300lm 6700lm 5500lm	TL4-8401851N-WW TL4-8403051N-WW TL4-8406551N-WW

24 W	26 W	34 V	700 mA	80	2700K	18° 30° 65°	4200lm 4200lm 4200lm	3200lm 3300lm 2700lm	TL4-8271824N-WB TL4-8273024N-WB TL4-8276524N-WB
					3000K	18° 30° 65°	4400lm 4400lm 4400lm	3400lm 3500lm 2900lm	TL4-8301824N-WB TL4-8303024N-WB TL4-8306524N-WB
					4000K	18° 30° 65°	4700lm 4700lm 4700lm	3700lm 3800lm 3100lm	TL4-8401824N-WB TL4-8403024N-WB TL4-8406524N-WB
36 W	40 W	34 V	1050 mA	80	2700K	18° 30° 65°	5600lm 5600lm 5600lm	4600lm 4800lm 4000lm	TL4-8271836N-WB TL4-8273036N-WB TL4-8276536N-WB
					3000K	18° 30° 65°	6000lm 6000lm 6000lm	4800lm 5000lm 4200lm	TL4-8301836N-WB TL4-8303036N-WB TL4-8306536N-WB
					4000K	18° 30° 65°	6500lm 6500lm 6500lm	5100lm 5300lm 4500lm	TL4-8401836N-WB TL4-8403036N-WB TL4-8406536N-WB
51 W	55 W	36 V	1400 mA	80	2700K	18° 30° 65°	7000lm 7000lm 7000lm	5700lm 6000lm 5000lm	TL4-8271851N-WB TL4-8273051N-WB TL4-8276551N-WB
					3000K	18° 30° 65°	7400lm 7400lm 7400lm	5900lm 6300lm 5200lm	TL4-8301851N-WB TL4-8303051N-WB TL4-8306551N-WB
					4000K	18° 30° 65°	8000lm 8000lm 8000lm	6300lm 6700lm 5500lm	TL4-8401851N-WB TL4-8403051N-WB TL4-8406551N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / TAKEO Pro/ T150C Pro

TAKEO150 ProCeiling Light

Super Eye Comfort

Higher Efficiency

NEW



17W	CRI80	2700K	30°	CITIZEN	UGR	IP54	5	CB	CE	SDCM < 2	200 Ø152
24W	CRI90	3000K	65°	50,000h@L80B10	< 19						
		4000K									



Matt Reflector



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17 W	19 W	36 V	500 mA	80	2700K	30°	3000lm	2450lm	TMC4-8273017N-WM
						65°	3000lm	2000lm	TMC4-8276517N-WM
						3000K 30°	3200lm	2600lm	TMC4-8303017N-WM
						65°	3200lm	2100lm	TMC4-8306517N-WM
						4000K 30°	3500lm	2800lm	TMC4-8403017N-WM
						65°	3500lm	2300lm	TMC4-8406517N-WM
24 W	26 W	36 V	700 mA	80	2700K	30°	4000lm	3300lm	TMC4-8273024N-WM
						65°	4000lm	2700lm	TMC4-8276524N-WM
						3000K 30°	4200lm	3500lm	TMC4-8303024N-WM
						65°	4200lm	2850lm	TMC4-8306524N-WM
						4000K 30°	4500lm	3800lm	TMC4-8403024N-WM
						65°	4500lm	3000lm	TMC4-8406524N-WM

17 W	19 W	36 V	500 mA	80	2700K	30°	3000lm	2450lm	TMC4-8273017N-WB
						65°	3000lm	2000lm	TMC4-8276517N-WB
						3000K 30°	3200lm	2600lm	TMC4-8303017N-WB
						65°	3200lm	2100lm	TMC4-8306517N-WB
						4000K 30°	3500lm	2800lm	TMC4-8403017N-WB
						65°	3500lm	2300lm	TMC4-8406517N-WB
24 W	26 W	36 V	700 mA	80	2700K	30°	4000lm	3300lm	TMC4-8273024N-WB
						65°	4000lm	2700lm	TMC4-8276524N-WB
						3000K 30°	4200lm	3500lm	TMC4-8303024N-WB
						65°	4200lm	2850lm	TMC4-8306524N-WB
						4000K 30°	4500lm	3800lm	TMC4-8403024N-WB
						65°	4500lm	3000lm	TMC4-8406524N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Black Reflector



White Reflector



Matt Reflector



NEKO / TAKEO Pro/ TS100 Pro

Fixed LED Downlight

Super Eye Comfort

Higher Efficiency

NEW



NEKO / TAKEO Pro/ TS150 Pro

Fixed LED Downlight

Super Eye Comfort

Higher Efficiency

NEW



8.5W
12W

CRI80
CRI90

2700K
3000K
4000K

50,000h@L80B10

UGR
< 19

IP54

CB

CE

SDCM < 2

1-30mm
Ceiling Thickness

17W
24W

CRI80
CRI90

2700K
3000K
4000K

50,000h@L80B10

UGR
< 19

IP54

CB

CE

SDCM < 2

1-25mm
Ceiling Thickness



Matt Reflector



White Reflector




Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8.5 W	10 W	34 V	250 mA	80	2700K	60°	1300lm	950lm	TSS4-8276008N-WM
					3000K	60°	1400lm	1000lm	TSS4-8306008N-WM
					4000K	60°	1500lm	1100lm	TSS4-8406008N-WM
12 W	14 W	34 V	350 mA	80	2700K	60°	1800lm	1250lm	TSS4-8276012N-WM
					3000K	60°	1900lm	1350lm	TSS4-8306012N-WM
					4000K	60°	2050lm	1500lm	TSS4-8406012N-WM
8.5 W	10 W	34 V	250 mA	80	2700K	60°	1300lm	950lm	TSS4-8276008N-WW
					3000K	60°	1400lm	1000lm	TSS4-8306008N-WW
					4000K	60°	1500lm	1100lm	TSS4-8406008N-WW
12 W	14 W	34 V	350 mA	80	2700K	60°	1800lm	1250lm	TSS4-8276012N-WW
					3000K	60°	1900lm	1350lm	TSS4-8306012N-WW
					4000K	60°	2050lm	1500lm	TSS4-8406012N-WW
8.5 W	10 W	34 V	250 mA	80	2700K	60°	1300lm	950lm	TSS4-8276008N-WB
					3000K	60°	1400lm	1000lm	TSS4-8306008N-WB
					4000K	60°	1500lm	1100lm	TSS4-8406008N-WB
12 W	14 W	34 V	350 mA	80	2700K	60°	1800lm	1250lm	TSS4-8276012N-WB
					3000K	60°	1900lm	1350lm	TSS4-8306012N-WB
					4000K	60°	2050lm	1500lm	TSS4-8406012N-WB
Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)									



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17 W	19 W	36 V	500 mA	80	2700K	70°	3000lm	1900lm	TSM4-8277017N-WM
					3000K	70°	3200lm	2050lm	TSM4-8307017N-WM
					4000K	70°	3500lm	2200lm	TSM4-8407017N-WM
24 W	26 W	36 V	700 mA	80	2700K	70°	4000lm	2700lm	TSM4-8277024N-WM
					3000K	70°	4200lm	2800lm	TSM4-8307024N-WM
					4000K	70°	4500lm	3000lm	TSM4-8407024N-WM



Matt Reflector

17 W	19 W	36 V	500 mA	80	2700K	70°	3000lm	1900lm	TSM4-8277017N-WW
					3000K	70°	3200lm	2050lm	TSM4-8307017N-WW
					4000K	70°	3500lm	2200lm	TSM4-8407017N-WW
24 W	26 W	36 V	700 mA	80	2700K	70°	4000lm	2700lm	TSM4-8277024N-WW
					3000K	70°	4200lm	2800lm	TSM4-8307024N-WW
					4000K	70°	4500lm	3000lm	TSM4-8407024N-WW



White Reflector

17 W	19 W	36 V	500 mA	80	2700K	70°	3000lm	1900lm	TSM4-8277017N-WB
					3000K	70°	3200lm	2050lm	TSM4-8307017N-WB
					4000K	70°	3500lm	2200lm	TSM4-8407017N-WB
24 W	26 W	36 V	700 mA	80	2700K	70°	4000lm	2700lm	TSM4-8277024N-WB
					3000K	70°	4200lm	2800lm	TSM4-8307024N-WB
					4000K	70°	4500lm	3000lm	TSM4-8407024N-WB

Code Remark:

N=N(No Driver)

F=F(ON-OFF)

P=P(Phase Dim)

A=A(1-10V Dim)

D=D(DALI Dim)

Black Reflector

NEKO / TAKEO Pro/ TS200 Pro

Fixed LED Downlight

Super Eye Comfort

Higher Efficiency

NEW



Black Housing Available for TAKEO Series

24W
36W

CRI80
CRI90

2700K
3000K
4000K

50,000h@L80B10

UGR
< 19

IP54

CB

SDCM < 2

1-25mm
Ceiling Thickness



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W	26 W	34V	700 mA	80	2700K	70°	4200lm	2700lm	TSL4-8277024N-WM
					3000K	70°	4400lm	2800lm	TSL4-8307024N-WM
					4000K	70°	4700lm	3000lm	TSL4-8407024N-WM
36 W	40 W	34 V	1050 mA	80	2700K	70°	5600lm	3700lm	TSL4-8277036N-WM
					3000K	70°	6000lm	3900lm	TSL4-8307036N-WM
					4000K	70°	6500lm	4200lm	TSL4-8407036N-WM



White Reflector

24 W	26 W	34V	700 mA	80	2700K	70°	4200lm	2700lm	TSL4-8277024N-WW
					3000K	70°	4400lm	2800lm	TSL4-8307024N-WW
					4000K	70°	4700lm	3000lm	TSL4-8407024N-WW
36 W	40 W	34 V	1050 mA	80	2700K	70°	5600lm	3700lm	TSL4-8277036N-WW
					3000K	70°	6000lm	3900lm	TSL4-8307036N-WW
					4000K	70°	6500lm	4200lm	TSL4-8407036N-WW



Black Reflector

24 W	26 W	34V	700 mA	80	2700K	70°	4200lm	2700lm	TSL4-8277024N-WB
					3000K	70°	4400lm	2800lm	TSL4-8307024N-WB
					4000K	70°	4700lm	3000lm	TSL4-8407024N-WB
36 W	40 W	34 V	1050 mA	80	2700K	70°	5600lm	3700lm	TSL4-8277036N-WB
					3000K	70°	6000lm	3900lm	TSL4-8307036N-WB
					4000K	70°	6500lm	4200lm	TSL4-8407036N-WB


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



NEKO / TAKEO / T75
Fixed LED Downlight
Super Eye Comfort
High Efficiency



11W	CRI80	2700K	25°	CITIZEN	UGR	IP54	5	CB	CE	ETL
7.5W	CRI90	3000K	50°	50,000h@L80B10	< 19		75			Intertek



Matt Reflector



White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	80	2700K	25°	1000lm	720lm	TT1-8272508N-WM
						50°	1000lm	720lm	TT1-8275008N-WM
					3000K	25°	1100lm	750lm	TT1-8302508N-WM
						50°	1100lm	750lm	TT1-8305008N-WM
					4000K	25°	1200lm	800lm	TT1-8402508N-WM
						50°	1200lm	800lm	TT1-8405008N-WM
11 W	13 W	31 V	350 mA	80	2700K	25°	1300lm	900lm	TT2-8272511N-WM
						50°	1300lm	900lm	TT2-8275011N-WM
					3000K	25°	1400lm	950lm	TT2-8302511N-WM
						50°	1400lm	950lm	TT2-8305011N-WM
					4000K	25°	1500lm	1050lm	TT2-8402511N-WM
						50°	1500lm	1050lm	TT2-8405011N-WM

7.5 W	9 W	31 V	250 mA	80	2700K	25°	1000lm	720lm	TT1-8272508N-WW
						50°	1000lm	720lm	TT1-8275008N-WW
					3000K	25°	1100lm	750lm	TT1-8302508N-WW
						50°	1100lm	750lm	TT1-8305008N-WW
					4000K	25°	1200lm	800lm	TT1-8402508N-WW
						50°	1200lm	800lm	TT1-8405008N-WW
11 W	13 W	31 V	350 mA	80	2700K	25°	1300lm	900lm	TT2-8272511N-WW
						50°	1300lm	900lm	TT2-8275011N-WW
					3000K	25°	1400lm	950lm	TT2-8302511N-WW
						50°	1400lm	950lm	TT2-8305011N-WW
					4000K	25°	1500lm	1050lm	TT2-8402511N-WW
						50°	1500lm	1050lm	TT2-8405011N-WW

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Project: Carita Project in Paris, France



Black Reflector


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	80	2700K	25°	1000lm	720lm	TT1-8272508N-WB
						50°	1000lm	720lm	TT1-8275008N-WB
					3000K	25°	1100lm	750lm	TT1-8302508N-WB
						50°	1100lm	750lm	TT1-8305008N-WB
					4000K	25°	1200lm	800lm	TT1-8402508N-WB
						50°	1200lm	800lm	TT1-8405008N-WB
11 W	13 W	31 V	350 mA	80	2700K	25°	1300lm	900lm	TT2-8272511N-WB
						50°	1300lm	900lm	TT2-8275011N-WB
					3000K	25°	1400lm	950lm	TT2-8302511N-WB
						50°	1400lm	950lm	TT2-8305011N-WB
					4000K	25°	1500lm	1050lm	TT2-8402511N-WB
						50°	1500lm	1050lm	TT2-8405011N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / TAKEO / T100

Fixed LED Downlight

Super Eye Comfort
High Efficiency

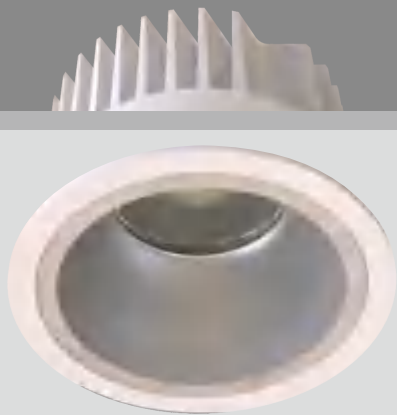

13W
9W

18W Available
In Different LED Chip

CRI80
CRI90

2700K
3000K
4000K

30°
50°

50,000h@L80B10

UGR
< 19

IP54

CB

CE



Matt Reflector



White Reflector



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	80	2700K	30°	1200lm	1050lm	TS1-8273009N-WM
						50°	1200lm	950lm	TS1-8275009N-WM
					3000K	30°	1300lm	1100lm	TS1-8303009N-WM
						50°	1300lm	1000lm	TS1-8305009N-WM
					4000K	30°	1400lm	1200lm	TS1-8403009N-WM
						50°	1400lm	1100lm	TS1-8405009N-WM
13 W	15 W	36 V	350 mA	80	2700K	30°	1700lm	1450lm	TS2-8273013N-WM
						50°	1700lm	1250lm	TS2-8275013N-WM
					3000K	30°	1800lm	1500lm	TS2-8303013N-WM
						50°	1800lm	1300lm	TS2-8305013N-WM
					4000K	30°	1900lm	1600lm	TS2-8403013N-WM
						50°	1900lm	1400lm	TS2-8405013N-WM
9 W	11 W	36 V	250 mA	80	2700K	30°	1200lm	1050lm	TS1-8273009N-WW
						50°	1200lm	950lm	TS1-8275009N-WW
					3000K	30°	1300lm	1100lm	TS1-8303009N-WW
						50°	1300lm	1000lm	TS1-8305009N-WW
					4000K	30°	1400lm	1200lm	TS1-8403009N-WW
						50°	1400lm	1100lm	TS1-8405009N-WW
13 W	15 W	36 V	350 mA	80	2700K	30°	1700lm	1450lm	TS2-8273013N-WW
						50°	1700lm	1250lm	TS2-8275013N-WW
					3000K	30°	1800lm	1500lm	TS2-8303013N-WW
						50°	1800lm	1300lm	TS2-8305013N-WW
					4000K	30°	1900lm	1600lm	TS2-8403013N-WW
						50°	1900lm	1400lm	TS2-8405013N-WW
9 W	11 W	36 V	250 mA	80	2700K	30°	1200lm	1050lm	TS1-8273009N-WB
						50°	1200lm	950lm	TS1-8275009N-WB
					3000K	30°	1300lm	1100lm	TS1-8303009N-WB
						50°	1300lm	1000lm	TS1-8305009N-WB
					4000K	30°	1400lm	1200lm	TS1-8403009N-WB
						50°	1400lm	1100lm	TS1-8405009N-WB
13 W	15 W	36 V	350 mA	80	2700K	30°	1700lm	1450lm	TS2-8273013N-WB
						50°	1700lm	1250lm	TS2-8275013N-WB
					3000K	30°	1800lm	1500lm	TS2-8303013N-WB
						50°	1800lm	1300lm	TS2-8305013N-WB
					4000K	30°	1900lm	1600lm	TS2-8403013N-WB
						50°	1900lm	1400lm	TS2-8405013N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



T100-18W
Matt Reflector



T100-18W
White Reflector





T100-18W
Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	80	2700K	30°	2000lm	1800lm	TS3-8273018N-WM
						50°	2000lm	1500lm	TS3-8275018N-WM
					3000K	30°	2200lm	1900lm	TS3-8303018N-WM
						50°	2200lm	1600lm	TS3-8305018N-WM
					4000K	30°	2400lm	2000lm	TS3-8403018N-WM
						50°	2400lm	1700lm	TS3-8405018N-WM
				90	2700K	30°	1800lm	1550lm	TS3-9273018N-WM
						50°	1800lm	1300lm	TS3-9275018N-WM
					3000K	30°	1900lm	1650lm	TS3-9303018N-WM
						50°	1900lm	1400lm	TS3-9305013N-WM
					4000K	30°	2100lm	1800lm	TS3-9403018N-WM
						50°	2100lm	1500lm	TS3-9405018N-WM
18 W	21 W	36 V	500 mA	80	2700K	30°	2000lm	1800lm	TS3-8273018N-WW
						50°	2000lm	1500lm	TS3-8275018N-WW
					3000K	30°	2200lm	1900lm	TS3-8303018N-WW
						50°	2200lm	1600lm	TS3-8305018N-WW
					4000K	30°	2400lm	2000lm	TS3-8403018N-WW
						50°	2400lm	1700lm	TS3-8405018N-WW
				90	2700K	30°	1800lm	1550lm	TS3-9273018N-WW
						50°	1800lm	1300lm	TS3-9275018N-WW
					3000K	30°	1900lm	1650lm	TS3-9303018N-WW
						50°	1900lm	1400lm	TS3-9305018N-WW
					4000K	30°	2100lm	1800lm	TS3-9403018N-WW
						50°	2100lm	1500lm	TS3-9405018N-WW
18W	21 W	36 V	500 mA	80	2700K	30°	2000lm	1800lm	TS3-8273018N-WB
						50°	2000lm	1500lm	TS3-8275018N-WB
					3000K	30°	2200lm	1900lm	TS3-8303018N-WB
						50°	2200lm	1600lm	TS3-8305018N-WB
					4000K	30°	2400lm	2000lm	TS3-8403018N-WB
						50°	2400lm	1700lm	TS3-8405018N-WB
				90	2700K	30°	1800lm	1550lm	TS3-9273018N-WB
						50°	1800lm	1300lm	TS3-9275018N-WB
					3000K	30°	1900lm	1650lm	TS3-9303018N-WB
						50°	1900lm	1400lm	TS3-9305018N-WB
					4000K	30°	2100lm	1800lm	TS3-9403018N-WB
						50°	2100lm	1500lm	TS3-9405018N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / TAKEO / T100-DW
Fixed LED Downlight
Dim to Warm

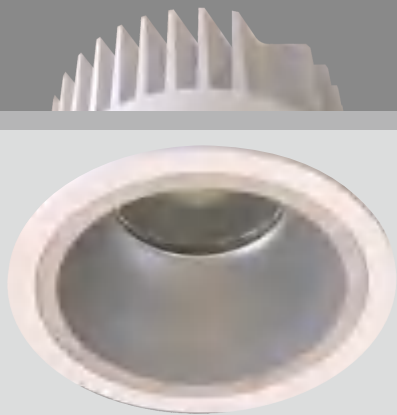

12W	CRI95	1800K-3000K Dim to Warm	50°	bridgelux 50,000h@L80B10	UGR < 19	IP54	5 GUARANTEED	CB	CE	ETL Intertek		79	Ø110
-----	-------	----------------------------	-----	-----------------------------	-------------	------	-----------------	----	----	-----------------	--	----	------


	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
	12 W	14 W	34 V	350 mA	95	1800K-3000K	50°	1200lm	Max.1000lm	TS2-9D35012N-WM
Matt Reflector										
	12 W	14 W	34 V	350 mA	95	1800K-3000K	50°	1200lm	Max.1000lm	TS2-9D35012N-WW
White Reflector										
	12 W	14 W	34 V	350 mA	95	1800K-3000K	50°	1200lm	Max.1000lm	TS2-9D35012N-WB
Black Reflector										
Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)										

DIM to WARM



1800K

2700K

3000K

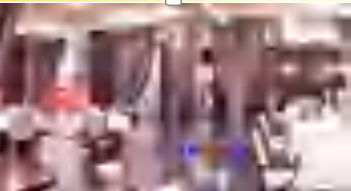

NEKO / TAKEO / T100-TW
Fixed LED Downlight
Tunable White

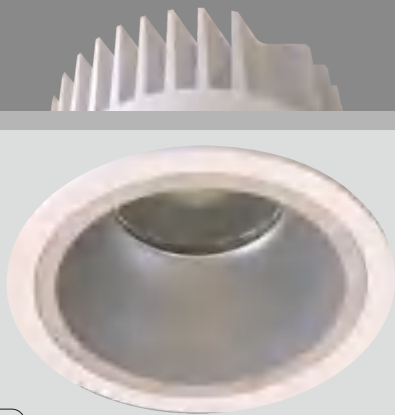

13W	CRI90	2700K-6500K Tunable White	50°	bridgelux 50,000h@L80B10	UGR < 19	IP54	5 GUARANTEED	CB	CE	ETL Intertek		79	Ø110
-----	-------	------------------------------	-----	-----------------------------	-------------	------	-----------------	----	----	-----------------	--	----	------

	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
	13 W	15 W	36 V	350 mA	90	2700K-6500K	50°	Max.900lm	TS2-9TW5013N-WM
						@2700K	50°	750lm	
						@3000K	50°	780lm	
						@4000K	50°	850lm	
						@5000K	50°	900lm	
						@6500K	50°	900lm	
Matt Reflector									
	13 W	15 W	36 V	350 mA	90	2700K-6500K	50°	Max.900lm	TS2-9TW5013N-WW
						@2700K	50°	750lm	
						@3000K	50°	780lm	
						@4000K	50°	850lm	
						@5000K	50°	900lm	
						@6500K	50°	900lm	
White Reflector									
	13 W	15 W	36 V	350 mA	90	2700K-6500K	50°	Max.900lm	TS2-9TW5013N-WB
						@2700K	50°	750lm	
						@3000K	50°	780lm	
						@4000K	50°	850lm	
						@5000K	50°	900lm	
						@6500K	50°	900lm	
Black Reflector									
Code Remark: N=N(No Driver) D=D(DALI Dim)									

NEKO / TAKEO / T150

Fixed LED Downlight

Super Eye Comfort

High Efficiency





Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code	
18 W	21 W	36 V	500 mA	80	2700K	30°	2600lm	2200lm	TM1-8273018N-WM	
						60°	2600lm	1950lm	TM1-8276018N-WM	
						3000K	30°	2800lm	2300lm	TM1-8303018N-WM
						60°	2800lm	2000lm	TM1-8306018N-WM	
						4000K	30°	3000lm	2500lm	TM1-8403018N-WM
						60°	3000lm	2200lm	TM1-8406018N-WM	
25 W	28 W	36 V	700 mA	80	2700K	30°	3600lm	3000lm	TM2-8273025N-WM	
						60°	3600lm	2600lm	TM2-8276025N-WM	
						3000K	30°	3800lm	3100lm	TM2-8303025N-WM
						60°	3800lm	2700lm	TM2-8306025N-WM	
						4000K	30°	4000lm	3300lm	TM2-8403025N-WM
						60°	4000lm	2900lm	TM2-8406025N-WM	



White Reflector

18 W	21 W	36 V	500 mA	80	2700K	30°	2600lm	2200lm	TM1-8273018N-WW	
						60°	2600lm	1950lm	TM1-8276018N-WW	
						3000K	30°	2800lm	2300lm	TM1-8303018N-WW
						60°	2800lm	2000lm	TM1-8306018N-WW	
						4000K	30°	3000lm	2500lm	TM1-8403018N-WW
						60°	3000lm	2200lm	TM1-8406018N-WW	
25 W	28 W	36 V	700 mA	80	2700K	30°	3600lm	3000lm	TM2-8273025N-WW	
						60°	3600lm	2600lm	TM2-8276025N-WW	
						3000K	30°	3800lm	3100lm	TM2-8303025N-WW
						60°	3800lm	2700lm	TM2-8306025N-WW	
						4000K	30°	4000lm	3300lm	TM2-8403025N-WW
						60°	4000lm	2900lm	TM2-8406025N-WW	

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Matt Reflector



White Reflector




Black Reflector



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	80	2700K	30°	2600lm	2200lm	TM1-8273018N-WB
						60°	2600lm	1950lm	TM1-8276018N-WB
					2700K	30°	2800lm	2300lm	TM1-8303018N-WB
						60°	2800lm	2000lm	TM1-8306018N-WB
					4000K	30°	3000lm	2500lm	TM1-8403018N-WB
						60°	3000lm	2200lm	TM1-8406018N-WB
25 W	28 W	36 V	700 mA	80	2700K	30°	3600lm	3000lm	TM2-8273025N-WB
						60°	3600lm	2600lm	TM2-8276025N-WB
					3000K	30°	3800lm	3100lm	TM2-8303025N-WB
						60°	3800lm	2700lm	TM2-8306025N-WB
					4000K	30°	4000lm	3300lm	TM2-8403025N-WB
						60°	4000lm	2900lm	TM2-8406025N-WB
Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)									

NEKO / TAKEO / T150-TW
Fixed LED Downlight
Tunable White



25W
18W

CRI90

2700K-6500K
Tunable White

60°

bridgelux
50,000h@L80B10

UGR
< 19

IP54

5
YEAR
GUARANTEE

CB

CE

ETL
Intertek



Matt Reflector



White Reflector



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
18 W	21 W	36 V	500 mA	90	2700K-6500K	60°	Max.1400lm	TM1-9TW6018N-WM
					@2700K	60°	1200lm	
					@3000K	60°	1250lm	
					@4000K	60°	1350lm	
					@5000K	60°	1400lm	
					@6500K	60°	1400lm	
25 W	28 W	36 V	700 mA	90	2700K-6500K	60°	Max.1900lm	TM2-9TW6025N-WM
					@2700K	60°	1700lm	
					@3000K	60°	1750lm	
					@4000K	60°	1850lm	
					@5000K	60°	1900lm	
					@6500K	60°	1900lm	
18 W	21 W	36 V	500 mA	90	2700K-6500K	60°	Max.1400lm	TM1-9TW6018N-WW
					@2700K	60°	1200lm	
					@3000K	60°	1250lm	
					@4000K	60°	1350lm	
					@5000K	60°	1400lm	
					@6500K	60°	1400lm	
25 W	28 W	36 V	700 mA	90	2700K-6500K	60°	Max.1900lm	TM2-9TW6025N-WW
					@2700K	60°	1700lm	
					@3000K	60°	1750lm	
					@4000K	60°	1850lm	
					@5000K	60°	1900lm	
					@6500K	60°	1900lm	
18 W	21 W	36 V	500 mA	90	2700K-6500K	60°	Max.1400lm	TM1-9TW6018N-WB
					@2700K	60°	1200lm	
					@3000K	60°	1250lm	
					@4000K	60°	1350lm	
					@5000K	60°	1400lm	
					@6500K	60°	1400lm	
25 W	28 W	36 V	700 mA	90	2700K-6500K	60°	Max.1900lm	TM2-9TW6025N-WB
					@2700K	60°	1700lm	
					@3000K	60°	1750lm	
					@4000K	60°	1850lm	
					@5000K	60°	1900lm	
					@6500K	60°	1900lm	

Code Remark: N=N(No Driver) D=D(DALI Dim)

Project: Mist Hot Spring Hotel Xuchang, China



NEKO / TAKEO / T200

Fixed LED Downlight

Super Eye Comfort

High Efficiency



Project: Malaysia International Exhibition Convention Centre, Malaysia



38W	CRI80	2700K	18°	CITIZEN	UGR	IP 54	5	CB	CE	ETL
52W	CRI90	3000K	30°	50,000h@L80B10	< 19		1-25mm			Intertek
		4000K	60°				200			



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
38 W	42 W	36 V	1050 mA	80	2700K	18°	5200lm	4300lm	TL2-8271838N-WM
						30°	5200lm	4300lm	TL2-8273038N-WM
						60°	5200lm	3800lm	TL2-8276038N-WM
					3000K	18°	5400lm	4400lm	TL2-8301838N-WM
						30°	5400lm	4400lm	TL2-8303038N-WM
						60°	5400lm	3900lm	TL2-8306038N-WM
					4000K	18°	5600lm	4600lm	TL2-8401838N-WM
						30°	5600lm	4600lm	TL2-8403038N-WM
						60°	5600lm	4100lm	TL2-8406038N-WM
52 W	56 W	36 V	1400 mA	80	2700K	18°	6400lm	5300lm	TL3-8271852N-WM
						30°	6400lm	5300lm	TL3-8273052N-WM
						60°	6400lm	4700lm	TL3-8276052N-WM
					3000K	18°	6600lm	5400lm	TL3-8301852N-WM
						30°	6600lm	5400lm	TL3-8303052N-WM
						60°	6600lm	4800lm	TL3-8306052N-WM
					4000K	18°	6800lm	5600lm	TL3-8401852N-WM
						30°	6800lm	5600lm	TL3-8403052N-WM
						60°	6800lm	5000lm	TL3-8406052N-WM



Matt Reflector



White Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
38 W	42 W	36 V	1050 mA	80	2700K	18°	5200lm	4300lm	TL2-8271838N-WW
						30°	5200lm	4300lm	TL2-8273038N-WW
						60°	5200lm	3800lm	TL2-8306038N-WW
					3000K	18°	5400lm	4400lm	TL2-8301838N-WW
						30°	5400lm	4400lm	TL2-8303038N-WW
						60°	5400lm	3900lm	TL2-8306038N-WW
					4000K	18°	5600lm	4600lm	TL2-8401838N-WW
						30°	5600lm	4600lm	TL2-8403038N-WW
						60°	5600lm	4100lm	TL2-8406038N-WW
52 W	56 W	36 V	1400 mA	80	2700K	18°	6400lm	5300lm	TL3-8271852N-WW
						30°	6400lm	5300lm	TL3-8273052N-WW
						60°	6400lm	4700lm	TL3-8306052N-WW
					3000K	18°	6600lm	5400lm	TL3-8301852N-WW
						30°	6600lm	5400lm	TL3-8303052N-WW
						60°	6600lm	4800lm	TL3-8306052N-WW
					4000K	18°	6800lm	5600lm	TL3-8401852N-WW
						30°	6800lm	5600lm	TL3-8403052N-WW
						60°	6800lm	5000lm	TL3-8406052N-WW

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
38 W	42 W	36 V	1050 mA	80	2700K	18°	5200lm	4300lm	TL2-8271838N-WB
						30°	5200lm	4300lm	TL2-8273038N-WB
						60°	5200lm	3800lm	TL2-8276038N-WB
					3000K	18°	5400lm	4400lm	TL2-8301838N-WB
						30°	5400lm	4400lm	TL2-8303038N-WB
						60°	5400lm	3900lm	TL2-8306038N-WB
					4000K	18°	5600lm	4600lm	TL2-8401838N-WB
						30°	5600lm	4600lm	TL2-8403038N-WB
						60°	5600lm	4100lm	TL2-8406038N-WB
52 W	56 W	36 V	1400 mA	80	2700K	18°	6400lm	5300lm	TL3-8271852N-WB
						30°	6400lm	5300lm	TL3-8273052N-WB
						60°	6400lm	4700lm	TL3-8276052N-WB
					3000K	18°	6600lm	5400lm	TL3-8301852N-WB
						30°	6600lm	5400lm	TL3-8303052N-WB
						60°	6600lm	4800lm	TL3-8306052N-WB
					4000K	18°	6800lm	5600lm	TL3-8401852N-WB
						30°	6800lm	5600lm	TL3-8403052N-WB
						60°	6800lm	5000lm	TL3-8406052N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / TAKEO / T200-TW
Fixed LED Downlight
Tunable White



25W

CRI90

2700K-6500K
Tunable White

60°

bridgelux
50,000h@L80B10

UGR
< 19

IP54

5
GUARANTEE

CB

CE

ETL
Intertek

200
1-25mm
Ceiling Thickness

132
Ø218

	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
 Matt Reflector	25 W	28 W	36 V	700 mA	90	2700K-6500K	60°	Max.1900lm	TL1-9TW6025N-WM
						@2700K	60°	1700lm	
						@3000K	60°	1750lm	
						@4000K	60°	1850lm	
						@5000K	60°	1900lm	
						@6500K	60°	1900lm	
 White Reflector	25 W	28 W	36 V	700 mA	90	2700K-6500K	60°	Max.1900lm	TL1-9TW6025N-WW
						@2700K	60°	1700lm	
						@3000K	60°	1750lm	
						@4000K	60°	1850lm	
						@5000K	60°	1900lm	
						@6500K	60°	1900lm	
 Black Reflector	25 W	28 W	36 V	700 mA	90	2700K-6500K	60°	Max.1900lm	TL1-9TW6025N-WB
						@2700K	60°	1700lm	
						@3000K	60°	1750lm	
						@4000K	60°	1850lm	
						@5000K	60°	1900lm	
						@6500K	60°	1900lm	

Code Remark: N=N(No Driver) D=D(DALI Dim)

Project: Malaysia International Exhibition Convention Centre, Malaysia



NEKO / TAKEO / T150C

TAKEO150 Ceiling Light

Super Eye Comfort

High Efficiency



25W CRI80 2700K 30°
18W CRI90 3000K 60°


CITIZEN
50,000h@L80B10

UGR < 19

IP 20

5 YEAR GUARANTEE

CB CE



Matt Reflector



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	80	2700K	30°	2800lm	2300lm	TMC1-8273018N-WM
						60°	2800lm	2000lm	TMC1-8276018N-WM
						3000K 30°	2800lm	2300lm	TMC1-8303018N-WM
						60°	2800lm	2000lm	TMC1-8306018N-WM
						4000K 30°	3000lm	2500lm	TMC1-8403018N-WM
						60°	3000lm	2200lm	TMC1-8406018N-WM
25 W	28 W	36 V	700 mA	80	2700K	30°	3800lm	3100lm	TMC2-8273025N-WM
						60°	3800lm	2700lm	TMC2-8276025N-WM
						3000K 30°	3800lm	3100lm	TMC2-8303025N-WM
						60°	3800lm	2700lm	TMC2-8306025N-WM
						4000K 30°	4000lm	3300lm	TMC2-8403025N-WM
						60°	4000lm	2900lm	TMC2-8406025N-WM
18 W	21 W	36 V	500 mA	80	2700K	30°	2800lm	2300lm	TMC1-8273018N-WB
						60°	2800lm	2000lm	TMC1-8276018N-WB
						3000K 30°	2800lm	2300lm	TMC1-8303018N-WB
						60°	2800lm	2000lm	TMC1-8306018N-WB
						4000K 30°	3000lm	2500lm	TMC1-8403018N-WB
						60°	3000lm	2200lm	TMC1-8406018N-WB
25 W	28 W	36 V	700 mA	80	2700K	30°	3800lm	3100lm	TMC2-8273025N-WB
						60°	3800lm	2700lm	TMC2-8276025N-WB
						3000K 30°	3800lm	3100lm	TMC2-8303025N-WB
						60°	3800lm	2700lm	TMC2-8306025N-WB
						4000K 30°	4000lm	3300lm	TMC2-8403025N-WB
						60°	4000lm	2900lm	TMC2-8406025N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



Black Reflector

White Reflector


Matt Reflector



NEKO / TAKEO / TS68

Fixed LED Downlight

Super Eye Comfort
High Efficiency

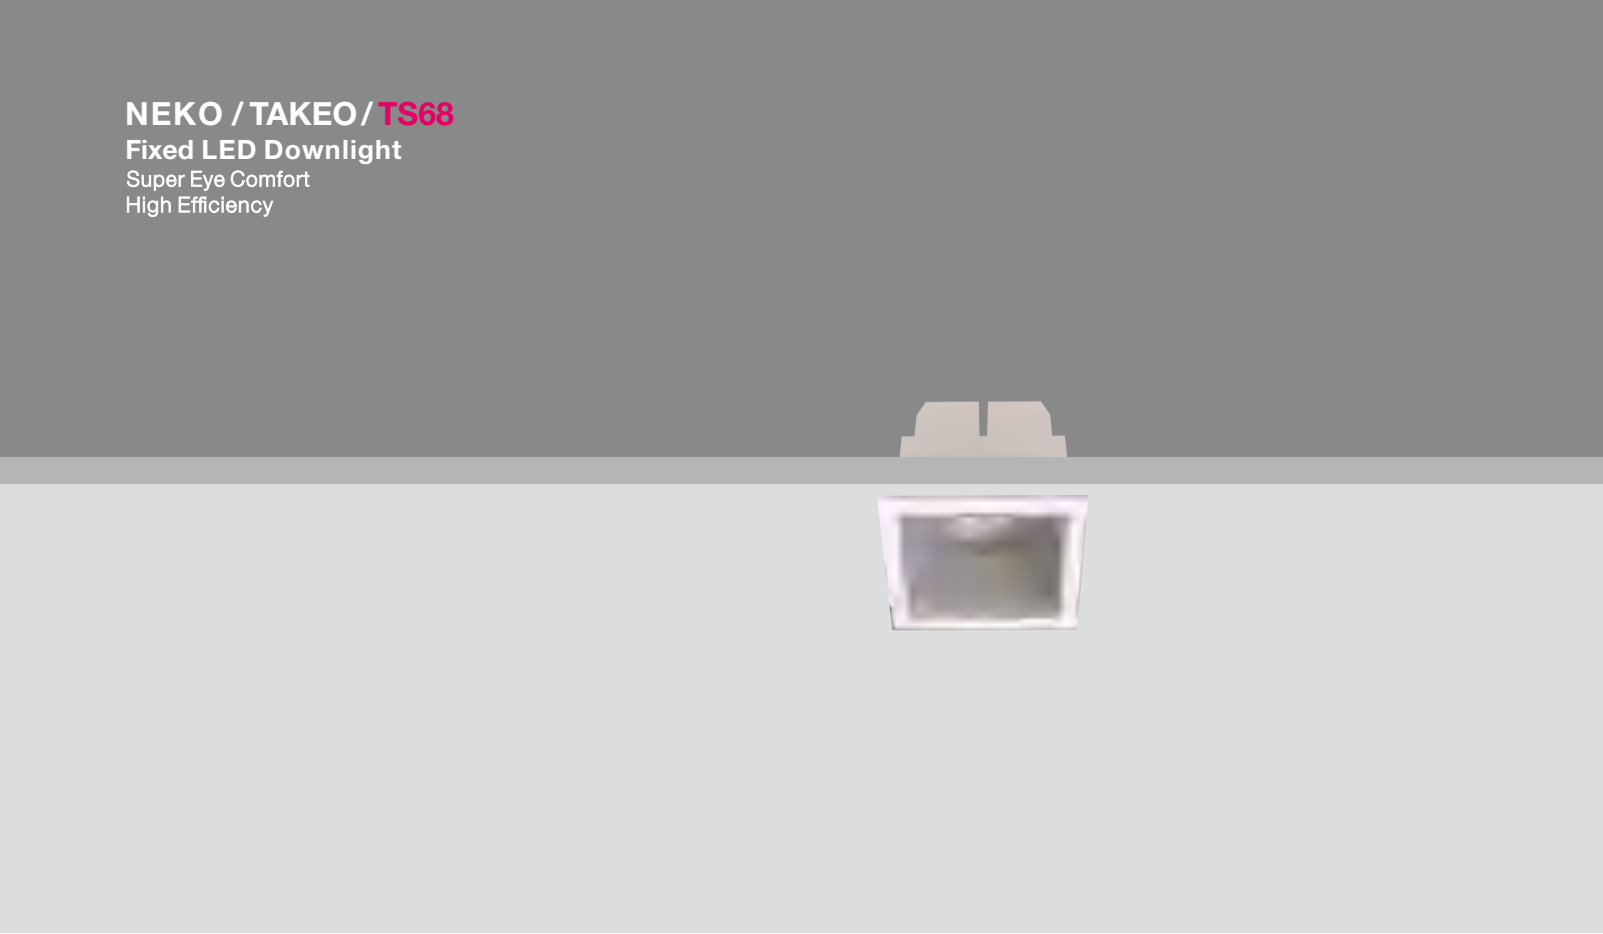

Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	80	2700K	25°	1000lm	680lm	TTS1-8272508N-WB
						60°	1000lm	680lm	TTS1-8276008N-WB
					3000K	25°	1100lm	700lm	TTS1-8302508N-WB
						60°	1100lm	700lm	TTS1-8306008N-WB
					4000K	25°	1200lm	750lm	TTS1-8402508N-WB
						60°	1200lm	750lm	TTS1-8406008N-WB
11 W	13 W	31 V	350 mA	80	2700K	25°	1300lm	870lm	TTS2-8272511N-WB
						60°	1300lm	870lm	TTS2-8276011N-WB
					3000K	25°	1400lm	900lm	TTS2-8302511N-WB
						60°	1400lm	900lm	TTS2-8306011N-WB
					4000K	25°	1500lm	950lm	TTS2-8402511N-WB
						60°	1500lm	950lm	TTS2-8406011N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

7.5 W
11 W

CRI80
CRI90

2700K
3000K
4000K

25°
60°


50,000h@L80B10

UGR
< 19


IP54



CB

CE





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5 W	9 W	31 V	250 mA	80	2700K	25°	1000lm	680lm	TTS1-8272508N-WM
						60°	1000lm	680lm	TTS1-8276008N-WM
					3000K	25°	1100lm	700lm	TTS1-8302508N-WM
						60°	1100lm	700lm	TTS1-8306008N-WM
					4000K	25°	1200lm	750lm	TTS1-8402508N-WM
						60°	1200lm	750lm	TTS1-8406008N-WM
11 W	13 W	31 V	350 mA	80	2700K	25°	1300lm	870lm	TTS2-8272511N-WM
						60°	1300lm	870lm	TTS2-8276011N-WM
					3000K	25°	1400lm	900lm	TTS2-8302511N-WM
						60°	1400lm	900lm	TTS2-8306011N-WM
					4000K	25°	1500lm	950lm	TTS2-8402511N-WM
						60°	1500lm	950lm	TTS2-8406011N-WM



Matt Reflector



White Reflector

7.5 W	9 W	31 V	250 mA	80	2700K	25°	1000lm	680lm	TTS1-8272508N-WW
						60°	1000lm	680lm	TTS1-8276008N-WW
					3000K	25°	1100lm	700lm	TTS1-8302508N-WW
						60°	1100lm	700lm	TTS1-8306008N-WW
					4000K	25°	1200lm	750lm	TTS1-8402508N-WW
						60°	1200lm	750lm	TTS1-8406008N-WW
11 W	13 W	31 V	350 mA	80	2700K	25°	1300lm	870lm	TTS2-8272511N-WW
						60°	1300lm	870lm	TTS2-8276011N-WW
					3000K	25°	1400lm	900lm	TTS2-8302511N-WW
						60°	1400lm	900lm	TTS2-8306011N-WW
					4000K	25°	1500lm	950lm	TTS2-8402511N-WW
						60°	1500lm	950lm	TTS2-8406011N-WW

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



NEKO / TAKEO/TS100

Fixed LED Downlight

Super Eye Comfort
High Efficiency



NEKO / TAKEO/TS150

Fixed LED Downlight

Super Eye Comfort
High Efficiency



9 W
13W

CRI80
CRI90

2700K
3000K
4000K

50,000h@L80B10

UGR
< 19

IP54

CB

CE

Intertek

100x100

1-30mm
Ceiling Thickness

79
110x110



Matt Reflector



White Reflector



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	80	2700K	60°	1200lm	850lm	TSS1-8276009N-WM
					3000K	60°	1300lm	900lm	TSS1-8306009N-WM
					4000K	60°	1400lm	1000lm	TSS1-8406009N-WM
13 W	15 W	36 V	350 mA	80	2700K	60°	1700lm	1150lm	TSS2-8276013N-WM
					3000K	60°	1800lm	1200lm	TSS2-8306013N-WM
					4000K	60°	1900lm	1300lm	TSS2-8406013N-WM

9 W	11 W	36 V	250 mA	80	2700K	60°	1200lm	850lm	TSS1-8276009N-WW
					3000K	60°	1300lm	900lm	TSS1-8306009N-WW
					4000K	60°	1400lm	1000lm	TSS1-8406009N-WW
13 W	15 W	36 V	350 mA	80	2700K	60°	1700lm	1150lm	TSS2-8276013N-WW
					3000K	60°	1800lm	1200lm	TSS2-8306013N-WW
					4000K	60°	1900lm	1300lm	TSS2-8406013N-WW

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

18W
25W

CRI80
CRI90

2700K
3000K
4000K

50,000h@L80B10

UGR
< 19

IP54

CB

CE

Intertek


150x150

1-25mm
Ceiling Thickness

100
167x167



Matt Reflector



White Reflector



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	21 W	36 V	500 mA	80	2700K	70°	2100lm	1600lm	TSM1-8277018N-WM
					3000K	70°	2300lm	1700lm	TSM1-8307018N-WM
					4000K	70°	2500lm	1800lm	TSM1-8407018N-WM
25 W	28 W	36 V	700 mA	80	2700K	70°	3200lm	2200lm	TSM2-8277025N-WM
					3000K	70°	3400lm	2400lm	TSM2-8307025N-WM
					4000K	70°	3600lm	2600lm	TSM2-8407025N-WM

18 W	21 W	36 V	500 mA	80	2700K	70°	2100lm	1600lm	TSM1-8277018N-WW
					3000K	70°	2300lm	1700lm	TSM1-8307018N-WW
					4000K	70°	2500lm	1800lm	TSM1-8407018N-WW
25 W	28 W	36 V	700 mA	80	2700K	70°	3200lm	2200lm	TSM2-8277025N-WW
					3000K	70°	3400lm	2400lm	TSM2-8307025N-WW
					4000K	70°	3600lm	2600lm	TSM2-8407025N-WW

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / TAKEO / TS200

Fixed LED Downlight

Super Eye Comfort

High Efficiency



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	80	2700K	70°	2800lm	2000lm	TSL1-8277025N-WM
					3000K	70°	3000lm	2200lm	TSL1-8307025N-WM
					4000K	70°	3200lm	2400lm	TSL1-8407025N-WM
38 W	42 W	36 V	1050 mA	80	2700K	70°	4100lm	3000lm	TSL2-8277038N-WM
					3000K	70°	4300lm	3200lm	TSL2-8307038N-WM
					4000K	70°	4500lm	3400lm	TSL2-8407038N-WM



White Reflector

25 W	28 W	36 V	700 mA	80	2700K	70°	2800lm	2000lm	TSL1-8277025N-WW
					3000K	70°	3000lm	2200lm	TSL1-8307025N-WW
					4000K	70°	3200lm	2400lm	TSL1-8407025N-WW
38 W	42 W	36 V	1050 mA	80	2700K	70°	4100lm	3000lm	TSL2-8277038N-WW
					3000K	70°	4300lm	3200lm	TSL2-8307038N-WW
					4000K	70°	4500lm	3400lm	TSL2-8407038N-WW



Black Reflector

25 W	28 W	36 V	700 mA	80	2700K	70°	2800lm	2000lm	TSL1-8277025N-WB
					3000K	70°	3000lm	2200lm	TSL1-8307025N-WB
					4000K	70°	3200lm	2400lm	TSL1-8407025N-WB
38 W	42 W	36 V	1050 mA	80	2700K	70°	4100lm	3000lm	TSL2-8277038N-WB
					3000K	70°	4300lm	3200lm	TSL2-8307038N-WB
					4000K	70°	4500lm	3400lm	TSL2-8407038N-WB


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Black Housing Available for TAKEO Series

NEKO / CLUB LED Module



- NEKO LED-Module sind die perfekte Austauschlösung für MR16 Halogen.
- Sehr schickes und elegantes Design und vielfältig einsetzbar bei Downlight- und Spotanwendungen.
- Hohe Farbkonsistenz bei allen LED-Modulen innerhalb einer 3-Step-MacAdam-Ellipse
- Neko-LED-Module können in verschiedenen Leuchten verwendet werden, ohne Einfluss auf die Farbkonsistenz.
- Hervorragende Lichtausbeute und exzellenter Lampenlichtstromerhalt mit 50.000 Stunden Lebensdauer machen häufige Lampenwechsel zu einem Relikt der Vergangenheit.
- 5 Jahre Qualitätsgarantie von NEKO.

- The NEKO LED module is a perfect replacement for MR16 halogen modules.
- Smart and elegant design.
- Versatile for downlight and spotlight applications.
- Uniform color for all LED modules within 3 MacAdam steps.
- You can use NEKO LED modules in various fixture designs with no color variability.
- Outstanding lumen output, excellent lumen maintenance.
- 50,000-hour lifetime eliminates frequent re-lamping.
- NEKO 5-Year Quality Guarantee

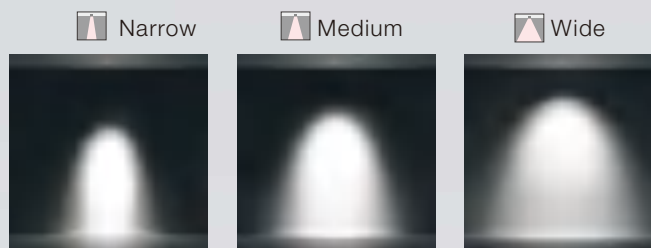

Verschiedene Abstrahlwinkel für architektonische Designs
Three beam angles for various architectural design requirements.




Model No.	M3	M4
Product Photo		
Dimension (mm)		
Cutout (mm)	Mounted with Trim	Mounted with Trim
Wattage	7.5W/ 11W	9W/ 13W/ 18W
CCT	2700K/ 3000K/ 4000K Dim to Warm	2700K/ 3000K/ 4000K Dim to Warm
CRI	>80/ >90	>80/ >90
Beam Angle	15°/ 25°/ 35°/ 60°	20°/ 35°/ 60°
Lumen Output	1050lm @CRI80 3000K	1300lm @CRI80 3000K
Reflector Color	NEKO Standard	NEKO Standard
IP	IP54	IP54
Dimming	On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim	On/ Off, Phase Dim, 0/1-10V Dim, DALI Dim
Accessory	Fit with CLUB Series Trims	Fit with CLUB Series Trims

NEKO / CLUB/ M3
LED Downlight Module
Fit with CLUB Series Trims



12W	CR195	1800K-9000K Dim to Warm	35° 60°	bridgelux 50,000h@L80B10	Replace Halogen 50W	UGR < 19	IP54	5 YEARS GUARANTEE	CB	CE
-----	-------	----------------------------	------------	-----------------------------	------------------------	-------------	------	-------------------------	----	----



M3-DW

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	34 V	350 mA	95	1800K-3000K	35° 60°	1100lm 1100lm	Max.850lm Max.850lm	M3- 9D33512N-NN M3- 9D36012N-NN



Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

DIM to WARM


1800K

2700K

3000K

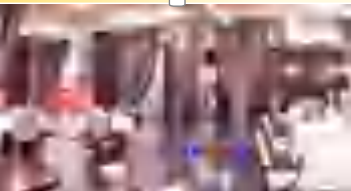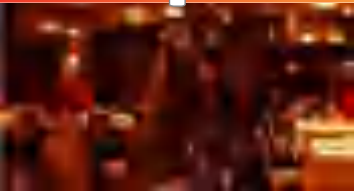

11W 7.5W	CR190	2700K 3000K 4000K	15° 25° 35° 60°	CITIZEN 50,000h@L80B10	UGR < 19	IP54	5 YEARS GUARANTEE	CB	CE	ETL Intertek
-------------	-------	-------------------------	--------------------------	---------------------------	-------------	------	-------------------------	----	----	-----------------



M3

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	31 V	350 mA	90	2700K	15° 25° 35° 60°	1000lm 1000lm 1000lm 1000lm	900lm 900lm 900lm 900lm	M3- 9271511N-NN M3- 9272511N-NN M3- 9273511N-NN M3- 9276011N-NN
					3000K	15° 25° 35° 60°	1100lm 1100lm 1100lm 1100lm	950lm 950lm 950lm 950lm	M3- 9301511N-NN M3- 9302511N-NN M3- 9303511N-NN M3- 9306011N-NN
					4000K	15° 25° 35° 60°	1200lm 1200lm 1200lm 1200lm	1000lm 1000lm 1000lm 1000lm	M3- 9401511N-NN M3- 9402511N-NN M3- 9403511N-NN M3- 9406011N-NN
7.5W	9 W	31 V	250 mA	90	2700K	15° 25° 35° 60°	850lm 850lm 850lm 850lm	650lm 650lm 650lm 650lm	M3- 9271508N-NN M3- 9272508N-NN M3- 9273508N-NN M3- 9276008N-NN
					3000K	15° 25° 35° 60°	900lm 900lm 900lm 900lm	700lm 700lm 700lm 700lm	M3- 9301508N-NN M3- 9302508N-NN M3- 9303508N-NN M3- 9306008N-NN
					4000K	15° 25° 35° 60°	950lm 950lm 950lm 950lm	750lm 750lm 750lm 750lm	M3- 9401508N-NN M3- 9402508N-NN M3- 9403508N-NN M3- 9406008N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)




Can be used in limited ceiling space of 80mm height


NEKO / CLUB/ M4

LED Downlight Module

Fit with CLUB Series Trims

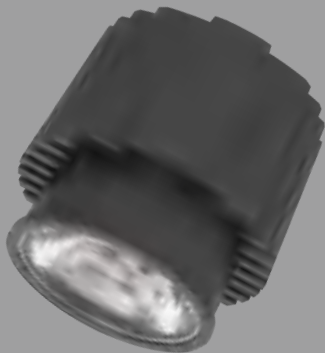

12W	CRI95	1800K-3000K Dim to Warm	35° 60°	bridgelux 50,000h@L80B10	Replace Halogen 50W	UGR < 19	IP54	5 YEARS GUARANTEE	CB	CE
-----	-------	----------------------------	------------	-----------------------------	------------------------	-------------	------	----------------------	----	----



M4-DW

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	34 V	350 mA	95	1800K-3000K	35° 60°	1100lm 1100lm	Max.950lm Max.950lm	M4- 9D33512N-NN M4- 9D36012N-NN



Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

DIM to WARM


1800K

2700K

3000K

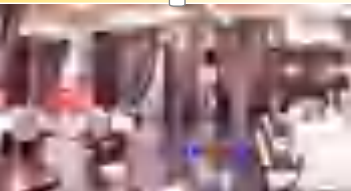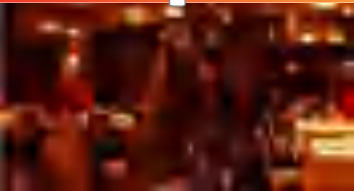

13W 9W	18W Available In Different LED Chip	CRI90	2700K 3000K 4000K	20° 35° 60°	CITIZEN 50,000h@L80B10	UGR < 19	IP54	5 YEARS GUARANTEE	CB	CE	ETL Intertek
-----------	--	-------	-------------------------	-------------------	---------------------------	-------------	------	----------------------	----	----	-----------------



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	20° 35° 60°	1300lm 1300lm 1300lm	1100lm 1100lm 1100lm	M4- 9272013N-NN M4- 9273513N-NN M4- 9276013N-NN
					3000K	20° 35° 60°	1400lm 1200lm 1400lm	1200lm 1200lm 1200lm	M4- 9302013N-NN M4- 9303513N-NN M4- 9306013N-NN
					4000K	20° 35° 60°	1500lm 1300lm 1500lm	1300lm 1300lm 1300lm	M4- 9402013N-NN M4- 9403513N-NN M4- 9406013N-NN
9W	11 W	36 V	250 mA	90	2700K	20° 35° 60°	900lm 900lm 900lm	800lm 800lm 800lm	M4- 9272009N-NN M4- 9273509N-NN M4- 9276009N-NN
					3000K	20° 35° 60°	1000lm 1000lm 1000lm	850lm 850lm 850lm	M4- 9302009N-NN M4- 9303509N-NN M4- 9306009N-NN
					4000K	20° 35° 60°	1100lm 1100lm 1100lm	950lm 950lm 950lm	M4- 9402009N-NN M4- 9403509N-NN M4- 9406009N-NN
18W	21 W	36 V	500 mA	90	2700K	20° 35° 60°	1800lm 1800lm 1800lm	1500lm 1500lm 1500lm	M4- 9272018N-NN M4- 9273518N-NN M4- 9276018N-NN
					3000K	20° 35° 60°	1900lm 1900lm 1900lm	1600lm 1600lm 1600lm	M4- 9302018N-NN M4- 9303518N-NN M4- 9306018N-NN
					4000K	20° 35° 60°	2000lm 2000lm 2000lm	1700lm 1700lm 1700lm	M4- 9402018N-NN M4- 9403518N-NN M4- 9406018N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



M4



M4-18W




Can be used in limited ceiling space of 80mm height

- NEKO M4 Pro-LED-Module sind die perfekte Austauschlösung für MR16 Halogen.
- Sehr schickes und elegantes Design und vielfältig einsetzbar bei Downlight- und Spotanwendungen.
- Hohe Farbkonsistenz bei allen LED-Modulen innerhalb einer 2-Step-MacAdam-Ellipse
- NEKO M4 Pro-LED-Module können in verschiedenen Leuchten verwendet werden, ohne Einfluss auf die Farbkonsistenz.
- Hervorragende Lichtausbeute und exzellenter Lampenlichtstromerhalt mit
- 50.000 Stunden Lebensdauer machen häufige Lampenwechsel zu einem Relikt der Vergangenheit.
- 5 Jahre Qualitätsgarantie von NEKO.

- The NEKO M4 Pro LED module is a perfect replacement for MR16 halogen modules.
- Smart and elegant design.
- Versatile for downlight and spotlight applications.
- Uniform color for all LED modules within 2 MacAdam steps.
- You can use NEKO M4 Pro LED modules in various fixture designs with no color variability.
- Outstanding lumen output, excellent lumen maintenance.
- 50,000-hour lifetime eliminates frequent re-lamping.
- NEKO 5-Year Quality Guarantee



Verschiedene Abstrahlwinkel für architektonische Designs
Five beam angles for various architectural design requirements.

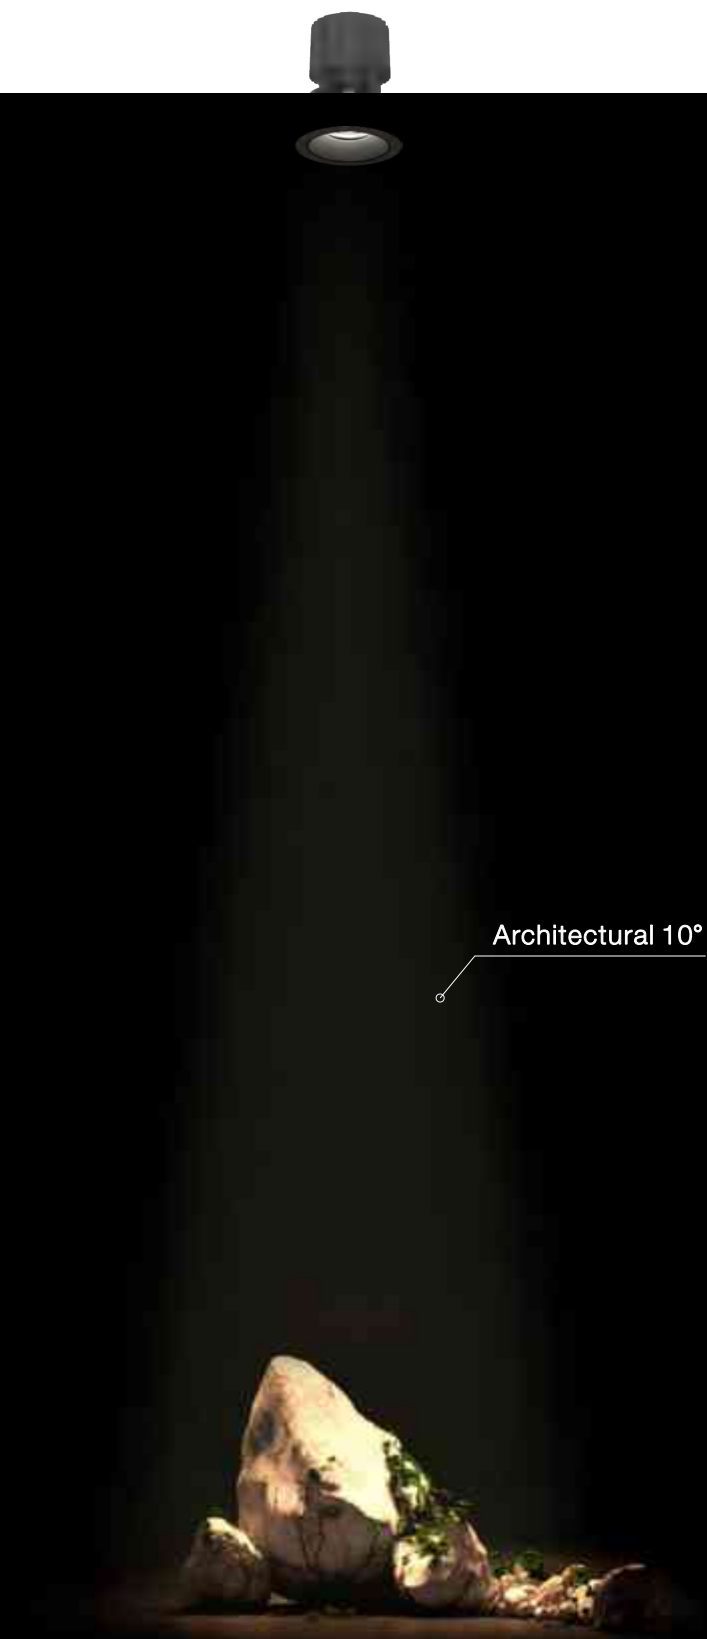

NEKO / CLUB/ M4 Pro
Architectural LED Downlight Module
Fit with CLUB Series Trims



M4 Pro LED Module
LED Power: 7W/ 9W/ 12W/ 13W/ 18W
LED Chip: Bridgelux CRI>97, R9=95, 2-step SDCM
Beam Angle: 10°/ 15°/ 25°/ 35°/ 50°
Standard CCT: 2700K/ 3000K/ 3500K/ 4000K
Optional CCT: 1800K-3000K Warm Dim/ 2700K-6500K Tunable White
Optional Accessory: Honeycomb/ Diffusion Filter/ Linear Spread Filter
Single Asymmetric Filter/ Double Asymmetric Filter

M4 Pro LED Module



Accessory:



Honeycomb



Diffusion Filter



Linear Spread Filter



Single Asymmetric Filter




Double Asymmetric Filter


CLUB Trim:



Honeycomb Effect

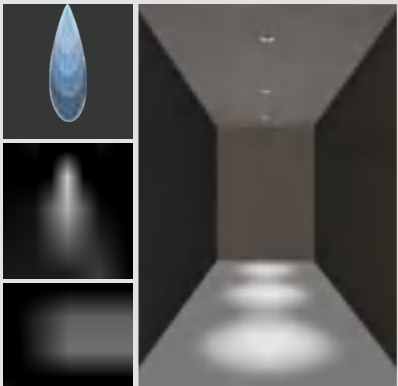


Diffusion Filter Effect

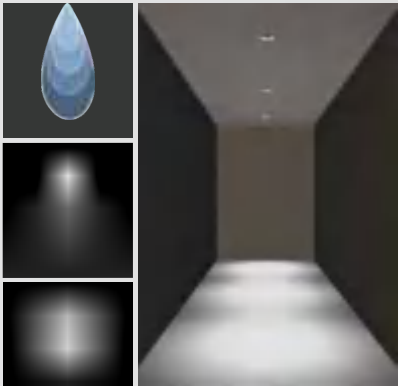


Linear Spread Filter Effect



Single Asymmetric Filter Effect

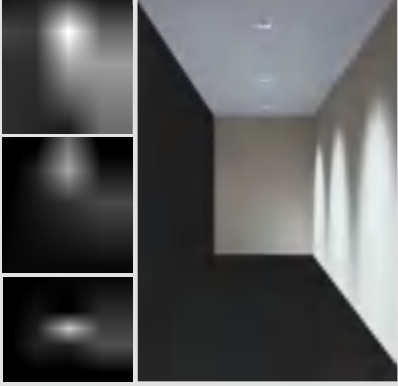

Double Asymmetric Filter Effect

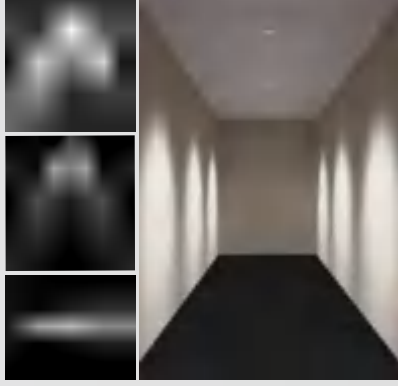

NEKO / CLUB/ **M4 Pro**

Architectural LED Downlight Module


Fit with CLUB Series Trims

!

NEW



13W	CRI97	2700K	15°		UGR < 19	IP54		CB	CE
18W		3000K	25°						
		3500K	35°						
		4000K	50°						



M4 Pro-13W




M4 Pro-18W

LED Power System Power		LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	97	2700K	15°	1300lm	1050lm	
						25°	1300lm	1050lm	M4P3- 0271513N-NN
						35°	1300lm	1050lm	M4P3- 0273513N-NN
						50°	1300lm	1000lm	M4P3- 0275013N-NN
					3000K	15°	1400lm	1100lm	M4P3- 0301513N-NN
						25°	1400lm	1100lm	M4P3- 0302513N-NN
						35°	1400lm	1100lm	M4P3- 0303513N-NN
						50°	1400lm	1050lm	M4P3- 0305013N-NN
					3500K	15°	1450lm	1150lm	M4P3- 0351513N-NN
						25°	1450lm	1150lm	M4P3- 0352513N-NN
						35°	1450lm	1150lm	M4P3- 0353513N-NN
						50°	1450lm	1100lm	M4P3- 0355013N-NN
					4000K	15°	1500lm	1200lm	M4P3- 0401513N-NN
						25°	1500lm	1200lm	M4P3- 0402513N-NN
						35°	1500lm	1200lm	M4P3- 0403513N-NN
						50°	1500lm	1150lm	M4P3- 0405013N-NN
18 W	21 W	36 V	500 mA	97	2700K	18°	1900lm	1500lm	M4P4- 0271818N-NN
						30°	1900lm	1500lm	M4P4- 0273018N-NN
						36°	1900lm	1500lm	M4P4- 0273618N-NN
						50°	1900lm	1400lm	M4P4- 0275018N-NN
					3000K	18°	2000lm	1600lm	M4P4- 0301818N-NN
						30°	2000lm	1600lm	M4P4- 0303018N-NN
						36°	2000lm	1600lm	M4P4- 0303618N-NN
						50°	2000lm	1500lm	M4P4- 0305018N-NN
					3500K	18°	2100lm	1650lm	M4P4- 0351818N-NN
						30°	2100lm	1650lm	M4P4- 0353018N-NN
						36°	2100lm	1650lm	M4P4- 0353618N-NN
						50°	2100lm	1600lm	M4P4- 0355018N-NN
					4000K	18°	2200lm	1700lm	M4P4- 0401818N-NN
						30°	2200lm	1700lm	M4P4- 0403018N-NN
						36°	2200lm	1700lm	M4P4- 0403618N-NN
						50°	2200lm	1650lm	M4P4- 0405018N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

7W	CRI97	2700K	10°		UGR < 19	IP54		CB	CE
		3000K							
		3500K							
		4000K							



M4 Pro-7W-10°

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	97	2700K	10°	650lm	500lm	M4P1- 0271007N-NN
					3000K	10°	700lm	550lm	M4P1- 0301007N-NN
					3500K	10°	725lm	600lm	M4P1- 0351007N-NN
					4000K	10°	750lm	650lm	M4P1- 0401007N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)




NEKO / CLUB/ **M4 Pro**

Architectural LED Downlight Module

Fit with CLUB Series Trims

NEW



12W

CRI95

1800K-3000K
Dim to Warm

38°
50°

bridgelux

50,000h@L80B10


UGR
< 19

IP54

5 YEARS
GUARANTEE

CB


CE



M4 Pro-DW

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	34 V	350 mA	95	1800K-3000K	38°	1100lm	Max.900lm	M4P5-0D33812N-NN
						50°	1100lm	Max.850lm	M4P5-0D35012N-NN

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

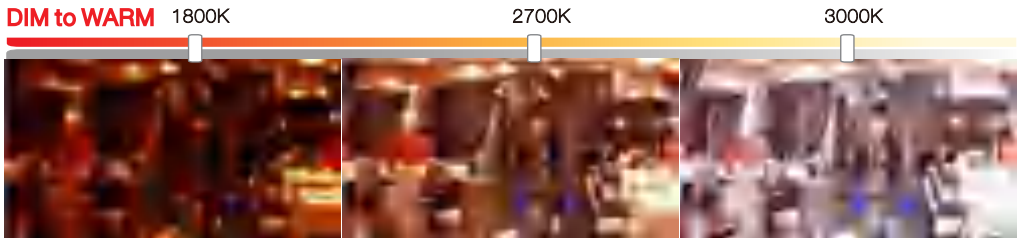

9W
13W

CRI90

2700K-6500K
Tunable White

20°
38°
50°

bridgelux

50,000h@L80B10


UGR
< 19

IP54

5 YEARS
GUARANTEE

CB


CE



M4 Pro-TW

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
9 W	11 W	36 V	250 mA	90	2700K-6500K	20°	700lm-850lm	M4P6-9TW2009N-NN
						38°	700lm-850lm	M4P6-9TW3809N-NN
						50°	620lm-750lm	M4P6-9TW5009N-NN
					@2700K	38°	700lm	
					@3000K	38°	730lm	
					@4000K	38°	800lm	
					@5000K	38°	850lm	
					@6500K	38°	850lm	
13 W	15 W	36 V	350 mA	90	2700K-6500K	20°	900lm-1100lm	M4P6-9TW2013N-NN
						38°	900lm-1100lm	M4P6-9TW3813N-NN
						50°	850lm-1050lm	M4P6-9TW5013N-NN
					@2700K	38°	900lm	
					@3000K	38°	950lm	
					@4000K	38°	1000lm	
					@5000K	38°	1100lm	
					@6500K	38°	1100lm	


Code Remark: N=N(No Driver) D=D(DT8 DALI Dim)







NEKO / CLUB
Trim Series

- Perfect choice for specified architectural projects
- Compatible with Mr16 and LED Modules
- Wide range of design variants for different applications
- Available in trimless versions
- Decorative rings painted in a variety of colors (black, white, marble, wood, etc.)
- Magnetic design for changing decorative ring without any tools

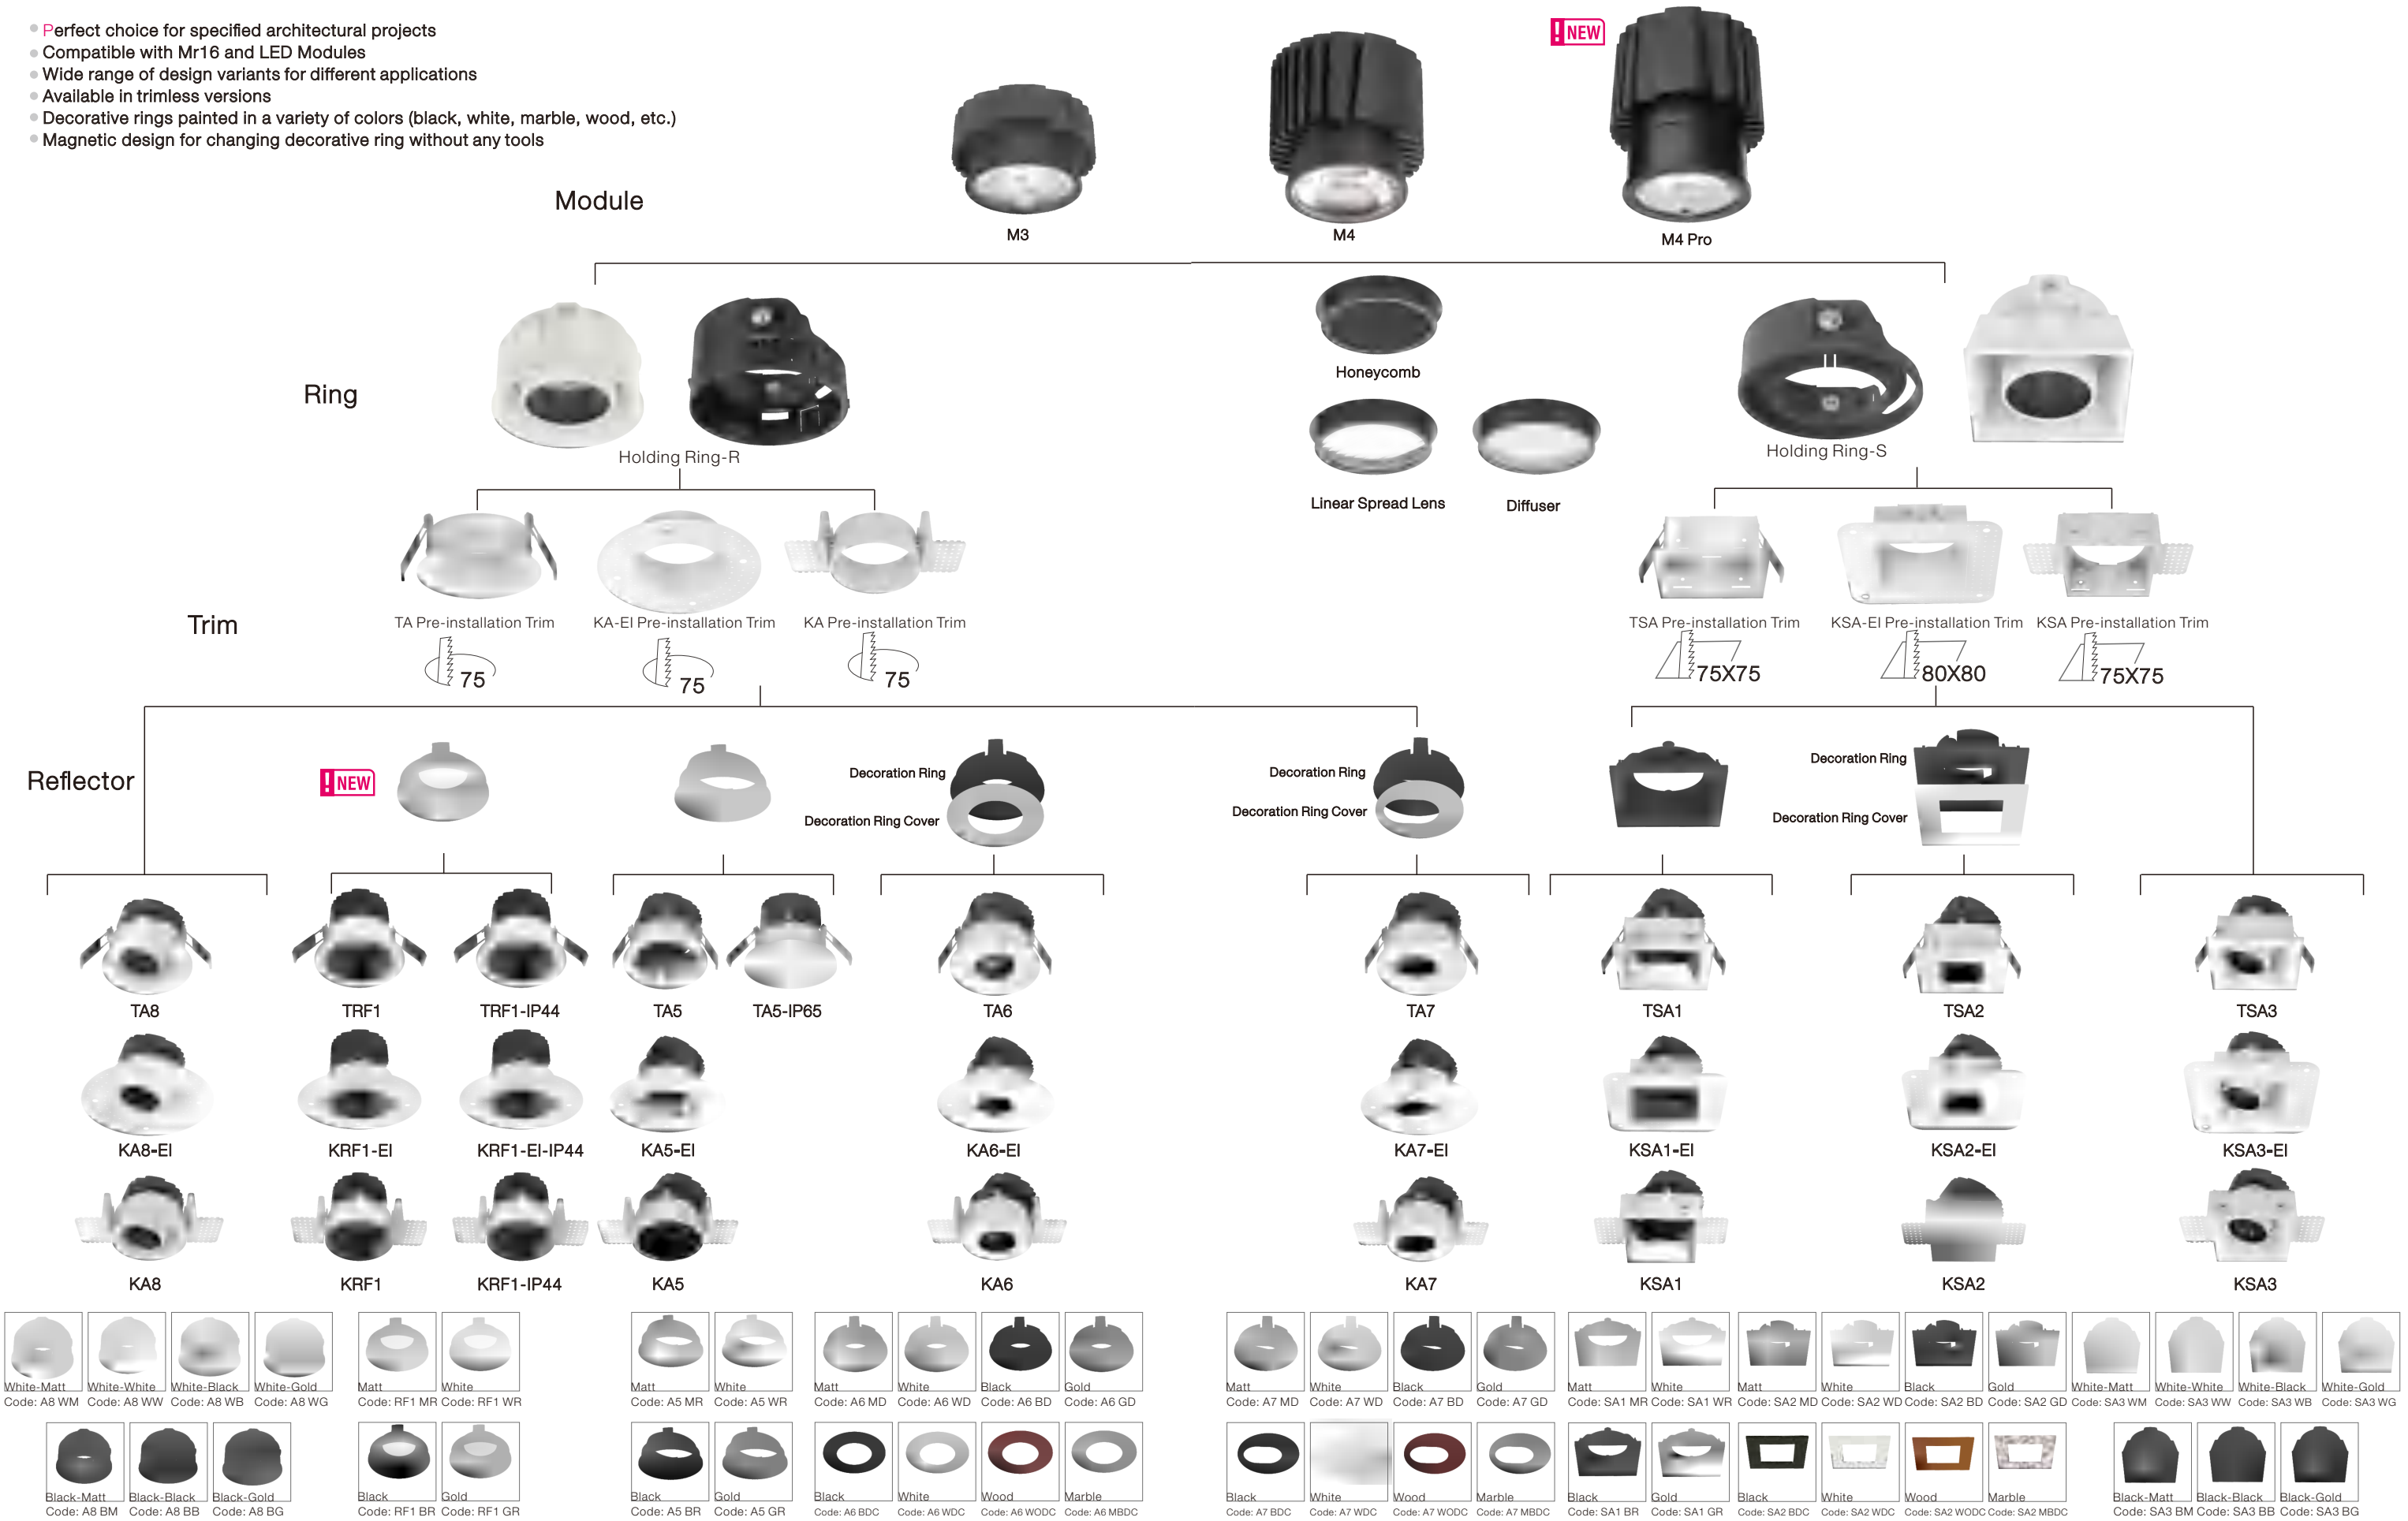


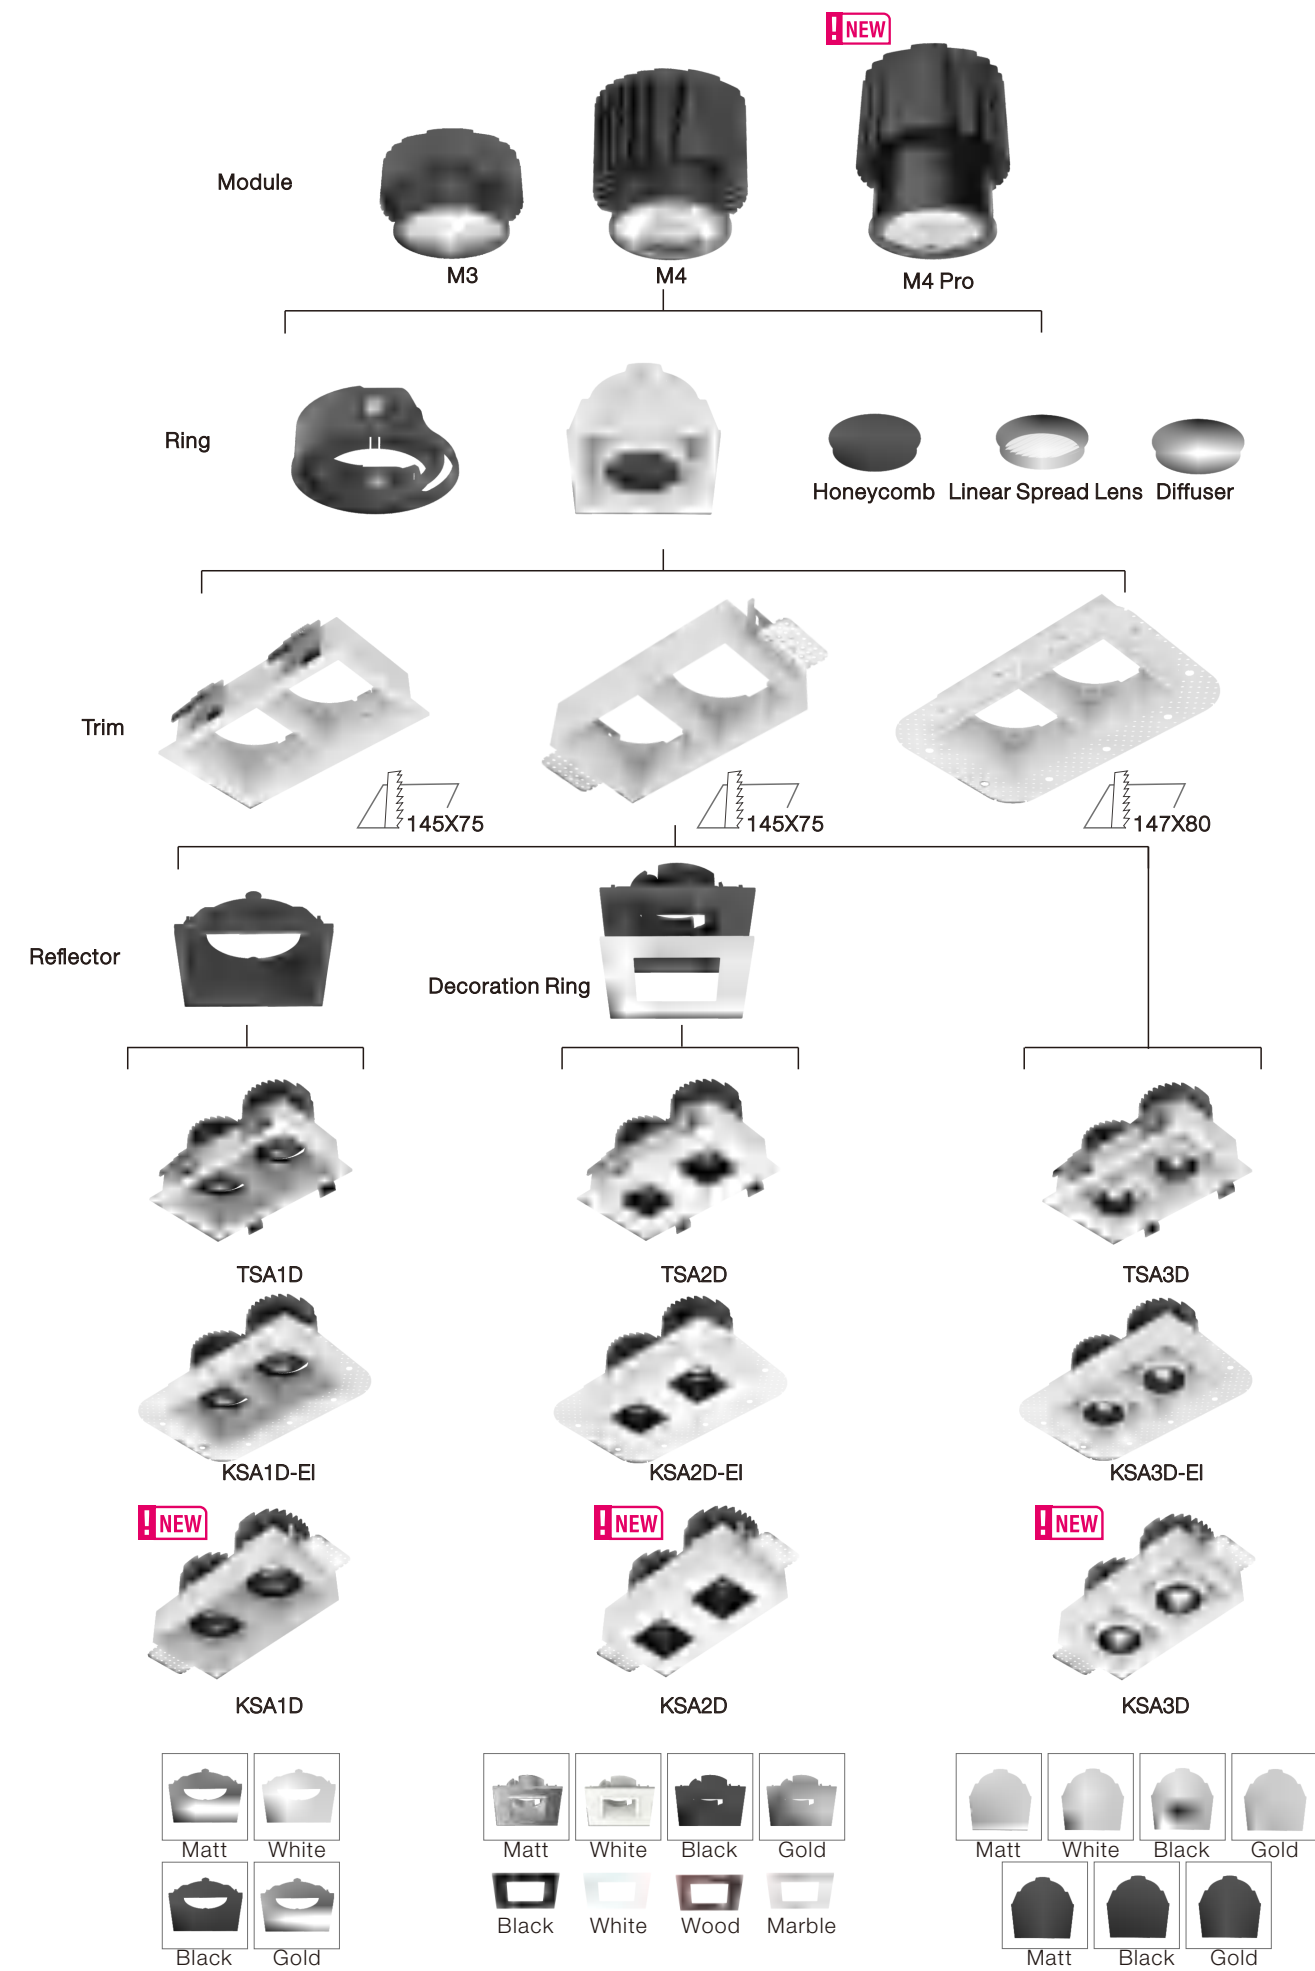


NEW

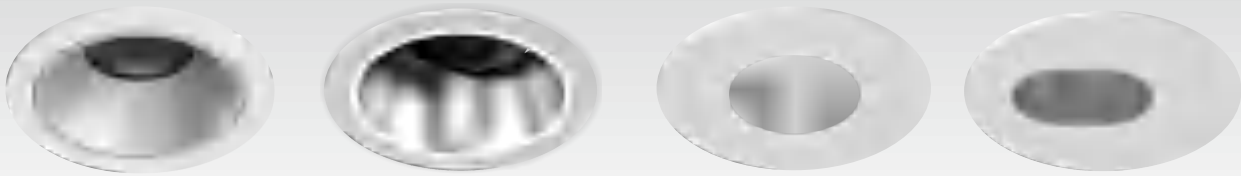


TRF1

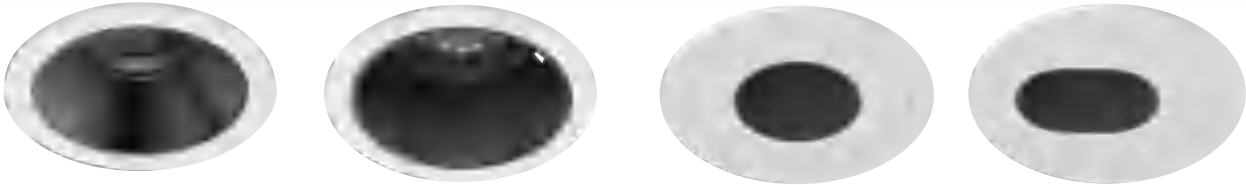

TA5

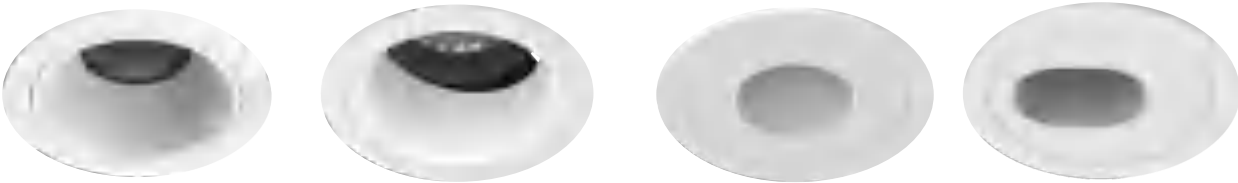


TA6

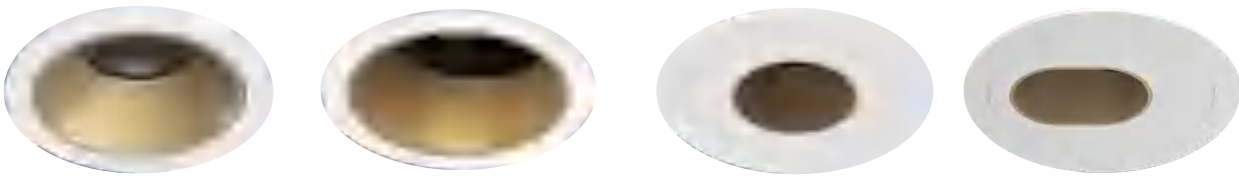


TA7




TA8

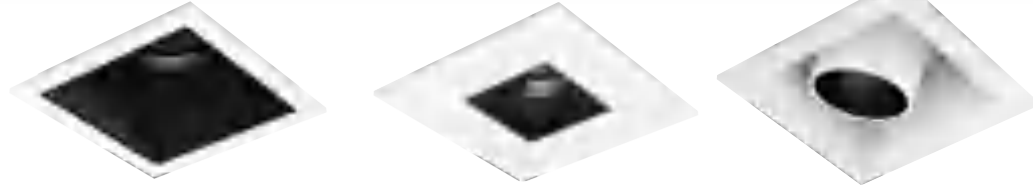



TSA1

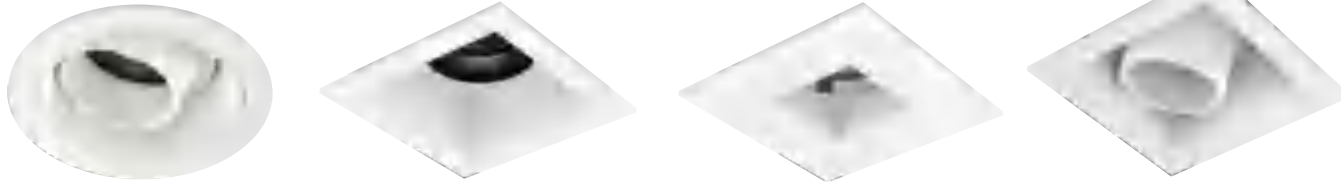



TSA2

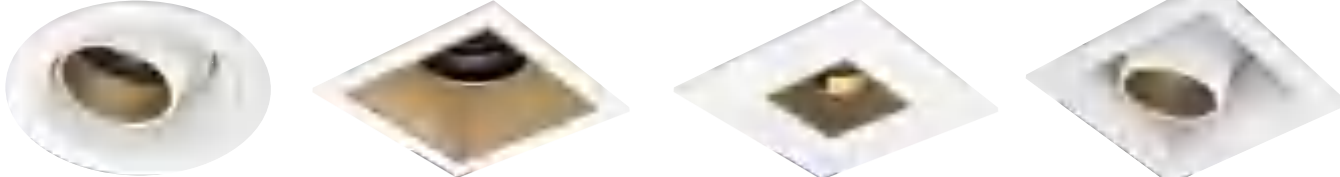



TSA3

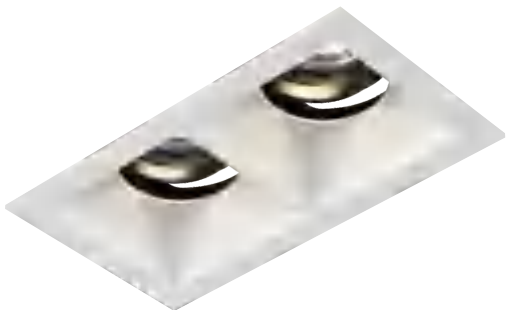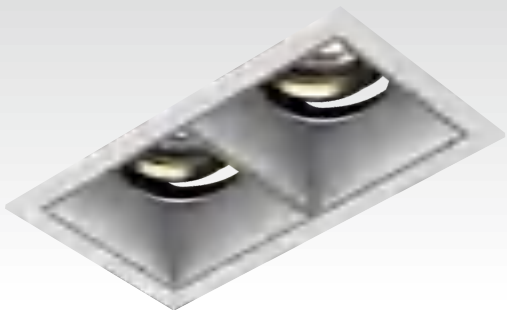

TSA1D

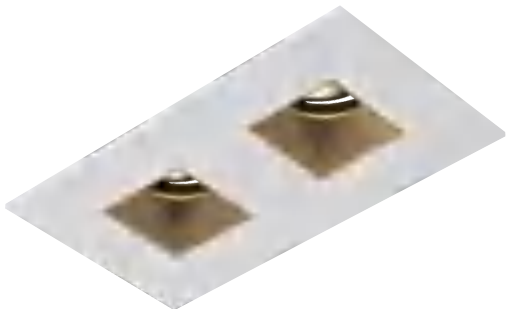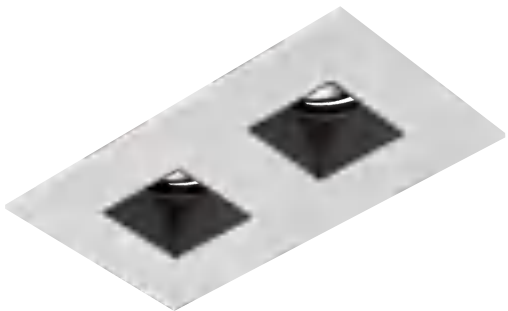


TSA2D

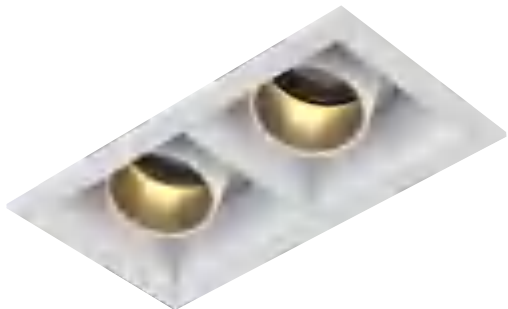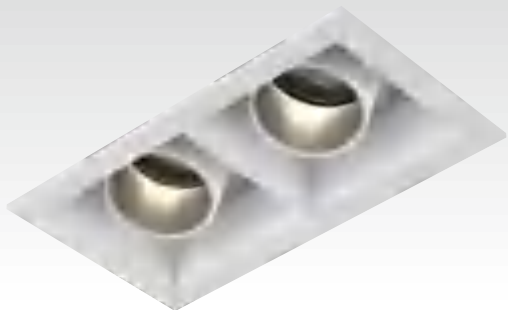






TSA3D



TA5-IP65





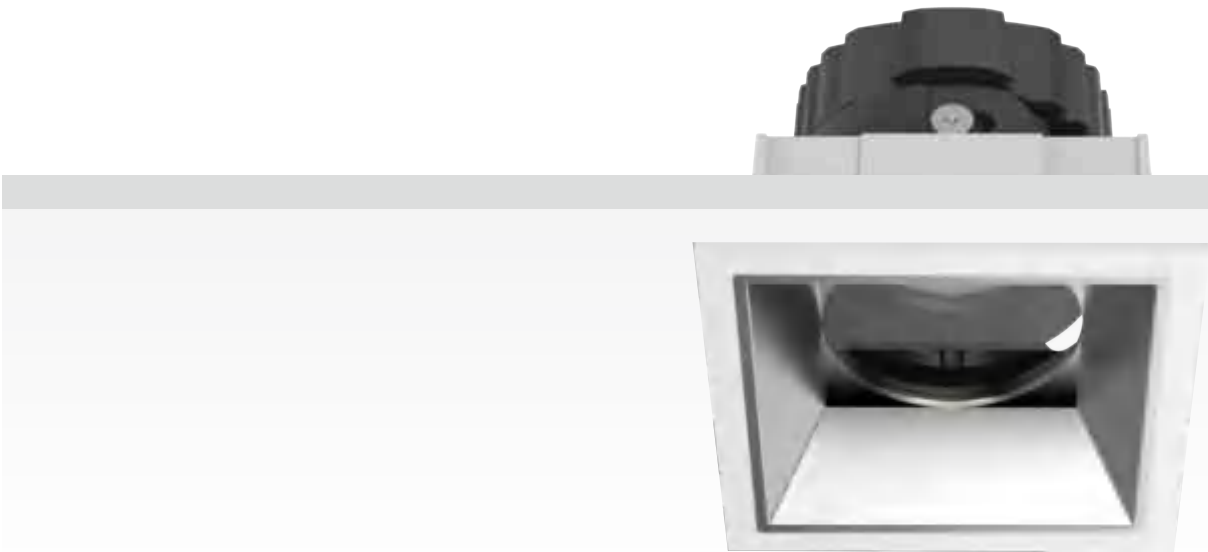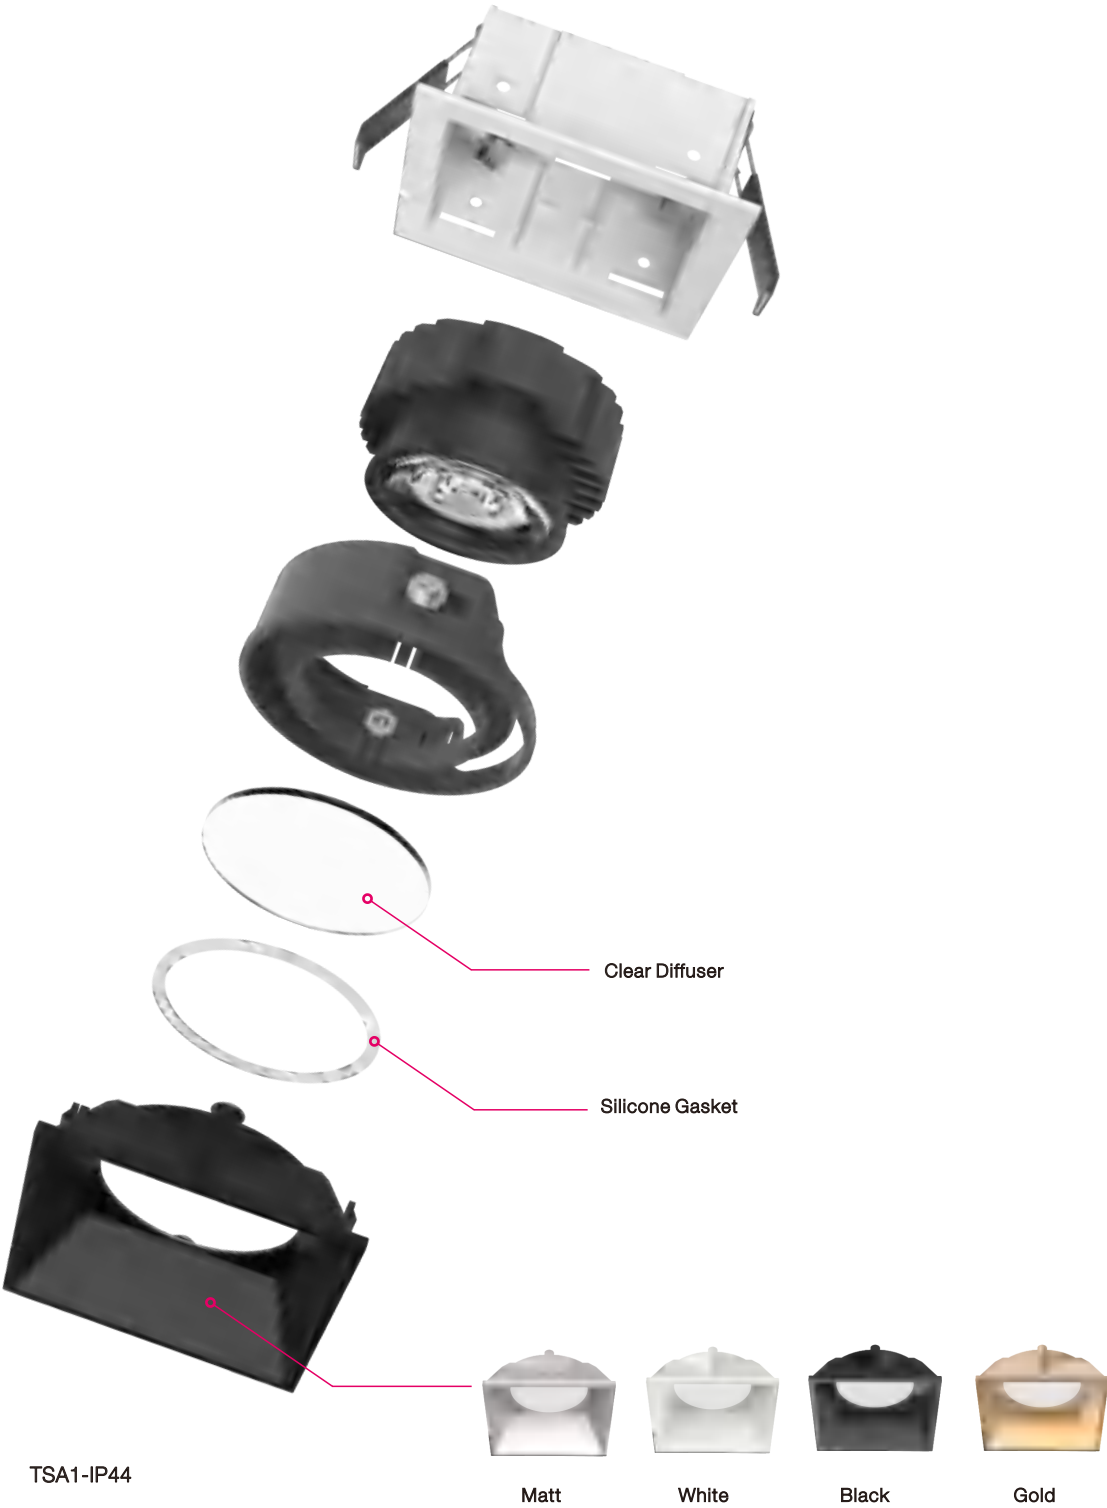



NEW



KA5



KA8



KRF1



KSA1



KSA1D-EI



KSA3



KA6



KSA2



KA7











KSA2D-EI



KSA3D-EI

Installation Trimless Trims

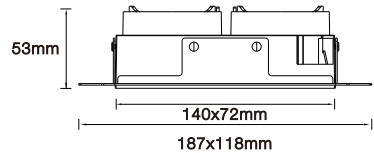


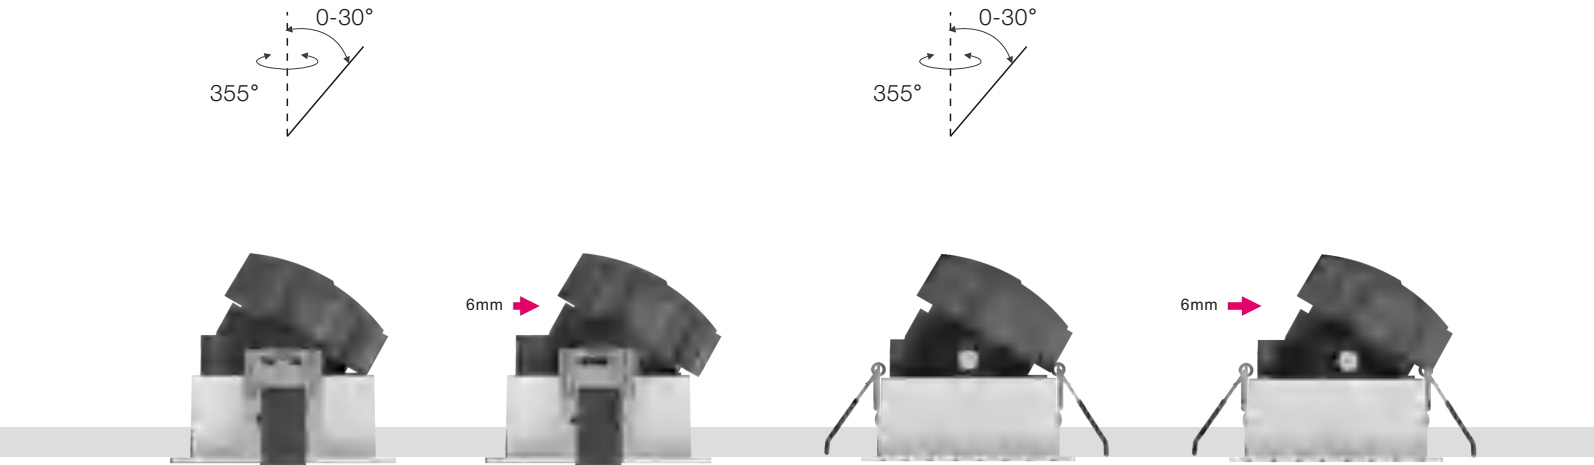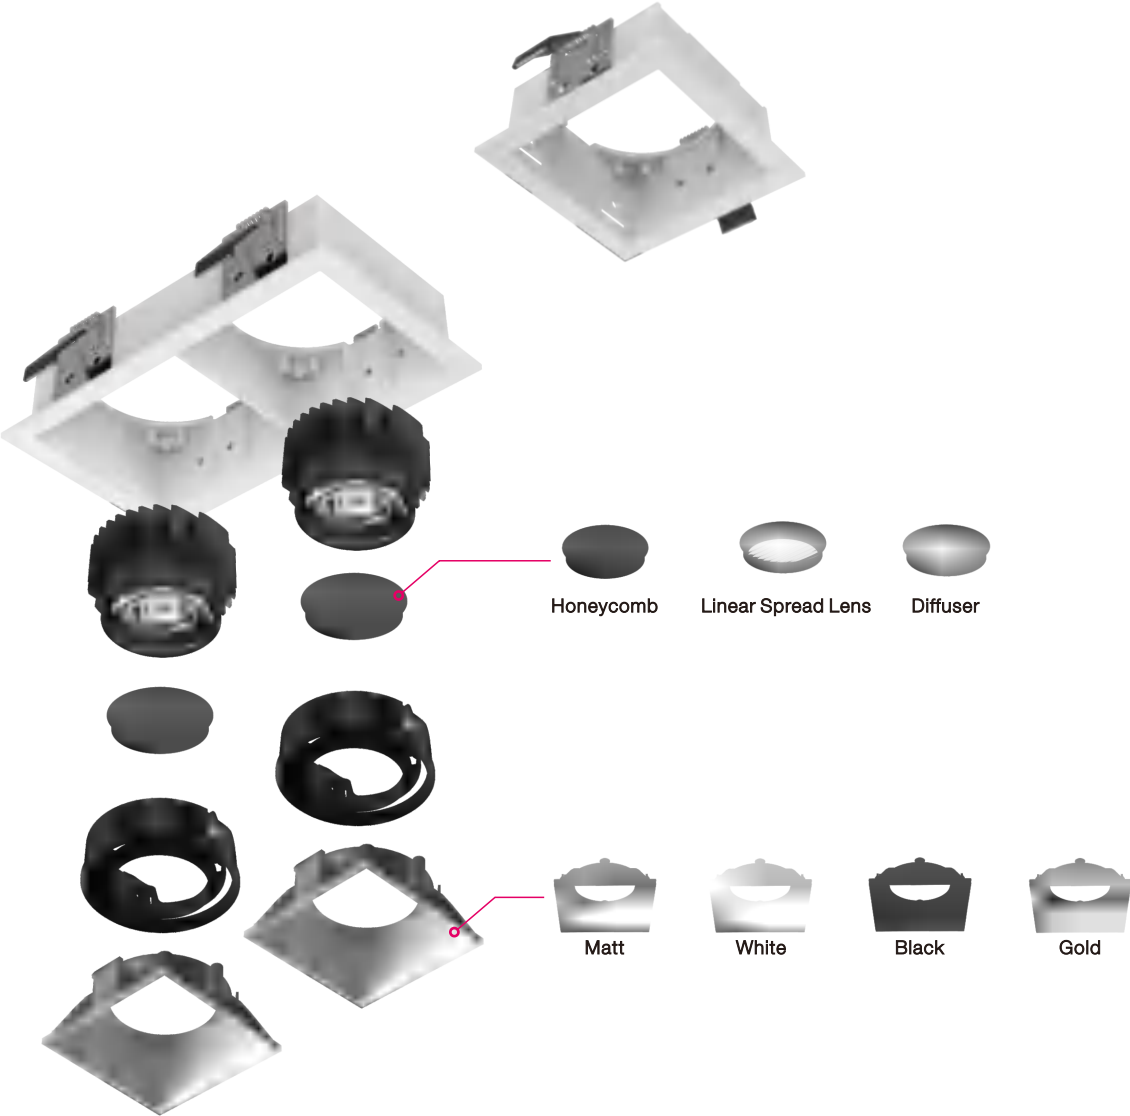


TSA1





TSA1D



75X75

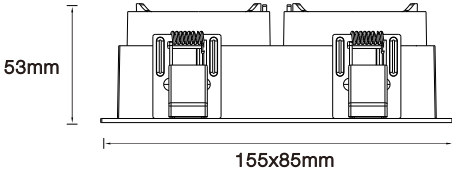


145X75

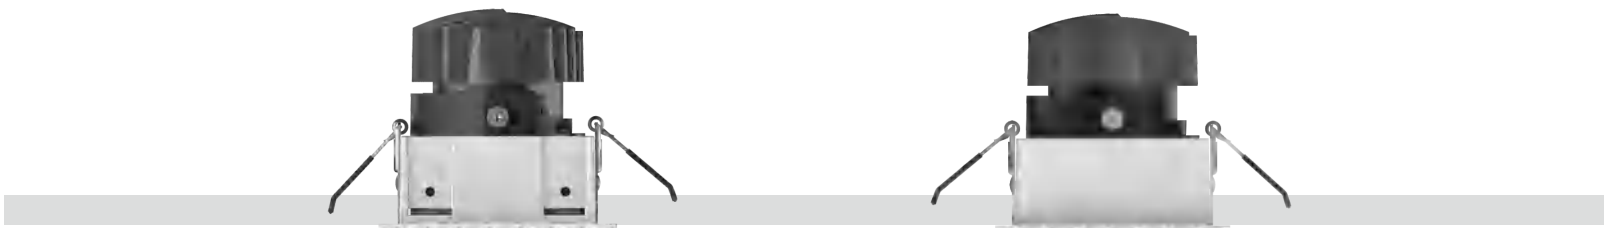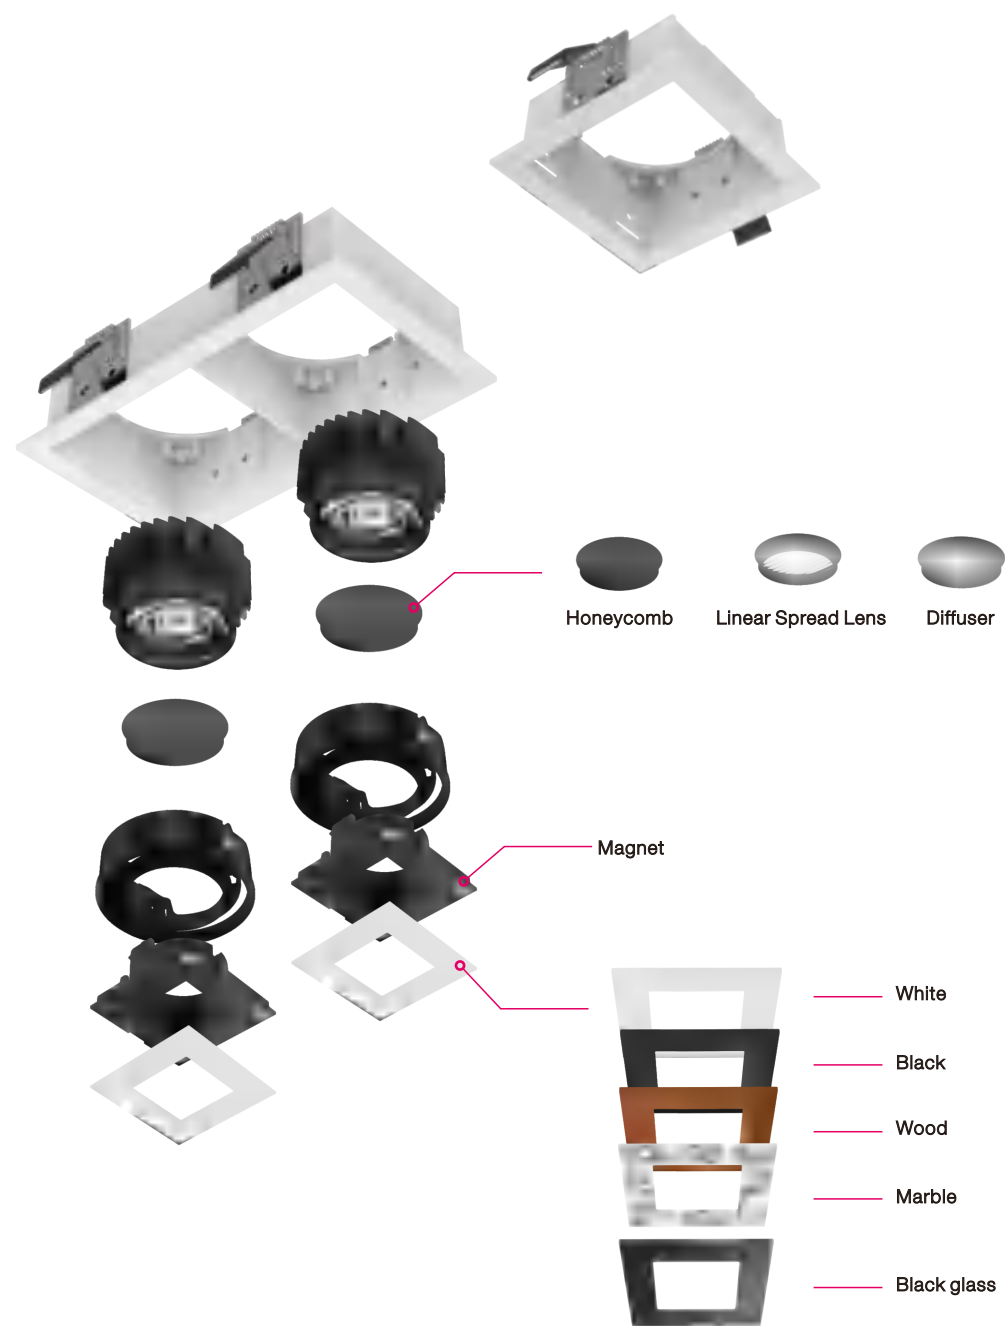


TSA2





TSA2D



75X75

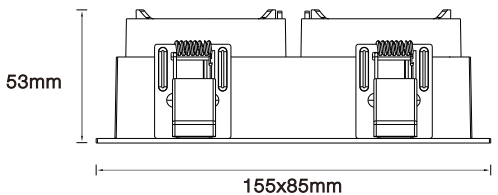


145X75

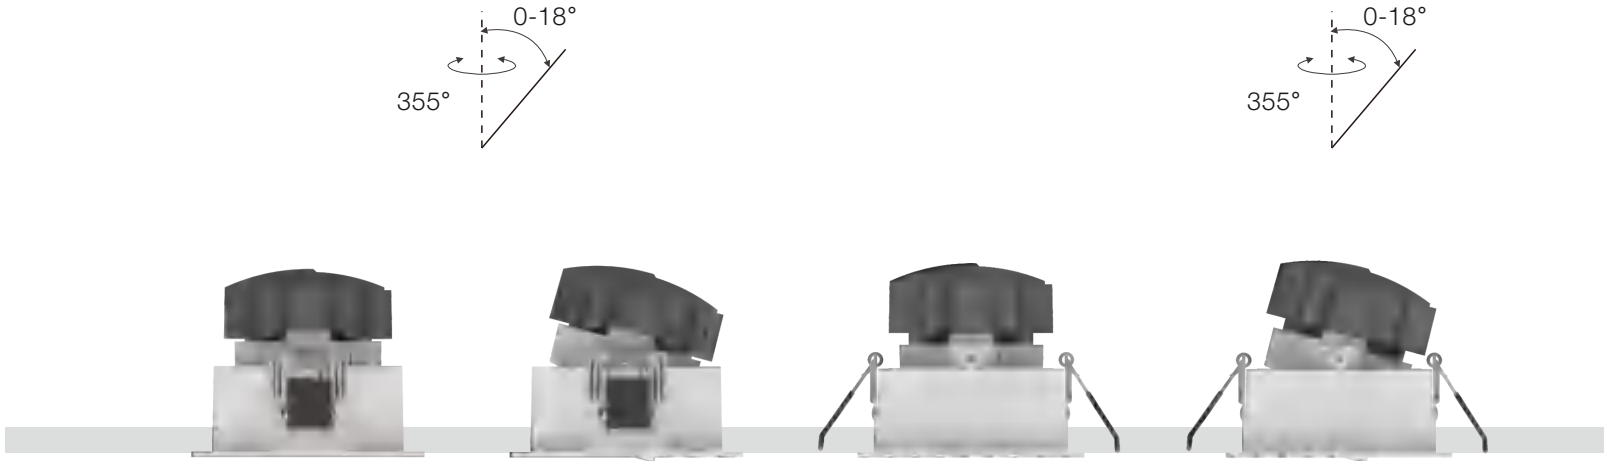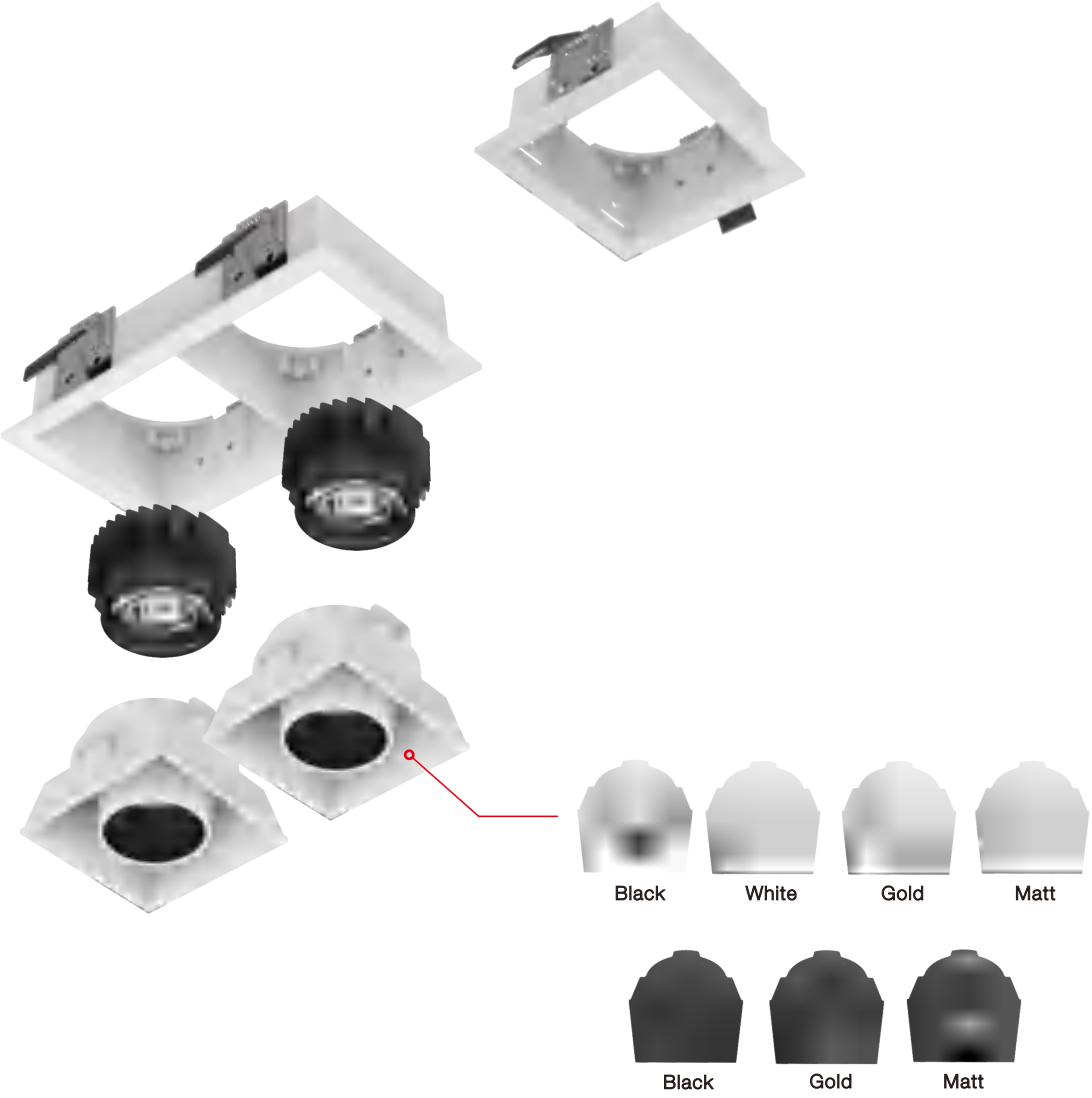


TSA3



TSA3D



75X75

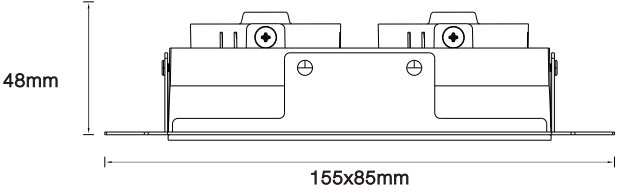

145X75

NEKO / CLUB
Trim Series

TA5



M3-TA5



M4-TA5

TA6



M3-TA6




M4-TA6

TA7



M3-TA7



M4-TA7

TA8



M3-TA8



M4-TA8

KA5-EI



M3-KA5-EI




M4-KA5-EI

KA6-EI



M3-KA6-EI



M4-KA6-EI

KA7-EI



M3-KA7-EI



M4-KA7-EI

KA8-EI




M3-KA8-EI



M4-KA8-EI

KA5



M3-KA5



M4-KA5

KA6



M3-KA6



M4-KA6

KA7



M3-KA7



M4-KA7

KA8





M3-KA8





M4-KA8

NEKO / CLUB
Trim Series



TRF1/ TRF1-IP44 **! NEW**






KRF1-EI/ KRF1-EI-IP44 **! NEW**






KRF1/ KRF1-IP44 **! NEW**





TSA1






KSA1-EI





KSA1






TSA2




KSA2-EI





KSA2





TSA3



KSA3-EI




KSA3




NEKO / CLUB
Trim Series


TSA1D

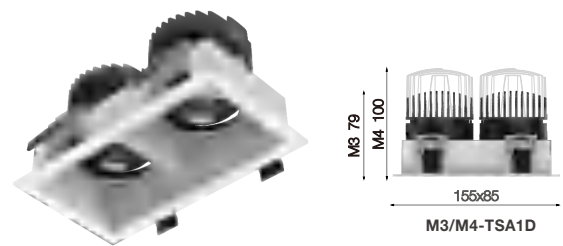


TSA2D

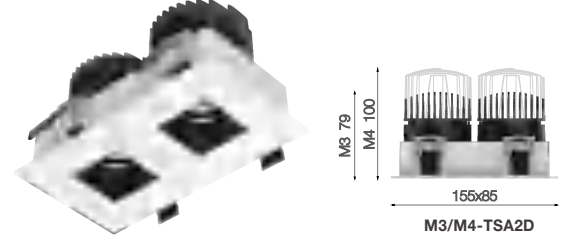


TSA3D

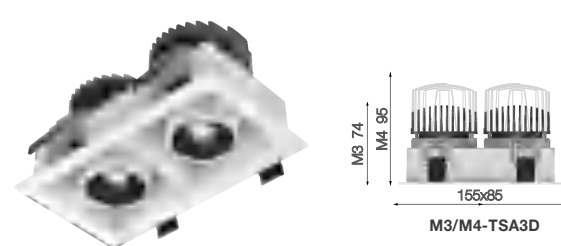


KSA1D-EI

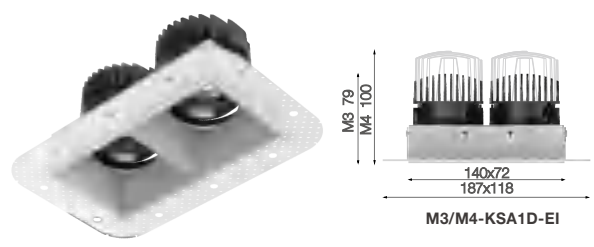


KSA2D-EI

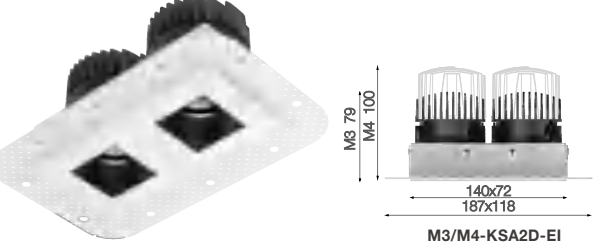


KSA2D-EI

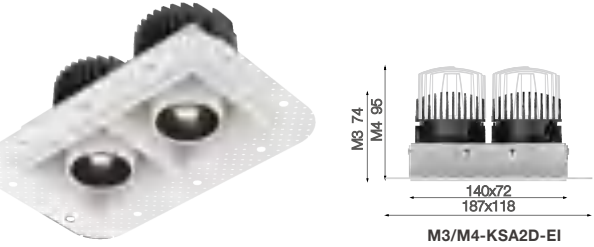


KSA1D **! NEW**

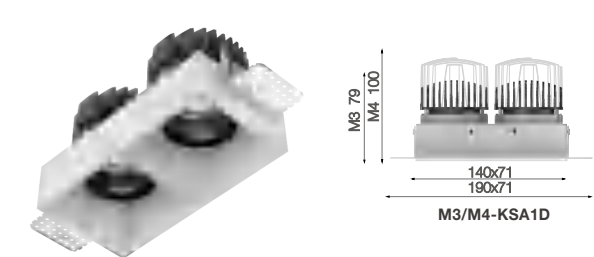

KSA2D **! NEW**

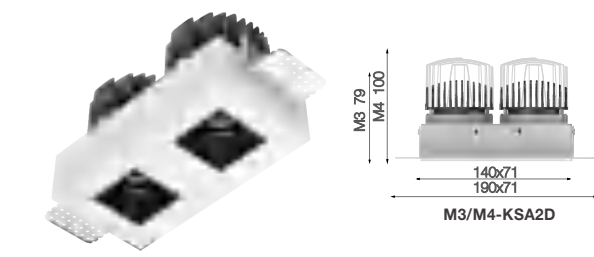

KSA3D **! NEW**

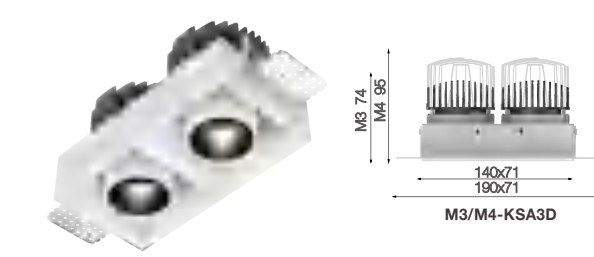



Classic
SKYJACK A68 SJA1-9W



Recessed Architectural
SKYJACK D SJD-9W



IP65
SKYJACK F SJF-9W



Shop & Corridors
SKYJACK A145 SJA2-25W

NEKO / SKYJACK A68

LED Downlight

Incl. Phase Dim Driver & Fast Connection Junction Box



9W	CRI90	2700K 3000K	38°	±30° Tilttable	bridgelux 50,000h@L80B10	IP44	5 GUARANTEED	CE
----	-------	----------------	-----	-------------------	-----------------------------	------	-----------------	----




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K 38°	3000K 38°	900lm 950lm	720lm 750lm	SJA1-9273809P-WW SJA1-9303809P-WW

Code Remark: P=(Phase Dim)


9 W	11 W	18 V	500 mA	90	2700K 38°	3000K 38°	900lm 950lm	720lm 750lm	SJA1-9273809P-BB SJA1-9303809P-BB
-----	------	------	--------	----	-----------	-----------	----------------	----------------	--------------------------------------

Code Remark: P=(Phase Dim)

Light Distribution

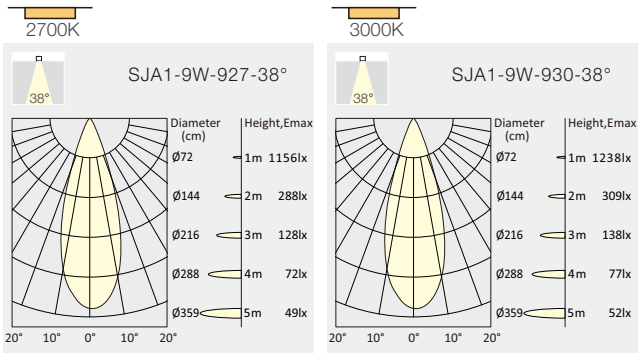

6W	CRI90	1800K-3000K Dim to Warm	38°	±30° Tilttable	bridgelux 50,000h@L80B10	IP44	5 GUARANTEED	CE
----	-------	----------------------------	-----	-------------------	-----------------------------	------	-----------------	----




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	18 V	350 mA	90	1800K-3000K 38°		650lm	Max.450lm	SJA1-9D33806P-WW

Code Remark: P=(Phase Dim)

6 W	8 W	18 V	350 mA	90	1800K-3000K 38°		650lm	Max.450lm	SJA1-9D33806P-BB
-----	-----	------	--------	----	-----------------	--	-------	-----------	------------------

Code Remark: P=(Phase Dim)

Light Distribution

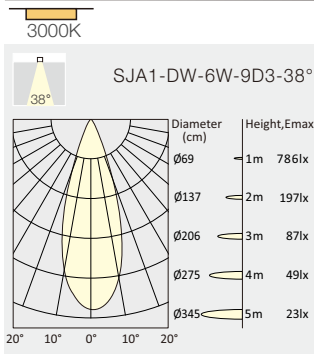

DIM to WARM

1800K

2700K

3000K





NEKO / SKYJACK D

LED Downlight

Incl. Phase Dim Driver & Fast Connection Junction Box



9W	CRI90	2700K 3000K	38° ±30° Tilttable	bridgelux 50,000h@L80B10	UGR < 19	IP44	5 GUARANTEE	CE			
----	-------	----------------	--------------------------	-----------------------------	-------------	------	----------------	----	--	--	--


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K 38° 3000K 38°	900lm	900lm 950lm	700lm 750lm	SJD-9273809P-WW SJD-9303809P-WW

Code Remark: P=(Phase Dim)


9 W	11 W	18 V	500 mA	90	2700K 38° 3000K 38°	900lm	650lm 700lm	SJD-9273809P-BB SJD-9303809P-BB
-----	------	------	--------	----	------------------------	-------	----------------	------------------------------------

Code Remark: P=(Phase Dim)

Light Distribution

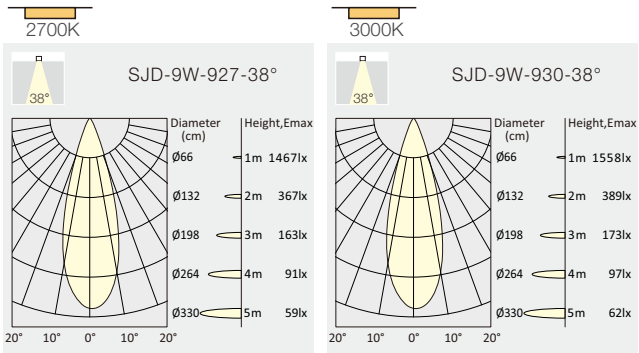

6W	CRI90	1800K-3000K Dim to Warm	38° ±30° Tilttable	bridgelux 50,000h@L80B10	IP44	5 GUARANTEE	CE
----	-------	----------------------------	--------------------------	-----------------------------	------	----------------	----




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	18 V	350 mA	90	1800K-3000K 38°	650lm	650lm	Max.450lm	SJD-9D33806P-WW

Code Remark: P=(Phase Dim)

6 W	8 W	18 V	350 mA	90	1800K-3000K 38°	650lm	Max.400lm	SJD-9D33806P-BB
-----	-----	------	--------	----	-----------------	-------	-----------	-----------------

Code Remark: P=(Phase Dim)

Light Distribution

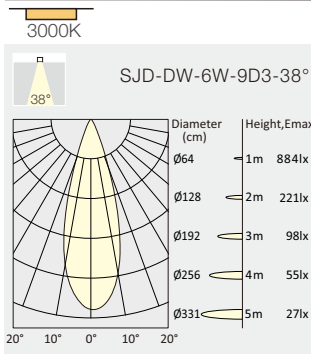


DIM to WARM

1800K 2700K 3000K



NEKO / SKYJACK F
LED Downlight
Incl. Phase Dim Driver & Fast Connection Junction Box



9W

CRI90

2700K
3000K

38°

bridgelux
50,000h@L80B10

IP65
PROOF

5 YEAR
GUARANTEE

CE




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K 38°	38°	900lm	720lm	SJF-9273809P-WW
					3000K 38°		950lm	750lm	SJF-9303809P-WW

Code Remark: P=(Phase Dim)


9 W	11 W	18 V	500 mA	90	2700K 38°	38°	900lm	720lm	SJF-9273809P-BB
					3000K 38°		950lm	750lm	SJF-9303809P-BB

Code Remark: P=(Phase Dim)

Light Distribution

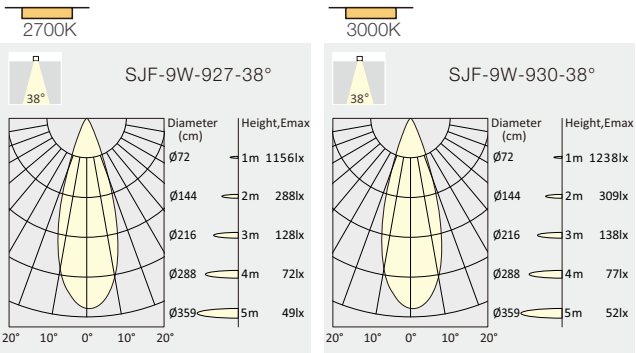

NEKO / SKYJACK A145
LED Downlight

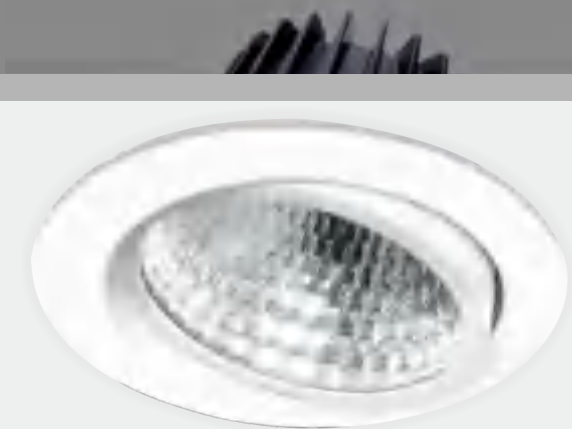

25W	CRI90	3000K	30°	±30° Tilttable	bridgelux 50,000h0L80B10	UGR < 19	IP20	5 GUARANTEED	CE		
-----	-------	-------	-----	-------------------	-----------------------------	-------------	------	-----------------	----	--	--


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	3000K	30°	2500lm	2200lm	SJA2-9303025N-WW

Code Remark N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

25 W	28 W	36 V	700 mA	90	3000K	30°	2500lm	2200lm	SJA2-9303025N-BB
------	------	------	--------	----	-------	-----	--------	--------	------------------

Code Remark N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Light Distribution

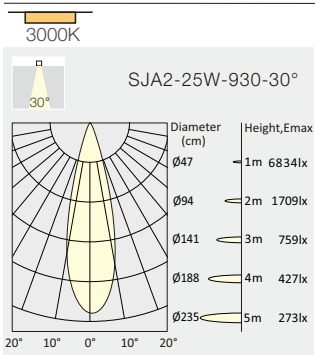



K1X30



K1X55



K1X70



NEKO / KENZO / K1X30
Adjustable LED Spotlight



Black Decoration Ring



White Decoration Ring



Gold Decoration Ring

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	12 V	350 mA	90	2700K	15°	350lm	300lm	K1S-9271504N-WB
						30°	350lm	300lm	K1S-9273004N-WB
						55°	350lm	300lm	K1S-9275504N-WB
					3000K	15°	400lm	320lm	K1S-9301504N-WB
						30°	400lm	320lm	K1S-9303004N-WB
						55°	400lm	320lm	K1S-9305504N-WB
					4000K	15°	450lm	350lm	K1S-9401504N-WB
						30°	450lm	350lm	K1S-9403004N-WB
						55°	450lm	350lm	K1S-9405504N-WB
					2700K	15°	350lm	300lm	K1S-9271504N-WW
						30°	350lm	300lm	K1S-9273004N-WW
						55°	350lm	300lm	K1S-9275504N-WW
					3000K	15°	400lm	320lm	K1S-9301504N-WW
						30°	400lm	320lm	K1S-9303004N-WW
						55°	400lm	320lm	K1S-9305504N-WW
					4000K	15°	450lm	350lm	K1S-9401504N-WW
						30°	450lm	350lm	K1S-9403004N-WW
						55°	450lm	350lm	K1S-9405504N-WW
4 W	6 W	12 V	350 mA	90	2700K	15°	350lm	300lm	K1S-9271504N-WG
						30°	350lm	300lm	K1S-9273004N-WG
						55°	350lm	300lm	K1S-9275504N-WG
					3000K	15°	400lm	320lm	K1S-9301504N-WG
						30°	400lm	320lm	K1S-9303004N-WG
						55°	400lm	320lm	K1S-9305504N-WG
					4000K	15°	450lm	350lm	K1S-9401504N-WG
						30°	450lm	350lm	K1S-9403004N-WG
						55°	450lm	350lm	K1S-9405504N-WG

Code Remark: N=N(No Driver) F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / KENZO / K1X55
Adjustable LED Spotlight



Black Decoration Ring



White Decoration Ring



Gold Decoration Ring

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	260 mA	90	2700K	18°	850lm	700lm	K1M-9271809N-WB
						24°	850lm	700lm	K1M-9272409N-WB
						36°	850lm	700lm	K1M-9273609N-WB
					3000K	18°	950lm	720lm	K1M-9301809N-WB
						24°	950lm	720lm	K1M-9302409N-WB
						36°	950lm	720lm	K1M-9303609N-WB
					4000K	18°	1050lm	800lm	K1M-9401809N-WB
						24°	1050lm	800lm	K1M-9402409N-WB
						36°	1050lm	800lm	K1M-9403609N-WB
9 W	11 W	36 V	260 mA	90	2700K	18°	850lm	700lm	K1M-9271809N-WW
						24°	850lm	700lm	K1M-9272409N-WW
						36°	850lm	700lm	K1M-9273609N-WW
					3000K	18°	950lm	720lm	K1M-9301809N-WW
						24°	950lm	720lm	K1M-9302409N-WW
						36°	950lm	720lm	K1M-9303609N-WW
					4000K	18°	1050lm	800lm	K1M-9401809N-WW
						24°	1050lm	800lm	K1M-9402409N-WW
						36°	1050lm	800lm	K1M-9403609N-WW
9 W	11 W	36 V	260 mA	90	2700K	18°	850lm	700lm	K1M-9271809N-WG
						24°	850lm	700lm	K1M-9272409N-WG
						36°	850lm	700lm	K1M-9273609N-WG
					3000K	18°	950lm	720lm	K1M-9301809N-WG
						24°	950lm	720lm	K1M-9302409N-WG
						36°	950lm	720lm	K1M-9303609N-WG
					4000K	18°	1050lm	800lm	K1M-9401809N-WG
						24°	1050lm	800lm	K1M-9402409N-WG
						36°	1050lm	800lm	K1M-9403609N-WG

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Optional accessory



Code for K1M-9402409N-WG with Honeycomb
K1M-9402409N-WG -H

Honeycomb

NEKO / KENZO / K1X70
Adjustable LED Spotlight



13W
18W

CRI90
CRI80

2700K
3000K
4000K

15°

25°

30°

CITIZEN

50,000h@L80B10

UGR
< 19


IP20

5

GUARANTEED

CB

CE



Black Decoration Ring

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code					
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	K1L1-9271513N-WB						
						25°	1400lm	1100lm	K1L1-9272513N-WB						
						30°	1400lm	1100lm	K1L1-9273013N-WB						
						3000K	15°	1500lm	1200lm	K1L1-9301513N-WB					
							25°	1500lm	1200lm	K1L1-9302513N-WB					
							30°	1500lm	1200lm	K1L1-9303013N-WB					
						4000K	15°	1600lm	1300lm	K1L1-9401513N-WB					
							25°	1600lm	1300lm	K1L1-9402513N-WB					
							30°	1600lm	1300lm	K1L1-9403013N-WB					
						18 W	21 W	36 V	500 mA	90	2700K	15°	1800lm	1500lm	K1L2-9271518N-WB
												25°	1800lm	1500lm	K1L2-9272518N-WB
												30°	1800lm	1500lm	K1L2-9273018N-WB
3000K	15°	2000lm	1600lm	K1L2-9301518N-WB											
	25°	2000lm	1600lm	K1L2-9302518N-WB											
	30°	2000lm	1600lm	K1L2-9303018N-WB											
4000K	15°	2200lm	1700lm	K1L2-9401518N-WB											
	25°	2200lm	1700lm	K1L2-9402518N-WB											
	30°	2200lm	1700lm	K1L2-9403018N-WB											

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



White Decoration Ring



Gold Decoration Ring

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code					
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	K1L1-9271513N-WW						
						25°	1400lm	1100lm	K1L1-9272513N-WW						
						30°	1400lm	1100lm	K1L1-9273013N-WW						
						3000K	15°	1500lm	1200lm	K1L1-9301513N-WW					
							25°	1500lm	1200lm	K1L1-9302513N-WW					
							30°	1500lm	1200lm	K1L1-9303013N-WW					
						4000K	15°	1600lm	1300lm	K1L1-9401513N-WW					
							25°	1600lm	1300lm	K1L1-9402513N-WW					
							30°	1600lm	1300lm	K1L1-9403013N-WW					
						18 W	21 W	36 V	500 mA	90	2700K	15°	1800lm	1500lm	K1L2-9271518N-WW
												25°	1800lm	1500lm	K1L2-9272518N-WW
												30°	1800lm	1500lm	K1L2-9273018N-WW
3000K	15°	2000lm	1600lm	K1L2-9301518N-WW											
	25°	2000lm	1600lm	K1L2-9302518N-WW											
	30°	2000lm	1600lm	K1L2-9303018N-WW											
4000K	15°	2200lm	1700lm	K1L2-9401518N-WW											
	25°	2200lm	1700lm	K1L2-9402518N-WW											
	30°	2200lm	1700lm	K1L2-9403018N-WW											

13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	K1L1-9271513N-WG
						25°	1400lm	1100lm	K1L1-9272513N-WG
						30°	1400lm	1100lm	K1L1-9273013N-WG
					3000K	15°	1500lm	1200lm	K1L1-9301513N-WG
						25°	1500lm	1200lm	K1L1-9302513N-WG
						30°	1500lm	1200lm	K1L1-9303013N-WG
					4000K	15°	1600lm	1300lm	K1L1-9401513N-WG
						25°	1600lm	1300lm	K1L1-9402513N-WG
						30°	1600lm	1300lm	K1L1-9403013N-WG
18 W	21 W	36 V	500 mA	90	2700K	15°	1800lm	1500lm	K1L2-9271518N-WG
						25°	1800lm	1500lm	K1L2-9272518N-WG
						30°	1800lm	1500lm	K1L2-9273018N-WG
					3000K	15°	2000lm	1600lm	K1L2-9301518N-WG
						25°	2000lm	1600lm	K1L2-9302518N-WG
						30°	2000lm	1600lm	K1L2-9303018N-WG
					4000K	15°	2200lm	1700lm	K1L2-9401518N-WG
						25°	2200lm	1700lm	K1L2-9402518N-WG
						30°	2200lm	1700lm	K1L2-9403018N-WG

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



Optional accessory



Code for K1L2-9403018N-WG with Honeycomb
K1L2-9403018N-WG-H

Honeycomb

Project: Bvlgari Hotel, Shanghai, China

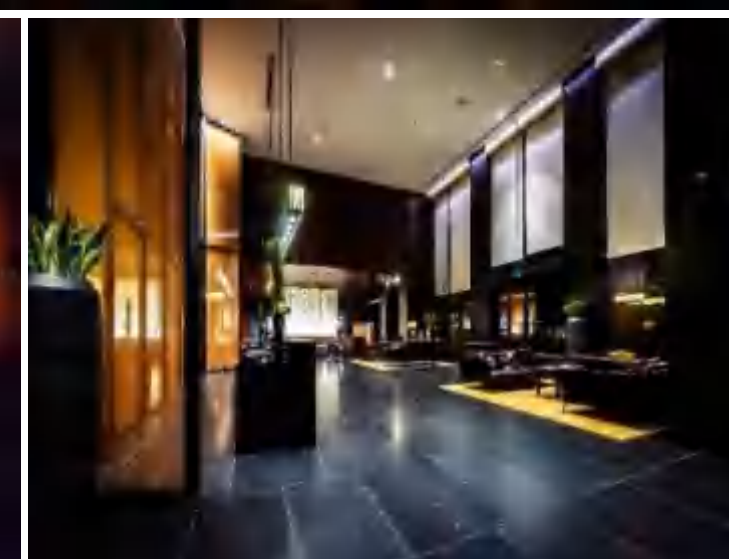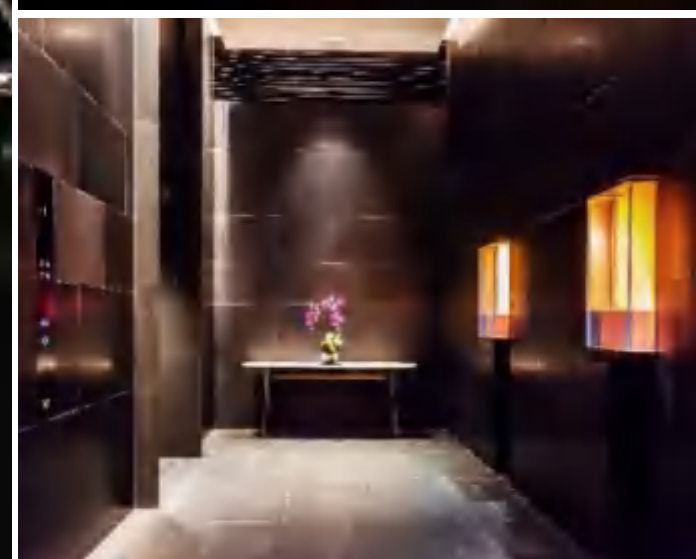



NEKO / FUSION

- Hohe Lichtplanungsflexibilität mit verschiedenen Grössen von Lichtmodulen
 - Schmale LED-Downlights für reinen Minimalismus
 - Bester Blendschutz mit hoher Leistung und gutem Sehkomfort
 - Fix und schwenkbar, Wall Washer, Allgemeinbeleuchtung, Spot und rahmenlose Version verfügbar
 - 5 Jahre Garantie
-
- Create a circle of light from a line of LED Downlights
 - A narrow line of nano LED Downlights for pure minimalism
 - Superior glare control for high performance and visual comfort
 - Fixed, Adjustable, Wall Washer, General light, Spotlight and trimless versions for choice
 - Five-year guarantee



Fixed







Adjustable

Wall Washer


General Light

Spotlight

Trimless



FW5 / 5 LED / 11W / 600 lm

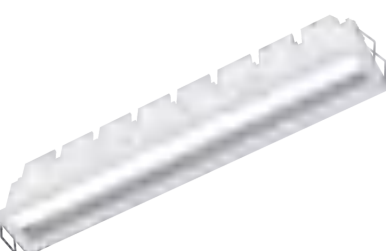


FW10 / 10 LED / 22W / 1200 lm




FWT5 / 5 LED / 11W / 600 lm




FWT10 / 10 LED / 22W / 1200 lm




FG5 / 5 LED / 11W / 400 lm

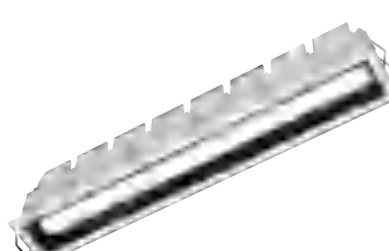

FG10 / 10 LED / 22W / 950 lm

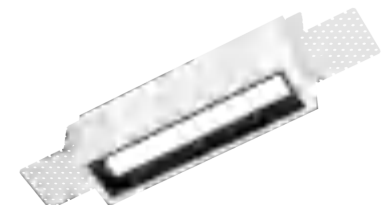

FGT5 / 5 LED / 11W / 400 lm

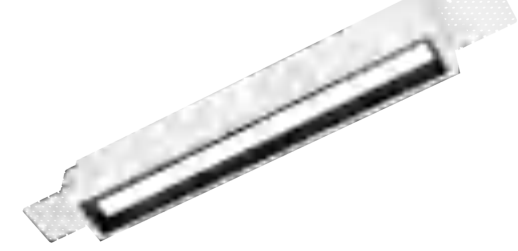

FGT10 / 10 LED / 22W / 950 lm




FS1 / 1 LED / 2W / 170 lm



FS2 / 2 LED / 4W / 350 lm



FS3 / 3 LED / 7W / 550 lm




FS6 / 6 LED / 14W / 1050 lm



FF3-FS1 / 4 LED / 9W / 700 lm



FF6-FS2 / 8 LED / 18W / 1400 lm



FST3 / 3 LED / 7W / 550 lm



FST6 / 6 LED / 14W / 1050 lm




FFT3-FST1 / 4 LED / 9W / 700 lm




FFT6-FST2 / 8 LED / 18W / 1400 lm

Secondary Reflector




Black




Specular

Beam





Medium 24°




Wide 40°




Black Reflector



Specular Reflector





Secondary Reflector





Black Specular


Beam



Medium 24° Wide 40°

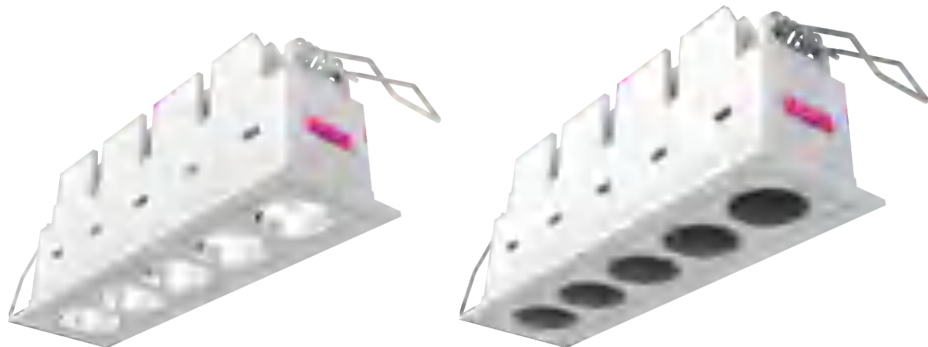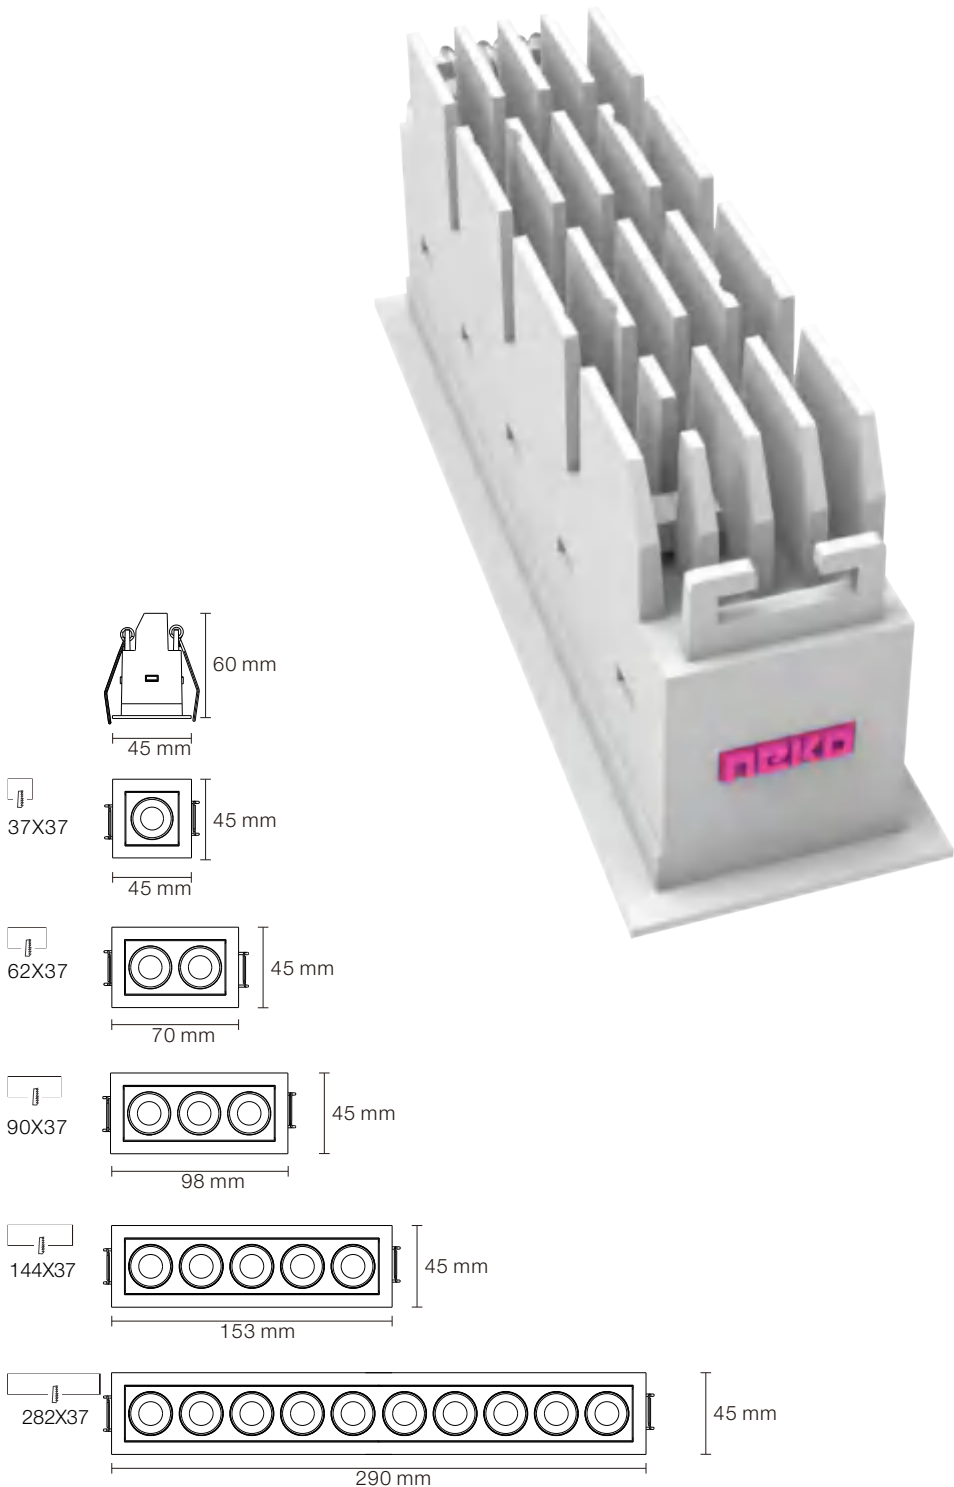

NEKO / FUSION / FF1
Fixed LED Downlight



Project: Muyang Museum, China

2W

CR190
CRI80

2700K
3000K
4000K

24°
40°

OSRAM
50,000h@L80B10

UGR
< 10

IP 20

5


YEARS
GUARANTEE

CB

CE

ETL

Intertek



	LED Power		System Power		LED Voltage		LED Current		CRI	CCT	Beam	LED Output		System Output		Code
	2 W	3 W	3 W	3 W	3 V	3 V	700 mA	700 mA				24°	40°	220lm	160lm	
 Black Reflector									80	2700K	24°	220lm	220lm	160lm	160lm	FF1-8272402N-WB
												40°	220lm	160lm	160lm	FF1-8274002N-WB
											3000K	24°	250lm	170lm	170lm	FF1-8302402N-WB
												40°	250lm	170lm	170lm	FF1-8304002N-WB
											4000K	24°	280lm	180lm	180lm	FF1-8402402N-WB
												40°	280lm	180lm	180lm	FF1-8404002N-WB
 Black Reflector									80	2700K	24°	220lm	220lm	160lm	160lm	FF1-8272402N-BB
												40°	220lm	160lm	160lm	FF1-8274002N-BB
											3000K	24°	250lm	170lm	170lm	FF1-8302402N-BB
												40°	250lm	170lm	170lm	FF1-8304002N-BB
											4000K	24°	280lm	180lm	180lm	FF1-8402402N-BB
												40°	280lm	180lm	180lm	FF1-8404002N-BB
 Specular Reflector									80	2700K	24°	220lm	220lm	180lm	180lm	FF1-8272402N-WS
												40°	220lm	180lm	180lm	FF1-8274002N-WS
											3000K	24°	250lm	200lm	200lm	FF1-8302402N-WS
												40°	250lm	200lm	200lm	FF1-8304002N-WS
											4000K	24°	280lm	220lm	220lm	FF1-8402402N-WS
												40°	280lm	220lm	220lm	FF1-8404002N-WS
 Specular Reflector									80	2700K	24°	220lm	220lm	180lm	180lm	FF1-8272402N-BS
												40°	220lm	180lm	180lm	FF1-8274002N-BS
											3000K	24°	250lm	200lm	200lm	FF1-8302402N-BS
												40°	250lm	200lm	200lm	FF1-8304002N-BS
											4000K	24°	280lm	220lm	220lm	FF1-8402402N-BS
												40°	280lm	220lm	220lm	FF1-8404002N-BS

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)



NEKO / FUSION / FF2
Fixed LED Downlight



Project: Bvlgari Hotel, Shanghai, China

4W

CRI90
CRI80

2700K
3000K
4000K

24°
40°

OSRAM
50,000h@L80B10

UGR
< 10

IP20

5

YEARS

GUARANTEE

CB

CE

ETL

us

Intertek

62x37

1-25mm

Ceiling Thickness

60

70x45



Black Reflector



Black Reflector



Specular Reflector



Specular Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code					
4 W	6 W	6 V	700 mA	80	2700K	24°	450lm	330lm	FF2-8272404N-WB						
						40°	450lm	330lm	FF2-8274004N-WB						
						3000K	24°	500lm	350lm	FF2-8302404N-WB					
							40°	500lm	350lm	FF2-8304004N-WB					
						4000K	24°	550lm	380lm	FF2-8402404N-WB					
							40°	550lm	380lm	FF2-8404004N-WB					

						4 W	6 W	6 V	700 mA	80	2700K	24°	450lm	330lm	FF2-8272404N-BB
40°	450lm	330lm	FF2-8274004N-BB												
3000K	24°	500lm	350lm	FF2-8302404N-BB											
	40°	500lm	350lm	FF2-8304004N-BB											
4000K	24°	550lm	380lm	FF2-8402404N-BB											
	40°	550lm	380lm	FF2-8404004N-BB											

4 W	6 W	6 V	700 mA	80	2700K							24°	450lm	380lm	FF2-8272404N-WS
						40°	450lm	380lm	FF2-8274004N-WS						
						3000K	24°	500lm	400lm	FF2-8302404N-WS					
							40°	500lm	400lm	FF2-8304004N-WS					
						4000K	24°	550lm	440lm	FF2-8402404N-WS					
							40°	550lm	440lm	FF2-8404004N-WS					

						4 W	6 W	6 V	700 mA	80	2700K	24°	450lm	380lm	FF2-8272404N-BS
40°	450lm	380lm	FF2-8274004N-BS												
3000K	24°	500lm	400lm	FF2-8302404N-BS											
	40°	500lm	400lm	FF2-8304004N-BS											
4000K	24°	550lm	440lm	FF2-8402404N-BS											
	40°	550lm	440lm	FF2-8404004N-BS											

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)




NEKO / FUSION / FF3
Fixed LED Downlight



Project: Hallunda Station, Sweden

7W	CRI90 CRI80	2700K 3000K 4000K	24° 40°	OSRAM 50,000h@L80B10	UGR < 10	IP20	5 YEARS GUARANTEE	CB	CE	ETL Intertek
----	----------------	-------------------------	------------	-------------------------	-------------	------	-------------------------	----	----	-----------------




Black Reflector



Black Reflector



Specular Reflector



Specular Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	9 V	700 mA	80	2700K	24°	700lm	500lm	FF3-8272407N-WB	
						40°	700lm	500lm	FF3-8274007N-WB	
					3000K	24°	750lm	550lm	FF3-8302407N-WB	
						40°	750lm	550lm	FF3-8304007N-WB	
					4000K	24°	800lm	600lm	FF3-8402407N-WB	
						40°	800lm	600lm	FF3-8404007N-WB	
7 W	9 W	9 V	700 mA	80	2700K	24°	700lm	500lm	FF3-8272407N-BB	
						40°	700lm	500lm	FF3-8274007N-BB	
					3000K	24°	750lm	550lm	FF3-8302407N-BB	
						40°	750lm	550lm	FF3-8304007N-BB	
					4000K	24°	800lm	600lm	FF3-8402407N-BB	
						40°	800lm	600lm	FF3-8404007N-BB	
7 W	9 W	9 V	700 mA	80	2700K	24°	700lm	550lm	FF3-8272407N-WS	
						40°	700lm	550lm	FF3-8274007N-WS	
					3000K	24°	750lm	600lm	FF3-8302407N-WS	
						40°	750lm	600lm	FF3-8304007N-WS	
					4000K	24°	800lm	650lm	FF3-8402407N-WS	
						40°	800lm	650lm	FF3-8404007N-WS	
7 W	9 W	9 V	700 mA	80	2700K	24°	700lm	550lm	FF3-8272407N-BS	
						40°	700lm	550lm	FF3-8274007N-BS	
					3000K	24°	750lm	600lm	FF3-8302407N-BS	
						40°	750lm	600lm	FF3-8304007N-BS	
					4000K	24°	800lm	650lm	FF3-8402407N-BS	
						40°	800lm	650lm	FF3-8404007N-BS	


Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)




NEKO / FUSION / **FX4**
Fixed LED Downlight



9W	CRI90 CRI80	2700K 3000K 4000K	24° 40°	OSRAM 50,000h@L80B10	UGR < 10	IP 20		CB	CE	
----	----------------	-------------------------	------------	--------------------------------	-------------	-------	--	----	----	--




Black Reflector



Black Reflector



Specular Reflector



Specular Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	12 V	700 mA	80	2700K	24°	850lm	670lm	FX4-8272409N-WB	
						40°	850lm	670lm	FX4-8274009N-WB	
					3000K	24°	900lm	700lm	FX4-8302409N-WB	
						40°	900lm	700lm	FX4-8304009N-WB	
					4000K	24°	1000lm	750lm	FX4-8402409N-WB	
						40°	1000lm	750lm	FX4-8404009N-WB	
9 W	11 W	12 V	700 mA	80	2700K	24°	850lm	670lm	FX4-8272409N-BB	
						40°	850lm	670lm	FX4-8274009N-BB	
					3000K	24°	900lm	700lm	FX4-8302409N-BB	
						40°	900lm	700lm	FX4-8304009N-BB	
					4000K	24°	1000lm	750lm	FX4-8402409N-BB	
						40°	1000lm	750lm	FX4-8404009N-BB	
9 W	11 W	12 V	700 mA	80	2700K	24°	850lm	700lm	FX4-8272409N-WS	
						40°	850lm	700lm	FX4-8274009N-WS	
					3000K	24°	900lm	750lm	FX4-8302409N-WS	
						40°	900lm	750lm	FX4-8304009N-WS	
					4000K	24°	1000lm	800lm	FX4-8402409N-WS	
						40°	1000lm	800lm	FX4-8404009N-WS	
9 W	11 W	12 V	700 mA	80	2700K	24°	850lm	700lm	FX4-8272409N-BS	
						40°	850lm	700lm	FX4-8274009N-BS	
					3000K	24°	900lm	750lm	FX4-8302409N-BS	
						40°	900lm	750lm	FX4-8304009N-BS	
					4000K	24°	1000lm	800lm	FX4-8402409N-BS	
						40°	1000lm	800lm	FX4-8404009N-BS	

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Project: Office Helsinki, Finland




NEKO / FUSION / FF5
Fixed LED Downlight



Project: World Health Organization Building, Philippines

11W	CRI90 CRI80	2700K 3000K 4000K	24° 40°	OSRAM 50,000h@L80B10	UGR < 10	IP 20	5 YEARS GUARANTEE	CB	CE	ETL Intertek
-----	----------------	-------------------------	------------	-------------------------	-------------	-------	-------------------------	----	----	-----------------



Black Reflector



Black Reflector



Specular Reflector



Specular Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	850lm	FF5-8272411N-WB	
						40°	1200lm	850lm	FF5-8274011N-WB	
						3000K	24°	1300lm	900lm	FF5-8302411N-WB
					40°	1300lm	900lm	FF5-8304011N-WB		
					4000K	24°	1400lm	950lm	FF5-8402411N-WB	
						40°	1400lm	950lm	FF5-8404011N-WB	
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	850lm	FF5-8272411N-BB	
						40°	1200lm	850lm	FF5-8274011N-BB	
						3000K	24°	1300lm	900lm	FF5-8302411N-BB
					40°	1300lm	900lm	FF5-8304011N-BB		
					4000K	24°	1400lm	950lm	FF5-8402411N-BB	
						40°	1400lm	950lm	FF5-8404011N-BB	
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	950lm	FF5-8272411N-WS	
						40°	1200lm	950lm	FF5-8274011N-WS	
						3000K	24°	1300lm	1000lm	FF5-8302411N-WS
					40°	1300lm	1000lm	FF5-8304011N-WS		
					4000K	24°	1400lm	1100lm	FF5-8402411N-WS	
						40°	1400lm	1100lm	FF5-8404011N-WS	
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	950lm	FF5-8272411N-BS	
						40°	1200lm	950lm	FF5-8274011N-BS	
						3000K	24°	1300lm	1000lm	FF5-8302411N-BS
					40°	1300lm	1000lm	FF5-8304011N-BS		
					4000K	24°	1400lm	1100lm	FF5-8402411N-BS	
						40°	1400lm	1100lm	FF5-8404011N-BS	





Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



NEKO / FUSION / FF10
Fixed LED Downlight



Project: Bvlgari Hotel, Shanghai, China

22W	CRI90 CRI80	2700K 3000K 4000K	24° 40°	OSRAM UGR 50,000h@L80B10 < 10	IP 20		CB	CE					
LED Power System Power LED Voltage LED Current CRI CCT Beam LED Output System Output Code													
 Black Reflector	22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	1600lm	FF10-8272422N-WB			
							40°	2400lm	1600lm	FF10-8274022N-WB			
							3000K	24°	2600lm	1800lm	FF10-8302422N-WB		
								40°	2600lm	1800lm	FF10-8304022N-WB		
							4000K	24°	2800lm	2000lm	FF10-8402422N-WB		
								40°	2800lm	2000lm	FF10-8404022N-WB		
 Black Reflector	22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	1600lm	FF10-8272422N-BB			
							40°	2400lm	1600lm	FF10-8274022N-BB			
							3000K	24°	2600lm	1800lm	FF10-8302422N-BB		
								40°	2600lm	1800lm	FF10-8304022N-BB		
							4000K	24°	2800lm	2000lm	FF10-8402422N-BB		
								40°	2800lm	2000lm	FF10-8404022N-BB		
 Specular Reflector	22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	2000lm	FF10-8272422N-WS			
							40°	2400lm	2000lm	FF10-8274022N-WS			
							3000K	24°	2600lm	2100lm	FF10-8302422N-WS		
								40°	2600lm	2100lm	FF10-8304022N-WS		
							4000K	24°	2800lm	2300lm	FF10-8402422N-WS		
								40°	2800lm	2300lm	FF10-8404022N-WS		
 Specular Reflector	22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	2000lm	FF10-8272422N-BS			
							40°	2400lm	2000lm	FF10-8274022N-BS			
							3000K	24°	2600lm	2100lm	FF10-8302422N-BS		
								40°	2600lm	2100lm	FF10-8304022N-BS		
							4000K	24°	2800lm	2300lm	FF10-8402422N-BS		
								40°	2800lm	2300lm	FF10-8404022N-BS		

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



Black Reflector

Black Reflector




Black Reflector

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)


Black Reflector

Black Reflector



Black Reflector

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

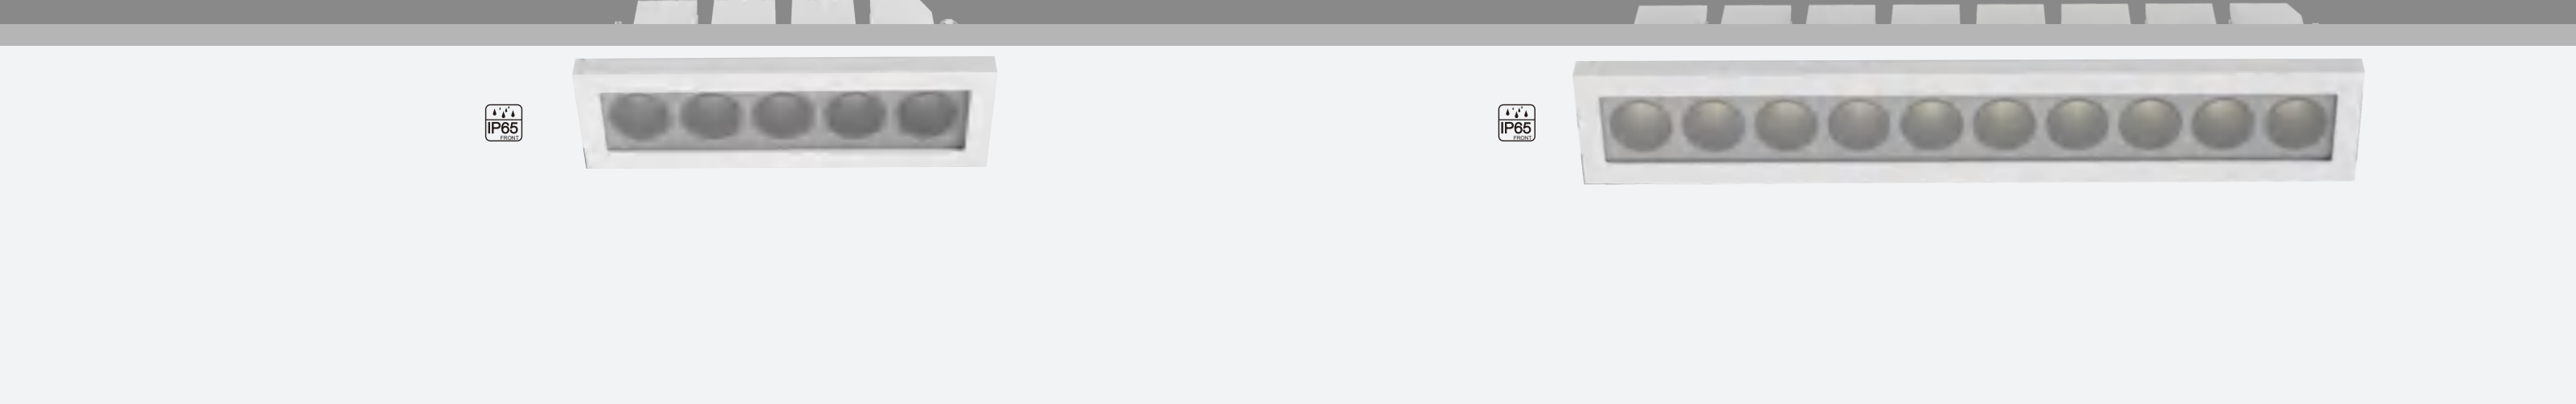

11W

CRI80
CRI90

2700K
3000K
4000K

35°

45°

OSRAM

50,000h@L80B10

UGR < 19

IP65

5

GUARANTEED

CB

CE

ETL

us

Intertek


148x37

1-25mm


Ceiling Thickness

65

157x50




Black Reflector



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	35°	1200lm	650lm	FF5-8273511N-WB-IP	
						45°	1200lm	650lm	FF5-8274511N-WB-IP	
						3000K	35°	1300lm	685lm	FF5-8303511N-WB-IP
							45°	1300lm	685lm	FF5-8304511N-WB-IP
					4000K	35°	1400lm	750lm	FF5-8403511N-WB-IP	
						45°	1400lm	750lm	FF5-8404511N-WB-IP	
11 W	13 W	15 V	700 mA	80	2700K	35°	1200lm	650lm	FF5-8273511N-BB-IP	
						45°	1200lm	650lm	FF5-8274511N-BB-IP	
						3000K	35°	1300lm	685lm	FF5-8303511N-BB-IP
							45°	1300lm	685lm	FF5-8304511N-BB-IP
					4000K	35°	1400lm	750lm	FF5-8403511N-BB-IP	
						45°	1400lm	750lm	FF5-8404511N-BB-IP	

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

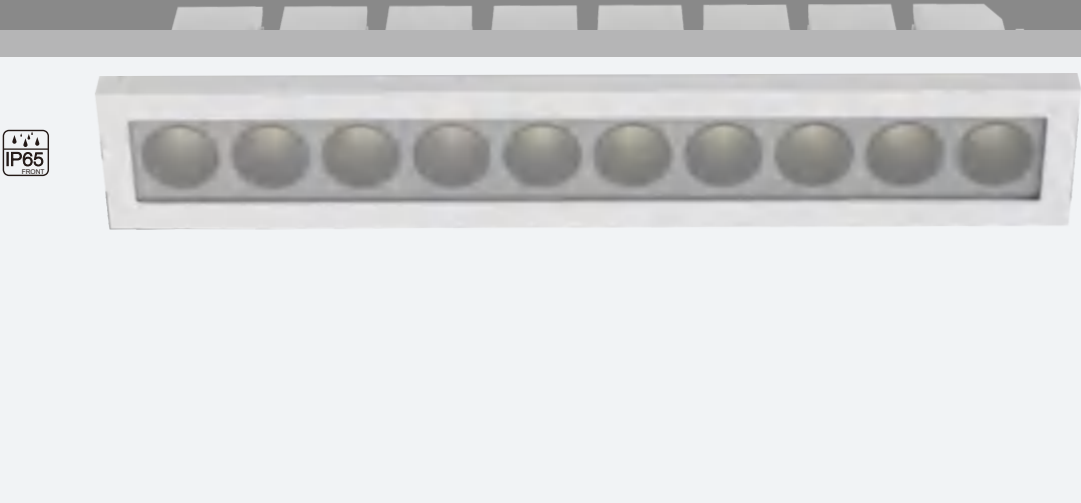

22W

CRI80
CRI90

2700K
3000K
4000K

35°

45°

OSRAM

50,000h@L80B10

UGR < 19

IP65

5

GUARANTEED

CB

CE

ETL

us

Intertek


286x37

1-25mm


Ceiling Thickness

65

294x50

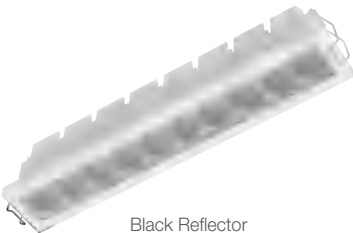

Black Reflector

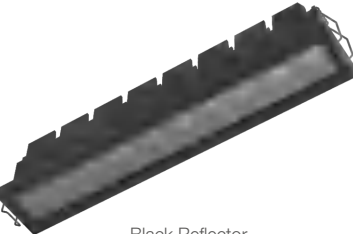


Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code			
22 W	24 W	30 V	700 mA	80	2700K	35°	2400lm	1250lm	FF10-8273522N-WB-IF				
						45°	2400lm	1250lm	FF10-8274522N-WB-IF				
						3000K	35°	2600lm	1350lm	FF10-8303522N-WB-IF			
							45°	2600lm	1350lm	FF10-8304522N-WB-IF			
					4000K	35°	2800lm	1500lm	FF10-8403522N-WB-IF				
						45°	2800lm	1500lm	FF10-8404522N-WB-IF				
22 W	24 W	30 V	700 mA	80	2700K	35°	2400lm	1250lm	FF10-8273522N-BB-IP				
						45°	2400lm	1250lm	FF10-8274522N-BB-IP				
						3000K	35°	2600lm	1350lm	FF10-8303522N-BB-IP			
							45°	2600lm	1350lm	FF10-8304522N-BB-IP			
					4000K	35°	2800lm	1500lm	FF10-8403522N-BB-IP				
						45°	2800lm	1500lm	FF10-8404522N-BB-IP				

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

NEKO / FUSION / **FFT5**
Fixed Trimless Downlight

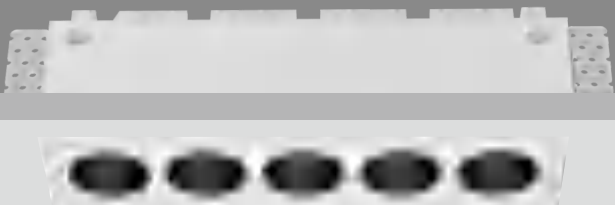

NEKO / FUSION / **FFT10**
Fixed Trimless Downlight




11W	CRI90 CRI80	2700K 3000K 4000K	24° 40°	OSRAM 50,000h@L80B10	UGR < 10	IP20		CB	CE			
-----	----------------	-------------------------	------------	-------------------------	-------------	------	--	----	----	--	--	--

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code				
11	W	13	W	15	V	700	mA	80	2700K	24°	1200lm	850lm	FFT5-8272411N-WB	
										40°	1200lm	850lm	FFT5-8274011N-WB	
										3000K	24°	1300lm	900lm	FFT5-8302411N-WB
											40°	1300lm	900lm	FFT5-8304011N-WB
										4000K	24°	1400lm	950lm	FFT5-8402411N-WB
											40°	1400lm	950lm	FFT5-8404011N-WB



Black Reflector

11	W	13	W	15	V	700	mA	80	2700K	24° 40°	1200lm 1200lm	850lm 850lm	FFT5-8272411N-BB FFT5-8274011N-BB
									3000K	24° 40°	1300lm 1300lm	900lm 900lm	FFT5-8302411N-BB FFT5-8304011N-BB
									4000K	24° 40°	1400lm 1400lm	950lm 950lm	FFT5-8402411N-BB FFT5-8404011N-BB




Black Reflector

11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	950lm	FFT5-8272411N-WS
						40°	1200lm	950lm	FFT5-8274011N-WS
					3000K	24°	1300lm	1000lm	FFT5-8302411N-WS
						40°	1300lm	1000lm	FFT5-8304011N-WS
					4000K	24°	1400lm	1100lm	FFT5-8402411N-WS
						40°	1400lm	1100lm	FFT5-8404011N-WS



Specular Reflector

11	W	13	W	15	V	700	mA	80	2700K	24° 40°	1200lm 1200lm	950lm 950lm	FFT5-8272411N-BS FFT5-8274011N-BS
									3000K	24° 40°	1300lm 1300lm	1000lm 1000lm	FFT5-8302411N-BS FFT5-8304011N-BS
									4000K	24° 40°	1400lm 1400lm	1100lm 1100lm	FFT5-8402411N-BS FFT5-8404011N-BS



Specular Reflector

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

22W	CRI90 CRI80	2700K 3000K 4000K	24° 40°	OSRAM 50,000h@L80B10	UGR < 10	IP20		CB	CE			
-----	----------------	-------------------------	------------	-------------------------	-------------	------	--	----	----	--	--	--

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22	W	24 W	30 V	700 mA	80	2700K	24°	2400lm	1600lm	FFTA-8272422N-WB
							40°	2400lm	1600lm	FFTA-8274022N-WB
						3000K	24°	2600lm	1800lm	FFTA-8302422N-WB
							40°	2600lm	1800lm	FFTA-8304022N-WB
						4000K	24°	2800lm	2000lm	FFTA-8402422N-WB
							40°	2800lm	2000lm	FFTA-8404022N-WB



Black Reflector

22	W	24	W	30	V	700	mA	80	2700K	24° 40°	2400lm 2400lm	1600lm 1600lm	FFTA-8272422N-BB FFTA-8274022N-BB
									3000K	24° 40°	2600lm 2600lm	1800lm 1800lm	FFTA-8302422N-BB FFTA-8304022N-BB
									4000K	24° 40°	2800lm 2800lm	2000lm 2000lm	FFTA-8402422N-BB FFTA-8404022N-BB




Black Reflector

22	W	24	W	30	V	700	mA	80	2700K	24° 40°	2400lm 2400lm	2000lm 2000lm	FFTA-8272422N-WS FFTA-8274022N-WS
									3000K	24° 40°	2600lm 2600lm	2100lm 2100lm	FFTA-8302422N-WS FFTA-8304022N-WS
									4000K	24° 40°	2800lm 2800lm	2300lm 2300lm	FFTA-8402422N-WS FFTA-8404022N-WS




Specular Reflector



22	W	24	W	30	V	700	mA	80	2700K	24°	2400lm	2000lm	FFTA-8272422N-BS
										40°	2400lm	2000lm	FFTA-8274022N-BS
									3000K	24°	2600lm	2100lm	FFTA-8302422N-BS
										40°	2600lm	2100lm	FFTA-8304022N-BS
									4000K	24°	2800lm	2300lm	FFTA-8402422N-BS
										40°	2800lm	2300lm	FFTA-8404022N-BS



Specular Reflector

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

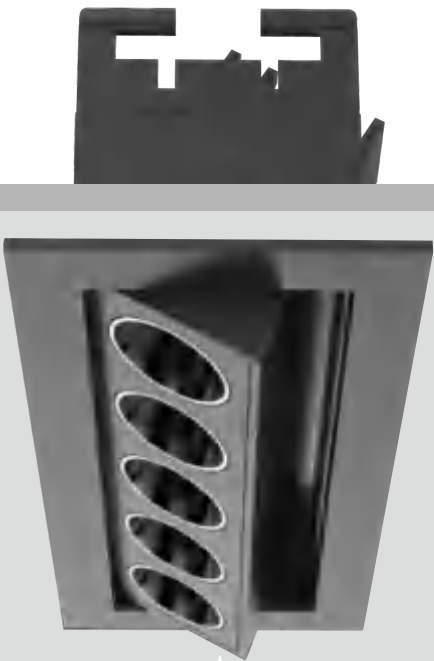


11W	CRI90 CRI80	2700K 3000K 4000K	24° 40°	OSRAM 50,000h@L80B10	UGR < 10	IP 20	5 YEARS GUARANTEE	CB	CE	ETL Intertek	160x53	1-25mm Ceiling Thickness	60 171x70	
														
Black Reflector														
														
Black Reflector														
														
Specular Reflector														
														
Specular Reflector														
LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code					
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	850lm	FA5-8272411N-WB					
						40°	1200lm	850lm	FA5-8274011N-WB					
						3000K	24°	1300lm	900lm	FA5-8302411N-WB				
							40°	1300lm	900lm	FA5-8304011N-WB				
						4000K	24°	1400lm	950lm	FA5-8402411N-WB				
							40°	1400lm	950lm	FA5-8404011N-WB				

11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	850lm	FA5-8272411N-BB					
						40°	1200lm	850lm	FA5-8274011N-BB					
						3000K	24°	1300lm	900lm	FA5-8302411N-BB				
							40°	1300lm	900lm	FA5-8304011N-BB				
						4000K	24°	1400lm	950lm	FA5-8402411N-BB				
							40°	1400lm	950lm	FA5-8404011N-BB				

11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	950lm	FA5-8272411N-WS					
						40°	1200lm	950lm	FA5-8274011N-WS					
						3000K	24°	1300lm	1000lm	FA5-8302411N-WS				
							40°	1300lm	1000lm	FA5-8304011N-WS				
						4000K	24°	1400lm	1100lm	FA5-8402411N-WS				
							40°	1400lm	1100lm	FA5-8404011N-WS				

11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	950lm	FA5-8272411N-BS					
						40°	1200lm	950lm	FA5-8274011N-BS					
						3000K	24°	1300lm	1000lm	FA5-8302411N-BS				
							40°	1300lm	1000lm	FA5-8304011N-BS				
						4000K	24°	1400lm	1100lm	FA5-8402411N-BS				
							40°	1400lm	1100lm	FA5-8404011N-BS				






Code Remark:										N=(NO Driver)	F=(ON-OFF)	P=(Phase Dim)	A=(1-10V Dim)	D=(DALI Dim)

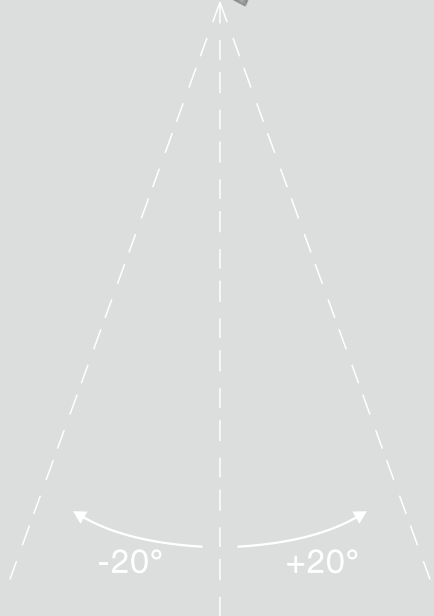

NEKO / FUSION / FA10
Adjustable LED Downlight



Project: Bvlgari Hotel, Shanghai, China

22W	CRI90 CRI80	2700K 3000K 4000K	24° 40°	OSRAM 50,000h@L80B10	UGR < 10	IP 20		CB	CE						
LED Power System Power LED Voltage LED Current CRI CCT Beam LED Output System Output Code															
 Black Reflector	22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	1600lm	FA10-8272422N-WB					
							40°	2400lm	1600lm	FA10-8274022N-WB					
							3000K	24°	2600lm	1800lm	FA10-8302422N-WB				
								40°	2600lm	1800lm	FA10-8304022N-WB				
								4000K	24°	2800lm	2000lm	FA10-8402422N-WB			
									40°	2800lm	2000lm	FA10-8404022N-WB			
 Black Reflector	22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	1600lm	FA10-8272422N-BB					
							40°	2400lm	1600lm	FA10-8274022N-BB					
							3000K	24°	2600lm	1800lm	FA10-8302422N-BB				
								40°	2600lm	1800lm	FA10-8304022N-BB				
								4000K	24°	2800lm	2000lm	FA10-8402422N-BB			
									40°	2800lm	2000lm	FA10-8404022N-BB			
 Specular Reflector	22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	2000lm	FA10-8272422N-WS					
							40°	2400lm	2000lm	FA10-8274022N-WS					
							3000K	24°	2600lm	2100lm	FA10-8302422N-WS				
								40°	2600lm	2100lm	FA10-8304022N-WS				
								4000K	24°	2800lm	2300lm	FA10-8402422N-WS			
									40°	2800lm	2300lm	FA10-8404022N-WS			
 Specular Reflector	22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	2000lm	FA10-8272422N-BS					
							40°	2400lm	2000lm	FA10-8274022N-BS					
							3000K	24°	2600lm	2100lm	FA10-8302422N-BS				
								40°	2600lm	2100lm	FA10-8304022N-BS				
								4000K	24°	2800lm	2300lm	FA10-8402422N-BS			
									40°	2800lm	2300lm	FA10-8404022N-BS			
Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)															



NEKO / FUSION / FW5
Wall Washer LED Downlight



Project: Private House, China

11W

CRI90
CRI80

2700K
3000K
4000K


60,000h@L80B10

IP 20




CB

CE












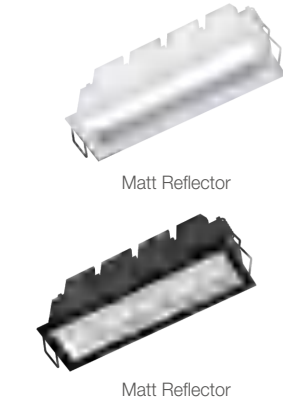

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	WW	1200lm	550lm	FW5-827WW11N-WM	
					3000K	WW	1300lm	600lm	FW5-830WW11N-WM	
					4000K	WW	1400lm	650lm	FW5-840WW11N-WM	
11 W	13 W	15 V	700 mA	80	2700K	WW	1200lm	550lm	FW5-827WW11N-BM	
					3000K	WW	1300lm	600lm	FW5-830WW11N-BM	
					4000K	WW	1400lm	650lm	FW5-840WW11N-BM	

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Trimless available



Trimless code for FW5-830WW11N-WM
FWT5-830WW11N-WM













NEKO / FUSION / FW10
Wall Washer LED Downlight

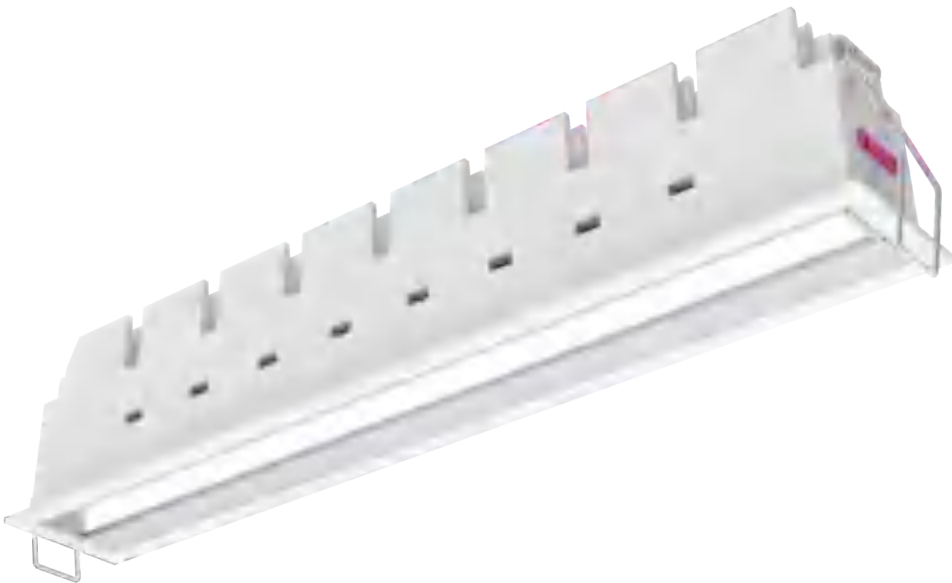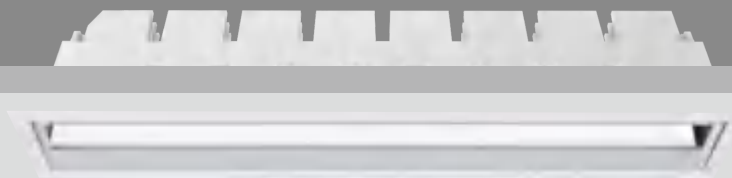

22W	CRI90 CRI80	2700K 3000K 4000K	 OSRAM 60,000h@L80B10	IP 20	 5 YEAR GUARANTEE	CB	CE		 282x37	 1-25mm Ceiling Thickness	 60 290x45
-----	----------------	-------------------------	--	-------	--	----	----	--	--	--	---



Matt Reflector



Matt Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	WW	2400lm	1100lm	FW10-827WW22N-WM	
					3000K	WW	2600lm	1200lm	FW10-830WW22N-WM	
					4000K	WW	2800lm	1300lm	FW10-840WW22N-WM	



22 W	24 W	30 V	700 mA	80	2700K	WW	2400lm	1100lm	FW10-827WW22N-BM	
					3000K	WW	2600lm	1200lm	FW10-830WW22N-BM	
					4000K	WW	2800lm	1300lm	FW10-840WW22N-BM	

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Trimless available




Trimless code for FW10-830WW22N-WM
FWTA-830WW22N-WM

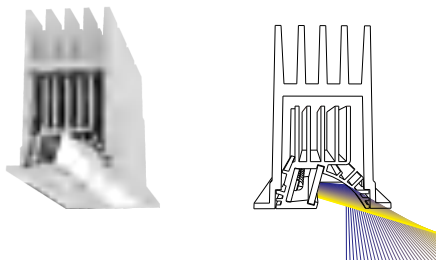


sehr gute Wall Washer Beleuchtungsqualität
High quality wall washer illumination



NEKO / FUSION / **FG5**
General LED Downlight



Black Reflector



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code			
11	W	13	W	15	V	700	mA	80	2700K	75°	1200lm	380lm	FG5-8277511N-WB
									3000K	75°	1300lm	400lm	FG5-8307511N-WB
									4000K	75°	1400lm	450lm	FG5-8407511N-WB


11	W	13	W	15	V	700	mA	80	2700K	75°	1200lm	350lm	FG5-8277511N-BB
									3000K	75°	1300lm	400lm	FG5-8307511N-BB
									4000K	75°	1400lm	450lm	FG5-8407511N-BB

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)


Trimless available




Trimless code for FG5-8307511N-WB
FG**T**5-8307511N-WB



NEKO / FUSION / **FG10**
General LED Downlight



Black Reflector



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code			
22	W	24	W	30	V	700	mA	80	2700K	75°	2400lm	850lm	FG10-8277522N-WE
									3000K	75°	2600lm	900lm	FG10-8307522N-WE
									4000K	75°	2800lm	950lm	FG10-8407522N-WE


22	W	24	W	30	V	700	mA	80	2700K	75°	2400lm	850lm	FG10-8277522N-BB
									3000K	75°	2600lm	900lm	FG10-8307522N-BB
									4000K	75°	2800lm	950lm	FG10-8407522N-BB

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Trimless available




Trimless code for FG10-8307522N-WB
FG**T**A-8307522N-WB




Project: Medical Office Celle Germany, Germany




Diversity Design with Adjustable Spot Light



NEKO / FUSION / **FS1**
Adjustable Spotlight



NEKO / FUSION / **FS2**
Adjustable Spotlight




2W	CRI80 CRI90	2700K 3000K 4000K		OSRAM 50,000h@L80B10	UGR < 19	IP 20		CB	CE		
----	----------------	-------------------------	--	--------------------------------	-------------	-------	--	----	----	--	--



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code				
2 W	3 W	3 V	700 mA	80	2700K	15°	220lm	160lm	FS1-8271502N-WN					
						30°	220lm	160lm	FS1-8273002N-WN					
					3000K	15°	250lm	170lm	FS1-8301502N-WN					
						30°	250lm	170lm	FS1-8303002N-WN					
					4000K	15°	280lm	180lm	FS1-8401502N-WN					
						30°	280lm	180lm	FS1-8403002N-WN					
					2 W	3 W	3 V	700 mA	80	2700K	15°	220lm	160lm	FS1-8271502N-BN
30°	220lm	160lm	FS1-8273002N-BN											
3000K	15°	250lm	170lm	FS1-8301502N-BN										
	30°	250lm	170lm	FS1-8303002N-BN										
4000K	15°	280lm	180lm	FS1-8401502N-BN										
	30°	280lm	180lm	FS1-8403002N-BN										

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)


4W	CRI80 CRI90	2700K 3000K 4000K		OSRAM 50,000h@L80B10	UGR < 19	IP 20		CB	CE		
----	----------------	-------------------------	--	--------------------------------	-------------	-------	--	----	----	--	--



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4 W	6 W	6 V	700 mA	80	2700K	15°	450lm	330lm	FS2-8271504N-WN	
						30°	450lm	330lm	FS2-8273004N-WN	
					3000K	15°	500lm	350lm	FS2-8301504N-WN	
						30°	500lm	350lm	FS2-8303004N-WN	
					4000K	15°	550lm	400lm	FS2-8401504N-WN	
						30°	550lm	400lm	FS2-8403004N-WN	
4 W	6 W	6 V	700 mA	80	2700K	15°	450lm	330lm	FS2-8271504N-BN	
						30°	450lm	330lm	FS2-8273004N-BN	
					3000K	15°	500lm	350lm	FS2-8301504N-BN	
						30°	500lm	350lm	FS2-8303004N-BN	
					4000K	15°	550lm	400lm	FS2-8401504N-BN	
						30°	550lm	400lm	FS2-8403004N-BN	

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

NEKO / FUSION / FS3
Adjustable Spotlight

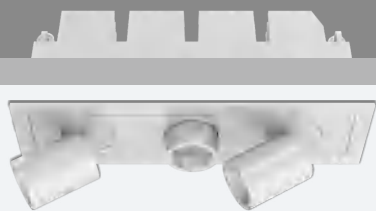

NEKO / FUSION / FS6
Adjustable Spotlight



7W

CRI80
CRI90

2700K
3000K
4000K

15°

30°

OSRAM

50,000h@L80B10

UGR < 19

IP 20

5

GUARANTEED

CB

CE

UL

US

Intertek

144x37

1-25mm

Ceiling Thickness

60

152.5x45

13W

CRI80
CRI90

2700K
3000K
4000K

15°

30°

OSRAM

50,000h@L80B10

UGR < 19

IP 20

5

GUARANTEED

CB

CE

UL

US

Intertek

282x37

1-25mm

Ceiling Thickness

60

290x45



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code	
	7 W	9 W	9 V	700 mA	80	2700K	15°	700lm	500lm	FS3-8271507N-WN	
							30°	700lm	500lm	FS3-8273007N-WN	
						3000K	15°	750lm	550lm	FS3-8301507N-WN	
							30°	750lm	550lm	FS3-8303007N-WN	
						4000K	15°	800lm	600lm	FS3-8401507N-WN	
							30°	800lm	600lm	FS3-8403007N-WN	
						2700K	15°	700lm	500lm	FS3-8271507N-BN	
							30°	700lm	500lm	FS3-8273007N-BN	
							3000K	15°	750lm	550lm	FS3-8301507N-BN
							30°	750lm	550lm	FS3-8303007N-BN	
							4000K	15°	800lm	600lm	FS3-8401507N-BN
							30°	800lm	600lm	FS3-8402507N-BN	


Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

	LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
	13 W	15 W	18 V	700 mA	80	2700K	15°	1400lm	1000lm	FS6-8271513N-WN	
							30°	1400lm	1000lm	FS6-8273013N-WN	
							3000K	15°	1500lm	1050lm	FS6-8301513N-WN
								30°	1500lm	1050lm	FS6-8303013N-WN
							4000K	15°	1600lm	1100lm	FS6-8401513N-WN
								30°	1600lm	1100lm	FS6-8403013N-WN
	13 W	15 W	18 V	700 mA	80	2700K	15°	1400lm	1000lm	FS6-8271513N-BN	
							30°	1400lm	1000lm	FS6-8273013N-BN	
							3000K	15°	1500lm	1050lm	FS6-8301513N-BN
								30°	1500lm	1050lm	FS6-8303013N-BN
							4000K	15°	1600lm	1100lm	FS6-8401513N-BN
								30°	1600lm	1100lm	FS6-8403013N-BN
Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)											

Trimless available




Trimless code for FS3-8301507N-WN
FST3-8301507N-WN



Trimless available



Trimless code for FS6-8301513N-WN
FST6-8301513N-WN



NEKO / FUSION / FF3-FS1
Adjustable Spotlight



NEKO / FUSION / FF6-FS2
Adjustable Spotlight



9W

CRI80
CRI90

2700K
3000K
4000K

24°

40°

OSRAM

50,000h@L80B10

UGR < 19

IP 20

5

GUARANTEED

CB

CE

UL

US

Intertek

144x37

1-25mm

Ceiling Thickness

60

152.5x45

17W

CRI80
CRI90

2700K
3000K
4000K

24°

40°

OSRAM

50,000h@L80B10

UGR < 19

IP 20

5

GUARANTEED

CB

CE

UL

US

Intertek

282x37

1-25mm


Ceiling Thickness

60

290x45




LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code							
	9 W	11 W	12 V	700 mA	80	2700K	24°	900lm	650lm	FFS1-8272409N-WB							
							40°	900lm	650lm	FFS1-8274009N-WB							
							3000K	24°	1000lm	700lm	FFS1-8302409N-WB						
								40°	1000lm	700lm	FFS1-8304009N-WB						
							4000K	24°	1100lm	800lm	FFS1-8402409N-WB						
								40°	1100lm	800lm	FFS1-8404009N-WB						



	9 W	11 W	12 V	700 mA	80	2700K	24°	900lm	650lm	FFS1-8272409N-BB							
							40°	900lm	650lm	FFS1-8274009N-BB							
							3000K	24°	1000lm	700lm	FFS1-8302409N-BB						
								40°	1000lm	700lm	FFS1-8304009N-BB						
							4000K	24°	1100lm	800lm	FFS1-8402409N-BB						
								40°	1100lm	800lm	FFS1-8404009N-BB						

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code						
	17 W	19 W	24 V	700 mA	80	2700K	24°	1900lm	1300lm	FFS2-8272417N-WB						
							40°	1900lm	1300lm	FFS2-8274017N-WB						
						3000K	24°	2000lm	1400lm	FFS2-8302417N-WB						
							40°	2000lm	1400lm	FFS2-8304017N-WB						
						4000K	24°	2200lm	1500lm	FFS2-8402417N-WB						
							40°	2200lm	1500lm	FFS2-8404017N-WB						

							17 W	19 W	24 V	700 mA	80	2700K	24°	1900lm	1300lm	FFS2-8272417N-BB
40°	1900lm	1300lm	FFS2-8274017N-BB													
3000K	24°	2000lm	1400lm	FFS2-8302417N-BB												
	40°	2000lm	1400lm	FFS2-8304017N-BB												
4000K	24°	2200lm	1500lm	FFS2-8402417N-BB												
	40°	2200lm	1500lm	FFS2-8404017N-BB												

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)																

Trimless available

Trimless code for FFS1-8304009N-WN
FFS3-8304009N-WN

144x37

36

60

144x37

Trimless available

Trimless code for FFS2-8304017N-WN
FFS4-8304017N-WN

282x37

37

60

282x37

NEKO / FUSION Fixed
Higher Efficiency Version
Flat Surface
Higher Lumen Output
More Beam Angles

NEW



FFE1-2W/ 220lm @CRI80 3000K



FFE3-6W/ 660lm @CRI80 3000K




FFE5-10W/ 1100lm @CRI80 3000K



FFE10-20W/ 2200lm @CRI80 3000K
FFE10-26W/ 2800lm @CRI80 3000K

Beam Angles

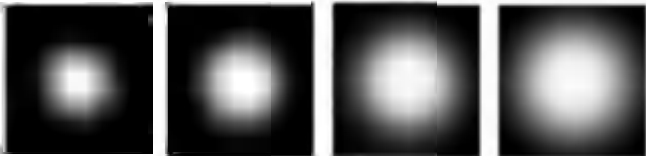

Spot 15°

Medium 24°


Wide 40°

Flood 55°

NEKO / FUSION Fixed / FFE1
Higher Efficiency Version
Flat Surface
Higher Lumen Output
More Beam Angles

NEW



2W	CRI90 CRI80	2700K 3000K 4000K	15° 24° 40° 55°	OSRAM 50,000h@L80B10	UGR < 19	IP20							
LED Power System Power LED Voltage LED Current CRI CCT Beam LED Output System Output Code													
 Black Reflector	2 W	3 W	3 V	700 mA	80	2700K	15°	230lm	210lm	FFE1-8271502	N-WB		
							24°	230lm	210lm	FFE1-8272402	N-WB		
							40°	230lm	210lm	FFE1-8274002	N-WB		
							55°	230lm	210lm	FFE1-8275502	N-WB		
						3000K	15°	250lm	220lm	FFE1-8301502	N-WB		
							24°	250lm	220lm	FFE1-8302402	N-WB		
							40°	250lm	220lm	FFE1-8304002	N-WB		
							55°	250lm	220lm	FFE1-8305502	N-WB		
						4000K	15°	270lm	240lm	FFE1-8401502	N-WB		
							24°	270lm	240lm	FFE1-8402402	N-WB		
							40°	270lm	240lm	FFE1-8404002	N-WB		
							55°	270lm	240lm	FFE1-8405502	N-WB		
 Black Reflector	2 W	3 W	3 V	700 mA	80	2700K	15°	230lm	210lm	FFE1-8271502	N-BB		
							24°	230lm	210lm	FFE1-8272402	N-BB		
							40°	230lm	210lm	FFE1-8274002	N-BB		
							55°	230lm	210lm	FFE1-8275502	N-BB		
						3000K	15°	250lm	220lm	FFE1-8301502	N-BB		
							24°	250lm	220lm	FFE1-8302402	N-BB		
							40°	250lm	220lm	FFE1-8304002	N-BB		
							55°	250lm	220lm	FFE1-8305502	N-BB		
						4000K	15°	270lm	240lm	FFE1-8401502	N-BB		
							24°	270lm	240lm	FFE1-8402402	N-BB		
							40°	270lm	240lm	FFE1-8404002	N-BB		
							55°	270lm	240lm	FFE1-8405502	N-BB		



Black Reflector



Black Reflector

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

NEKO / FUSION Fixed / FFE3
Higher Efficiency Version

Flat Surface
Higher Lumen Output
More Beam Angles



NEKO / FUSION Fixed / FFE5
Higher Efficiency Version

Flat Surface
Higher Lumen Output
More Beam Angles



6W	CRI90 CRI80	2700K 3000K 4000K	15° 24° 40° 55°	OSRAM 50,000h@L80B10	UGR < 19	IP20		CB	CE				
LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code			
	6 W	8 W	9 V	700 mA	80	2700K	15°	700lm	630lm	FFE3-8271506N-WB			
							24°	700lm	630lm	FFE3-8272406N-WB			
							40°	700lm	630lm	FFE3-8274006N-WB			
							55°	700lm	630lm	FFE3-8275506N-WB			
						3000K	15°	750lm	660lm	FFE3-8301506N-WB			
							24°	750lm	660lm	FFE3-8302406N-WB			
							40°	750lm	660lm	FFE3-8304006N-WB			
							55°	750lm	660lm	FFE3-8305506N-WB			
						4000K	15°	800lm	720lm	FFE3-8401506N-WB			
							24°	800lm	720lm	FFE3-8402406N-WB			
							40°	800lm	720lm	FFE3-8404006N-WB			
							55°	800lm	720lm	FFE3-8405506N-WB			

	6 W	8 W	9 V	700 mA	80	2700K	15°	700lm	630lm	FFE3-8271506N-BB			
							24°	700lm	630lm	FFE3-8272406N-BB			
							40°	700lm	630lm	FFE3-8274006N-BB			
							55°	700lm	630lm	FFE3-8275506N-BB			
						3000K	15°	750lm	660lm	FFE3-8301506N-BB			
							24°	750lm	660lm	FFE3-8302406N-BB			
							40°	750lm	660lm	FFE3-8304006N-BB			
							55°	750lm	660lm	FFE3-8305506N-BB			
						4000K	15°	800lm	720lm	FFE3-8401506N-BB			
							24°	800lm	720lm	FFE3-8402406N-BB			
							40°	800lm	720lm	FFE3-8404006N-BB			
							55°	800lm	720lm	FFE3-8405506N-BB			

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)													

10W	CRI90 CRI80	2700K 3000K 4000K	15° 24° 40° 55°	OSRAM 50,000h@L80B10	UGR < 19	IP20		CB	CE				
LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code			
	10 W	12 W	15 V	700 mA	80	2700K	15°	1200lm	1000lm	FFE5-8271510N-WB			
							24°	1200lm	1000lm	FFE5-8272410N-WB			
							40°	1200lm	1000lm	FFE5-8274010N-WB			
							55°	1200lm	1000lm	FFE5-8275510N-WB			
						3000K	15°	1300lm	1100lm	FFE5-8301510N-WB			
							24°	1300lm	1100lm	FFE5-8302410N-WB			
							40°	1300lm	1100lm	FFE5-8304010N-WB			
							55°	1300lm	1100lm	FFE5-8305510N-WB			
						4000K	15°	1400lm	1200lm	FFE5-8401510N-WB			
							24°	1400lm	1200lm	FFE5-8402410N-WB			
							40°	1400lm	1200lm	FFE5-8404010N-WB			
							55°	1400lm	1200lm	FFE5-8405510N-WB			
	10 W	12 W	15 V	700 mA	80	2700K	15°	1200lm	1000lm	FFE5-8271510N-BB			
							24°	1200lm	1000lm	FFE5-8272410N-BB			
							40°	1200lm	1000lm	FFE5-8274010N-BB			
							55°	1200lm	1000lm	FFE5-8275510N-BB			
						3000K	15°	1300lm	1100lm	FFE5-8301510N-BB			
							24°	1300lm	1100lm	FFE5-8302410N-BB			
							40°	1300lm	1100lm	FFE5-8304010N-BB			
							55°	1300lm	1100lm	FFE5-8305510N-BB			
						4000K	15°	1400lm	1200lm	FFE5-8401510N-BB			
							24°	1400lm	1200lm	FFE5-8402410N-BB			
							40°	1400lm	1200lm	FFE5-8404010N-BB			
							55°	1400lm	1200lm	FFE5-8405510N-BB			
Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)													

NEKO / FUSION Fixed / FFE10


Higher Efficiency Version

Flat Surface

Higher Lumen Output

More Beam Angles

NEW



Black Reflector



Black Reflector

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code					
20 W	29 W	29 V	700 mA	80	2700K	15°	2300lm	2100lm	FFEA-8271520	N-WB					
							2300lm	2100lm	FFEA-8272420	N-WB					
							2300lm	2100lm	FFEA-8274020	N-WB					
						3000K	15°	2300lm	2100lm	FFEA-8275520	N-WB				
							24°	2500lm	2200lm	FFEA-8301520	N-WB				
							24°	2500lm	2200lm	FFEA-8302420	N-WB				
					4000K	15°	2500lm	2200lm	FFEA-8304020	N-WB					
						15°	2700lm	2400lm	FFEA-8401520	N-WB					
						24°	2700lm	2400lm	FFEA-8402420	N-WB					
						40°	2700lm	2400lm	FFEA-8404020	N-WB					
					55°	2700lm	2400lm	FFEA-8405520	N-WB						
					26 W	29 W	29 V	900 mA	80	2700K	15°	3000lm	2600lm	FFEA-8271526	N-WB
												3000lm	2600lm	FFEA-8272426	N-WB
3000lm	2600lm	FFEA-8274026	N-WB												
3000K	15°	3000lm	2600lm	FFEA-8275526							N-WB				
	24°	3200lm	2800lm	FFEA-8301526							N-WB				
	24°	3200lm	2800lm	FFEA-8302426							N-WB				
4000K	15°	3200lm	2800lm	FFEA-8304026						N-WB					
	15°	3200lm	2800lm	FFEA-8305526						N-WB					
	15°	3500lm	3000lm	FFEA-8401526						N-WB					
	24°	3500lm	3000lm	FFEA-8402426						N-WB					
40°	3500lm	3000lm	FFEA-8404026	N-WB											
55°	3500lm	3000lm	FFEA-8405526	N-WB											
20 W	29 W	29 V	700 mA	80						2700K	15°	2300lm	2100lm	FFEA-8271520	N-BB
					2300lm	2100lm	FFEA-8272420	N-BB							
					2300lm	2100lm	FFEA-8274020	N-BB							
					3000K	15°	2300lm	2100lm	FFEA-8275520		N-BB				
						24°	2500lm	2200lm	FFEA-8301520		N-BB				
						24°	2500lm	2200lm	FFEA-8302420		N-BB				
					4000K	15°	2500lm	2200lm	FFEA-8304020	N-BB					
						15°	2700lm	2400lm	FFEA-8305520	N-BB					
						24°	2700lm	2400lm	FFEA-8401520	N-BB					
						24°	2700lm	2400lm	FFEA-8402420	N-BB					
					40°	2700lm	2400lm	FFEA-8404020	N-BB						
					55°	2700lm	2400lm	FFEA-8405520	N-BB						
					26 W	29 W	29 V	700 mA	80	2700K	15°	3000lm	2600lm	FFEA-8271526	N-BB
3000lm	2600lm	FFEA-8272426	N-BB												
3000lm	2600lm	FFEA-8274026	N-BB												
3000K	15°	3000lm	2600lm	FFEA-8275526							N-BB				
	24°	3200lm	2800lm	FFEA-8301526							N-BB				
	24°	3200lm	2800lm	FFEA-8302426							N-BB				
4000K	15°	3200lm	2800lm	FFEA-8304026						N-BB					
	15°	3200lm	2800lm	FFEA-8305526						N-BB					
	15°	3500lm	3000lm	FFEA-8401526						N-BB					
	24°	3500lm	3000lm	FFEA-8402426						N-BB					
40°	3500lm	3000lm	FFEA-8404026	N-BB											
55°	3500lm	3000lm	FFEA-8405526	N-BB											

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

Project: Eggen Restaurant, Norway













NEKO / FUSION Linear System
With FUSION Downlight Module

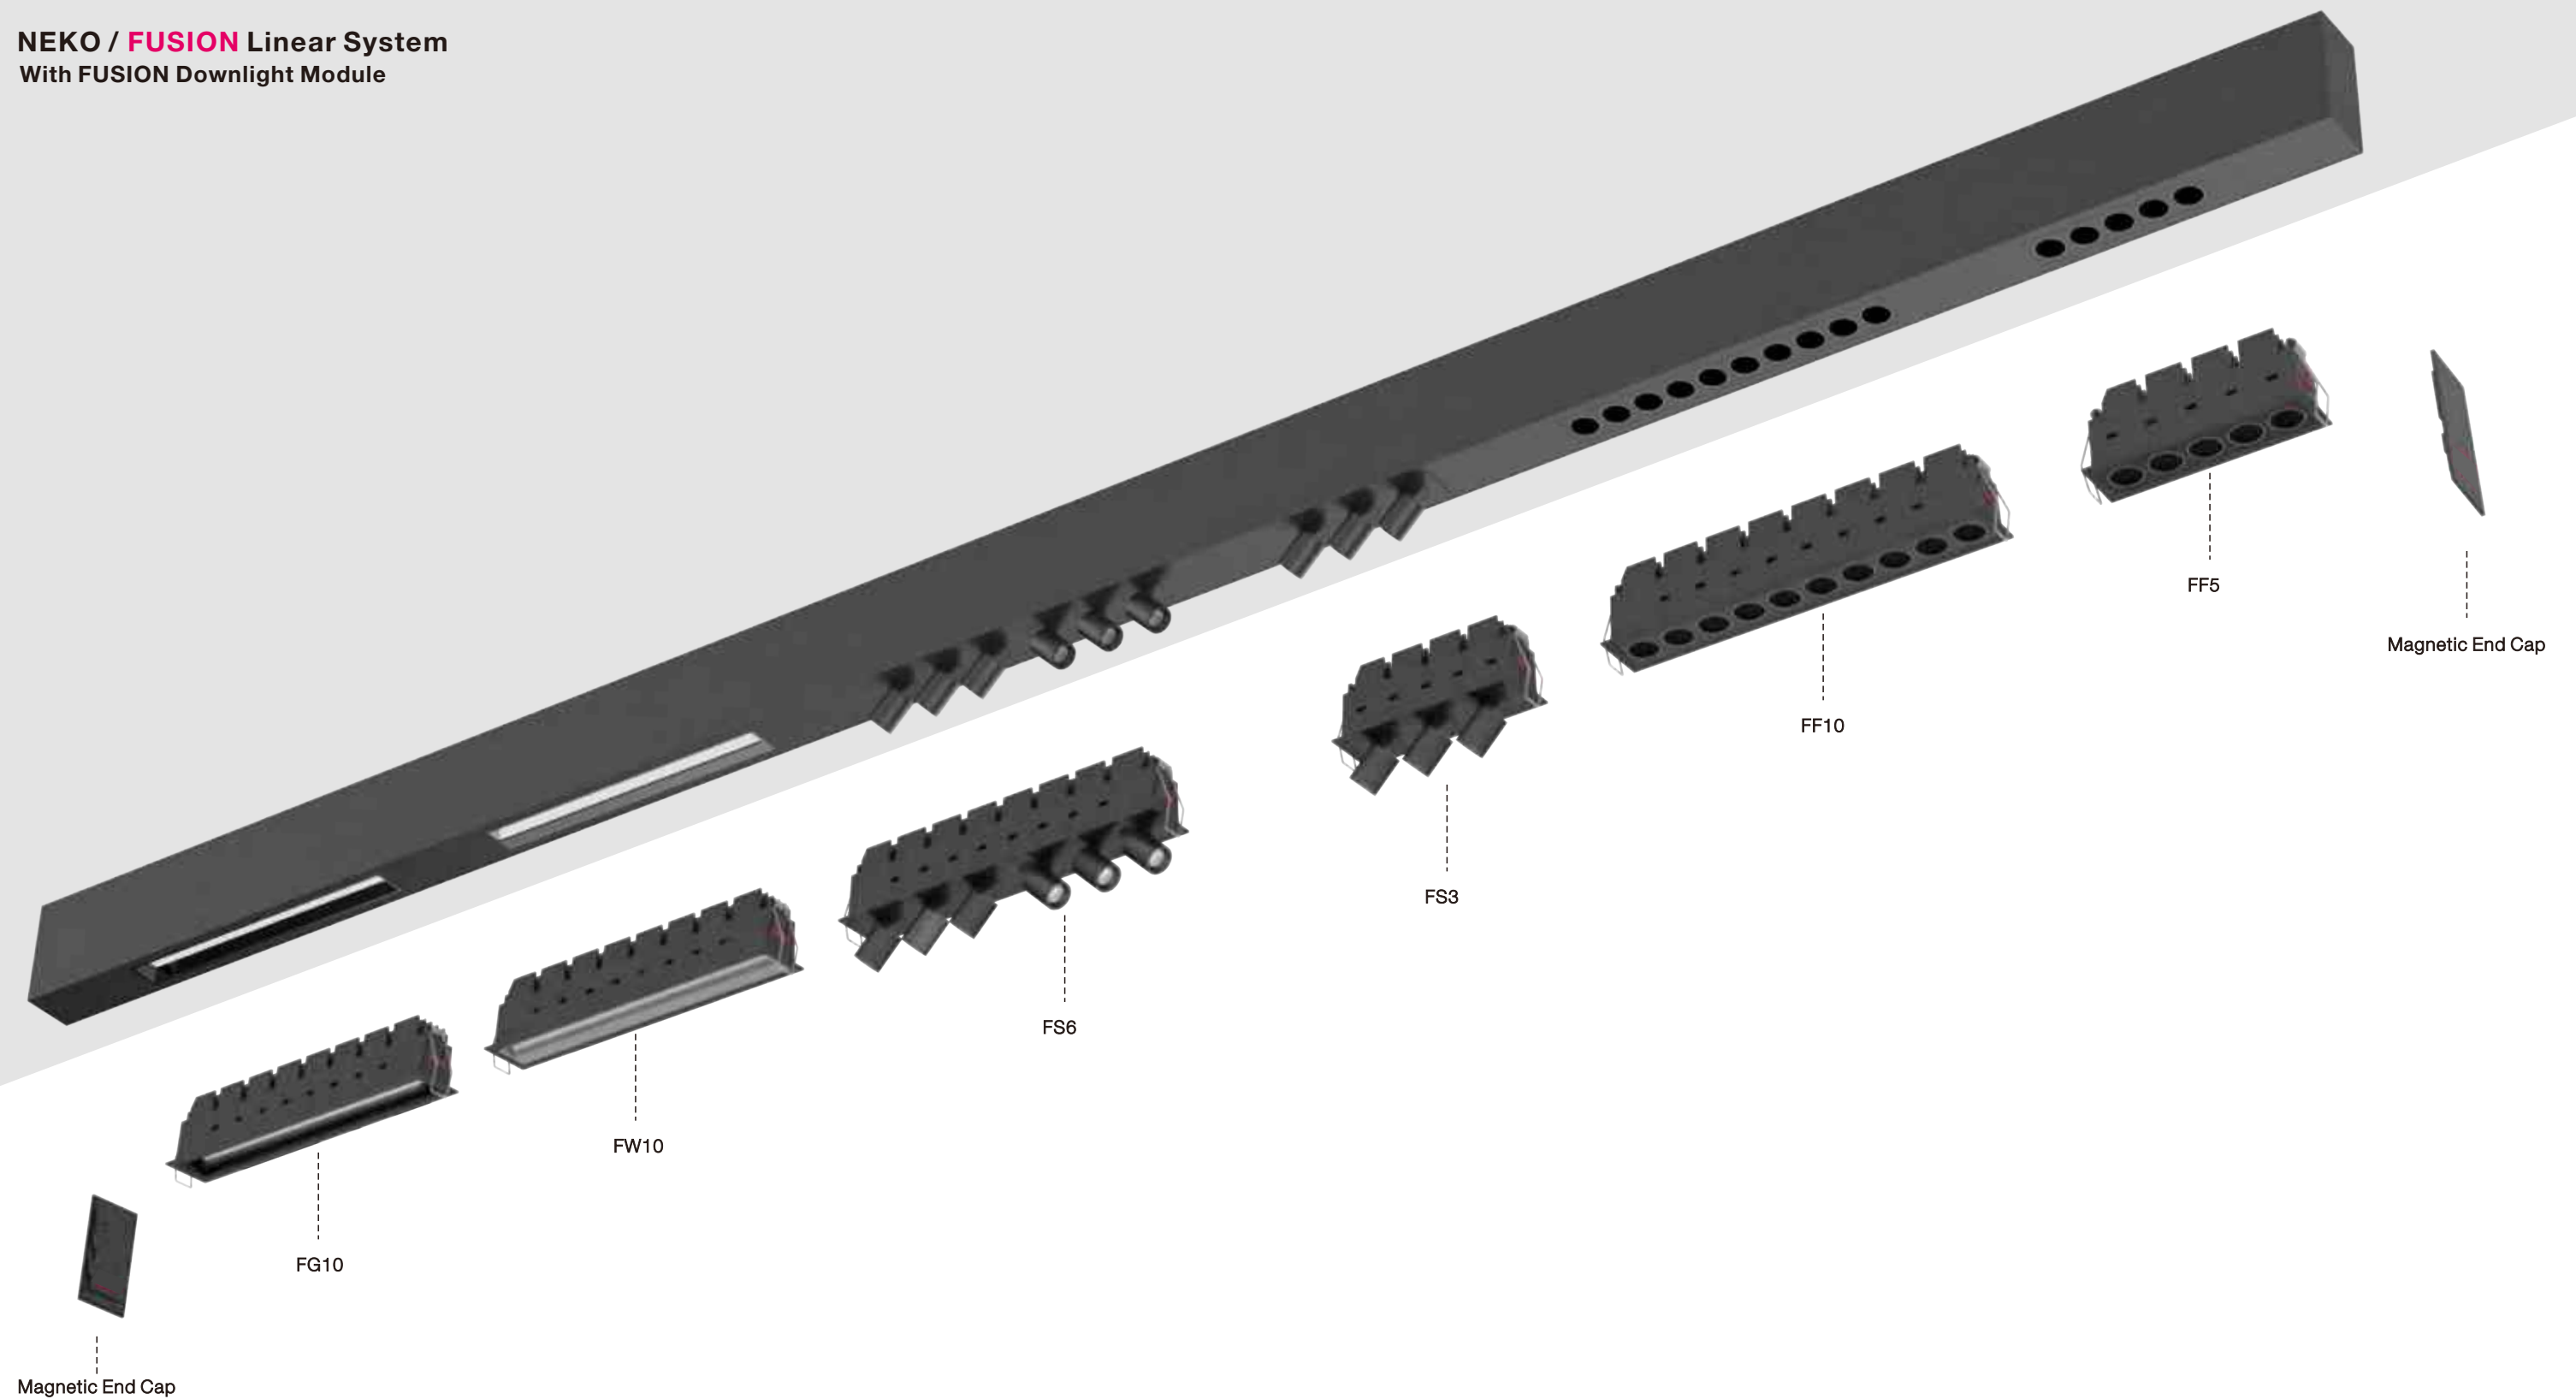

- Aufbau-, Einbau- und Pendelleuchte.
- Einfache und unbegrenzte Längenbestimmung, nahtlose Verbindung.
- Das Profil kann als einzelne, allgemeine, wall washer oder mit verschiedenen und unterschiedlichen Modulen bestückt werden.
- Modulares Profildesign ohne sichtbare Schrauben, Standardlänge 1,2 m & 1,5 m.
- Aluminiumprofil, Farbwahl weiß / schwarz .
- Pendelleuchte mit 2000mm Seilabhängung, werkzeuglose Höhenverstellung.
- Hoher Sehkomfort, UGR <19.
- LED 3000K / 4000K, Binning <3 step MacAdam, CRI 80/90.



- Suspended, surface mounted and recessed mounted luminaires.
- Easy and unlimited length adjustment, seamless connection.
- Can be used as single fixed / general light / spotlight / wall washer / MIXED.
- Modular profile design with no visible screws, standard length 1.2m & 1.5m.
- Aluminum profile, color choices white / black .
- Suspended luminaire with 2000mm cable suspension, tool free height adjustment.
- High visual comfort, UGR<19.
- LED 3000K/ 4000K, binning ≤ 3 step MacAdam, CRI 80/ 90.

NEKO / FUSION Linear System
With Linear Light Module

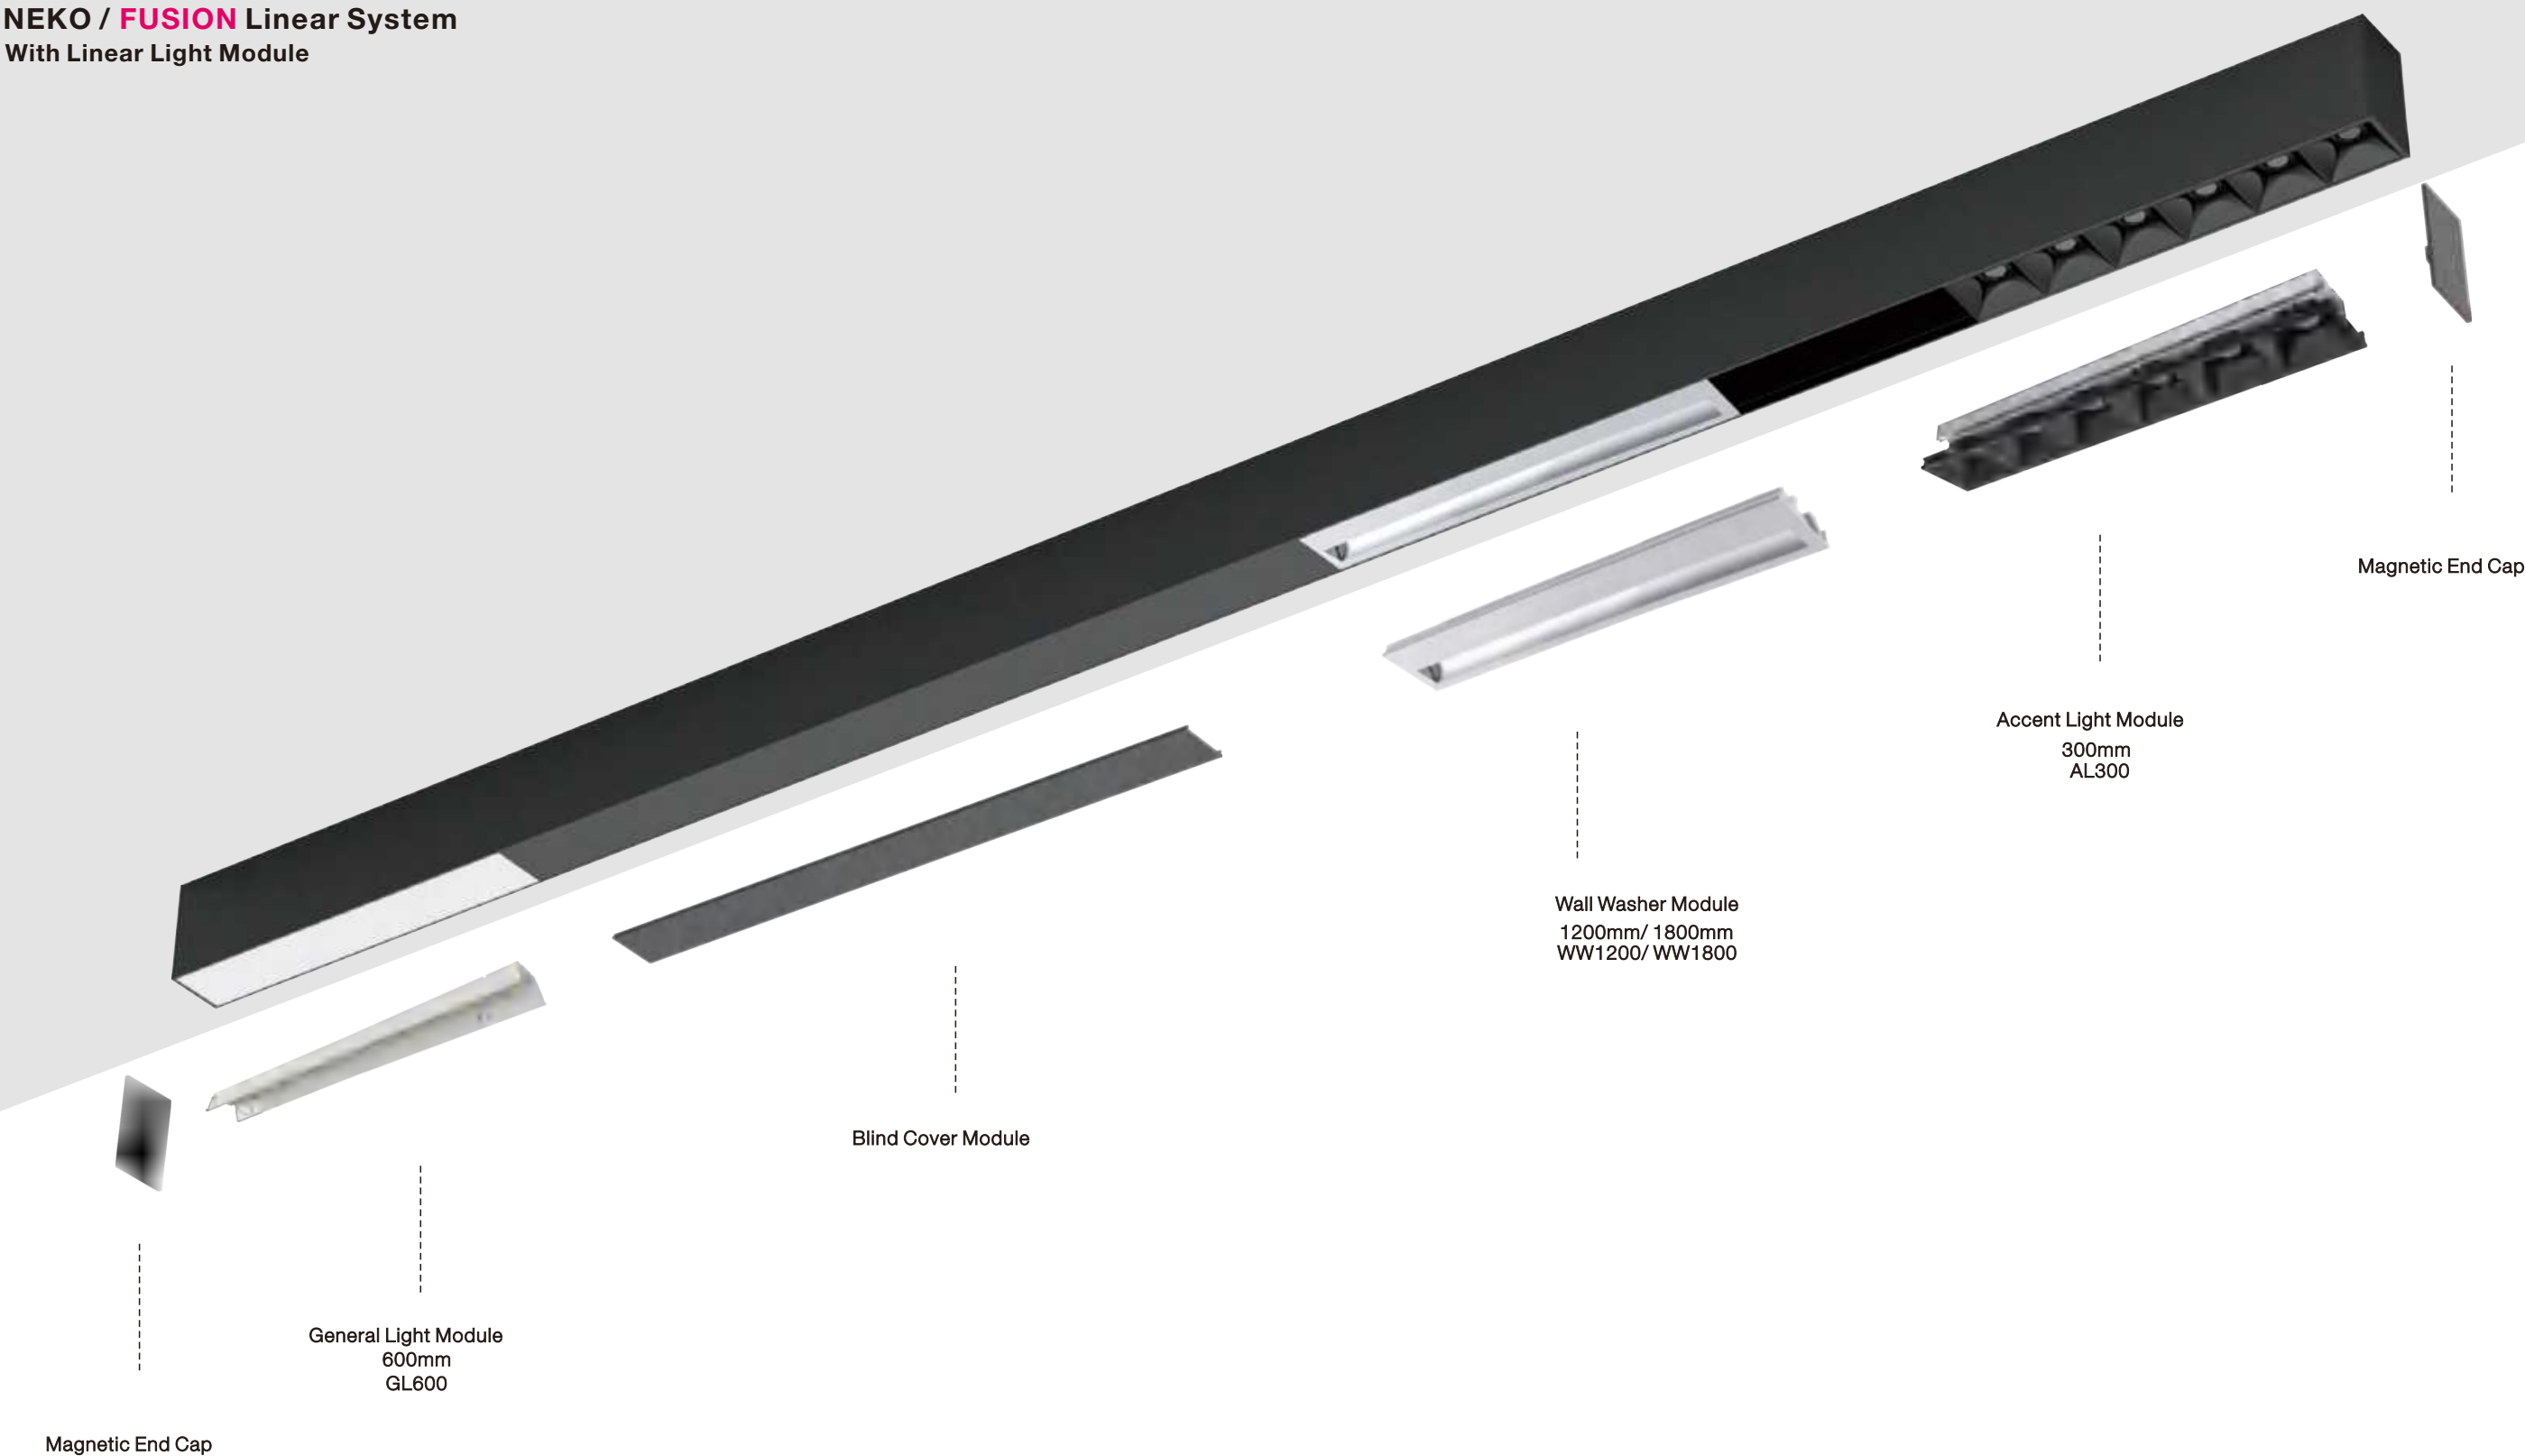

- Schönes Profilsystem aus Aluminiumdruckguss und mit 50 mm Breite
- Verschiedenste Lichtmodule für beste und individuelle Lichtlösungen
- Akzent-, Allgemein- und Spotbeleuchtung – auch Wall washer Modul vorhanden
- Komplette werkzeuglose Montage
- Standard und kundenspezifische Längen
- Magnetische Endkappen – keine Schrauben sichtbar

- Profile system made of extruded aluminium with 50mm width.
- Various lighting modules with multiple lighting applications.
- General light, accent light, wall washer and spotlight module for choice.
- Tool-free inserts mounting by clip-in mechanism.
- Standard and customized length of module and cover for high precise system.
- Magnetic end cap without fixing screws.

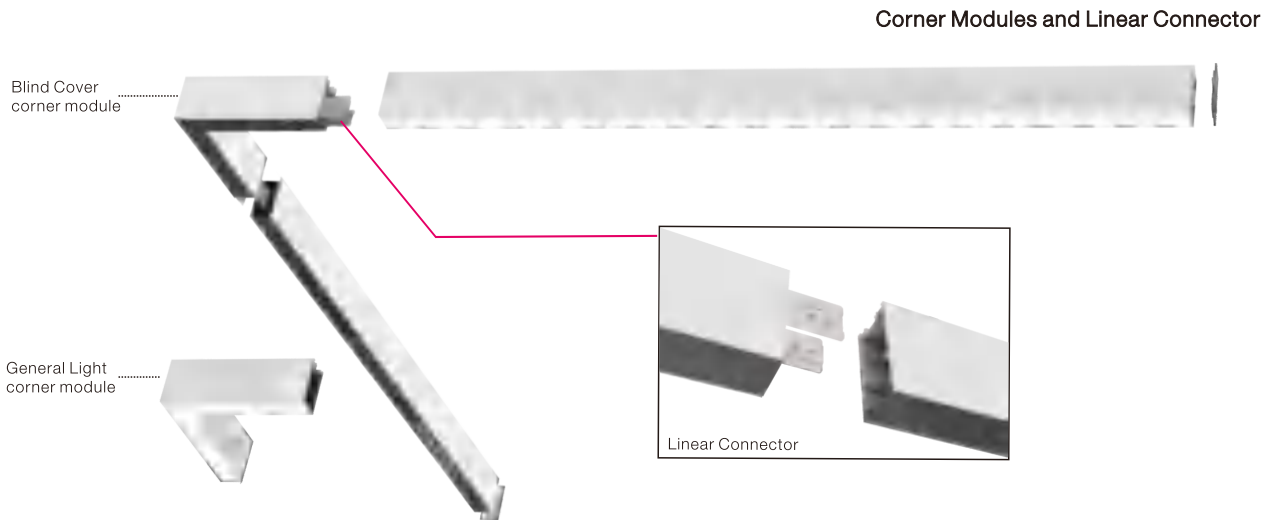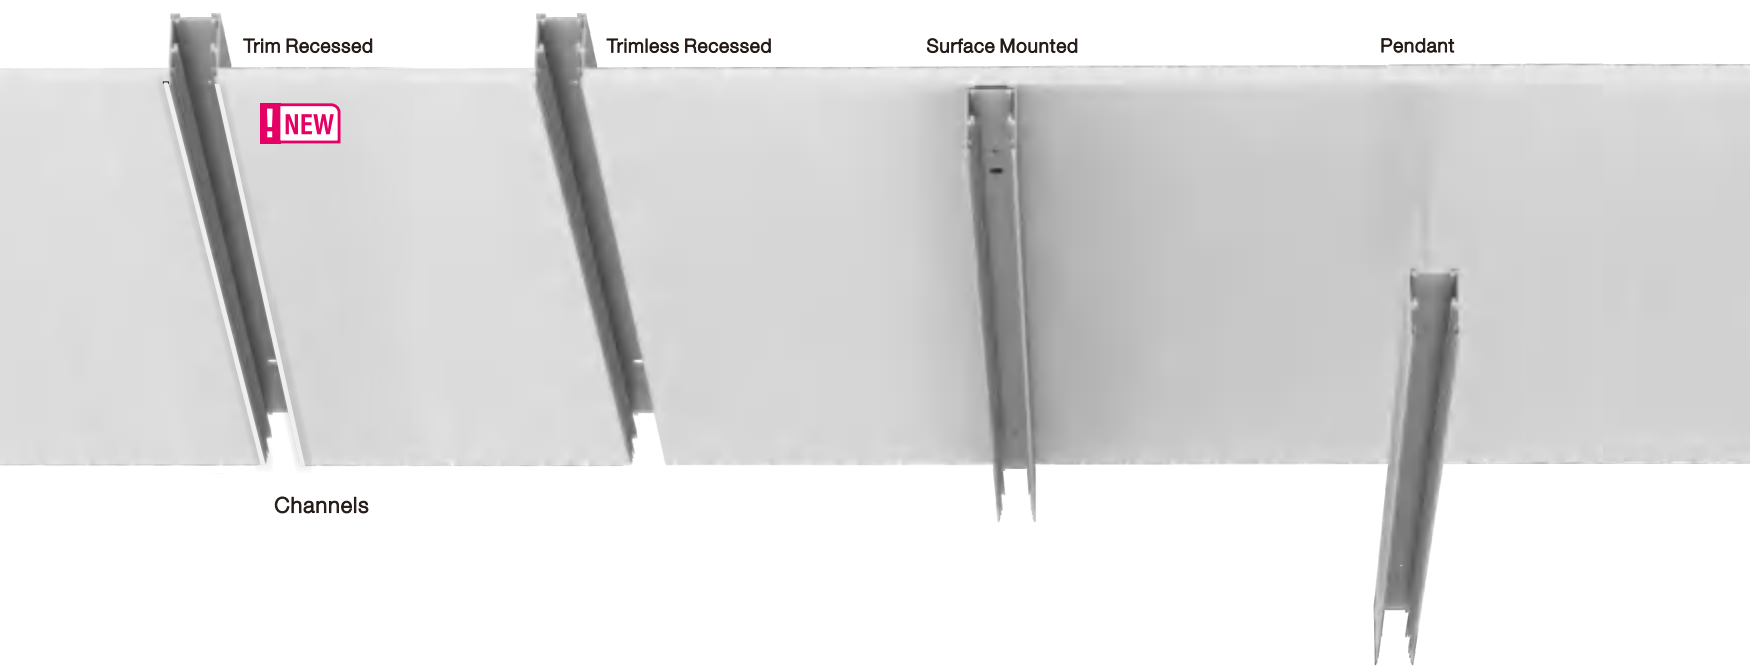


Inserts



Covers




Mounting Kits

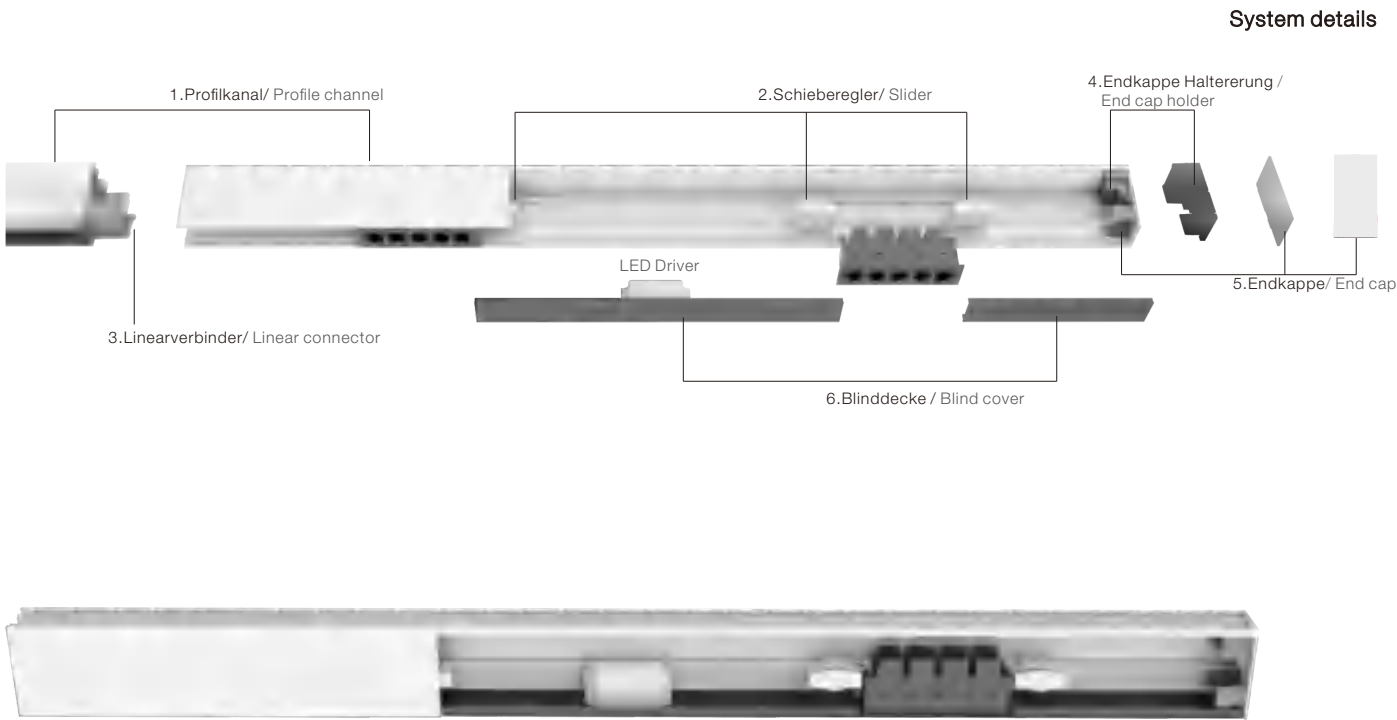

Intelligentes Linear-Profil-Design
Einfachste Installation der Fusion-Einbauleuchte in den Profilkanal

Smart linear profile design
Easy to install fusion downlight into profile channel

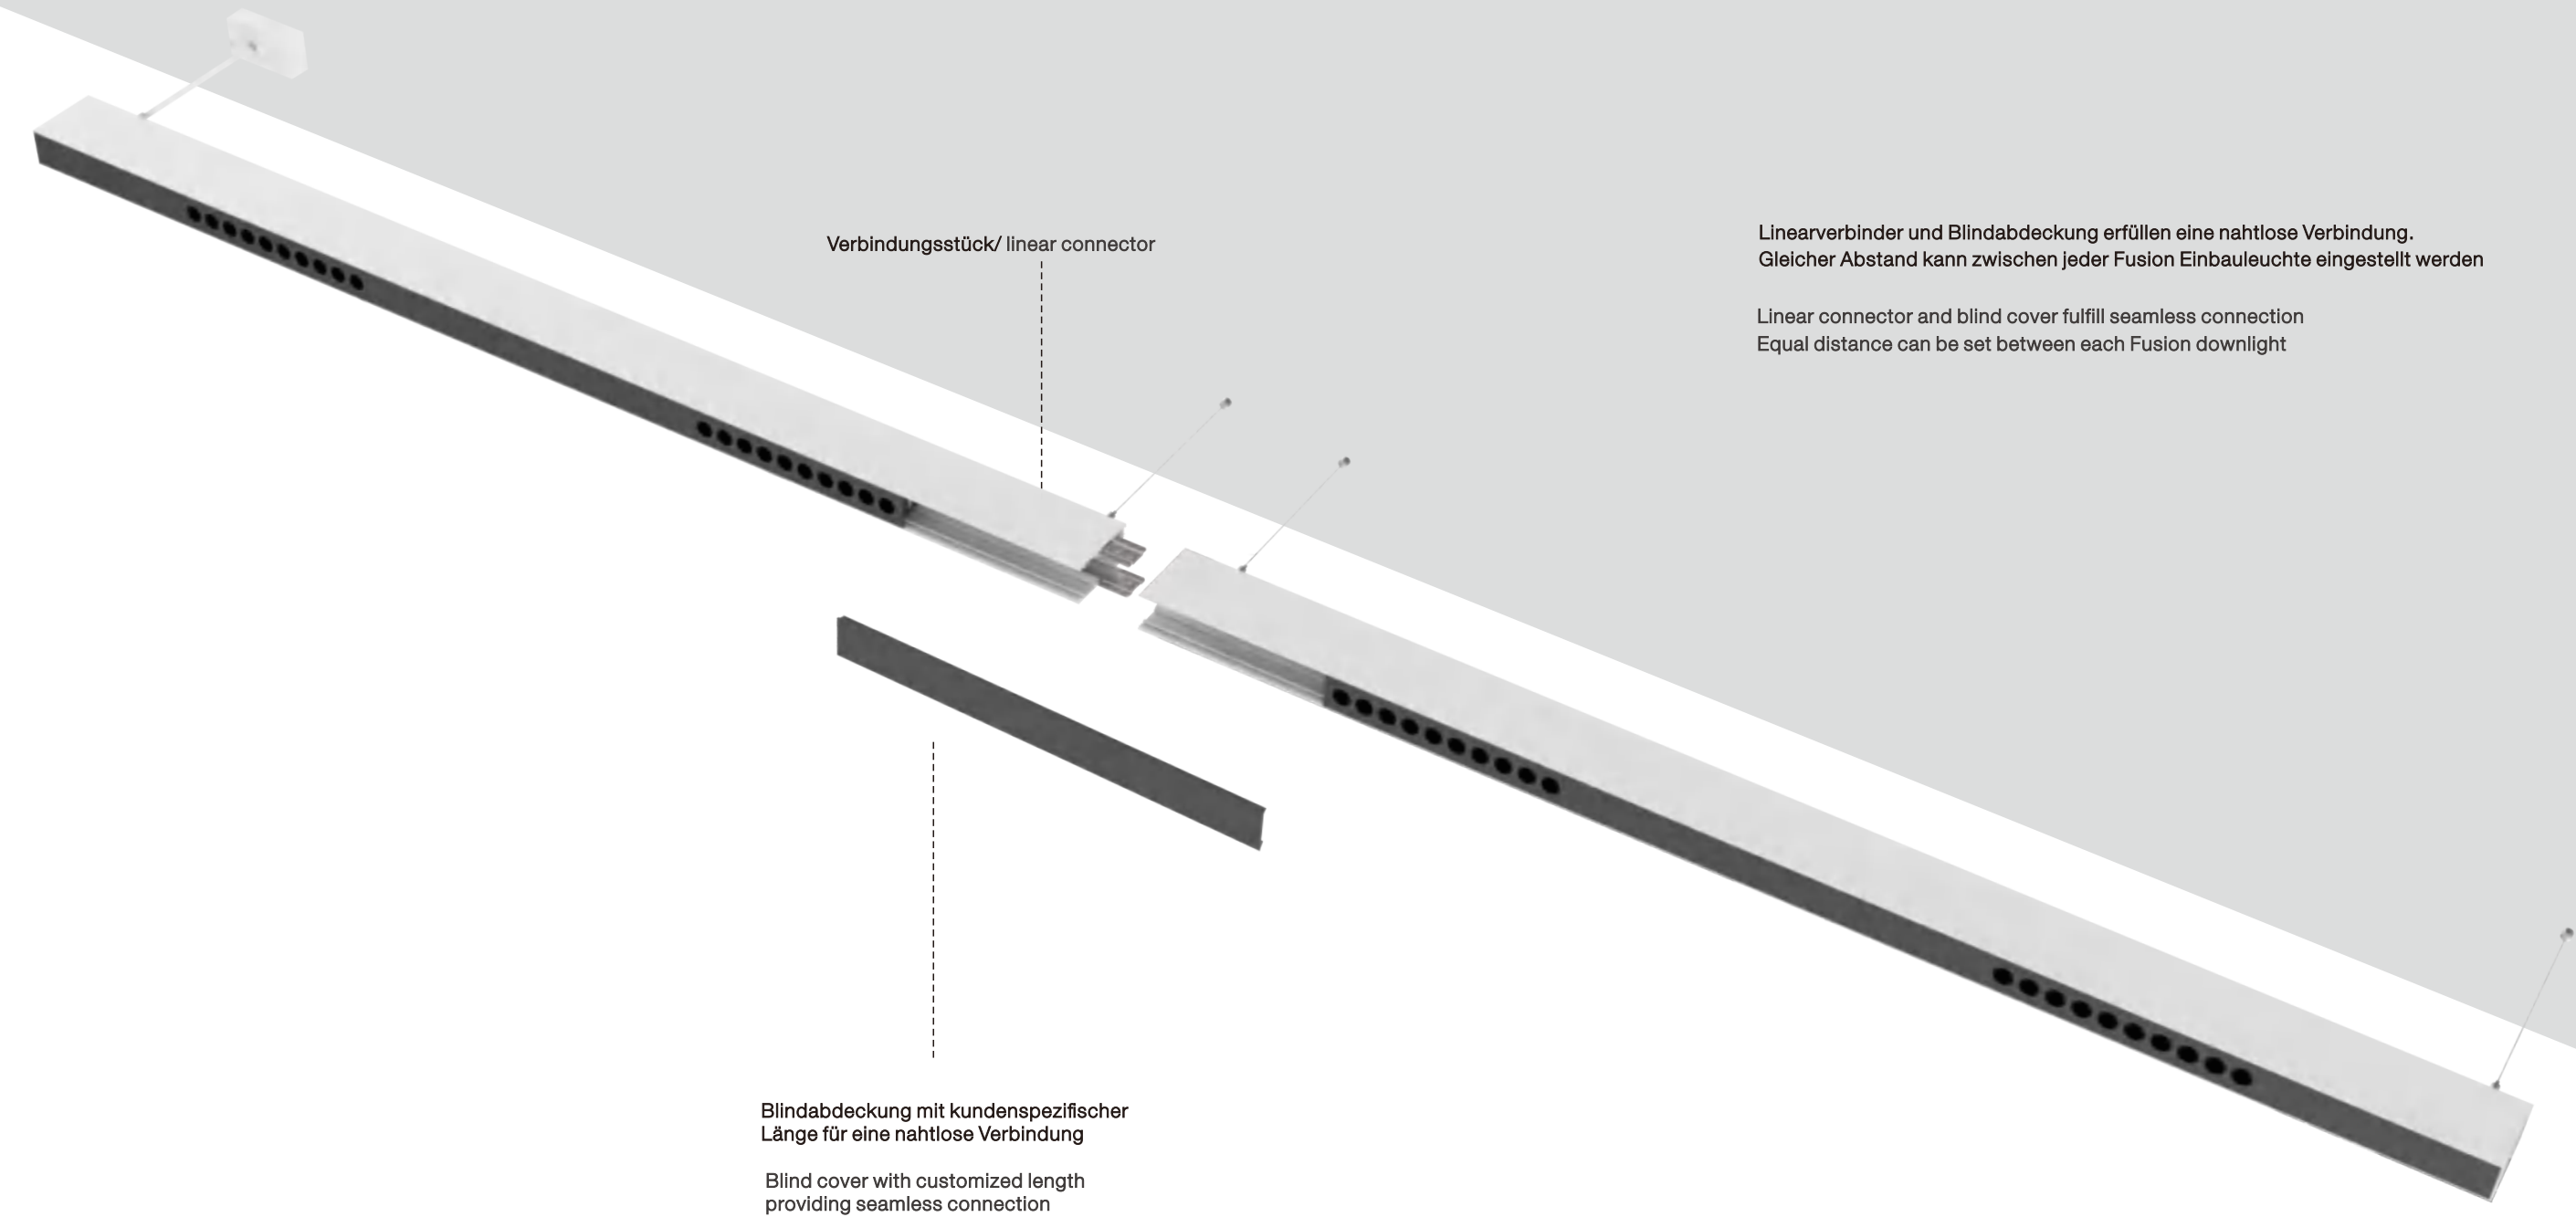

NEKO / FUSION Linear System

Linear Light module

General Light Module



GL600


Linkable extruded aluminium
for continuous linear light
594mm for different system
Opal cover can be customized length



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model
11 W	13 W	46V	250 mA	80	2700K	105°	1600lm	1200lm	GL600-11W-827-105°N
					3000K	105°	1700lm	1300lm	GL600-11W-830-105°N
					4000K	105°	1800lm	1400lm	GL600-11W-840-105°N
				90	2700K	105°	1500lm	1100lm	GL600-11W-927-105°N
					3000K	105°	1600lm	1200lm	GL600-11W-930-105°N
					4000K	105°	1700lm	1300lm	GL600-11W-940-105°N
				80	2700K	105°	2100lm	1700lm	GL600-16W-827-105°N
					3000K	105°	2200lm	1800lm	GL600-16W-830-105°N
					4000K	105°	2400lm	1900lm	GL600-16W-840-105°N
16 W	18 W	46V	350 mA	90	2700K	105°	1900lm	1600lm	GL600-16W-927-105°N
					3000K	105°	2000lm	1700lm	GL600-16W-930-105°N
					4000K	105°	2200lm	1900lm	GL600-16W-940-105°N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Light Distribution

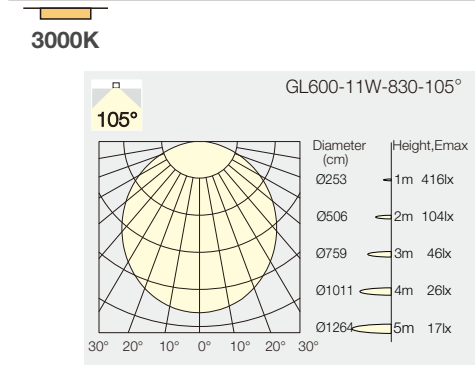

NEKO / FUSION Linear System

Linear Light module

Wallwasher Module



WW1200/ WW1800


Uniform wall washer effect



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model
22 W	26 W	46V	500 mA	80	2700K	WW	3200lm	1700lm	WW1200-22W-827N
					3000K	WW	3400lm	1800lm	WW1200-22W-830N
					4000K	WW	3600lm	1900lm	WW1200-22W-840N
				90	2700K	WW	3000lm	1500lm	WW1200-22W-927N
					3000K	WW	3200lm	1600lm	WW1200-22W-930N
					4000K	WW	3400lm	1700lm	WW1200-22W-940N
				80	2700K	WW	4600lm	2300lm	WW1200-32W-827N
					3000K	WW	4800lm	2500lm	WW1200-32W-830N
					4000K	WW	5000lm	2700lm	WW1200-32W-840N
32 W	36 W	46V	700 mA	90	2700K	WW	4000lm	2000lm	WW1200-32W-927N
					3000K	WW	4200lm	2200lm	WW1200-32W-930N
					4000K	WW	4400lm	2400lm	WW1200-32W-940N
32 W	36 W	46V	700 mA	80	2700K	WW	4600lm	2500lm	WW1800-32W-827N
					3000K	WW	4800lm	2700lm	WW1800-32W-830N
					4000K	WW	5000lm	2900lm	WW1800-32W-840N
				90	2700K	WW	4000lm	2100lm	WW1800-32W-927N
					3000K	WW	4200lm	2300lm	WW1800-32W-930N
					4000K	WW	4400lm	2500lm	WW1800-32W-940N
				80	2700K	WW	6200lm	3300lm	WW1800-48W-827N
					3000K	WW	6400lm	3500lm	WW1800-48W-830N
					4000K	WW	6600lm	3700lm	WW1800-48W-840N
48 W	52 W	46V	700+350 mA	90	2700K	WW	5500lm	2900lm	WW1800-48W-927N
					3000K	WW	5700lm	3100lm	WW1800-48W-930N
					4000K	WW	5900lm	3300lm	WW1800-48W-940N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Light Distribution

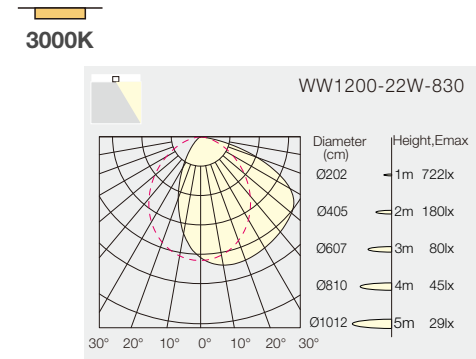

NEKO / FUSION Linear System

Linear Light module

Spot Light Module

SL300-1S-4W




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model			
4 W	6 W	12V	350 mA	80	2700K	15°	470lm	350lm	SL300-1S-4W-827-15° N			
						30°	470lm	350lm	SL300-1S-4W-827-30° N			
						55°	470lm	350lm	SL300-1S-4W-827-55° N			
					3000K	15°	500lm	380lm	SL300-1S-4W-830-15° N			
						30°	500lm	380lm	SL300-1S-4W-830-30° N			
						55°	500lm	380lm	SL300-1S-4W-830-55° N			
				4000K	15°	550lm	420lm	SL300-1S-4W-840-15° N				
					30°	550lm	420lm	SL300-1S-4W-840-30° N				
					55°	550lm	420lm	SL300-1S-4W-840-55° N				

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Light Distribution

3000K

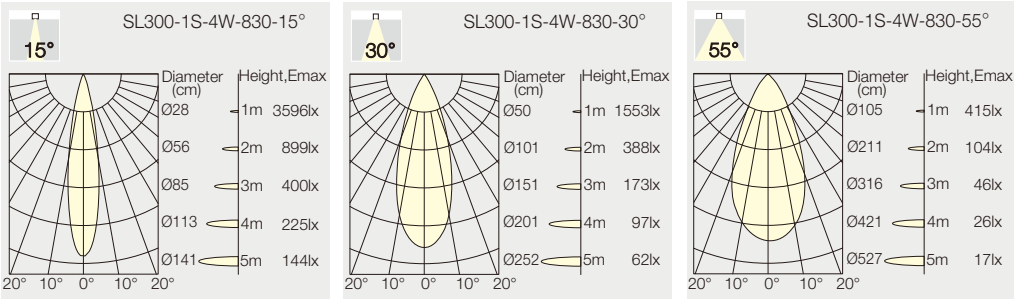


NEKO / FUSION Linear System

Linear Light module

Spot Light Module

SL300-2S-8W

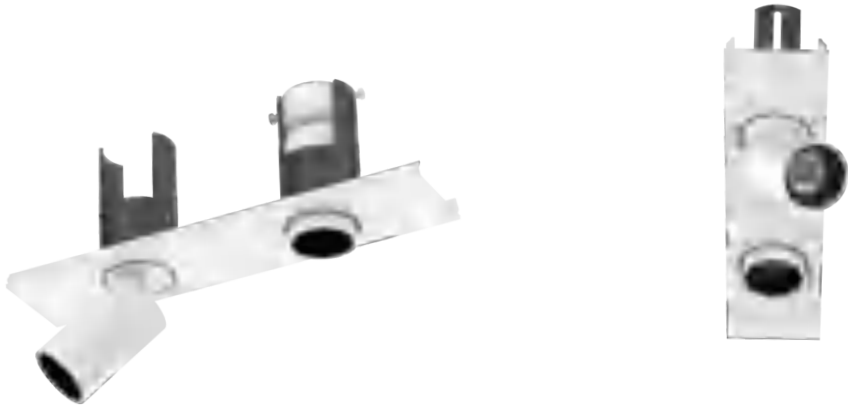


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model			
8 W	10 W	24V	350 mA	80	2700K	15°	850lm	650lm	SL300-2S-8W-827-15°N			
						30°	850lm	650lm	SL300-2S-8W-827-30°N			
						55°	850lm	650lm	SL300-2S-8W-827-55°N			
					3000K	15°	900lm	700lm	SL300-2S-8W-830-15°N			
						30°	900lm	700lm	SL300-2S-8W-830-30°N			
						55°	900lm	700lm	SL300-2S-8W-830-55°N			
				4000K	15°	950lm	750lm	SL300-2S-8W-840-15°N				
					30°	950lm	750lm	SL300-2S-8W-840-30°N				
					55°	950lm	750lm	SL300-2S-8W-840-55°N				

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Light Distribution

3000K

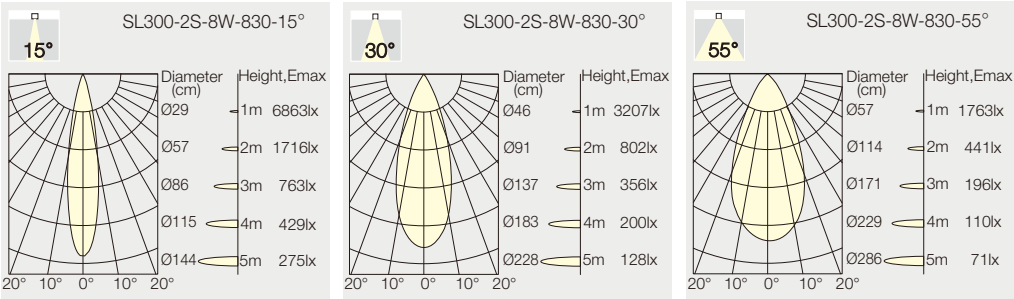

NEKO / **FUSION** Linear System

Linear Light module

Spot Light Module


SL450-3S-13W



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model			
13 W	15 W	36V	350 mA	80	2700K	15°	1200lm	950lm	SL450-3S-13W-827-15°N			
						30°	1200lm	950lm	SL450-3S-13W-827-30°N			
						55°	1200lm	950lm	SL450-3S-13W-827-55°N			
					3000K	15°	1300lm	1000lm	SL450-3S-13W-830-15°N			
						30°	1300lm	1000lm	SL450-3S-13W-830-30°N			
						55°	1300lm	1000lm	SL450-3S-13W-830-55°N			
				4000K	15°	1400lm	1100lm	SL450-3S-13W-840-15°N				
					30°	1400lm	1100lm	SL450-3S-13W-840-30°N				
					55°	1400lm	1100lm	SL450-3S-13W-840-55°N				

Code Remark: **N**=N(No Driver) **F**=F(ON-OFF) **P**=P(Phase Dim) **A**=A(1-10V Dim) **D**=D(DALI Dim)

Light Distribution

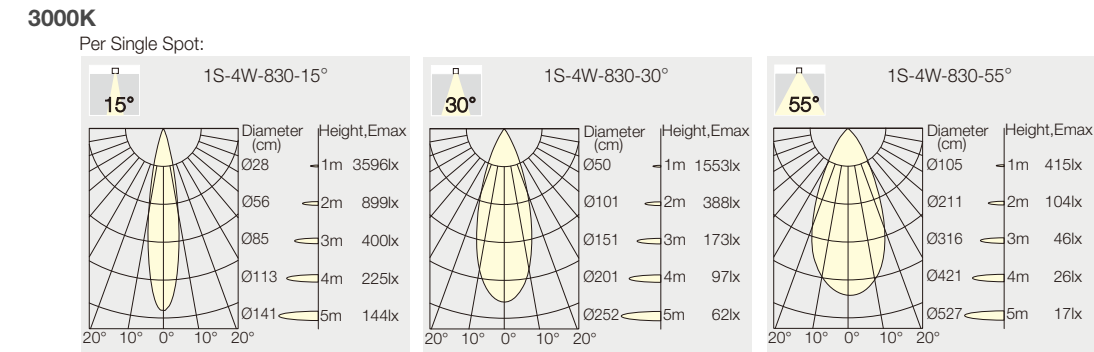

NEKO / **FUSION** Linear System

Linear Light module

Accent Light Module


AL300-13W



AL300

Different lens for beam control


Low glare contributed by black baffle



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model			
13 W	15 W	18 V	700 mA	80	2700K	15°	1300lm	1000lm	AL300-13W-827-15° N				
						30°	1300lm	1000lm	AL300-13W-827-30° N				
						40°	1300lm	1100lm	AL300-13W-827-40° N				
					3000K	15°	1400lm	1100lm	AL300-13W-830-15° N				
						30°	1400lm	1100lm	AL300-13W-830-30° N				
						40°	1400lm	1200lm	AL300-13W-830-40° N				
				4000K	15°	1500lm	1200lm	AL300-13W-840-15° N					
					30°	1500lm	1200lm	AL300-13W-840-30° N					
					40°	1500lm	1300lm	AL300-13W-840-40° N					

Code Remark: **N**=N(No Driver) **F**=F(ON-OFF) **P**=P(Phase Dim) **A**=A(1-10V Dim) **D**=D(DALI Dim)

Light Distribution

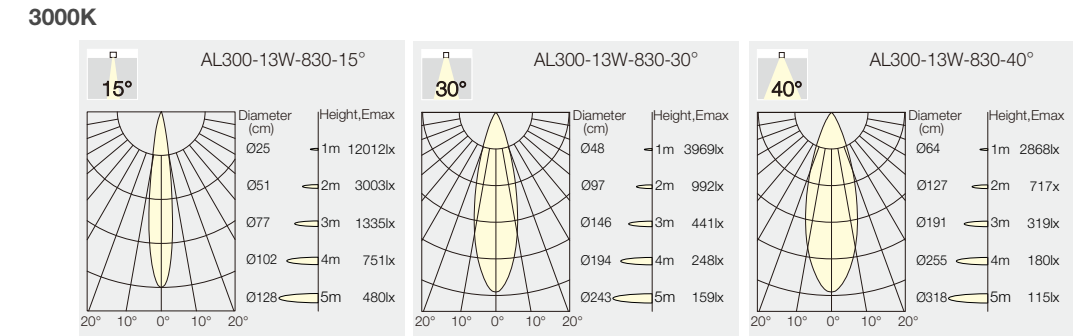

NEKO / FUSION Linear System
Linear Light module
Up Light Module
UL1200-11W/ UL1800-16W




11W	CRI80	2700K						15.5	1070/ 1605
16W	CRI90	3000K 4000K							

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model
11 W	13 W	46 V	250 mA	80	2700K	110°	1700lm	1500lm	UL1200-11W-827-110°N
						3000K	1800lm	1600lm	UL1200-11W-830-110°N
						4000K	1900lm	1700lm	UL1200-11W-840-110°N
16 W	18 W	46 V	350 mA	80	2700K	110°	2300lm	2000lm	UL1800-16W-827-110°N
						3000K	2500lm	2200lm	UL1800-16W-830-110°N
						4000K	2700lm	2400lm	UL1800-16W-840-110°N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Light Distribution

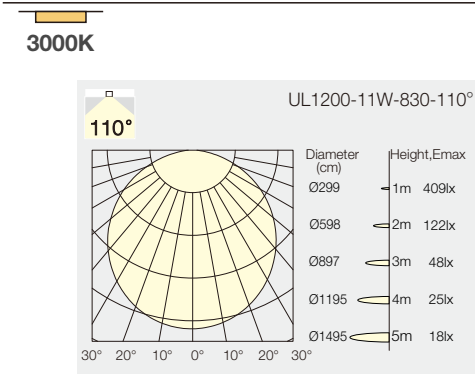


For more info see: www.nekolighting.com



NEKO/ **FUSION** Linear System
FL1500-2*FF10/ FL1200-2*FF5

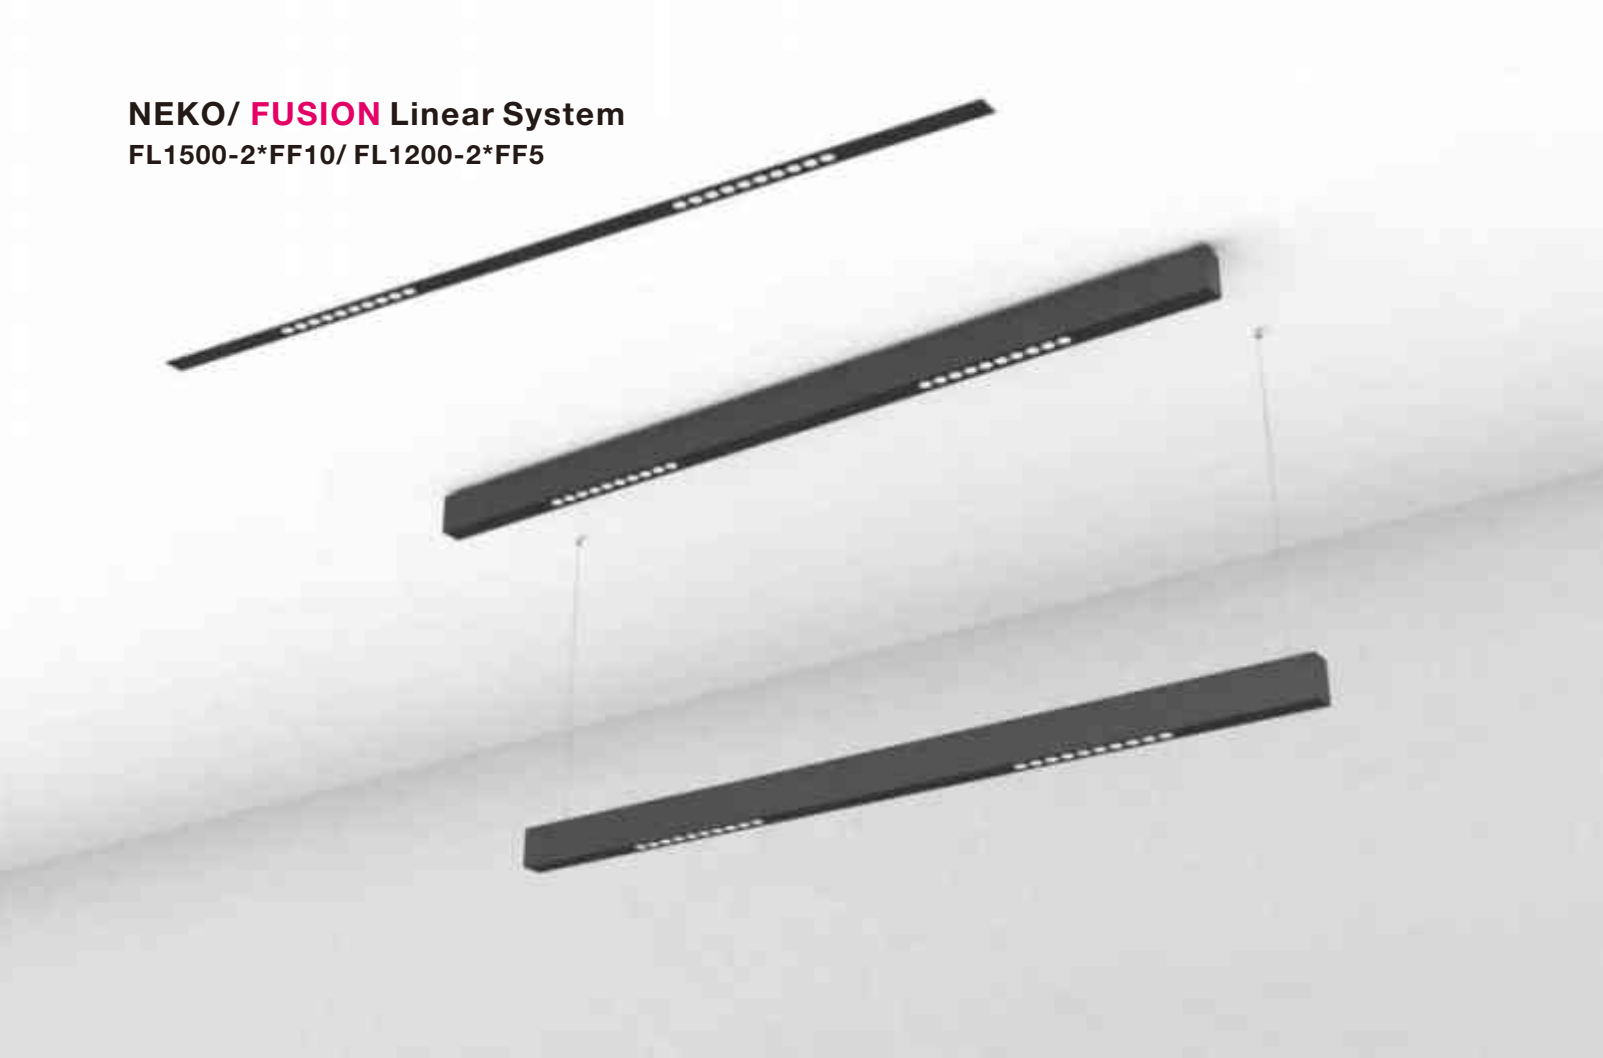


Project: Office Shire House, U.K.

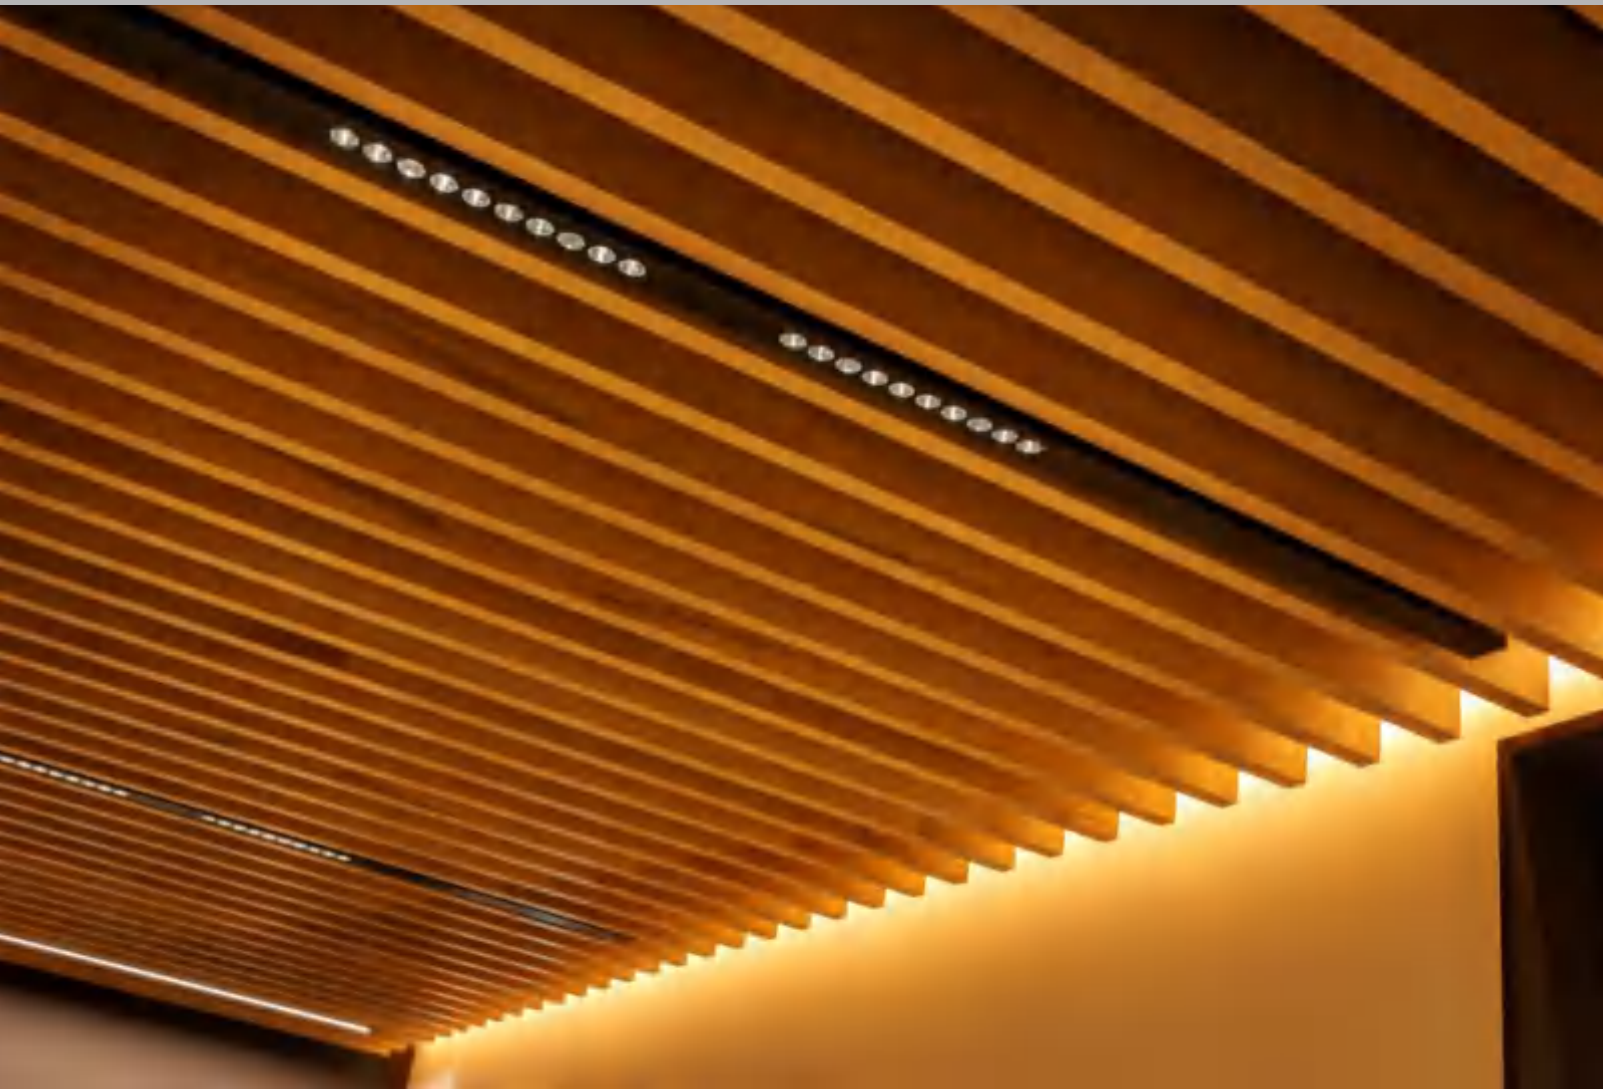



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Model
44 W	48 W	31+31V	700 mA	80	2700K	24°	5000lm	3400lm	1500mm	FL1500(Y)-2*FF10-44W-827-24°F
						40°	5000lm	3400lm	1500mm	FL1500(Y)-2*FF10-44W-827-40°F
						3000K 24°	5200lm	3600lm	1500mm	FL1500(Y)-2*FF10-44W-830-24°F
						40°	5200lm	3600lm	1500mm	FL1500(Y)-2*FF10-44W-830-40°F
						4000K 24°	5600lm	3800lm	1500mm	FL1500(Y)-2*FF10-44W-840-24°F
						40°	5600lm	3800lm	1500mm	FL1500(Y)-2*FF10-44W-840-40°F
22 W	26 W	16+16V	700 mA	80	2700K	24°	2400lm	1700lm	1200mm	FL1200(Y)-2*FF5-22W-827-24°F
						40°	2400lm	1700lm	1200mm	FL1200(Y)-2*FF5-22W-827-40°F
						3000K 24°	2600lm	1800lm	1200mm	FL1200(Y)-2*FF5-22W-830-24°F
						40°	2600lm	1800lm	1200mm	FL1200(Y)-2*FF5-22W-830-40°F
						4000K 24°	2800lm	1900lm	1200mm	FL1200(Y)-2*FF5-22W-840-24°F
						40°	2800lm	1900lm	1200mm	FL1200(Y)-2*FF5-22W-840-40°F

Remark: (Y)=P (Pendant) (Y)= S (Surface mounted) (Y)= R (Trimless Recessed) (Y)= F (Trim Recessed)
Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

NEKO/ **FUSION** Linear System
FL1800-GL1800/ FL1200-GL1200

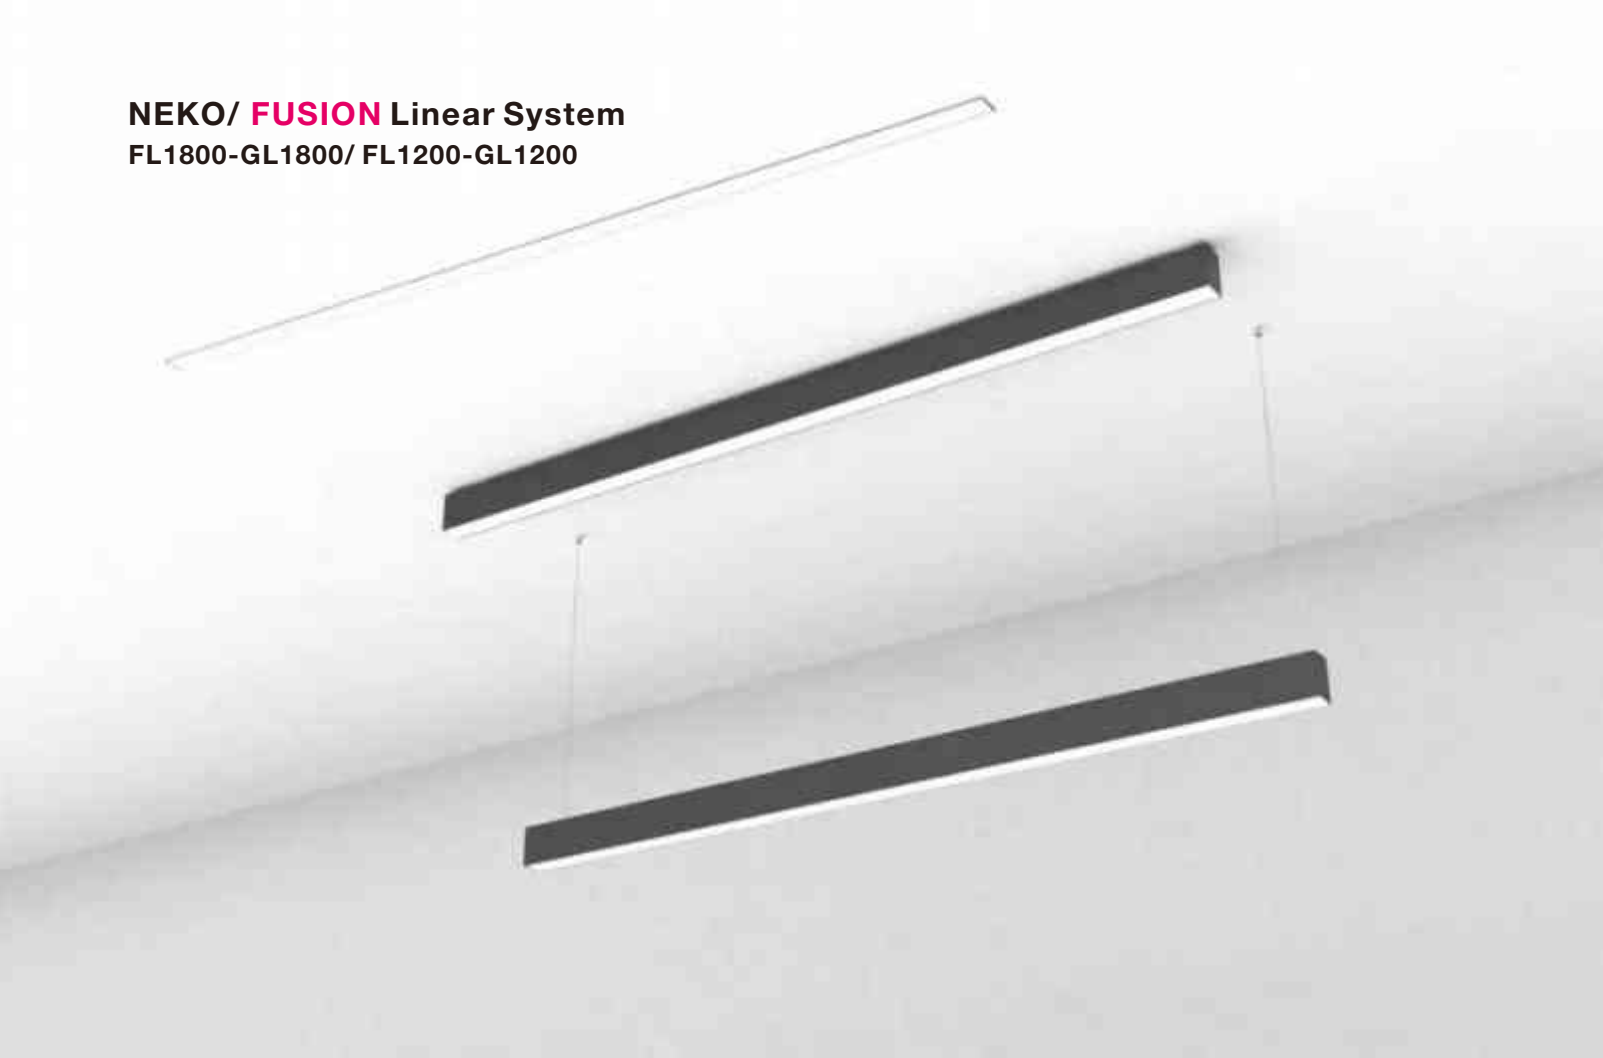


Project: Catalina Bay,New Zealand

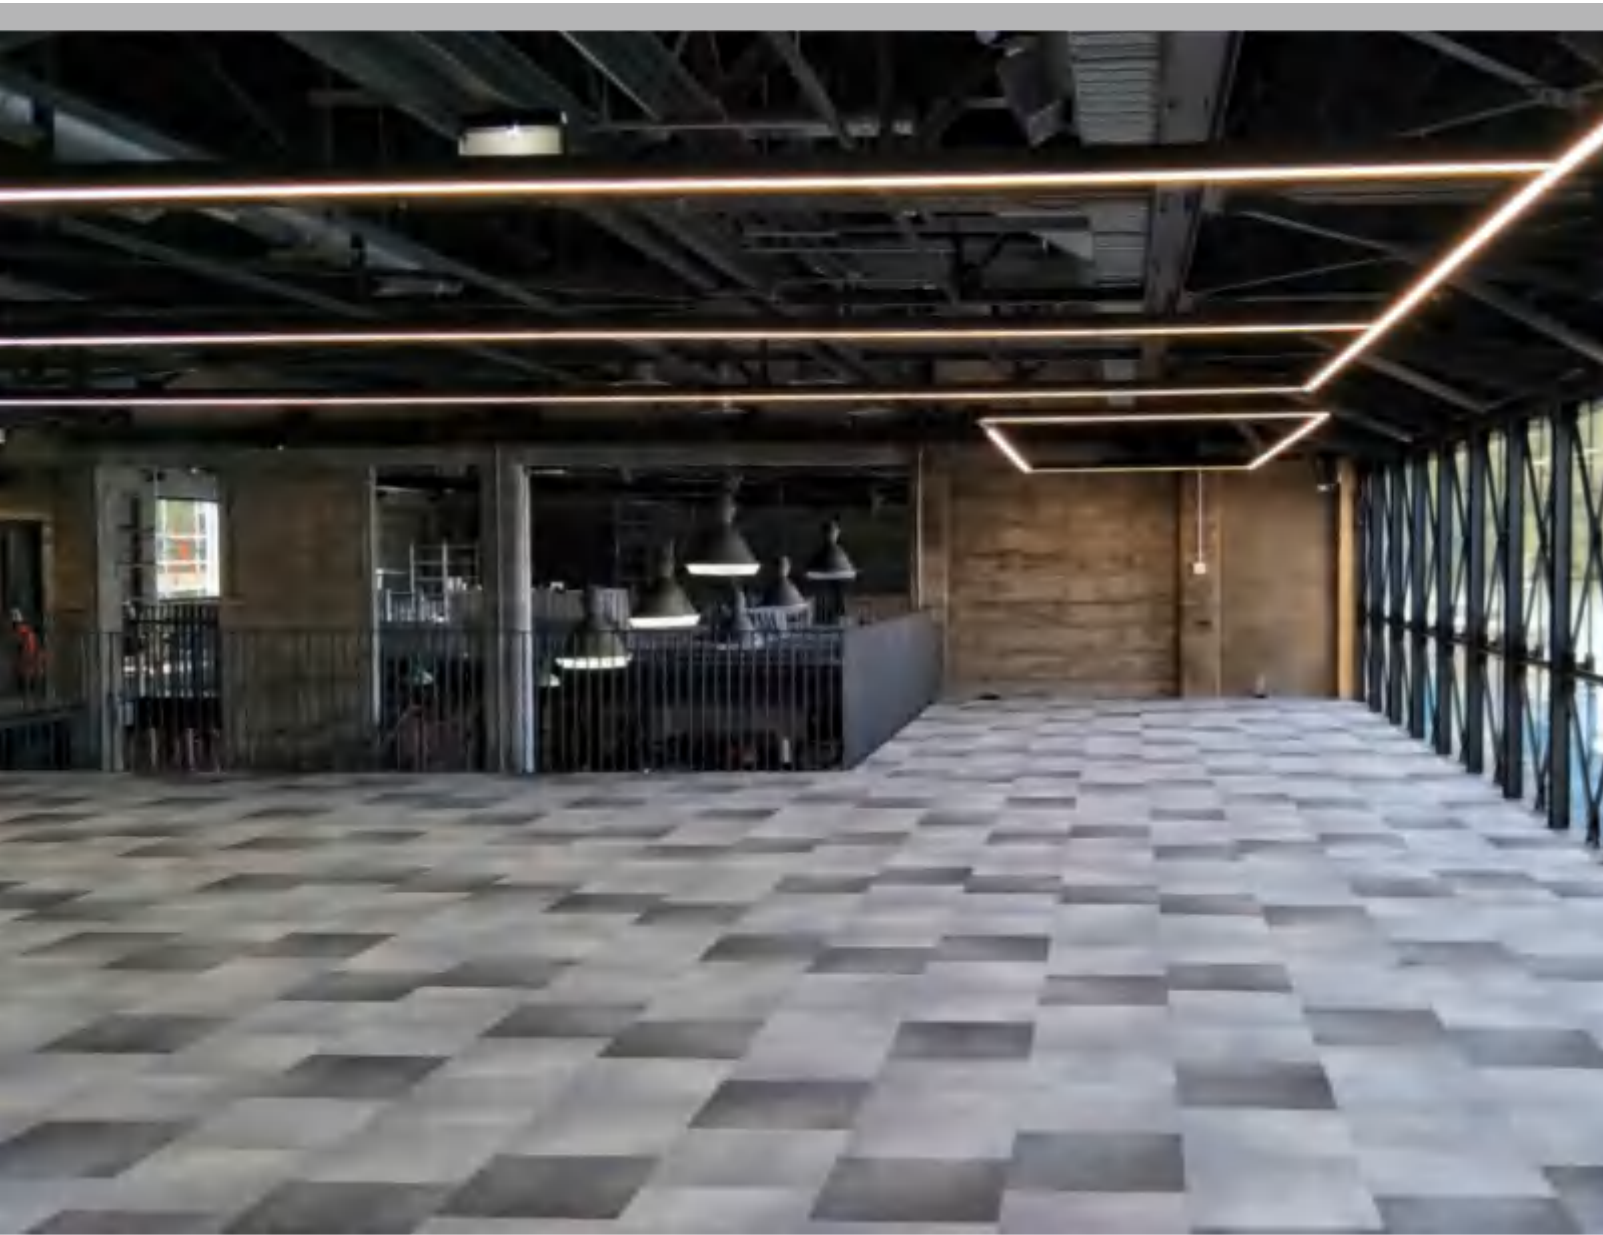


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Model	
32 W	36 W	46V	700 mA	80	2700K	105°	4600lm	3400lm	1800mm	FL1800(Y)-GL1800-32W-827F	
					3000K	105°	4800lm	3600lm	1800mm	FL1800(Y)-GL1800-32W-830F	
					4000K	105°	5000lm	3800lm	1800mm	FL1800(Y)-GL1800-32W-840F	
48 W	52 W	46V	700+350 mA	80	2700K	105°	6200lm	5000lm	1800mm	FL1800(Y)-GL1800-48W-827F	
					3000K	105°	6400lm	5200lm	1800mm	FL1800(Y)-GL1800-48W-830F	
					4000K	105°	7000lm	5500lm	1800mm	FL1800(Y)-GL1800-48W-840F	
22 W	26 W	46V	500 mA	80	2700K	105°	3200lm	2300lm	1200mm	FL1200(Y)-GL1200-22W-827F	
					3000K	105°	3400lm	2700lm	1200mm	FL1200(Y)-GL1200-22W-830F	
					4000K	105°	3600lm	2900lm	1200mm	FL1200(Y)-GL1200-22W-840F	
32 W	36 W	46V	700 mA	80	2700K	105°	4200lm	3400lm	1200mm	FL1200(Y)-GL1200-32W-827F	
					3000K	105°	4400lm	3600lm	1200mm	FL1200(Y)-GL1200-32W-830F	
					4000K	105°	4800lm	3800lm	1200mm	FL1200(Y)-GL1200-32W-840F	

Remark: (Y)=P (Pendant) (Y)=S (Surface mounted) (Y)=R (Trimless Recessed) (Y)=F (Trim Recessed)
Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

NEKO/ **FUSION** Linear System
FL1800-WW1800/ FL1200-WW1200

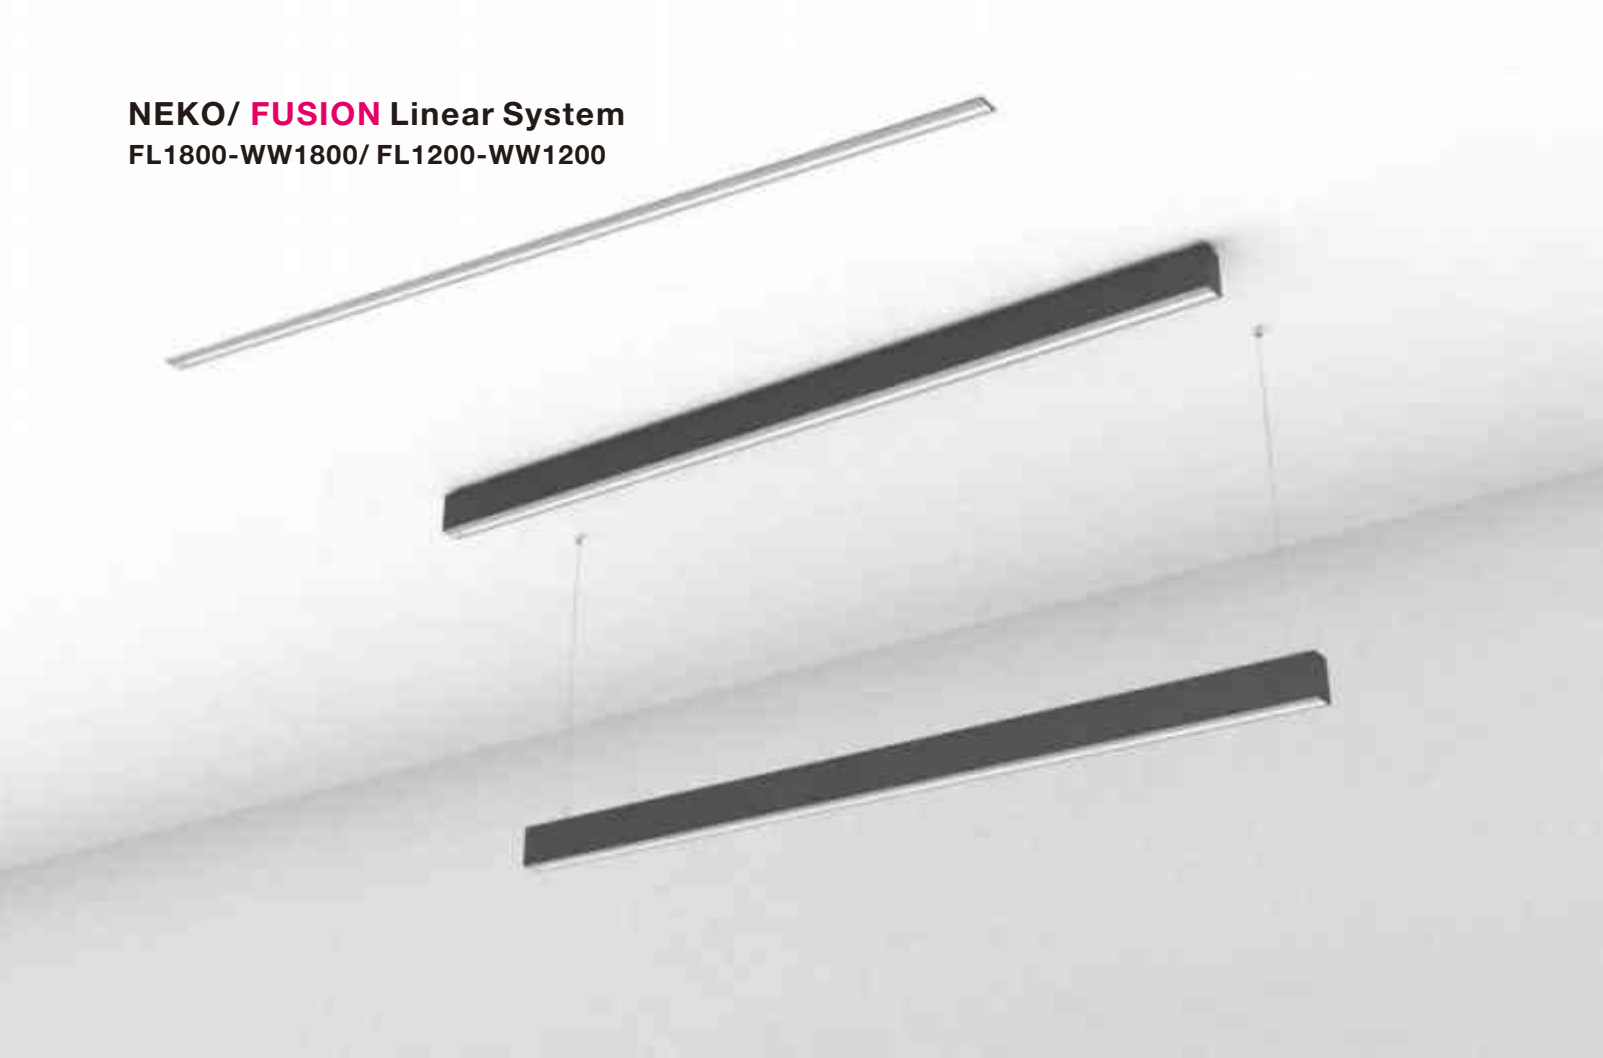

Project: School, Uruguay




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Model
32 W	36 W	46V	700 mA	80	2700K	WW	4600lm	2500lm	1800mm	FL1800(Y)-WW1800-32W-827F
					3000K	WW	4800lm	2700lm	1800mm	FL1800(Y)-WW1800-32W-830F
					4000K	WW	5000lm	2900lm	1800mm	FL1800(Y)-WW1800-32W-840F
48 W	52 W	46V	700+350 mA	80	2700K	WW	6200lm	3300lm	1800mm	FL1800(Y)-WW1800-48W-827F
					3000K	WW	6400lm	3500lm	1800mm	FL1800(Y)-WW1800-48W-830F
					4000K	WW	6600lm	3700lm	1800mm	FL1800(Y)-WW1800-48W-840F
22 W	26 W	46V	500 mA	80	2700K	WW	3200lm	1700lm	1200mm	FL1200(Y)-WW1200-22W-827F
					3000K	WW	3400lm	1800lm	1200mm	FL1200(Y)-WW1200-22W-830F
					4000K	WW	3600lm	1900lm	1200mm	FL1200(Y)-WW1200-22W-840F
32 W	36 W	46V	700 mA	80	2700K	WW	4600lm	2300lm	1200mm	FL1200(Y)-WW1200-32W-827F
					3000K	WW	4800lm	2500lm	1200mm	FL1200(Y)-WW1200-32W-830F
					4000K	WW	5000lm	2700lm	1200mm	FL1200(Y)-WW1200-32W-840F

Remark: (Y)=P (Pendant) (Y)= S (Surface mounted) (Y)= R (Trimless Recessed) (Y)= F (Trim Recessed)
Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



NEKO/ **FUSION** Linear System
FL1200-2*AL300/ FL1500-2*AL300

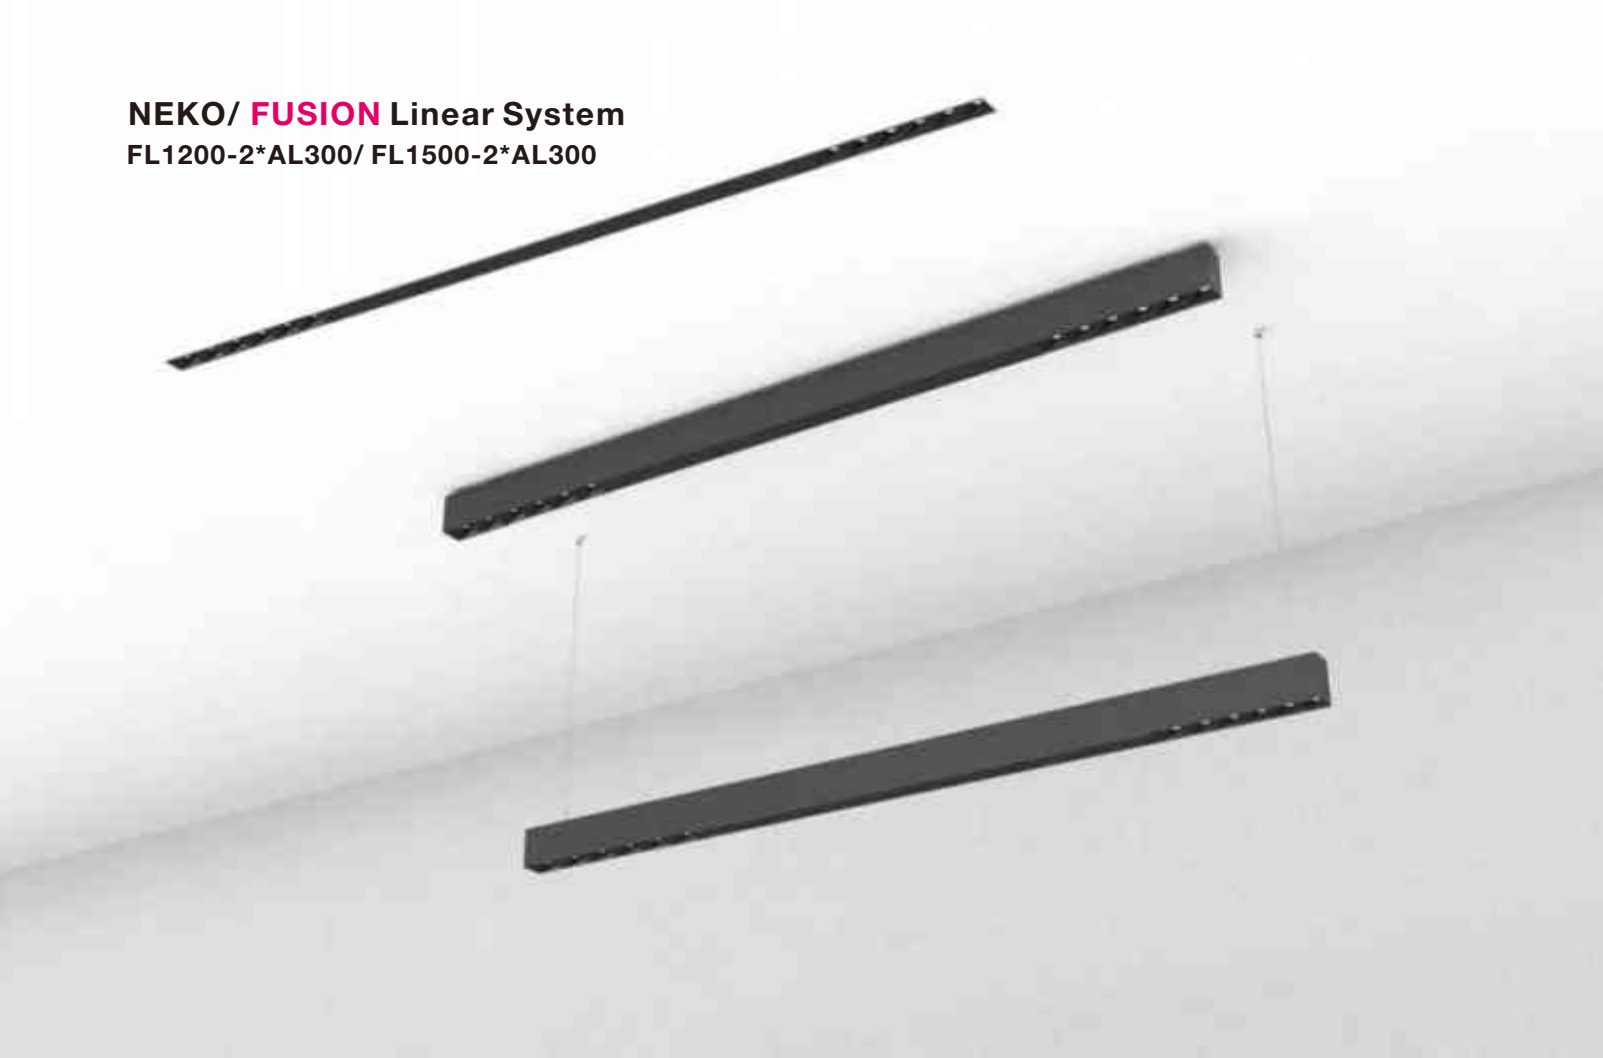

Project: Skyline Hill, Germany




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Model
26 W	30 W	36 V	700 mA	80	2700K	15°	2800lm	2000lm	1200mm	FL1200(Y)-2*AL300-26W-827-15D
						30°	2800lm	2000lm	1200mm	FL1200(Y)-2*AL300-26W-827-30D
						40°	2800lm	2200lm	1200mm	FL1200(Y)-2*AL300-26W-827-40D
					3000K	15°	3000lm	2200lm	1200mm	FL1200(Y)-2*AL300-26W-830-15D
						30°	3000lm	2200lm	1200mm	FL1200(Y)-2*AL300-26W-830-30D
						40°	3000lm	2400lm	1200mm	FL1200(Y)-2*AL300-26W-830-40D
					4000K	15°	3400lm	2400lm	1200mm	FL1200(Y)-2*AL300-26W-840-15D
						30°	3400lm	2400lm	1200mm	FL1200(Y)-2*AL300-26W-840-30D
						40°	3400lm	2600lm	1200mm	FL1200(Y)-2*AL300-26W-840-40D
					2700K	15°	2800lm	2000lm	1500mm	FL1500(Y)-2*AL300-26W-827-15D
						30°	2800lm	2000lm	1500mm	FL1500(Y)-2*AL300-26W-827-30D
						40°	2800lm	2200lm	1500mm	FL1500(Y)-2*AL300-26W-827-40D
26 W	30 W	36 V	700 mA	80	3000K	15°	3000lm	2200lm	1500mm	FL1500(Y)-2*AL300-26W-830-15D
						30°	3000lm	2200lm	1500mm	FL1500(Y)-2*AL300-26W-830-30D
						40°	3000lm	2400lm	1500mm	FL1500(Y)-2*AL300-26W-830-40D
					4000K	15°	3400lm	2400lm	1500mm	FL1500(Y)-2*AL300-26W-840-15D
						30°	3400lm	2400lm	1500mm	FL1500(Y)-2*AL300-26W-840-30D
						40°	3400lm	2600lm	1500mm	FL1500(Y)-2*AL300-26W-840-40D
					2700K	15°	2800lm	2000lm	1500mm	FL1500(Y)-2*AL300-26W-827-15D
						30°	2800lm	2000lm	1500mm	FL1500(Y)-2*AL300-26W-827-30D
						40°	2800lm	2200lm	1500mm	FL1500(Y)-2*AL300-26W-827-40D

Remark: (Y)=P (Pendant) (Y)= S (Surface mounted) (Y)= R (Trimless Recessed) (Y)= F (Trim Recessed)
Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



NEKO/ **FUSION** Linear System
FL1200-2*AL300+GL600

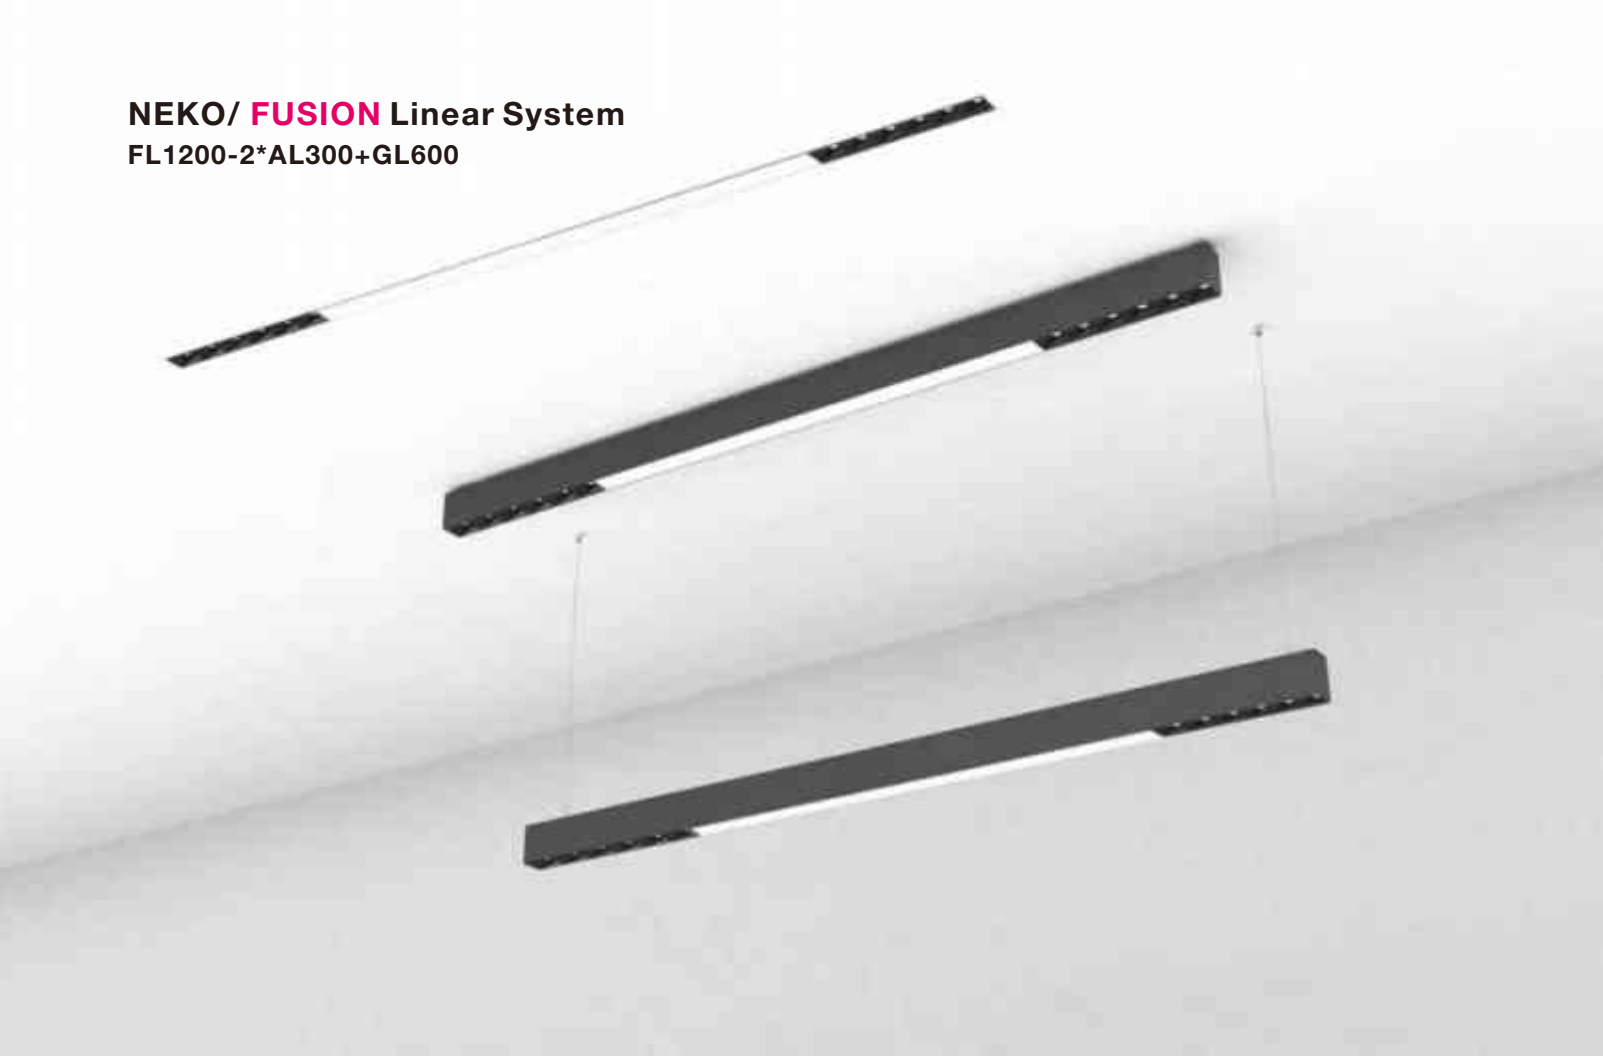


Project: Office Shire House, U.K.



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Model
37	W	41	W	47	V	700	mA	80	2700K	15°+105° 4500lm 3300lm FL1200(M)-2*AL300+GL600-37W-827-15DF
										30°+105° 4500lm 3300lm FL1200(M)-2*AL300+GL600-37W-827-30DF
										40°+105° 4500lm 3500lm FL1200(M)-2*AL300+GL600-37W-827-40DF
										3000K 15°+105° 4700lm 3500lm FL1200(M)-2*AL300+GL600-37W-830-15DF
										30°+105° 4700lm 3500lm FL1200(M)-2*AL300+GL600-37W-830-30DF
										40°+105° 4700lm 3700lm FL1200(M)-2*AL300+GL600-37W-830-40DF
										4000K 15°+105° 5100lm 3800lm FL1200(M)-2*AL300+GL600-37W-840-15DF
										30°+105° 5100lm 3800lm FL1200(M)-2*AL300+GL600-37W-840-30DF
										40°+105° 5100lm 4000lm FL1200(M)-2*AL300+GL600-37W-840-40DF

Remark: (M)=P (Pendant) (M)=S (Surface mounted) (M)=R (Trimless Recessed) (M)=F (Trim Recessed)
Code Remark: N=N (No Driver) F=F (ON-OFF) P=P (Phase Dim) A=A (1-10V Dim) D=D (DALI Dim)


NEKO/**FUSION** Linear System
More modules combination available

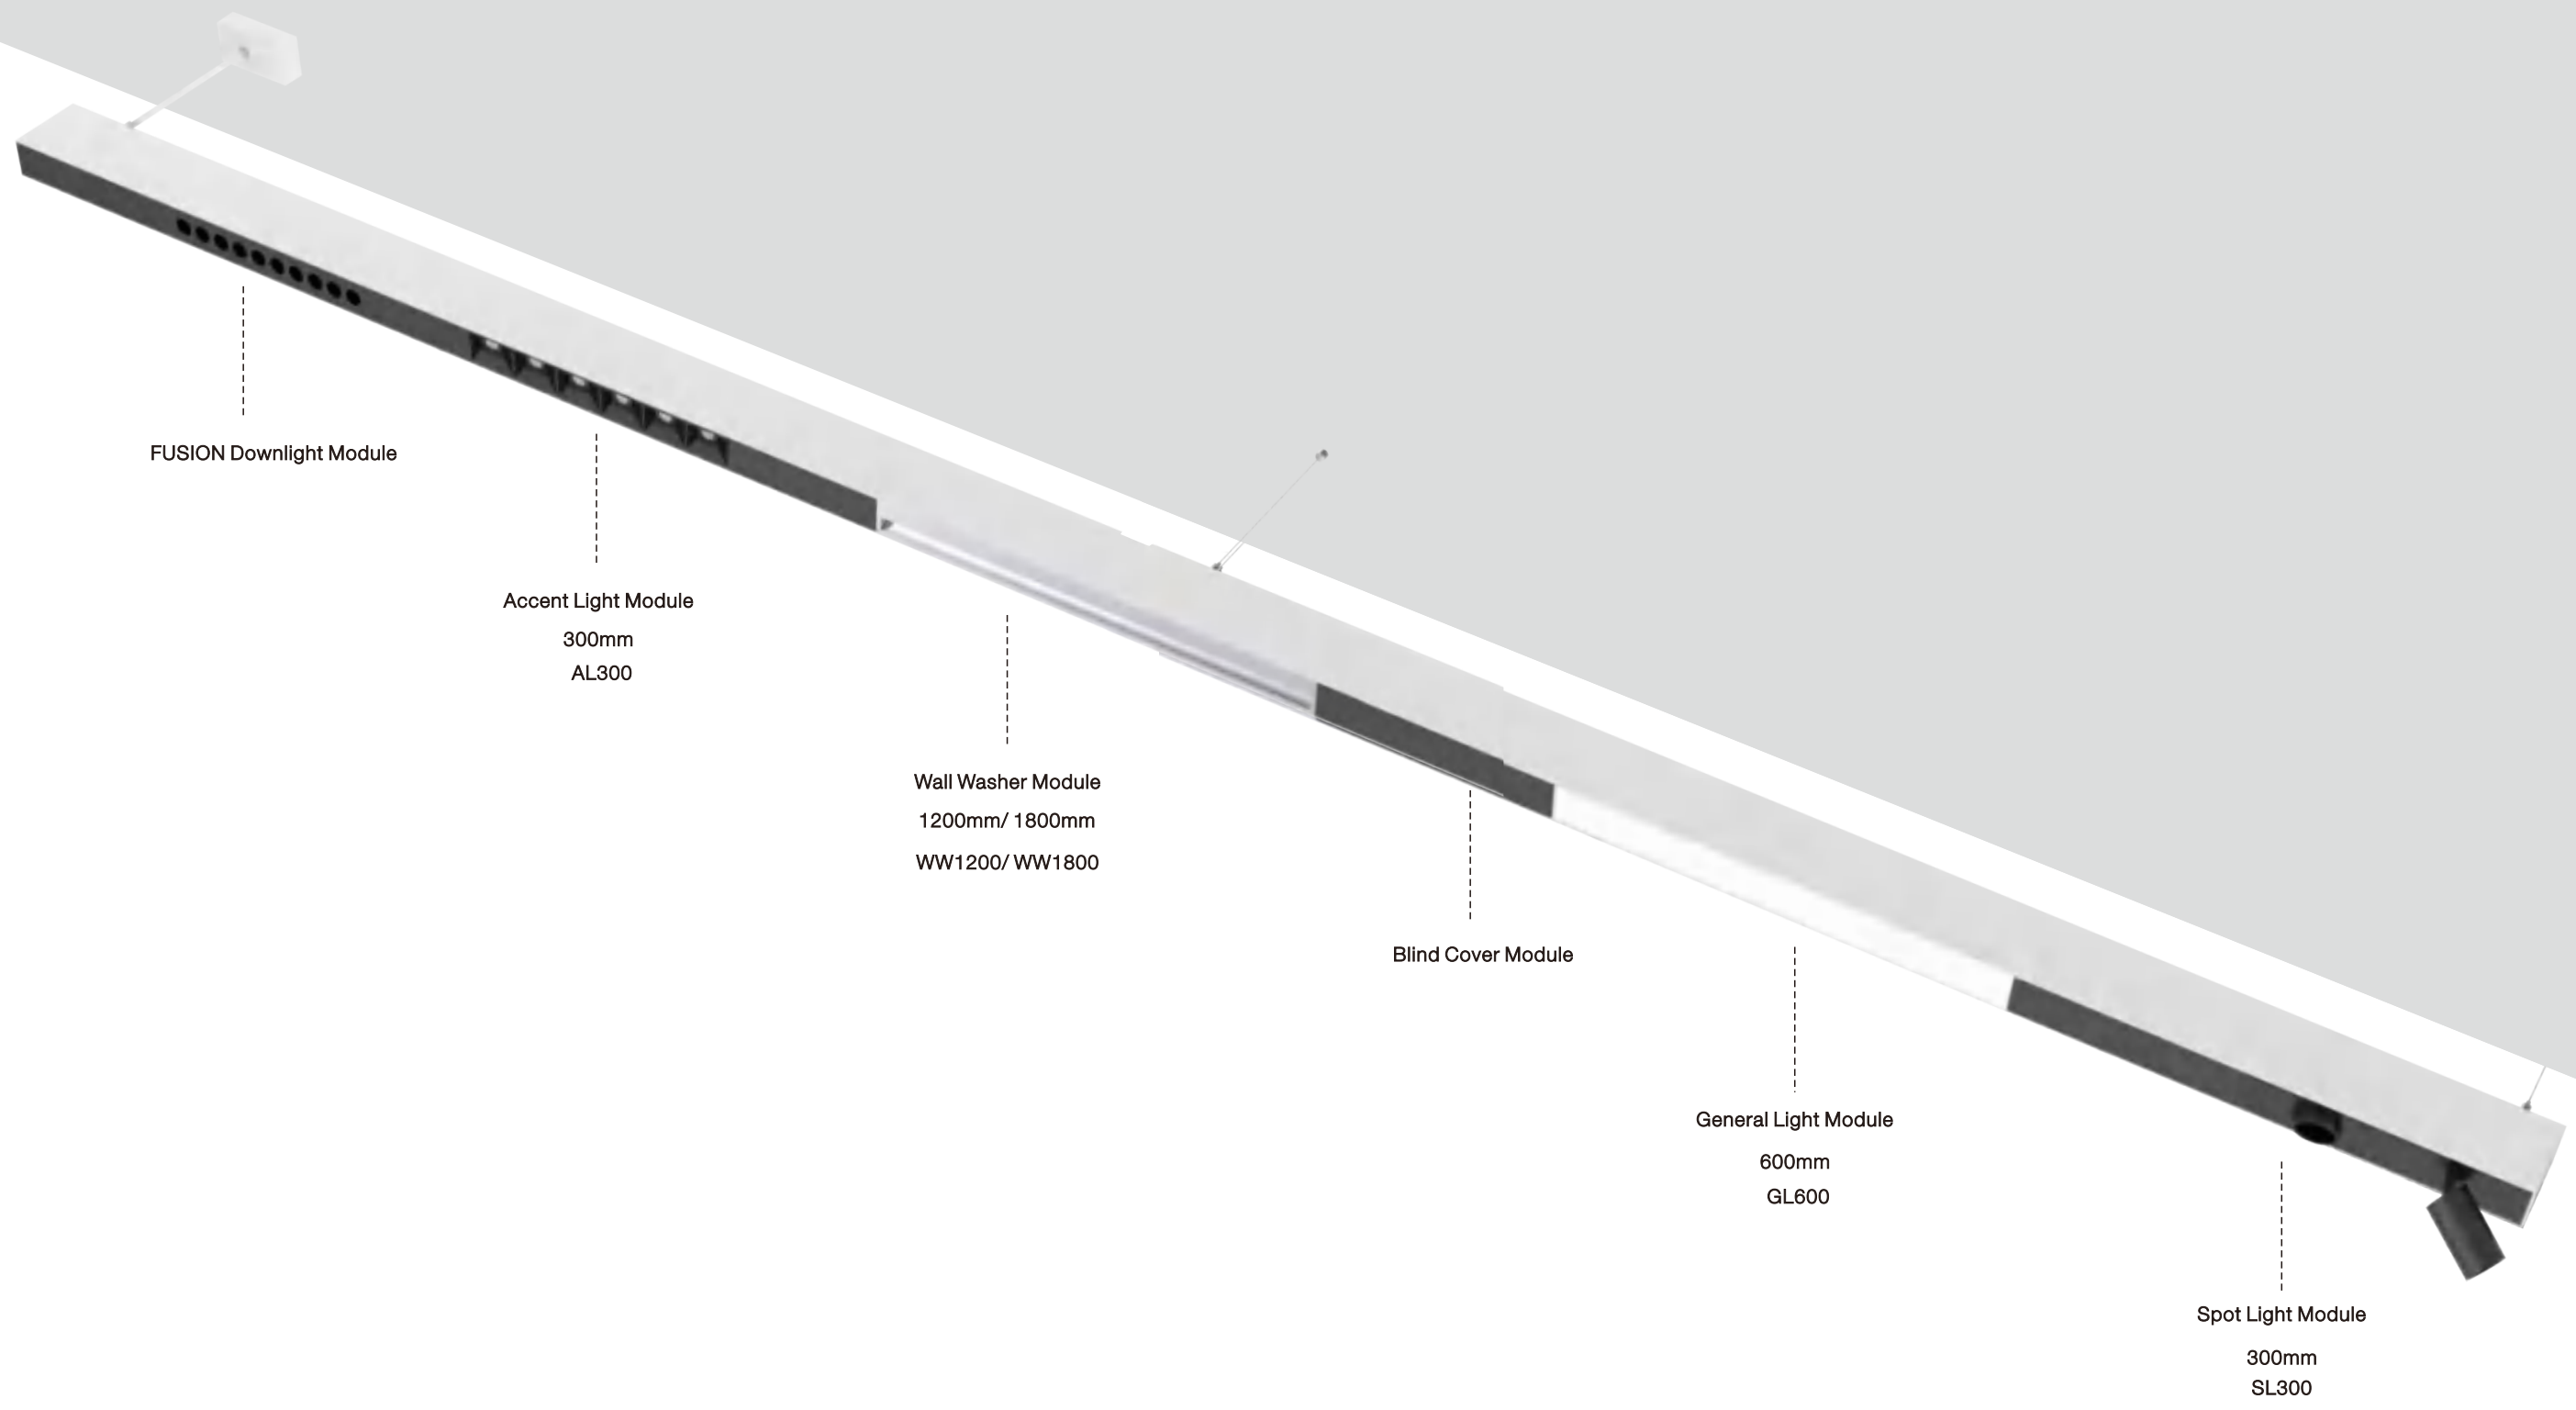

Linear System with more modules combination available.
All available with Suspended, surface mounted and recessed mounted versions.



Microprismatic Cover/ Opal Cover/ U-Cover

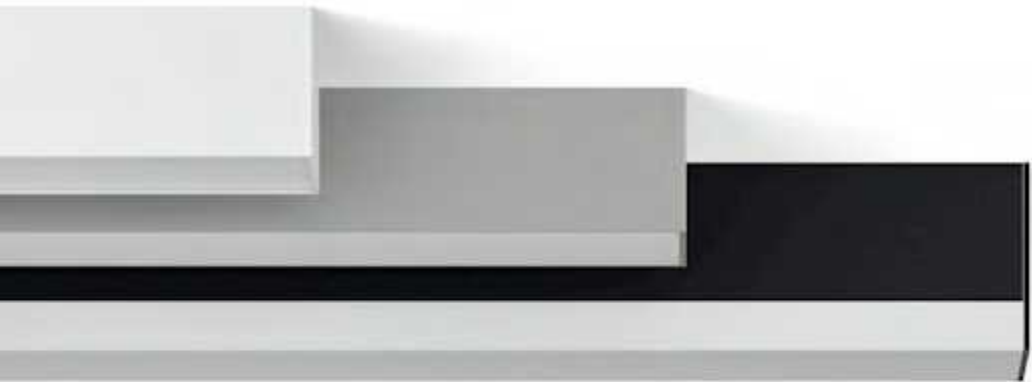


Microprismatic Cover/ Opal Cover/ U-Cover




Microprismatic Cover/ Opal Cover




Surface Mounted




Pendant

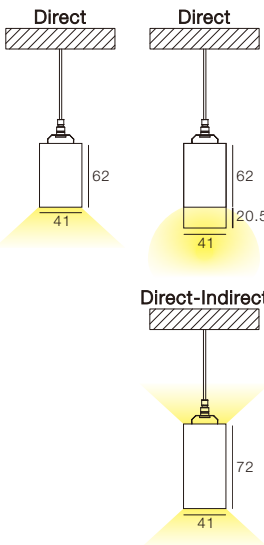



Trim Recessed



Microprismatic Cover/ Opal Cover

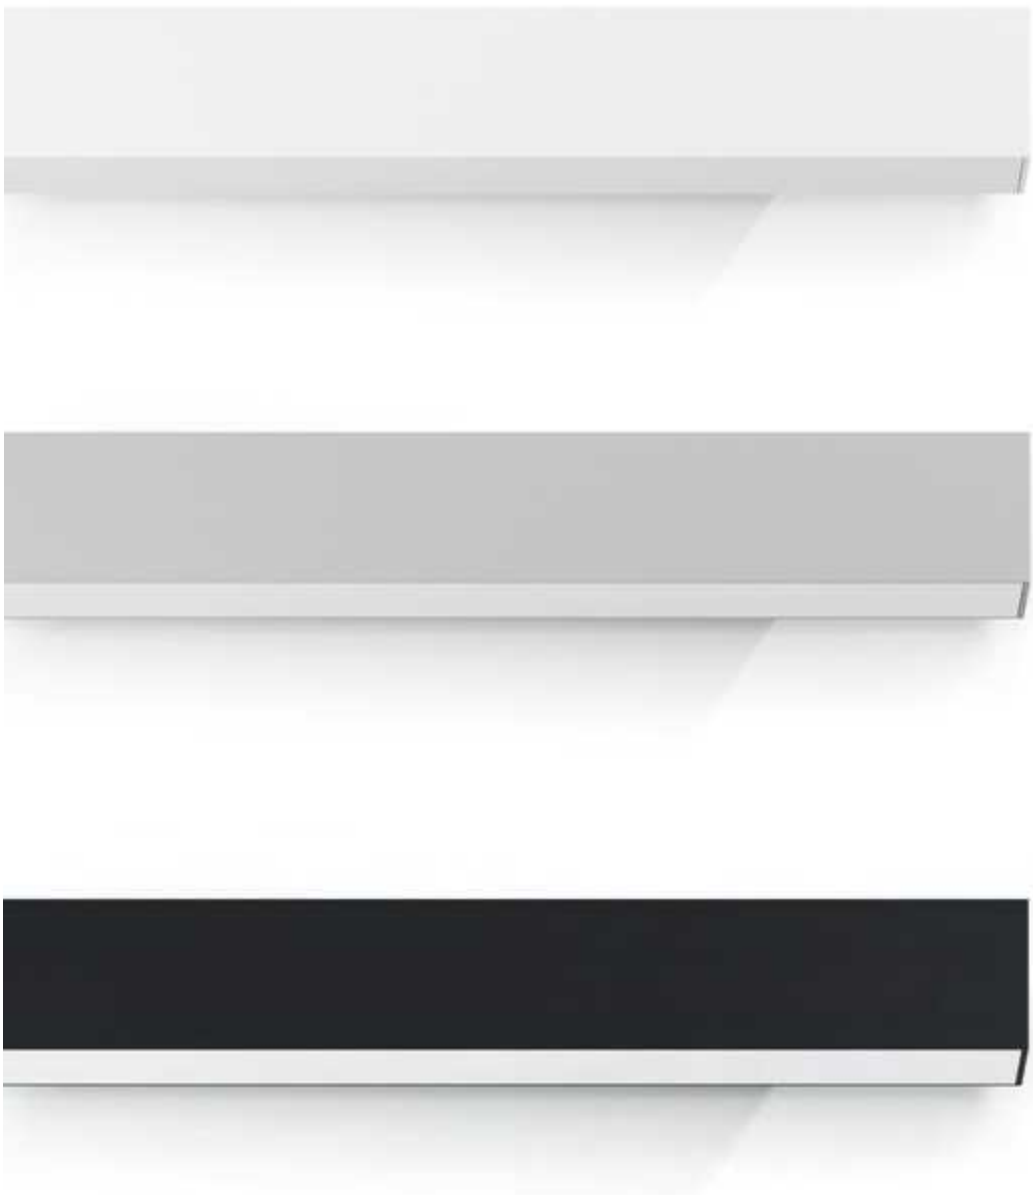


Wall Mounted



NEKO / DASH 40
Linear Light System
Surface Mounted



Surface Mounted



LED-Anbauleuchte direktstrahlend. Lichtkanal aus Aluminium Strangpressprofil mit einer Breite von 41mm. Fertigung der Leuchte millimetergenau auf Kundenwunsch möglich. Oberfläche der Leuchte feinstruktur matt pulverbeschichtet ähnlich RAL9016 weiß, RAL 9006 silber oder RAL9005 schwarz – auf Anfrage in RAL nach Wahl. Diffusor wahlweise in PMMA opal, PMMA opal U-Abdeckung oder PMMA klar mit eingeschobener Mikroprismatischer Plat-te für eine reduzierte Leuchtdichte (UGR<19). Der Konverter ist in das Leuchtengehäuse integriert. Wahlweise als on/off oder DALI Variante – weitere Steuerungsoptionen auf Anfrage möglich. Farbtem-peraturen: 2700K, 3000K, 4000K – weitere Licht-farben auf Anfrage. Farbwiedergabe CRI>80 oder CRI>90 – Mac Adam <3

Surface-mounted LED Luminaire direct beam Ex-truded aluminium light channel with 41mm width. The luminaire can be manufactured according to the customer's wishes down to the last millimetre. Luminaire surface fine textured matte powder coat-ing similar to RAL9016 white, RAL 9006 silver or RAL9005 black – or in any other RAL of your choice. Diffuser available in either PMMA opal, PMMA opal with U-cover or PMMA clear with microprismatic pla-te inserted for lower luminance (UGR<19). The con-verter is integrated into the luminaire housing. Avail-able as either on/off or DALI variant - other control options available on request. Colour temperatures: 2700K, 3000K, 4000K - other light colours availa-ble on request. Colour rendering CRI>80 or CRI>90 - Mac Adam <3

Luminaire en saillie à LED à rayonnement di-rect. Canal lumineux sous forme de profilé extrudé en aluminium d'une largeur de 41 mm. Possibilité de fabriquer le luminaire sur mesure, au millimètre près. Surface de luminaire thermolaquée matte à fine structure en RAL9016 blanc, RAL 9006 argent ou RAL9005 noir, sur demande RAL au choix. Dif-fuseur au choix en PMMA opale, couvercle en U en PPMA opale ou PPMA transparent avec plaque mi-croprismatique pour une intensité lumineuse réduite (UGR<19). Le convertisseur est intégré au boîtier du luminaire. Au choix en version on/off ou DALI, autres options de commande disponibles sur demande. Températures de couleur : 2700 K, 3000 K, 4000 K, autres couleurs sur demande. Rendu des couleurs CRI>80 ou CRI>90 – Mac Adam <3

ÜBERSICHT | OVERVIEW | VUE D'ENSEMBLE

GENERAL INFO
2700K, 3000K, 4000K
Direct Light
Up to 142lm/W, Up to 6297lm/m
Ra>80, Ra>90, MacAdam 3
On-Off / DALI
Opal & Microprismatic (UGR<19)
Up to L80B10/ 50,000h

HOUSING COLOUR
 Weiß feinstruktur matt RAL 9016 White fine structure matt RAL 9016 Blanc structure fine mate RAL 9016
 Schwarz feinstruktur matt RAL 9005 Black fine structure matt RAL 9005 Noir structure fine mate RAL 9005
 Silber feinstruktur matt RAL 9006 Silver fine structure matt RAL 9006 Argent structure fine mate RAL 9006



LED ANBAULEUCHTE
LED SURFACE MOUNTED LUMINAIRE
LED LUMINAIRE EN SAILLIE

Bestellbeispiel Example order Exemple de commande
3381mm, CRI80, 4000K, Direct, Low Output On-Off, Black, Microprismatic

D4S03381-840LPF-BM
1 2 3 4 5 6 7

1

LÄNGE LENGTH LONGEUR		CODE
571 mm	1,5	00571
851 mm	2,0	00851
1131 mm	2,6	01131
1271 mm	2,8	01271
1411 mm	3,5	01411
1691 mm	4,0	01691
2251 mm	5,0	02251
2531 mm	5,2	02531
2812 mm	6,6	02812
3372 mm	7,6	03372
3792 mm	9,1	03792

2

FARBWIEDERGABE COLOUR RENDERING COLOUR RENDERING	CODE
CRI>80	8
CRI>90	9

3

FARBTEMPERATUR COLOUR TEMPERATURE TEMPÉRATURE DE COULEUR	CODE
2700K	27 (CRI>90 only)
3000K	30
4000K	40

4

POWER OUTPUT SORTIE	CODE
Low Output	LP
High Output	HP

5


STEUERUNG CONTROL CONTRÔLE	CODE
On-Off	F
DALI	D

6

GEHÄUSEFARBE HOUSING COLOUR COULEUR DU BOÎTIER	CODE
Silver RAL9006	V
White RAL9016	W
Black RAL9005	B

7

ABDECKUNG COVER COUVERTURE	CODE
Opal	O
Microprismatic	M
U-Cover	C

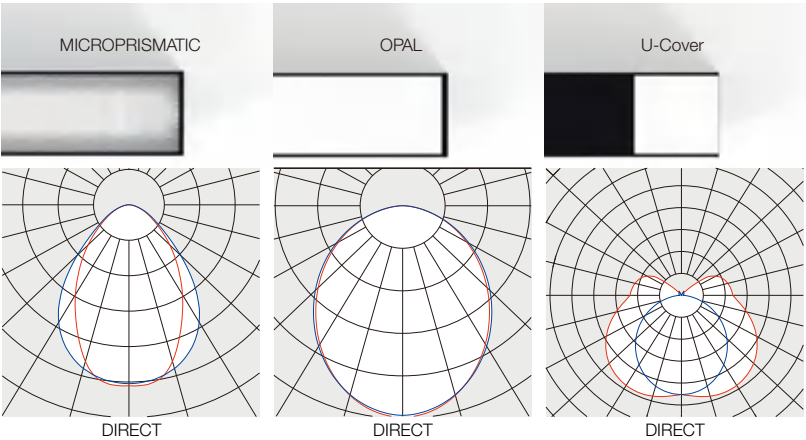


LENGTH MM	LUMEN WATT LOW OUTPUT	LUMEN WATT HIGH OUTPUT	LUMEN WATT LOW OUTPUT	LUMEN WATT HIGH OUTPUT	LUMEN WATT LOW OUTPUT	LUMEN WATT HIGH OUTPUT
571	757 lm 8 W	1503 lm 17 W	852 lm 8 W	1439 lm 17 W	785 lm 8 W	1492 lm 17 W
851	1135 lm 12 W	2254 lm 23 W	1136 lm 12W	2158 lm 23 W	1177 lm 12W	2238 lm 23 W
1131	1514 lm 15 W	3005 lm 29 W	1514 lm 15 W	2879 lm 29 W	1570 lm 15 W	2984 lm 29 W
1271	1703 lm 17 W	3381 lm 33 W	1704 lm 17 W	3238 lm 33 W	1767 lm 17 W	3357 lm 33 W
1411	1892 lm 18 W	3757 lm 35 W	1893 lm 18 W	3599 lm 35 W	1962 lm 18 W	3730 lm 35 W
1691	2271 lm 20 W	4508 lm 40 W	2272 lm 20 W	4318 lm 40 W	2355 lm 20 W	4476 lm 40 W
2251	3028 lm 27 W	6010 lm 53 W	3028 lm 27 W	5756 lm 53 W	3140 lm 27 W	5968 lm 53 W
2531	3406 lm 30 W	6762 lm 60 W	3408 lm 30 W	6475 lm 60 W	3534 lm 30 W	6714 lm 60 W
2812	3784 lm 35 W	7514 lm 70 W	3786 lm 35 W	7198 lm 70 W	3924 lm 35 W	7460 lm 70 W
3372	4542 lm 41 W	9016 lm 81 W	4544 lm 41 W	8636 lm 81 W	4710 lm 41 W	8952 lm 81 W
3792	5110 lm 46 W	10143 lm 91 W	5112 lm 46 W	9715 lm 91 W	5299 lm 46 W	10071 lm 91 W

Alle Lumen- und Wattangaben für 4000K, CRI80 – (Mikroprismenangaben ohne Opalfolie) (Details auf P. 313-314)
All lumen and watt figures are for 4000K, CRI80 – (Microprismatic details without opal film) (details on p. 313-314)
Toutes les données lumen et watt pour 4000K, CRI80 – (données microprisme sans feuille opale) (détails p. 313-314)

NEKO / DASH 40
Linear Light System
Pendant



Pendant

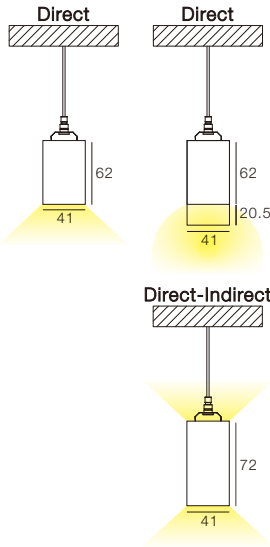

LED-Hängeleuchte direktstrahlend oder direkt-/indirektstrahlend. Lichtkanal aus Aluminium Strangpressprofil mit einer Breite von 41mm. Fertigung der Leuchte millimetergenau auf Kundenwunsch möglich. Oberfläche der Leuch-te feinstruktur matt pulverbeschichtet ähnlich RAL9016 weiß, RAL 9006 silber oder RAL9005 schwarz – auf Anfrage in RAL nach Wahl. Dif-fusor wahlweise in PMMA opal, PMMA opal U-Abdeckung oder PMMA klar mit eingescho-bener Mikroprismatischer Platte für eine re-duzierte Leuchtdichte (UGR<19). Leuchte inkl. Baldachin mit transparentem Einspeisekabel sowie Seilabhängern und Schnellspannern zur stufenlosen Regulierung der Montagehöhe. Der Konverter ist in das Leuchtengehäuse integriert. Wahlweise als on/off oder DALI Variante – wei-tere Steuerungsoptionen auf Anfrage möglich. Farbtemperaturen: 2700K, 3000K, 4000K – wei-tere Lichtfarben auf Anfrage. Farbwiedergabe CRI>80 oder CRI>90 – Mac Adam <3Farbtemperaturen: 2700K, 3000K, 4000K – wei-tere Lichtfarben auf Anfrage. Farbwiedergabe CRI>80 oder CRI>90 – Mac Adam <3

Pendant LED Luminaire direct beam or direct/indi-rect beam. Extruded aluminium light channel with 41mm width. The luminaire can be manufactured according to the customer's wishes down to the last millimetre. Luminaire surface fine textured mat-te powder coating similar to RAL9016 white, RAL 9006 silver or RAL9005 black – or in any other RAL of your choice. Diffuser available in either PMMA opal, PMMA opal with U-cover or PMMA clear with microprismatic plate inserted for lower luminance (UGR<19). Luminaire with canopy with transparent feed cable plus cable hangers and quick-release clamps for smooth mounting height adjustment. The converter is integrated into the luminaire housing. Available as either on/off or DALI variant - other control options available on request. Colour tempe-ratures: 2700K, 3000K, 4000K - other light colours available on request. Colour rendering CRI>80 or CRI>90 - Mac Adam <3

Suspension à LED à rayonnement direct ou direct/indirect. Canal lumineux sous forme de profilé extru-dé en aluminium d'une largeur de 41 mm. Possibilité de fabriquer le luminaire sur mesure, au millimètre près. Surface de luminaire thermolaquée matte à fine structure en RAL9016 blanc, RAL 9006 argent ou RAL9005 noir, sur demande RAL au choix. Dif-fuseur au choix en PMMA opale, couvercle en U en PPMA opale ou PPMA transparent avec plaque mi-croprismatique pour une intensité lumineuse réduite (UGR<19). Luminaire avec cache et câble d'alimen-tation transparent, câbles de suspension et systèmes de serrage rapide permettant d'ajuster la hauteur de montage en continu. Le convertisseur est intégré au boîtier du luminaire. Au choix en version on/off ou DALI, autres options de commande disponibles sur demande. Températures de couleur : 2700 K, 3000 K, 4000 K, autres couleurs sur demande. Ren-du des couleurs CRI>80 ou CRI>90 – Mac Adam <3

ÜBERSICHT | OVERVIEW | VUE D'ENSEMBLE

GENERAL INFO
2700K, 3000K, 4000K
Direct Light, Direct-Indirect Light
Up to 142lm/W, Up to 6297lm/m
Ra>80, Ra>90, MacAdam 3
On-Off / DALI
Opal & Microprismatic (UGR<19)
Up to L80B10/ 50,000h

HOUSING COLOUR
Weiß feinstruktur matt RAL 9016 White fine structure matt RAL 9016 Blanc structure fine mate RAL 9016
Schwarz feinstruktur matt RAL 9005 Black fine structure matt RAL 9005 Noir structure fine mate RAL 9005
Silber feinstruktur matt RAL 9006 Silver fine structure matt RAL 9006 Argent structure fine mate RAL 9006



LED-HÄNGELEUCHTE
LED PENDANT LUMINAIRE
LED SUSPENSION

Bestellbeispiel Example order Exemple de commande
3381mm, CRI80, 4000K, Direct-Indirect, Low Output On-Off, Black, Microprismatic

D4P03381-840LPF-BM-U

1 2 3 4 5 6 7 8

1

LÄNGE LENGTH LONGEUR		CODE
1131 mm	3,7	01131
1271 mm	3,9	01271
1411 mm	4,2	01411
1691 mm	4,9	01691
2251 mm	6,0	02251
2531 mm	6,2	02531
2812 mm	8,0	02812
3372 mm	9,3	03372
3792 mm	11,3	03792

2

FARBWIEDERGABE COLOUR RENDERING COLOUR RENDERING	CODE
CRI>80	8
CRI>90	9

3

FARBTEMPERATUR COLOUR TEMPERATURE TEMPÉRATURE DE COULEUR	CODE
2700K	27 (CRI>90 only)
3000K	30
4000K	40

4

POWER OUTPUT SORTIE	CODE
Low Output	LP
High Output	HP

5

STEUERUNG CONTROL CONTRÔLE	CODE
On-Off	F
DALI	D

6


GEHÄUSEFARBE HOUSING COLOUR COULEUR DU BOÎTIER	CODE
Silver RAL9006	V
White RAL9016	W
Black RAL9005	B

7

ABDECKUNG COVER COUVERTURE	CODE
Opal	O
Microprismatic	M
U-Cover	C

8

LICHTVERTEILUNG LIGHT DISTRIBUTION RÉPARTITION DE LA LUMIÈRE	CODE
Direct	(none)
Direct-Indirect	U

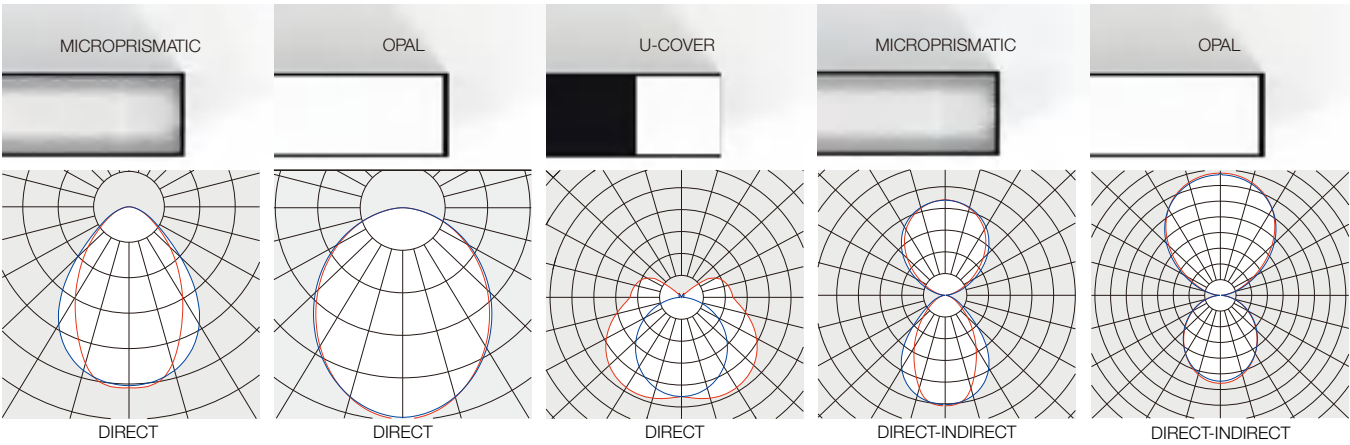


LENGTH MM	LUMEN WATT LOW OUTPUT	LUMEN WATT HIGH OUTPUT	LUMEN WATT LOW OUTPUT	LUMEN WATT HIGH OUTPUT	LUMEN WATT LOW OUTPUT	LUMEN WATT HIGH OUTPUT	LUMEN WATT LOW OUTPUT	LUMEN WATT HIGH OUTPUT	LUMEN WATT LOW OUTPUT	LUMEN WATT HIGH OUTPUT
1131	1514 lm 15 W	3005 lm 29 W	1514 lm 15 W	2879 lm 29 W	1570 lm 15 W	2984 lm 29 W	3527 lm 26 W	6866 lm 55 W	3535 lm 26 W	6846 lm 55 W
1271	1703 lm 17 W	3381 lm 33 W	1704 lm 17 W	3238 lm 33 W	1767 lm 17 W	3357 lm 33 W	3968 lm 29 W	7724 lm 63 W	3977 lm 29 W	7702 lm 63 W
1411	1892 lm 18 W	3757 lm 35 W	1893 lm 18 W	3599 lm 35 W	1962 lm 18 W	3730 lm 35 W	4408 lm 32 W	8582 lm 68 W	4419 lm 32 W	8557 lm 68 W
1691	2271 lm 20 W	4508 lm 40 W	2272 lm 20 W	4318 lm 40 W	2355 lm 20 W	4476 lm 40 W	5289 lm 38 W	10298 lm 82 W	5303 lm 38 W	10268 lm 82 W
2251	3028 lm 27 W	6010 lm 53 W	3028 lm 27 W	5756 lm 53 W	3140 lm 27 W	5968 lm 53 W	7054 lm 50 W	13732 lm 105 W	7070 lm 50 W	13692 lm 105 W
2531	3406 lm 30 W	6762 lm 60 W	3408 lm 30 W	6475 lm 60 W	3534 lm 30 W	6714 lm 60 W	7936 lm 56 W	15448 lm 119 W	7954 lm 56 W	15404 lm 119 W
2812	3784 lm 35 W	7514 lm 70 W	3786 lm 35 W	7198 lm 70 W	3924 lm 35 W	7460 lm 70 W	8816 lm 64 W	17164 lm 136 W	8838 lm 64 W	17114 lm 136 W
3372	4542 lm 41 W	9016 lm 81 W	4544 lm 41 W	8636 lm 81 W	4710 lm 41 W	8952 lm 81 W	10578 lm 77 W	20596 lm 163 W	10606 lm 77 W	20536 lm 163 W
3792	5110 lm 46 W	10143 lm 91 W	5112 lm 46 W	9715 lm 91 W	5299 lm 46 W	10071 lm 91 W	11900 lm 87 W	23140 lm 184 W	11932 lm 87 W	23103 lm 184 W

Alle Lumen- und Wattangaben für 4000K, CRI80 – (Mikroprismenangaben ohne Opalfolie) (Details auf P. 313-314)
All lumen and watt figures are for 4000K, CRI80 – (Microprismatic details without opal film) (details on p. 313-314)
Toutes les données lumen et watt pour 4000K, CRI80 – (données microprisme sans feuille opale) (détails p. 313-314)

NEKO / DASH 40
Linear Light System
Trim Recessed



Trim Recessed



LED-Einbauleuchte mit umlaufendem Rahmen direktstrahlend. Lichtkanal aus Aluminium Strangpressprofil mit einer Gesamtbreite von 54mm. Fertigung der Leuchte milimetergenau auf Kundenwunsch möglich. Oberfläche der Leuchte feinstruktur matt pulverbeschichtet ähnlich RAL9016 weiß, RAL 9006 silber oder RAL9005 schwarz – auf Anfrage in RAL nach Wahl. Diffusor wahlweise in PMMA opal oder PMMA klar mit eingeschobener Mikroprismatischer Platte für eine reduzierte Leuchtdichte (UGR<19). Leuchte inkl. Montagebügel. Der Konverter ist in das Leuchtengehäuse integriert. Wahlweise als on/off oder DALI Variante weitere Steuerungsoptionen auf Anfrage möglich. Farbtemperaturen: 2700K, 3000K, 4000K – weitere Lichtfarben auf Anfrage. Farbwiedergabe CRI>80 oder CRI>90 – Mac Adam <3

Recessed LED Luminaire with frame direct beam. Extruded aluminium light channel with a total width of 54mm. The luminaire can be manufactured ac-cording to the customer's wishes down to the last millimetre. Luminaire surface fine textured matte powder coating similar to RAL9016 white, RAL 9006 silver or RAL9005 black – or in any other RAL of your choice. Diffuser available in either PMMA opal or PMMA clear with microprismatic plate inserted for lower luminance (UGR<19). Luminaire with moun-ting bracket. The converter is integrated into the lu-minaire housing. Available as either on/off or DALI variant - other control options available on request. Colour temperatures: 2700K, 3000K, 4000K - other light colours available on request. Colour rendering CRI>80 or CRI>90 - Mac Adam <3

Luminaire à LED encastrable à rayonnement direct avec cadre périphérique. Canal lumineux sous forme de profilé extrudé en aluminium d'une largeur totale de 54 mm. Possibilité de fabriquer le luminaire sur mesure, au millimètre près. Surface de luminaire thermolaquée matte à fine structure en RAL9016 blanc, RAL 9006 argent ou RAL9005 noir, sur de-mande RAL au choix. Diffuseur au choix en PMMA opale ou transparent avec plaque microprismatique pour une intensité lumineuse réduite (UGR<19). Luminaire avec barre de montage. Le convertisseur est intégré au boîtier du luminaire. Au choix en ver-sion on/off ou DALI, autres options de commande disponibles sur demande. Températures de cou-leur : 2700 K, 3000 K, 4000 K, autres couleurs sur demande. Rendu des couleurs CRI>80 ou CRI>90 – Mac Adam <3

ÜBERSICHT | OVERVIEW | VUE D'ENSEMBLE

GENERAL INFO
2700K, 3000K, 4000K
Direct Light
Up to 142lm/W, Up to 6297lm/m
Ra>80, Ra>90, MacAdam 3
On-Off / DALI
Opal & Microprismatic (UGR<19)
Up to L80B10/ 50,000h

HOUSING COLOUR
 Weiß feinstruktur matt RAL 9016 White fine structure matt RAL 9016 Blanc structure fine mate RAL 9016
 Schwarz feinstruktur matt RAL 9005 Black fine structure matt RAL 9005 Noir structure fine mate RAL 9005
 Silber feinstruktur matt RAL 9006 Silver fine structure matt RAL 9006 Argent structure fine mate RAL 9006



LED EINBAULEUCHTE
LED RECESSED VERSION
LED LUMINAIRE ENCASTRABLE

Bestellbeispiel Example order Exemple de commande
3381mm, CRI80, 4000K, Direct, Low Output On-Off, Black, Microprismatic

D4R03381-840LPF-BM

1

LÄNGE LENGTH LONGEUR

CODE

580 mm

1,7

00571

860 mm

2,0

00851

1140 mm

2,5

01131

1280 mm

2,7

01271

1420 mm

3,3

01411

1700 mm

3,8

01691

2260 mm

4,6

02251

2540 mm

4,8

02531

2821m

6,4

02812

3381mm

7,3

03372

3801 mm

8,9

03792

2

FARBWIEDERGABE
COLOUR RENDERING
COLOUR RENDERING

CODE

CRI>80

8

CRI>90

9

3

FARBTEMPERATUR
COLOUR TEMPERATURE
TEMPÉRATURE DE COULEUR

CODE

2700K

27 (CRI>90 only)

3000K

30

4000K

40

4

POWER
OUTPUT
SORTIE

CODE

Low Output

LP

High Output

HP

5

STEUERUNG
CONTROL
CONTRÔLE

CODE

On-Off

F

DALI

D

6

GEHÄUSEFARBE
HOUSING COLOUR
COULEUR DU BOÎTIER

CODE

Silver RAL9006

V

White RAL9016

W

Black RAL9005

B

7

ABDECKUNG
COVER
COUVERTURE


CODE

Opal

O

Microprismatic

M

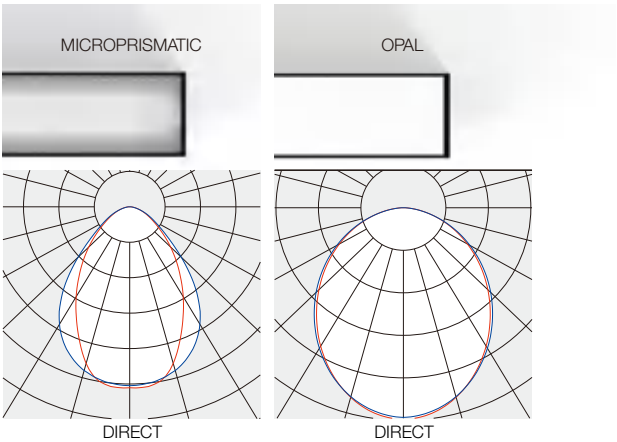

LENGTH MM	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT	LUMEN I WATT LOW OUTPUT	LUMEN I WATT HIGH OUTPUT
580	757 lm I 8 W	1503 lm I 17 W	852 lm I 8 W	1439 lm I 17 W
860	1135 lm I 12 W	2254 lm I 23 W	1136 lm I 12W	2158 lm I 23 W
1140	1514 lm I 15 W	3005 lm I 29 W	1514 lm I 15 W	2879 lm I 29 W
1280	1703 lm I 17 W	3381 lm I 33 W	1704 lm I 17 W	3238 lm I 33 W
1420	1892 lm I 18 W	3757 lm I 35 W	1893 lm I 18 W	3599 lm I 35 W
1700	2271 lm I 20 W	4508 lm I 40 W	2272 lm I 20 W	4318 lm I 40 W
2260	3028 lm I 27 W	6010 lm I 53 W	3028 lm I 27 W	5756 lm I 53 W
2540	3406 lm I 30 W	6762 lm I 60 W	3408 lm I 30 W	6475 lm I 60 W
2821	3784 lm I 35 W	7514 lm I 70 W	3786 lm I 35 W	7198 lm I 70 W
3381	4542 lm I 41 W	9016 lm I 81 W	4544 lm I 41 W	8636 lm I 81 W
3801	5110 lm I 46 W	10143 lm I 91 W	5112 lm I 46 W	9715 lm I 91 W

RAHMEN CADRE	LÄNGE LENGTH LA GAUCHE	BREITE WIDTH À DROITE	TIEFE DEPTH PROFONDEUR
580 mm	575 mm	49 mm	110 mm
860 mm	855 mm	49 mm	110 mm
1140 mm	1135 mm	49 mm	110 mm
1280 mm	1275 mm	49 mm	110 mm
1420 mm	1415 mm	49 mm	110 mm
1700 mm	1695 mm	49 mm	110 mm
2260 mm	2255 mm	49 mm	110 mm
2540 mm	2535 mm	49 mm	110 mm
2821 mm	2816 mm	49 mm	110 mm
3381 mm	3376 mm	49 mm	110 mm
3801 mm	3796 mm	49 mm	110 mm

Alle Lumen- und Wattangaben für 4000K, CRI80 – (Mikroprismenangaben ohne Opalfolie) (Details auf P. 313-314)
All lumen and watt figures are for 4000K, CRI80 – (Microprismatic details without opal film) (details on p. 313-314)
Toutes les données lumen et watt pour 4000K, CRI80 – (données microprisme sans feuille opale) (détails p. 313-314)

NEKO / DASH 40
Linear Light System
Wall Mounted





White RAL9016

Silver RAL9006

Black RAL9005

Wall Mounted



LED-Wandleuchte direktstrahlend oder direkt-/indirektstrahlend. Lichtkanal aus Aluminium Strangpressprofil mit einer Breite von 41mm. Fertigung der Leuchte millimetergenau auf Kundenwunsch möglich. Oberfläche der Leuch-te feinstruktur matt pulverbeschichtet ähnlich RAL9016 weiß, RAL 9006 silber oder RAL9005 schwarz – auf Anfrage in RAL nach Wahl. Dif-fusor wahlweise in PMMA opal oder PMMA klar mit eingeschobener Mikroprismatischer Plat-te für eine reduzierte Leuchtdichte (UGR<19). Leuchte inkl. speziellem Schnellmontage Wand-baldachin (Montage mittels Stecker und Gegen-stecker). Der Konverter ist in das Leuchten-gehäuse integriert. Wahlweise als on/off oder DALI Variante – weitere Steuerungsoptionen auf Anfrage möglich. Farbtemperaturen: 2700K, 3000K, 4000K – weitere Lichtfarben auf Anfrage. Farbwiedergabe CRI>80 oder CRI>90 – Mac Adam <3

LED Wall Luminaire direct beam or direct/indirect beam. Extruded aluminium light channel with 41mm width. The luminaire can be manufactured according to the customer's wishes down to the last millime-tre. Luminaire surface fine textured matte powder coating similar to RAL9016 white, RAL 9006 silver or RAL9005 black – or in any other RAL of your choice. Diffuser available in either PMMA opal or PMMA clear with microprismatic plate inserted for lower luminance (UGR<19). Luminaire with special quick-mount wall canopy (plug with mating plug used for mounting). The converter is integrated into the lu-minaire housing. Available as either on/off or DALI variant - other control options available on request. Colour temperatures: 2700K, 3000K, 4000K - other light colours available on request. Colour rendering CRI>80 or CRI>90 - Mac Adam <3

LED Applique Murale à rayonnement direct ou di-rect/indirect. Canal lumineux sous forme de profi-lé extrudé en aluminium d'une largeur de 41 mm. Possibilité de fabriquer le luminaire sur mesure, au millimètre près. Surface de luminaire thermolaquée matte à fine structure en RAL9016 blanc, RAL 9006 argent ou RAL9005 noir, sur demande RAL au choix. Diffuseur au choix en PMMA opale ou transparent avec plaque microprismatique pour une intensité lumineuse réduite (UGR<19). Luminaire avec cache mural spécial à montage rapide inclus (montage par fiche et contre-fiche). Le convertisseur est intégré au boîtier du luminaire. Au choix en version on/off ou DALI, autres options de commande disponibles sur demande. Températures de couleur : 2700 K, 3000 K, 4000 K, autres couleurs sur demande. Ren-du des couleurs CRI>80 ou CRI>90 – Mac Adam <3

ÜBERSICHT | OVERVIEW | VUE D'ENSEMBLE

GENERAL INFO
2700K, 3000K, 4000K
Direct Light, Direct-indirect Light
Up to 142lm/W, Up to 6297lm/m
Ra>80, Ra>90, MacAdam 3
On-Off / DALI
Opal & Microprism (UGR <19)
Up to L80B10/ 50,000h

HOUSING COLOUR
Weiß feinstruktur matt RAL 9016 White fine structure matt RAL 9016 Blanc structure fine mate RAL 9016
Schwarz feinstruktur matt RAL 9005 Black fine structure matt RAL 9005 Noir structure fine mate RAL 9005
Silber feinstruktur matt RAL 9006 Silver fine structure matt RAL 9006 Argent structure fine mate RAL 9006



LED WANDLEUCHTE
LED WALL LUMINAIRE
LED APPLIQUE MURALE

Bestellbeispiel Example order Exemple de commande
3381mm, CRI80, 4000K, Direct-Indirect, Low Output On-Off, Black, Microprismatic

D4W03381-840LPF-BM-U

1 2 3 4 5 6 7 8

1

LÄNGE LENGTH LONGEUR		CODE
571 mm	2,2	00571
851 mm	2,9	00851
1131 mm	3,7	01131
1271 mm	3,9	01271
1411 mm	4,2	01411
1691 mm	4,7	01691
2251 mm	5,7	02251
2531 mm	5,9	02531
2812 mm	7,8	02812
3372 mm	9,2	03372
3792 mm	10,9	03792

2

FARBWIEDERGABE COLOUR RENDERING COLOUR RENDERING	CODE
CRI>80	8
CRI>90	9

3

FARBTEMPERATUR COLOUR TEMPERATURE TEMPÉRATURE DE COULEUR	CODE
2700K	27 (CRI>90 only)
3000K	30
4000K	40

4

POWER OUTPUT SORTIE	CODE
Low Output	LP
High Output	HP

5

STEUERUNG CONTROL CONTRÔLE	CODE
On-Off	F
DALI	D

6


GEHÄUSEFARBE HOUSING COLOUR COULEUR DU BOÎTIER	CODE
Silver RAL9006	V
White RAL9016	W
Black RAL9005	B

7

ABDECKUNG COVER COUVERTURE	CODE
Opal	O
Microprismatic	M
U-Cover	C

8

LICHTVERTEILUNG LIGHT DISTRIBUTION RÉPARTITION DE LA LUMIÈRE	CODE
Direct	(none)
Direct-Indirect	U

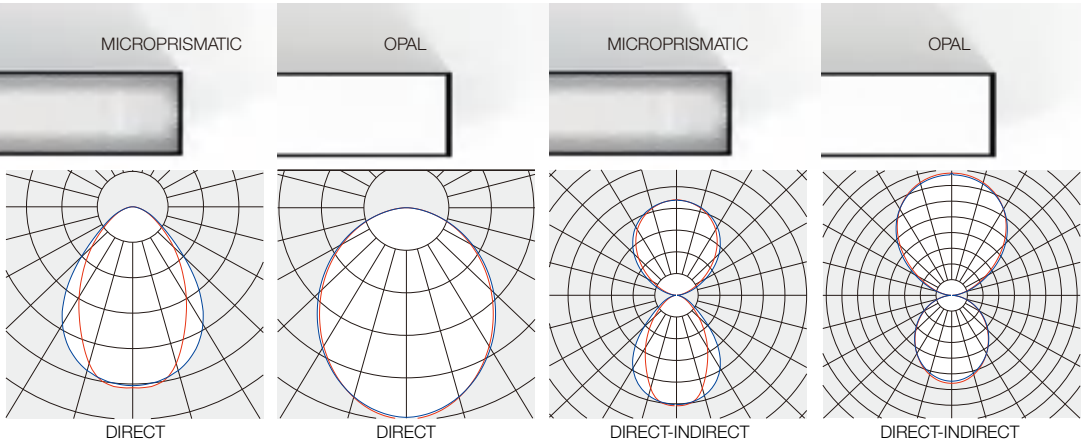

LENGTH MM	LUMEN WATT LOW OUTPUT	LUMEN WATT HIGH OUTPUT	LUMEN WATT LOW OUTPUT	LUMEN WATT HIGH OUTPUT	LUMEN WATT LOW OUTPUT	LUMEN WATT HIGH OUTPUT	LUMEN WATT LOW OUTPUT	LUMEN WATT HIGH OUTPUT
571	757 lm 8 W	1503 lm 17 W	852 lm 8 W	1439 lm 17 W	1763 lm 14 W	3433 lm 29 W	1767 lm 14 W	3423 lm 29 W
851	1135 lm 12 W	2254 lm 23 W	1136 lm 12W	2158 lm 23 W	2644 lm 20 W	5149 lm 43 W	2650 lm 20 W	5149 lm 43 W
1131	1514 lm 15 W	3005 lm 29 W	1514 lm 15 W	2879 lm 29 W	3527 lm 26 W	6866 lm 55 W	3535 lm 26 W	6846 lm 55 W
1271	1703 lm 17 W	3381 lm 33 W	1704 lm 17 W	3238 lm 33 W	3968 lm 29 W	7724 lm 63 W	3977 lm 29 W	7702 lm 63 W
1411	1892 lm 18 W	3757 lm 35 W	1893 lm 18 W	3599 lm 35 W	4408 lm 32 W	8582 lm 68 W	4419 lm 32 W	8557 lm 68 W
1691	2271 lm 20 W	4508 lm 40 W	2272 lm 20 W	4318 lm 40 W	5289 lm 38 W	10298 lm 82 W	5303 lm 38 W	10268 lm 82 W
2251	3028 lm 27 W	6010 lm 53 W	3028 lm 27 W	5756 lm 53 W	7054 lm 50 W	13732 lm 105 W	7070 lm 50 W	13692 lm 105 W
2531	3406 lm 30 W	6762 lm 60 W	3408 lm 30 W	6475 lm 60 W	7936 lm 56 W	15448 lm 119 W	7954 lm 56 W	15404 lm 119 W
2812	3784 lm 35 W	7514 lm 70 W	3786 lm 35 W	7198 lm 70 W	8816 lm 64 W	17164 lm 136 W	8838 lm 64 W	17114 lm 136 W
3372	4542 lm 41 W	9016 lm 81 W	4544 lm 41 W	8636 lm 81 W	10578 lm 77 W	20596 lm 163 W	10606 lm 77 W	20536 lm 163 W
3792	5110 lm 46 W	10143 lm 91 W	5112 lm 46 W	9715 lm 91 W	11900 lm 87 W	23140 lm 184 W	11932 lm 87 W	23103 lm 184 W

Alle Lumen- und Wattangaben für 4000K, CRI80 – (Mikroprismenangaben ohne Opalfolie) (Details auf P. 313-314)
All lumen and watt figures are for 4000K, CRI80 – (Microprismatic details without opal film) (details on p. 313-314)
Toutes les données lumen et watt pour 4000K, CRI80 – (données microprisme sans feuille opale) (détails p. 313-314)

LUMEN OUTPUT (lm)
MICROPRISMATIC

CRI80

LÄNGE	DIRECT - LOW OUTPUT		DIRECT - HIGH OUTPUT		DIRECT - LOW OUTPUT		DIRECT - HIGH OUTPUT	
LENGTH	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K
LONGEUR mm	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen
571 - 580	727	757	1443	1503	1693	1763	3295	3433
851 - 860	1090	1135	2164	2254	2539	2644	4942	5149
1131 - 1140	1453	1514	2885	3005	3386	3527	6591	6866
1271 - 1280	1635	1703	3246	3381	3809	3968	7415	7724
1411 - 1420	1817	1892	3607	3757	4232	4408	8238	8582
1691 - 1700	2180	2271	4328	4508	5078	5289	9885	10298
2251 - 2260	2906	3028	5770	6010	6672	7054	13182	13732
2531 - 2540	3270	3406	6492	6762	7618	7936	14830	15448
2812 - 2821	3634	3784	7214	7514	8464	8816	16476	17164
3372 - 3381	4360	4542	8656	9016	10156	10578	19770	20596
3792 - 3801	4905	5110	9738	10143	11425	11900	22241	23140

CRI90

LÄNGE	DIRECT - LOW OUTPUT			DIRECT - HIGH OUTPUT			DIRECT - LOW OUTPUT			DIRECT - HIGH OUTPUT		
LENGTH	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K
LONGEUR mm	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen
571 - 580	590	628	655	1172	1247	1300	1375	1463	1525	2678	2849	2969
851 - 860	885	942	982	1758	1871	1950	2062	2194	2287	4017	4273	4453
1131 - 1140	1180	1256	1309	2344	2494	2600	2751	2927	3051	5356	5699	5939
1271 - 1280	1328	1413	1473	2637	2806	2925	3095	3293	3432	6025	6411	6681
1411 - 1420	1476	1570	1637	2930	3118	3250	3438	3659	3813	6694	7123	7423
1691 - 1700	1771	1884	1964	3516	3741	3900	4125	4390	4575	8033	8547	8907
2251 - 2260	2360	2512	2618	4688	4988	5200	5502	5854	6102	10712	11395	11878
2531 - 2540	2656	2826	2946	5274	5612	5850	6190	6586	6864	12050	12822	13362
3372 - 3381	2952	3140	3274	5860	6236	6500	6876	7318	7626	13388	14246	14846
3372 - 3381	3542	3768	3928	7032	7482	7800	8250	8780	9150	16066	17094	17814
3792 - 3801	3985	4239	4419	7911	8417	8775	9281	9877	10293	18074	19230	20040

LUMEN OUTPUT (lm)
OPAL

CRI80

LÄNGE	DIRECT - LOW OUTPUT		DIRECT - HIGH OUTPUT		DIRECT - LOW OUTPUT		DIRECT - HIGH OUTPUT	
LENGTH	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K
LONGEUR mm	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen
571 - 580	818	852	1381	1439	1697	1767	3286	3423
851 - 860	1091	1136	2071	2158	2545	2650	4929	5149
1131 - 1140	1454	1514	2762	2879	3394	3535	6572	6846
1271 - 1280	1636	1704	3107	3238	3818	3977	7394	7702
1411 - 1420	1818	1893	3452	3599	4242	4419	8215	8557
1691 - 1700	2181	2272	4143	4318	5090	5303	9858	10268
2251 - 2260	2908	3028	5524	5756	6788	7070	13144	13692
2531 - 2540	3272	3408	6214	6475	7636	7954	14788	15404
2812 - 2821	3636	3786	6904	7198	8484	8838	16430	17114
3372 - 3381	4362	4544	8286	8636	10180	10606	19716	20536
3792 - 3801	4908	5112	9322	9715	11452	11932	22180	23103

CRI90

LÄNGE	DIRECT - LOW OUTPUT			DIRECT - HIGH OUTPUT			DIRECT - LOW OUTPUT			DIRECT - HIGH OUTPUT		
LENGTH	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K
LONGEUR mm	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen
571 - 580	664	707	737	1154	1194	1264	1378	1467	1529	2670	2841	2960
851 - 860	886	942	983	1731	1791	1896	2067	2200	2293	4005	4261	4440
1131 - 1140	1181	1257	1310	2309	2388	2529	2757	2934	3058	5340	5682	5921
1271 - 1280	1329	1414	1474	2597	2687	2845	3102	3301	3440	6008	6393	6662
1411 - 1420	1477	1571	1638	2886	2985	3161	3446	3667	3822	6675	7102	7401
1691 - 1700	1772	1885	1965	3463	3582	3793	4135	4400	4586	8010	8522	8881
2251 - 2260	2362	2514	2620	4618	4776	5058	5514	5868	6116	10680	11364	11842
2531 - 2540	2658	2828	2948	5194	5374	5690	6204	6602	6880	12016	12786	13324
2812 - 2821	2954	3142	3276	5772	5970	6322	6892	7334	7644	13350	14204	14802
3372 - 3381	3544	3770	3930	6926	7164	7586	8270	8800	9172	16020	17044	17762
3792 - 3801	3987	4242	4422	7792	8059	8534	9304	9900	10318	18022	19174	19982

OPAL U-COVER CRI80

LÄNGE	DIRECT - LOW OUTPUT		DIRECT - HIGH OUTPUT	
LENGTH	3000K	4000K	3000K	4000K
LONGEUR mm	Lumen	Lumen	Lumen	Lumen
571 - 580	753	785	1432	1492
851 - 860	1130	1177	2148	2238
1131 - 1140	1507	1570	2864	2984
1271 - 1280	1696	1767	3222	3357
1411 - 1420	1884	1962	3580	3730
1691 - 1700	2260	2355	4296	4476
2251 - 2260	3014	3140	5728	5968
2531 - 2540	3392	3534	6444	6714
2812 - 2821	3768	3924	7160	7460
3372 - 3381	4520	4710	8592	8952
3792 - 3801	5085	5299	9666	10071


OPAL U-COVER CRI90

DIRECT - LOW OUTPUT			DIRECT - HIGH OUTPUT		
2700K	3000K	4000K	2700K	3000K	4000K
Lumen	Lumen	Lumen	Lumen	Lumen	Lumen
612	652	679	1190	1230	1290
919	978	1019	1785	1846	1935
1225	1304	1358	2381	2461	2581
1378	1467	1528	2679	2769	2904
1531	1630	1697	2976	3076	3226
1837	1956	2037	3571	3691	3871
2450	2608	2716	4762	4922	5162
2756	2934	3056	5358	5538	5808
3062	3260	3394	5952	6152	6452
3674	3912	4074	7142	7382	7742
4133	4401	4583	8035	8304	8710

Microprismatic Cover/ Opal Cover



Surface Mounted




Microprismatic Cover/ Opal Cover



Microprismatic Cover/ Opal Cover




Pendant





Microprismatic Cover/ Opal Cover



Trim Recessed



Wall Mounted



NEKO / DASH 50
Linear Light System
Surface Mounted



LED-Anbauleuchte direktstrahlend. Lichtkanal aus Aluminium Strangpressprofil mit einer Breite von 50mm. Fertigung der Leuchte millimetergenau auf Kundenwunsch möglich. Oberfläche der Leuchte feinstruktur matt pulverbeschichtet ähnlich RAL9016 weiß, RAL 9006 silber oder RAL9005 schwarz – auf Anfrage in RAL nach Wahl. Diffusor wahlweise in PMMA opal oder PMMA klar mit eingeschobener Mikroprisma-tischer Platte für eine reduzierte Leuchtdichte (UGR<19). Der Konverter ist in das Leuchten-gehäuse integriert. Wahlweise als on/off oder DALI Variante – weitere Steuerungsoptionen auf Anfrage möglich. Farbtemperaturen: 2700K, 3000K, 4000K – weitere Lichtfarben auf Anfrage. Farbwiedergabe CRI>80 oder CRI>90 – Mac Adam <3


Surface-mounted LED Luminaire direct beam Ex-truded aluminium light channel with 50mm width. The luminaire can be manufactured according to the customer's wishes down to the last millimetre. Lumi-naire surface fine textured matte powder coating si-milar to RAL9016 white, RAL 9006 silver or RAL9005 black – or in any other RAL of your choice. Diffuser available in either PMMA opal or PMMA clear with microprismatic plate inserted for lower luminance (UGR<19). The converter is integrated into the lu-minaire housing. Available as either on/off or DALI variant - other control options available on request. Colour temperatures: 2700K, 3000K, 4000K - other light colours available on request. Colour rendering CRI>80 or CRI>90 - Mac Adam <3

Luminaire en saillie à LED à rayonnement direct. Canal lumineux sous forme de profilé extrudé en aluminium d'une largeur de 50 mm. Possibilité de fabriquer le luminaire sur mesure, au millimètre près. Surface de luminaire thermolaquée matte à fine structure en RAL9016 blanc, RAL 9006 argent ou RAL9005 noir, sur demande RAL au choix. Diffu-seur au choix en PMMA opale ou transparent avec plaque microprismatique pour une intensité lumi-neuse réduite (UGR<19). Le convertisseur est intégré au boîtier du luminaire. Au choix en version on/off ou DALI, autres options de commande disponibles sur demande. Températures de couleur : 2700 K, 3000 K, 4000 K, autres couleurs sur demande. Ren-du des couleurs CRI>80 ou CRI>90 – Mac Adam <3

ÜBERSICHT | OVERVIEW | VUE D'ENSEMBLE

GENERAL INFO
2700K, 3000K, 4000K
Direct Light
Up to 142lm/W, Up to 6297lm/m
Ra>80, Ra>90, MacAdam 3
On-Off / DALI
Opal & Microprismatic (UGR<19)
Up to L80B10/ 50,000h

HOUSING COLOUR
Weiß feinstruktur matt RAL 9016 White fine structure matt RAL 9016 Blanc structure fine mate RAL 9016
Schwarz feinstruktur matt RAL 9005 Black fine structure matt RAL 9005 Noir structure fine mate RAL 9005
Silber feinstruktur matt RAL 9006 Silver fine structure matt RAL 9006 Argent structure fine mate RAL 9006



LED ANBAULEUCHTE
LED SURFACE MOUNTED LUMINAIRE
LED LUMINAIRE EN SAILLIE

Bestellbeispiel Example order Exemple de commande
3381mm, CRI80, 4000K, Direct, Low Output On-Off, Black, Microprismatic

D5S03381-840LPF-BM

1

LÄNGE LENGTH LONGEUR		CODE
571 mm	1,5	00571
851 mm	2,0	00851
1131 mm	2,6	01131
1271 mm	2,8	01271
1411 mm	3,5	01411
1691 mm	4,0	01691
2251 mm	5,0	02251
2531 mm	5,2	02531
2812 mm	6,6	02812
3372 mm	7,6	03372
3792 mm	9,1	03792

2

FARBWIEDERGABE COLOUR RENDERING COLOUR RENDERING	CODE
CRI>80	8
CRI>90	9

3

FARBTEMPERATUR COLOUR TEMPERATURE TEMPÉRATURE DE COULEUR	CODE
2700K	27 (CRI>90 only)
3000K	30
4000K	40

4

POWER OUTPUT SORTIE	CODE
Low Output	LP
High Output	HP

5


STEUERUNG CONTROL CONTRÔLE	CODE
On-Off	F
DALI	D

6

GEHÄUSEFARBE HOUSING COLOUR COULEUR DU BOÎTIER	CODE
Silver RAL9006	V
White RAL9016	W
Black RAL9005	B

7



ABDECKUNG COVER COUVERTURE	CODE
Opal	O
Microprismatic	M

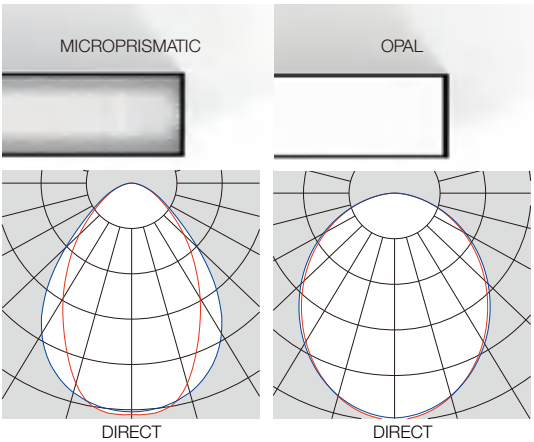

LENGTH MM	LUMEN WATT LOW OUTPUT	LUMEN WATT HIGH OUTPUT	LUMEN WATT LOW OUTPUT	LUMEN WATT HIGH OUTPUT
571	741 lm 8 W	1470 lm 17 W	741 lm 8 W	1470 lm 17 W
851	1111 lm 12 W	2205 lm 23 W	1111 lm 12W	2205 lm 23 W
1131	1481 lm 15 W	2940 lm 29 W	1481 lm 15 W	2940 lm 29 W
1271	1666 lm 16 W	3306 lm 33 W	1666 lm 16 W	3306 lm 33 W
1411	1851 lm 18 W	3675 lm 35 W	1851 lm 18 W	3675 lm 35 W
1691	2222 lm 20 W	4409 lm 41 W	2222 lm 20 W	4409 lm 41 W
2251	2962 lm 27 W	5879 lm 54 W	2962 lm 27 W	5879 lm 54 W
2531	3332 lm 30 W	6614 lm 60 W	3332 lm 30 W	6614 lm 60 W
2812	3702 lm 35 W	7349 lm 70 W	3702 lm 35 W	7349 lm 70 W
3372	4444 lm 41 W	8818 lm 81 W	4444 lm 41 W	8818 lm 81 W
3792	5000 lm 46 W	9922 lm 91 W	5000 lm 46 W	9922 lm 91 W

Alle Lumen- und Wattangaben für 4000K, CRI80 – (Mikroprismenangaben ohne Opalfolie) (Details auf P. 325-326)
All lumen and watt figures are for 4000K, CRI80 – (Microprismatic details without opal film) (details on p. 325-326)
Toutes les données lumen et watt pour 4000K, CRI80 – (données microprisme sans feuille opale) (détails p. 325-326)

NEKO / DASH 50
Linear Light System
Pendant

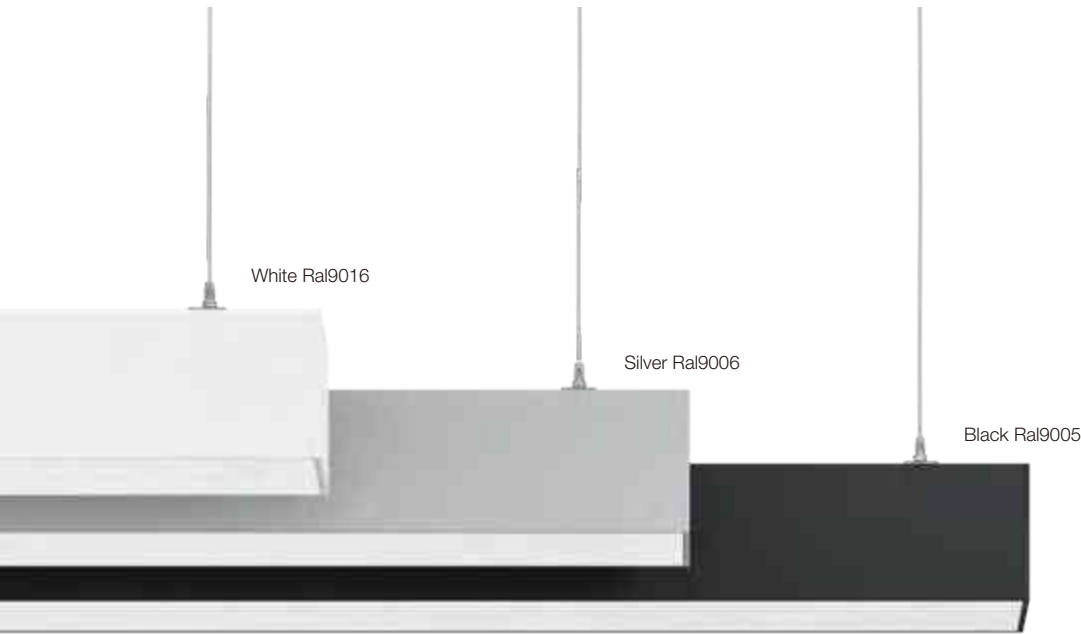

LED-Hängeleuchte direktstrahlend oder direkt-/indirektstrahlend. Lichtkanal aus Aluminium Strangpressprofil mit einer Breite von 50mm. Fertigung der Leuchte milimetergenau auf Kundenwunsch möglich. Oberfläche der Leuchte feinstruktur matt pulverbeschichtet ähnlich RAL9016 weiß, RAL 9006 silber oder RAL9005 schwarz – auf Anfrage in RAL nach Wahl. Diffusor wahlweise in PMMA opal oder PMMA klar mit eingeschobener Mikroprismatischer Platte für eine reduzierte Leuchtdichte (UGR<19). Leuchte inkl. Baldachin mit transparentem Einspeisekabel sowie Seilabhängern und Schnellspannern zur stufenlosen regulierung der Montagehöhe. Der Konverter ist in das Leuchtengehäuse integriert. Wahlweise als on/off oder DALI Variante – weitere Steuerungsoptionen auf Anfrage möglich. Farbtemperaturen: 2700K, 3000K, 4000K – weitere Lichtfarben auf Anfrage. Farbwiedergabe CRI>80 oder CRI>90 – Mac Adam <3

Pendant LED Luminaire direct beam or direct/indirect beam. Extruded aluminium light channel with 50mm width. The luminaire can be manufactured according to the customer's wishes down to the last millimetre. Luminaire surface fine textured matte powder coating similar to RAL9016 white, RAL 9006 silver or RAL9005 black – or in any other RAL of your choice. Diffuser available in either PMMA opal or PMMA clear with microprismatic plate inserted for lower luminance (UGR<19). Luminaire with canopy with transparent feed cable plus cable hangers and quick-release clamps for smooth mounting height adjustment. The converter is integrated into the luminaire housing. Available as either on/off or DALI variant - other control options available on request. Colour temperatures: 2700K, 3000K, 4000K - other light colours available on request. Colour rendering CRI>80 or CRI>90 - Mac Adam <3

uspension à LED à rayonnement direct ou direct/indirect. Canal lumineux sous forme de profilé extrudé en aluminium d'une largeur de 50 mm. Possibilité de fabriquer le luminaire sur mesure, au millimètre près. Surface de luminaire thermolaquée mate à fine structure en RAL9016 blanc, RAL 9006 argent ou RAL9005 noir, sur demande RAL au choix. Diffuseur au choix en PMMA opale ou transparent avec plaque microprismatique pour une intensité lumineuse réduite (UGR<19). Luminaire avec cache et câble d'alimentation transparent, câbles de suspension et systèmes de serrage rapide permettant d'ajuster la hauteur de montage en continu. Le convertisseur est intégré au boîtier du luminaire. Au choix en version on/off ou DALI, autres options de commande disponibles sur demande. Températures de couleur : 2700 K, 3000 K, 4000 K, autres couleurs sur demande. Rendu des couleurs CRI>80 ou CRI>90 couleurs CRI>80 ou CRI>90 - Mac Adam <3

ÜBERSICHT | OVERVIEW | VUE D'ENSEMBLE

GENERAL INFO
2700K, 3000K, 4000K
Direct Light, Direct-Indirect Light
Up to 142lm/W, Up to 6297lm/m
Ra>80, Ra>90, MacAdam 3
On-Off / DALI
Opal & Microprismatic (UGR<19)
Up to L80B10/ 50,000h

HOUSING COLOUR
 Weiß feinstruktur matt RAL 9016 White fine structure matt RAL 9016 Blanc structure fine mate RAL 9016
 Schwarz feinstruktur matt RAL 9005 Black fine structure matt RAL 9005 Noir structure fine mate RAL 9005
 Silber feinstruktur matt RAL 9006 Silver fine structure matt RAL 9006 Argent structure fine mate RAL 9006



LED-HÄNGELEUCHTE
LED PENDANT LUMINAIRE
LED SUSPENSION

Bestellbeispiel Example order Exemple de commande
3381mm, CRI80, 4000K, Direct-Indirect, Low Output On-Off, Black, Microprismatic

D5P03381-840LPF-BM-U

1

2

3

4

5

6

7

8

LÄNGE LENGTH LONGUEUR		CODE
1131 mm	3,7	01131
1271 mm	3,9	01271
1411 mm	4,2	01411
1691 mm	4,9	01691
2251 mm	6,0	02251
2531 mm	6,2	02531
2812 mm	8,0	02812
3372 mm	9,3	03372
3792 mm	11,3	03792

FARBWIEDERGABE COLOUR RENDERING COLOUR RENDERING	CODE
CRI>80	8
CRI>90	9

FARBTEMPERATUR COLOUR TEMPERATURE TEMPÉRATURE DE COULEUR	CODE
2700K	27 (CRI>90 only)
3000K	30
4000K	40


POWER OUTPUT SORTIE	CODE
Low Output	LP
High Output	HP

STEUERUNG CONTROL CONTRÔLE	CODE
On-Off	F
DALI	D

GEHÄUSEFARBE HOUSING COLOUR COULEUR DU BOÎTIER	CODE
Silver RAL9006	V
White RAL9016	W
Black RAL9005	B

ABDECKUNG COVER COUVERTURE	CODE
Opal	O
Microprismatic	M

LICHTVERTEILUNG LIGHT DISTRIBUTION RÉPARTITION DE LA LUMIÈRE	CODE
Direct	(none)
Direct-Indirect	U

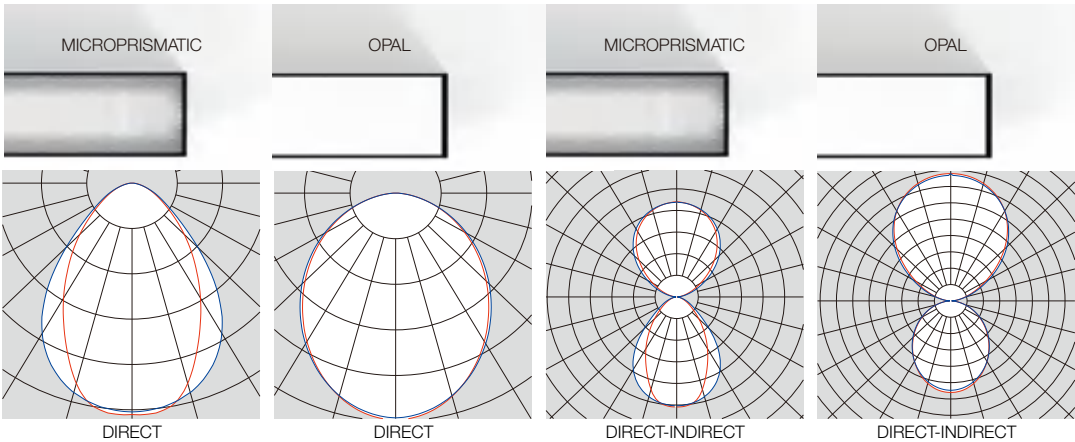


LENGTH MM	LUMEN WATT LOW OUTPUT	LUMEN WATT HIGH OUTPUT	LUMEN WATT LOW OUTPUT	LUMEN WATT HIGH OUTPUT	LUMEN WATT LOW OUTPUT	LUMEN WATT HIGH OUTPUT	LUMEN WATT LOW OUTPUT	LUMEN WATT HIGH OUTPUT	LUMEN WATT LOW OUTPUT	LUMEN WATT HIGH OUTPUT
1131	1481 lm 15 W	2940 lm 29 W	1481 lm 15 W	2940 lm 29 W	3517 lm 26 W	6548 lm 55 W	3517 lm 26 W	6548 lm 55 W	3517 lm 26 W	6548 lm 55 W
1271	1666 lm 16 W	3306 lm 33 W	1666 lm 16 W	3306 lm 33 W	3955 lm 29 W	7700 lm 62 W	3955 lm 29 W	7700 lm 62 W	3955 lm 29 W	7700 lm 62 W
1411	1851 lm 18 W	3675 lm 35 W	1851 lm 18 W	3675 lm 35 W	4397 lm 32 W	8556 lm 68 W	4397 lm 32 W	8556 lm 68 W	4397 lm 32 W	8556 lm 68 W
1691	2222 lm 20 W	4409 lm 41 W	2222 lm 20 W	4409 lm 41 W	5276 lm 38 W	10267 lm 81 W	5276 lm 38 W	10267 lm 81 W	5276 lm 38 W	10267 lm 81 W
2251	2962 lm 27 W	5879 lm 54 W	2962 lm 27 W	5879 lm 54 W	7034 lm 50 W	13690 lm 105 W	7034 lm 50 W	13690 lm 105 W	7034 lm 50 W	13690 lm 105 W
2531	3332 lm 30 W	6614 lm 60 W	3332 lm 30 W	6614 lm 60 W	7912 lm 56 W	15402 lm 118 W	7912 lm 56 W	15402 lm 118 W	7912 lm 56 W	15402 lm 118 W
2812	3702 lm 35 W	7349 lm 70 W	3702 lm 35 W	7349 lm 70 W	8794 lm 64 W	17112 lm 136 W	8794 lm 64 W	17112 lm 136 W	8794 lm 64 W	17112 lm 136 W
3372	4444 lm 41 W	8818 lm 81 W	4444 lm 41 W	8818 lm 81 W	10552 lm 77 W	20534 lm 163 W	10552 lm 77 W	20534 lm 163 W	10552 lm 77 W	20534 lm 163 W
3792	5000 lm 46 W	9922 lm 91 W	5000 lm 46 W	9922 lm 91 W	11871 lm 86 W	23101 lm 183 W	11871 lm 86 W	23101 lm 183 W	11871 lm 86 W	23101 lm 183 W

Alle Lumen- und Wattangaben für 4000K, CRI80 – (Mikroprismenangaben ohne Opalfolie) (Details auf P. 325-326)
All lumen and watt figures are for 4000K, CRI80 – (Microprismatic details without opal film) (details on p. 325-326)
Toutes les données lumen et watt pour 4000K, CRI80 – (données microprisme sans feuille opale) (détails p. 325-326)

NEKO / DASH 50
Linear Light System
Trim Recessed



Trim Recessed



LED-Einbauleuchte mit umlaufendem Rahmen direktstrahlend. Lichtkanal aus Aluminium Strangpressprofil mit einer Gesamtbreite von 63mm. Fertigung der Leuchte milimetergenau auf Kundenwunsch möglich. Oberfläche der Leuchte feinstruktur matt pulverbeschichtet ähnlich RAL9016 weiß, RAL 9006 silber oder RAL9005 schwarz – auf Anfrage in RAL nach Wahl. Diffusor wahlweise in PMMA opal oder PMMA klar mit eingeschobener Mikroprismatischer Platte für eine reduzierte Leuchtdichte (UGR<19). Leuchte inkl. Montagebügel. Der Konverter ist in das Leuchtengehäuse integriert. Wahlweise als on/off oder DALI Variantebe weitere Steuerungsoptionen auf Anfrage möglich. Farbtemperaturen: 2700K, 3000K, 4000K – weitere Lichtfarben auf Anfrage. Farbwiedergabe CRI>80 oder CRI>90 – Mac Adam <3

Recessed LED Luminaire with frame direct beam. Extruded aluminium light channel with a total width of 63mm. The luminaire can be manufactured ac-cording to the customer's wishes down to the last millimetre. Luminaire surface fine textured matte powder coating similar to RAL9016 white, RAL 9006 silver or RAL9005 black – or in any other RAL of your choice. Diffuser available in either PMMA opal or PMMA clear with microprismatic plate inserted for lower luminance (UGR<19). Luminaire with moun-ting bracket. The converter is integrated into the lu-minaire housing. Available as either on/off or DALI variant - other control options available on request. Colour temperatures: 2700K, 3000K, 4000K - other light colours available on request. Colour rendering CRI>80 or CRI>90 - Mac Adam <3

Luminaire à LED encastrable à rayonnement direct avec cadre périphérique. Canal lumineux sous forme de profilé extrudé en aluminium d'une largeur totale de 63 mm. Possibilité de fabriquer le luminaire sur mesure, au millimètre près. Surface de luminaire thermolaquée matte à fine structure en RAL9016 blanc, RAL 9006 argent ou RAL9005 noir, sur de-mande RAL au choix. Diffuseur au choix en PMMA opale ou transparent avec plaque microprismatique pour une intensité lumineuse réduite (UGR<19). Luminaire avec barre de montage. Le convertisseur est intégré au boîtier du luminaire. Au choix en ver-sion on/off ou DALI, autres options de commande disponibles sur demande. Températures de cou-leur : 2700 K, 3000 K, 4000 K, autres couleurs sur demande. Rendu des couleurs CRI>80 ou CRI>90 – Mac Adam <3

ÜBERSICHT | OVERVIEW | VUE D'ENSEMBLE

GENERAL INFO
2700K, 3000K, 4000K
Direct Light
Up to 142lm/W, Up to 6297lm/m
Ra>80, Ra>90, MacAdam 3
On-Off / DALI
Opal & Microprismatic (UGR<19)
Up to L80B10/ 50,000h

HOUSING COLOUR
Weiß feinstruktur matt RAL 9016 White fine structure matt RAL 9016 Blanc structure fine mate RAL 9016
Schwarz feinstruktur matt RAL 9005 Black fine structure matt RAL 9005 Noir structure fine mate RAL 9005
Silber feinstruktur matt RAL 9006 Silver fine structure matt RAL 9006 Argent structure fine mate RAL 9006



LED EINBAULEUCHTE
LED RECESSED VERSION
LED LUMINAIRE ENCASTRABLE

Bestellbeispiel Example order Exemple de commande
3381mm, CRI80, 4000K, Direct, Low Output On-Off, Black, Microprismatic

D5R03381-840LPF-BM

1

LÄNGE LENGTH LONGEUR

CODE

580 mm

1,7

00571

860 mm

2,0

00851

1140 mm

2,5

01131

1280 mm

2,7

01271

1420 mm

3,3

01411

1700 mm

3,8

01691

2260 mm

4,6

02251

2540 mm

4,8

02531

2821m

6,4

02812

3381mm

7,3

03372

3801 mm

8,9

03792

2

FARBWIEDERGABE
COLOUR RENDERING
COLOUR RENDERING

CODE

CRI>80

8

CRI>90

9

3

FARBTEMPERATUR
COLOUR TEMPERATURE
TEMPÉRATURE DE COULEUR

CODE

2700K

27 (CRI>90 only)

3000K

30

4000K

40

4

POWER
OUTPUT
SORTIE

CODE

Low Output

LP

High Output

HP

5

STEUERUNG
CONTROL
CONTRÔLE

CODE

On-Off

F

DALI

D

6

GEHÄUSEFARBE
HOUSING COLOUR
COULEUR DU BOÎTIER

CODE

Silver RAL9006

V

White RAL9016

W

Black RAL9005

B

7

ABDECKUNG
COVER
COUVERTURE


CODE

Opal

O

Microprismatic

M

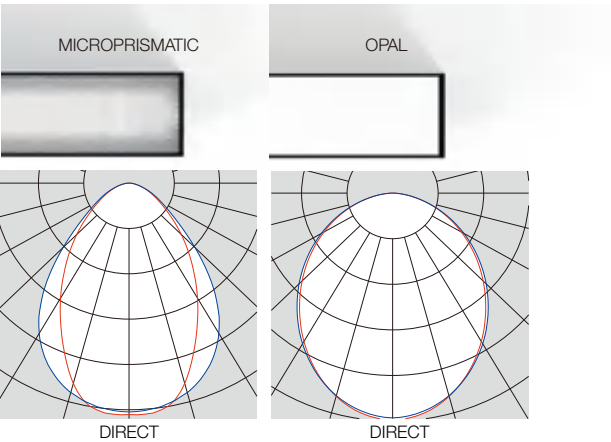

LENGTH MM	LUMEN WATT LOW OUTPUT	LUMEN WATT HIGH OUTPUT	LUMEN WATT LOW OUTPUT	LUMEN WATT HIGH OUTPUT
580	741 lm 8 W	1470 lm 17 W	741 lm 8 W	1470 lm 17 W
860	1111 lm 12 W	2205 lm 23 W	1111 lm 12W	2205 lm 23 W
1140	1481 lm 15 W	2940 lm 29 W	1481 lm 15 W	2940 lm 29 W
1280	1666 lm 16 W	3306 lm 33 W	1666 lm 16 W	3306 lm 33 W
1420	1851 lm 18 W	3675 lm 35 W	1851 lm 18 W	3675 lm 35 W
1700	2222 lm 20 W	4409 lm 41 W	2222 lm 20 W	4409 lm 41 W
2260	2962 lm 27 W	5879 lm 54 W	2962 lm 27 W	5879 lm 54 W
2540	3332 lm 30 W	6614 lm 60 W	3332 lm 30 W	6614 lm 60 W
2821	3702 lm 35 W	7349 lm 70 W	3702 lm 35 W	7349 lm 70 W
3381	4444 lm 41 W	8818 lm 81 W	4444 lm 41 W	8818 lm 81 W
3801	5000 lm 46 W	9922 lm 91 W	5000 lm 46 W	9922 lm 91 W

RAHMEN CADRE	LÄNGE LENGTH GAUCHE	BREITE WIDTH À DROITE	TIEFE DEPTH PROFONDEUR
580 mm	575 mm	57 mm	125 mm
860 mm	855 mm	57 mm	125 mm
1140 mm	1135 mm	57 mm	125 mm
1280 mm	1275 mm	57 mm	125 mm
1420 mm	1415 mm	57 mm	125 mm
1700 mm	1695 mm	57 mm	125 mm
2260 mm	2255 mm	57 mm	125 mm
2540 mm	2535 mm	57 mm	125 mm
2821 mm	2816 mm	57 mm	125 mm
3381 mm	3376 mm	57 mm	125 mm
3801 mm	3796 mm	57 mm	125 mm

Alle Lumen- und Wattangaben für 4000K, CRI80 – (Mikroprismenangaben ohne Opalfolie) (Details auf P. 325-326)
All lumen and watt figures are for 4000K, CRI80 – (Microprismatic details without opal film) (details on p. 325-326)
Toutes les données lumen et watt pour 4000K, CRI80 – (données microprisme sans feuille opale) (détails p. 325-326)

NEKO / DASH 50
Linear Light System
Wall Mounted




White Ral9016


Silver Ral9006

Black Ral9005

Wall Mounted



Direct-Indirect



LED-Wandleuchte direktstrahlend oder direkt-/indirektstrahlend. Lichtkanal aus Aluminium Strangpressprofil mit einer Breite von 41mm. Fertigung der Leuchte millimetergenau auf Kundenwunsch möglich. Oberfläche der Leuchte feinstruktur matt pulverbeschichtet ähnlich RAL9016 weiß, RAL 9006 silber oder RAL9005 schwarz – auf Anfrage in RAL nach Wahl. Dif-fusor wahlweise in PMMA opal oder PMMA klar mit eingeschobener Mikroprismatischer Platte für eine reduzierte Leuchtdichte (UGR<19). Leuchte inkl. speziellem Schnellmontage Wand-baldachin (Montage mittels Stecker und Gegen-stecker). Der Konverter ist in das Leuchten-gehäuse integriert. Wahlweise als on/off oder DALI Variante – weitere Steuerungsoptionen auf Anfrage möglich. Farbtemperaturen: 2700K, 3000K, 4000K – weitere Lichtfarben auf Anfrage. Farbwiedergabe CRI>80 oder CRI>90 – Mac Adam <3


LED Wall Luminaire direct beam or direct/indirect beam. Extruded aluminium light channel with 41mm width. The luminaire can be manufactured according to the customer's wishes down to the last millimetre. Luminaire surface fine textured matte powder coating similar to RAL9016 white, RAL 9006 silver or RAL9005 black – or in any other RAL of your choice. Diffuser available in either PMMA opal or PMMA clear with microprismatic plate inserted for lower luminance (UGR<19). Luminaire with special quick-mount wall canopy (plug with mating plug used for mounting). The converter is integrated into the luminaire housing. Available as either on/off or DALI variant - other control options available on request. Colour temperatures: 2700K, 3000K, 4000K - other light colours available on request. Colour rendering CRI>80 or CRI>90 - Mac Adam <3

LED Applique Murale à rayonnement direct ou direct/indirect. Canal lumineux sous forme de profilé extrudé en aluminium d'une largeur de 41 mm. Possibilité de fabriquer le luminaire sur mesure, au millimètre près. Surface de luminaire thermolaquée matte à fine structure en RAL9016 blanc, RAL 9006 argent ou RAL9005 noir, sur demande RAL au choix. Diffuseur au choix en PMMA opale ou transparent avec plaque microprismatique pour une intensité lumineuse réduite (UGR<19). Luminaire avec cache mural spécial à montage rapide inclus (montage par fiche et contre-fiche). Le convertisseur est intégré au boîtier du luminaire. Au choix en version on/off ou DALI, autres options de commande disponibles sur demande. Températures de couleur : 2700 K, 3000 K, 4000 K, autres couleurs sur demande. Rendu des couleurs CRI>80 ou CRI>90 – Mac Adam <3

ÜBERSICHT | OVERVIEW | VUE D'ENSEMBLE

GENERAL INFO
2700K, 3000K, 4000K
Direct Light, Direct-indirect Light
Up to 142lm/W, Up to 6297lm/m
Ra>80, Ra>90, MacAdam 3
On-Off / DALI
Opal & Microprism (UGR <19)
Up to L80B10/ 50,000h

HOUSING COLOUR
 Weiß feinstruktur matt RAL 9016 White fine structure matt RAL 9016 Blanc structure fine mate RAL 9016
 Schwarz feinstruktur matt RAL 9005 Black fine structure matt RAL 9005 Noir structure fine mate RAL 9005
 Silber feinstruktur matt RAL 9006 Silver fine structure matt RAL 9006 Argent structure fine mate RAL 9006



LED WANDLEUCHTE
LED WALL LUMINAIRE
LED APPLIQUE MURALE

Bestellbeispiel Example order Exemple de commande
3381mm, CRI80, 4000K, Direct-Indirect, Low Output On-Off, Black, Microprismatic

D5W03381-840LPF-BM-U
1 2 3 4 5 6 7 8


LÄNGE LENGTH LONGEUR		CODE
571 mm	2,2	00571
851 mm	2,9	00851
1131 mm	3,7	01131
1271 mm	3,9	01271
1411 mm	4,2	01411
1691 mm	4,7	01691
2251 mm	5,7	02251
2531 mm	5,9	02531
2812 mm	7,8	02812
3372 mm	9,2	03372
3792 mm	10,9	03792

GEHÄUSEFARBE HOUSING COLOUR COULEUR DU BOÎTIER	CODE
Silver RAL9006	V
White RAL9016	W
Black RAL9005	B

FARBWIEDERGABE COLOUR RENDERING COLOUR RENDERING	CODE	FARBTEMPERATUR COLOUR TEMPERATURE TEMPÉRATURE DE COULEUR	CODE
CRI>80	8	2700K	27 (CRI>90 only)
CRI>90	9	3000K	30
		4000K	40

POWER OUTPUT SORTIE	CODE	STEUERUNG CONTROL CONTRÔLE	CODE
Low Output	LP	On-Off	F
High Output	HP	DALI	D

ABDECKUNG COVER COUVERTURE	CODE	LICHTVERTEILUNG LIGHT DISTRIBUTION RÉPARTITION DE LA LUMIÈRE	CODE
Opal	O	Direct	(none)
Microprismatic	M	Direct-Indirect	U

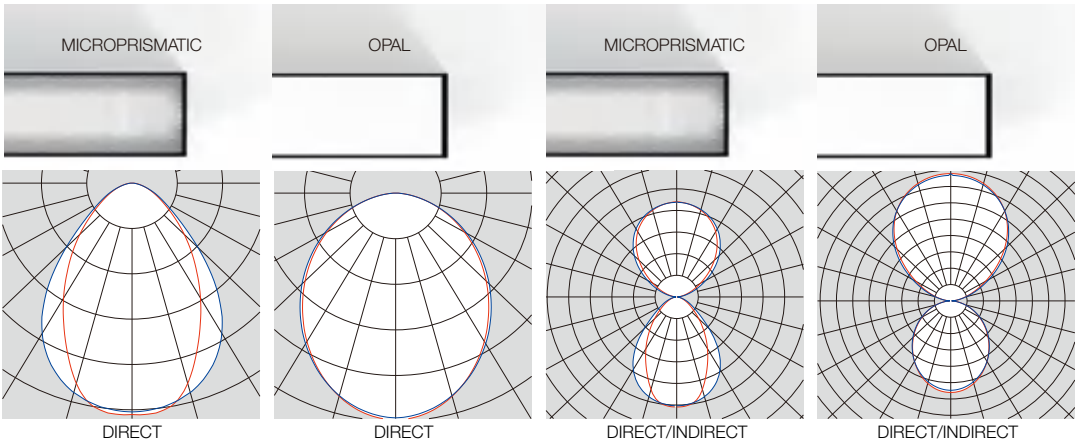

LENGTH MM	LUMEN WATT LOW OUTPUT	LUMEN WATT HIGH OUTPUT	LUMEN WATT LOW OUTPUT	LUMEN WATT HIGH OUTPUT	LUMEN WATT LOW OUTPUT	LUMEN WATT HIGH OUTPUT	LUMEN WATT LOW OUTPUT	LUMEN WATT HIGH OUTPUT
571	741 lm 8 W	1470 lm 17 W	741 lm 8 W	1470 lm 17 W	1758 lm 14 W	3422 lm 29 W	1758 lm 14 W	3422 lm 29 W
851	1111 lm 12 W	2205 lm 23 W	1111 lm 12W	2205 lm 23 W	2638 lm 23 W	5133 lm 42 W	2638 lm 23 W	5133 lm 42 W
1131	1481 lm 15 W	2940 lm 29 W	1481 lm 15 W	2940 lm 29 W	3517 lm 26 W	6548 lm 55 W	3517 lm 26 W	6548 lm 55 W
1271	1666 lm 16 W	3306 lm 33 W	1666 lm 16 W	3306 lm 33 W	3955 lm 29 W	7700 lm 62 W	3955 lm 29 W	7700 lm 62 W
1411	1851 lm 18 W	3675 lm 35 W	1851 lm 18 W	3675 lm 35 W	4397 lm 32 W	8556 lm 68 W	4397 lm 32 W	8556 lm 68 W
1691	2222 lm 20 W	4409 lm 41 W	2222 lm 20 W	4409 lm 41 W	5276 lm 38 W	10267 lm 81 W	5276 lm 38 W	10267 lm 81 W
2251	2962 lm 27 W	5879 lm 54 W	2962 lm 27 W	5879 lm 54 W	7034 lm 50 W	13690 lm 105 W	7034 lm 50 W	13690 lm 105 W
2531	3332 lm 30 W	6614 lm 60 W	3332 lm 30 W	6614 lm 60 W	7912 lm 56 W	15402 lm 118 W	7912 lm 56 W	15402 lm 118 W
2812	3702 lm 35 W	7349 lm 70 W	3702 lm 35 W	7349 lm 70 W	8794 lm 64 W	17112 lm 136 W	8794 lm 64 W	17112 lm 136 W
3372	4444 lm 41 W	8818 lm 81 W	4444 lm 41 W	8818 lm 81 W	10552 lm 77 W	20534 lm 163 W	10552 lm 77 W	20534 lm 163 W
3792	5000 lm 46 W	9922 lm 91 W	5000 lm 46 W	9922 lm 91 W	11871 lm 86 W	23101 lm 183 W	11871 lm 86 W	23101 lm 183 W

Alle Lumen- und Wattangaben für 4000K, CRI80 – (Mikroprismenangaben ohne Opalfolie) (Details auf P. 325–326)
All lumen and watt figures are for 4000K, CRI80 – (Microprismatic details without opal film) (details on p. 325-326)
Toutes les données lumen et watt pour 4000K, CRI80 – (données microprisme sans feuille opale) (détails p. 325-326)

LUMEN OUTPUT (lm)

MICROPRISMATIC

CRI80

LÄNGE	DIRECT - LOW OUTPUT		DIRECT - HIGH OUTPUT		DIRECT - LOW OUTPUT		DIRECT - HIGH OUTPUT	
LENGTH	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K
LONGEUR mm	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen
571 - 580	712	741	1389	1470	1688	1758	3282	3422
851 - 860	1067	1111	2083	2204	2532	2638	4926	5133
1131 - 1140	1423	1481	2777	2939	3376	3517	6565	6845
1271 - 1280	1601	1666	3124	3306	3797	3955	7386	7700
1411 - 1420	1779	1851	3471	3674	4220	4397	8210	8556
1691 - 1700	2135	2222	4166	4408	5064	5276	9852	10267
2251 - 2260	2826	2962	5554	5878	6752	7034	13130	13690
2531 - 2540	3202	3332	6248	6612	7594	7912	14780	15402
2812 - 2821	3558	3702	6942	7348	8440	8794	16420	17112
3372 - 3381	4270	4444	8332	8816	10128	10552	19704	20534
3792 - 3801	4804	5000	9455	9920	11394	11871	22167	23101

CRI90

LÄNGE	DIRECT - LOW OUTPUT			DIRECT - HIGH OUTPUT			DIRECT - LOW OUTPUT			DIRECT - HIGH OUTPUT		
LENGTH	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K
LONGEUR mm	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen
571 - 580	578	615	640	1147	1220	1277	1371	1459	1520	2670	2338	3025
851 - 860	867	922	961	1720	1831	1908	2057	2180	2281	4004	4260	4440
1131 - 1140	1155	1229	1280	2293	2440	2553	2742	2918	3041	5340	5676	6050
1271 - 1280	1299	1383	1440	2580	2745	2873	3085	3283	3421	6001	6386	6806
1411 - 1420	1444	1536	1600	2866	3050	3191	3429	3649	3803	6674	7100	7400
1691 - 1700	1734	1844	1920	3440	3660	3816	4115	4379	4563	8009	8520	8880
2251 - 2260	2310	2458	2560	4586	4880	5106	5486	5838	6082	10680	11352	12100
2531 - 2540	2600	2766	2880	5160	5490	5745	6170	6566	6840	12002	12770	13610
2812 - 2821	2888	3072	3200	5732	6100	6382	6858	7300	7606	13348	14200	14800
3372 - 3381	3468	3688	3840	6880	7320	7632	8230	8758	9126	16018	17040	17760
3792 - 3801	3902	4149	4325	7742	8240	8586	9259	9853	10267	18020	19170	19980

LUMEN OUTPUT (lm)

OPAL


CRI80

LÄNGE	DIRECT - LOW OUTPUT		DIRECT - HIGH OUTPUT		DIRECT - LOW OUTPUT		DIRECT - HIGH OUTPUT	
LENGTH	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K
LONGEUR mm	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen
571 - 580	712	741	1389	1470	1688	1758	3282	3422
851 - 860	1067	1111	2083	2204	2532	2638	4926	5133
1131 - 1140	1423	1481	2777	2939	3376	3517	6565	6845
1271 - 1280	1601	1666	3124	3306	3797	3955	7386	7700
1411 - 1420	1779	1851	3471	3674	4220	4397	8210	8556
1691 - 1700	2135	2222	4166	4408	5064	5276	9852	10267
2251 - 2260	2826	2962	5554	5878	6752	7034	13130	13690
2531 - 2540	3202	3332	6248	6612	7594	7912	14780	15402
2812 - 2821	3558	3702	6942	7348	8440	8794	16420	17112
3372 - 3381	4270	4444	8332	8816	10128	10552	19704	20534
3792 - 3801	4804	5000	9455	9920	11394	11871	22167	23101

CRI90

LÄNGE	DIRECT - LOW OUTPUT			DIRECT - HIGH OUTPUT			DIRECT - LOW OUTPUT			DIRECT - HIGH OUTPUT		
LENGTH	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K	2700K	3000K	4000K
LONGEUR mm	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen
571 - 580	578	615	640	1147	1220	1277	1371	1459	1520	2838	3025	3025
851 - 860	867	922	961	1720	1831	1908	2057	2190	2281	4260	4440	4440
1131 - 1140	1155	1229	1280	2293	2440	2553	2742	2918	3041	5676	6050	6050
1271 - 1280	1299	1383	1440	2580	2745	2873	3085	3283	3421	6386	6806	6806
1411 - 1420	1444	1536	1600	2866	3050	3191	3429	3649	3803	7100	7400	7400
1691 - 1700	1734	1844	1920	3440	3660	3816	4115	4379	4563	8520	8880	8880
2251 - 2260	2310	2458	2560	4586	4880	5106	5486	5838	6082	11352	12100	12100
2531 - 2540	2600	2766	2880	5160	5490	5745	6170	6566	6840	12770	13610	13610
2812 - 2821	2888	3072	3200	5732	6100	6382	6858	7300	7606	14200	14800	14800
3372 - 3381	3468	3688	3840	6880	7320	7632	8230	8758	9126	17040	17760	17760
3792 - 3801	3902	4149	4325	7742	8240	8586	9259	9853	10267	19170	19980	19980



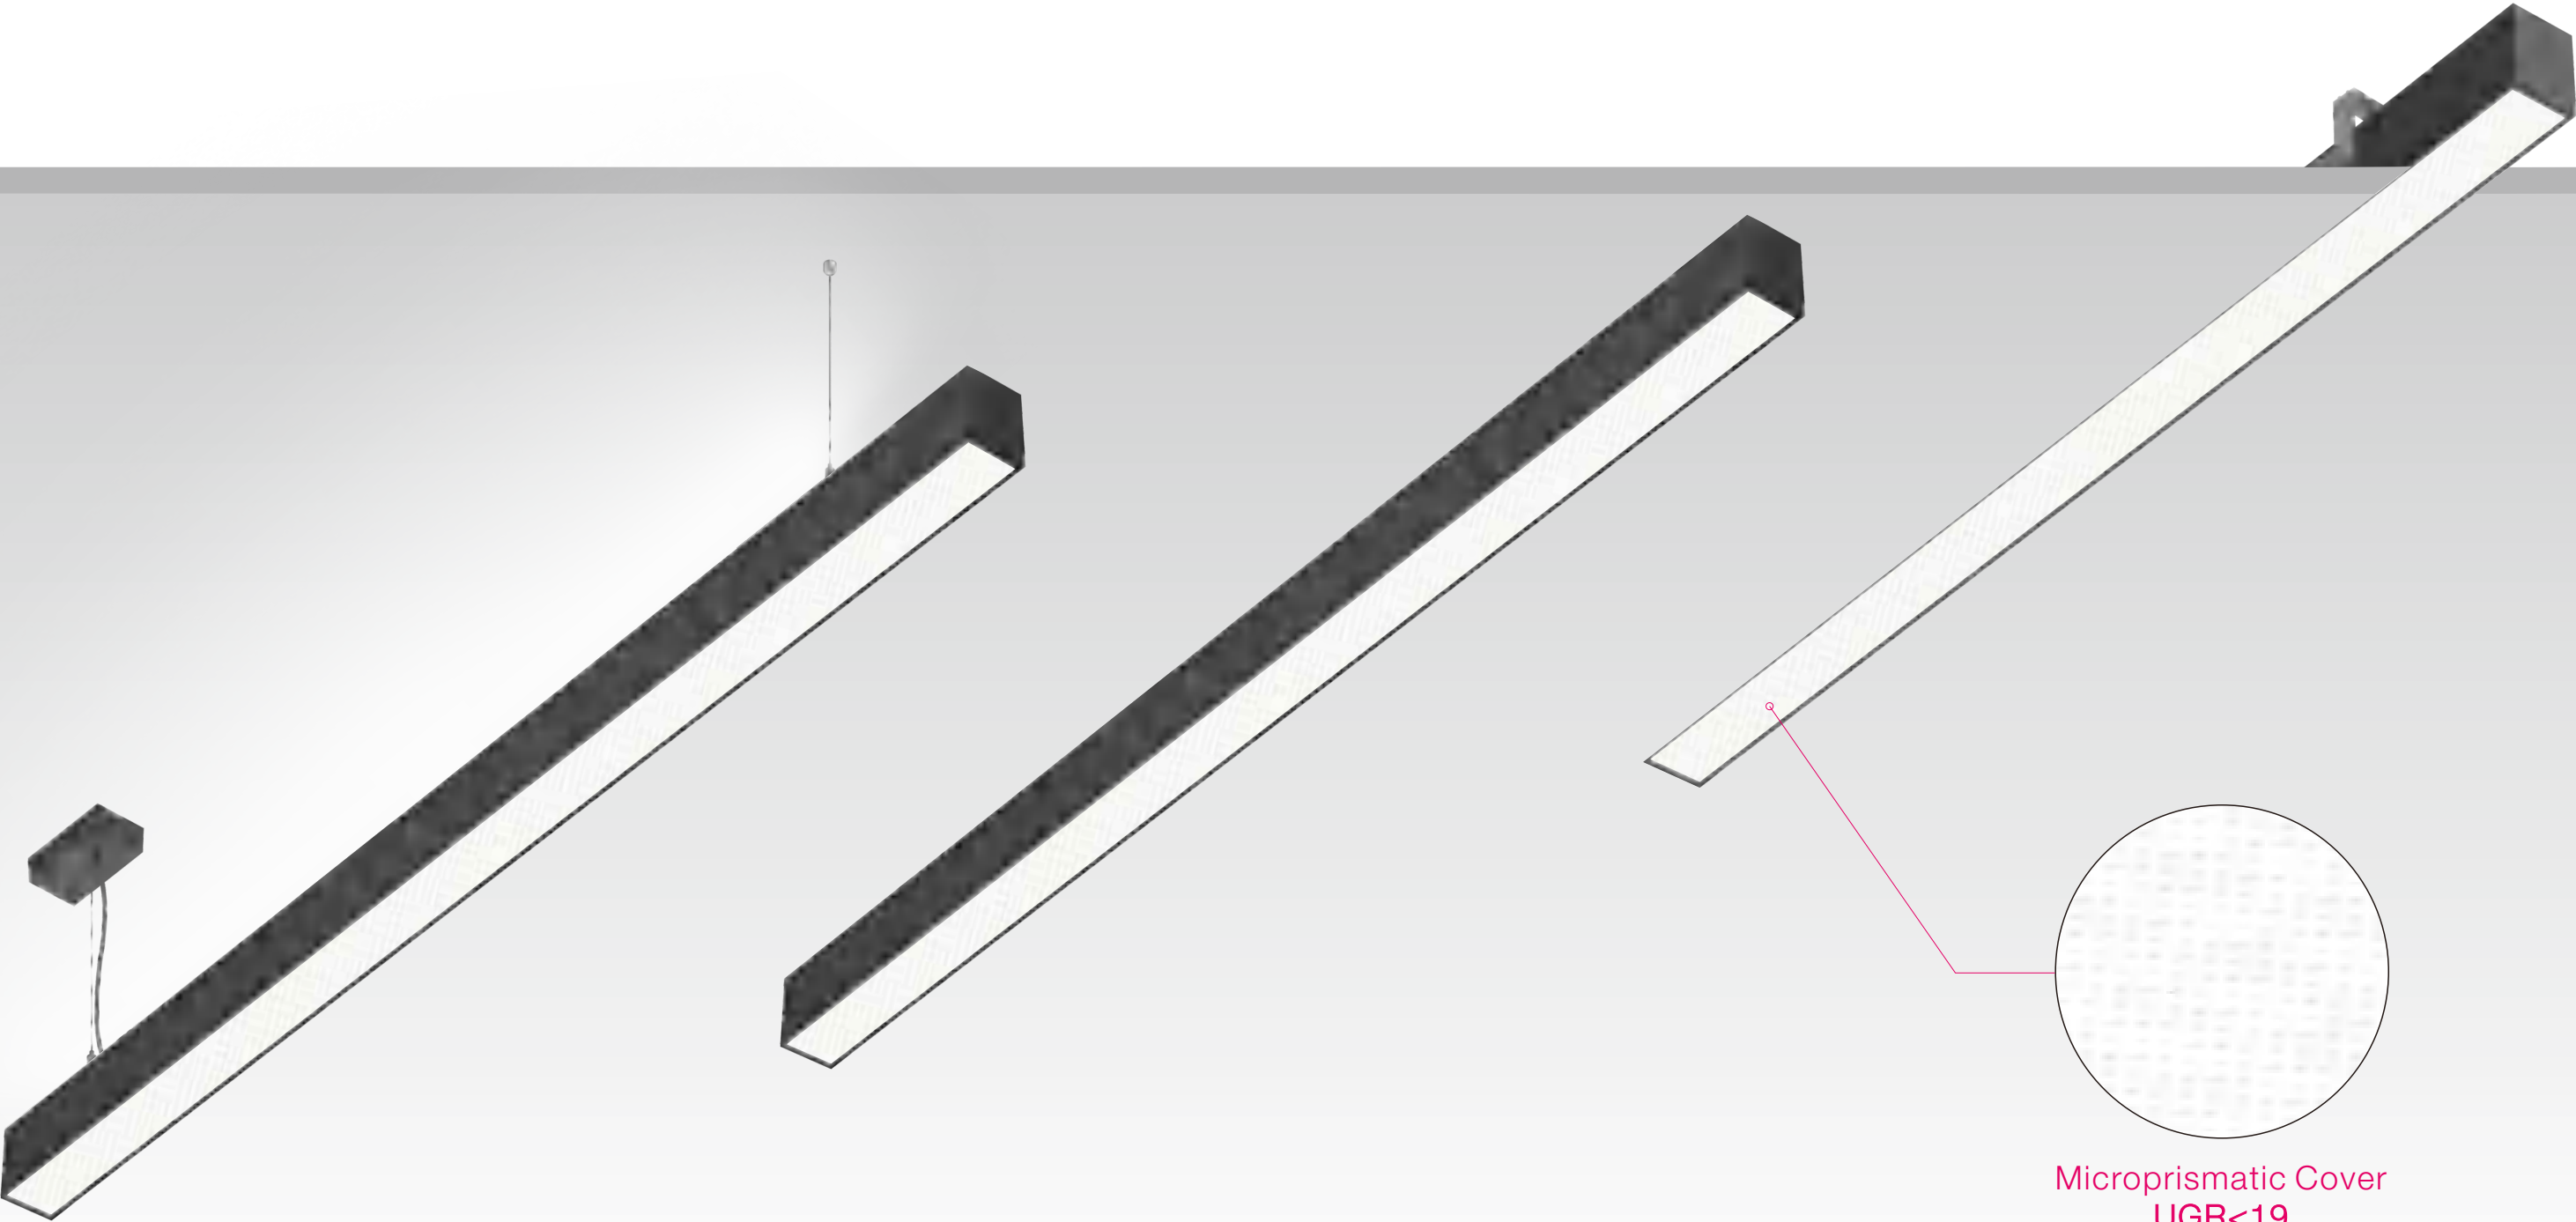


Microprismatic Cover
UGR<19


Pendant

Surface Mounted

Trimless Recessed

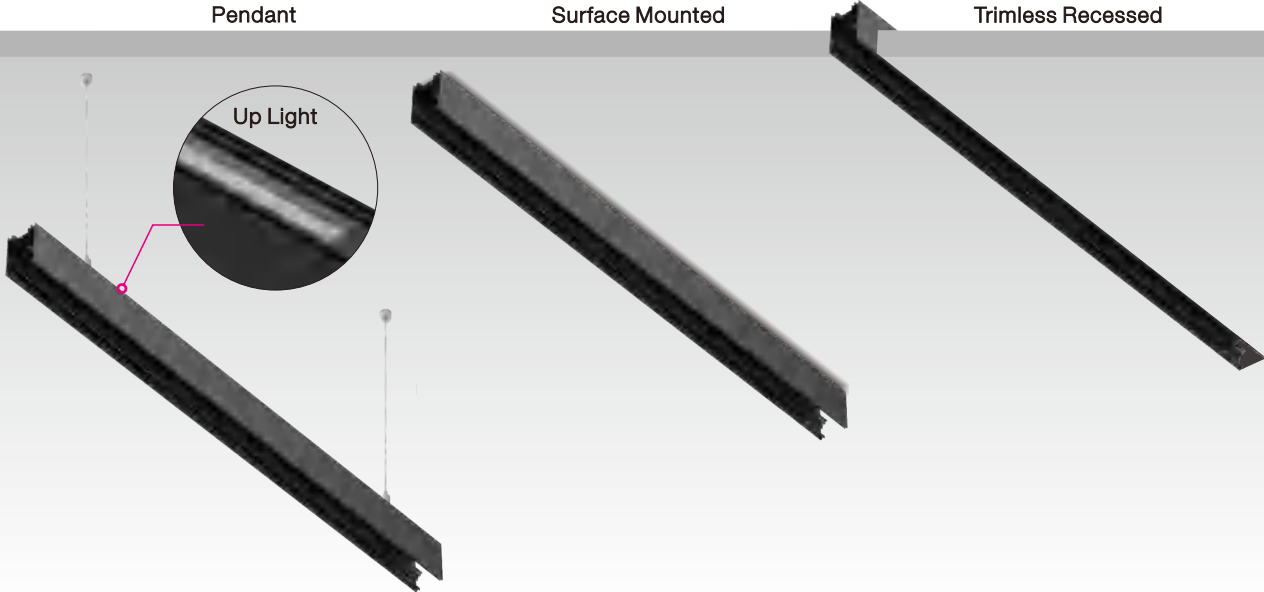

Channels

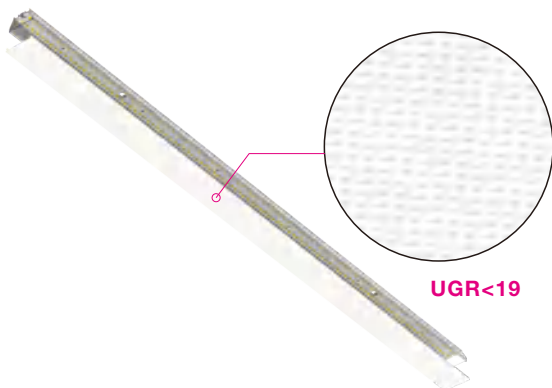

Mircoprismatic Diffuser (Standard)



Opal Diffuser (Option)

Optional Flexible Diffuser

*Up to 30 meters long, in-field cuttable





Flexible Prismatic Diffuser, UGR<19




Flexible Opal Diffuser

Inserts

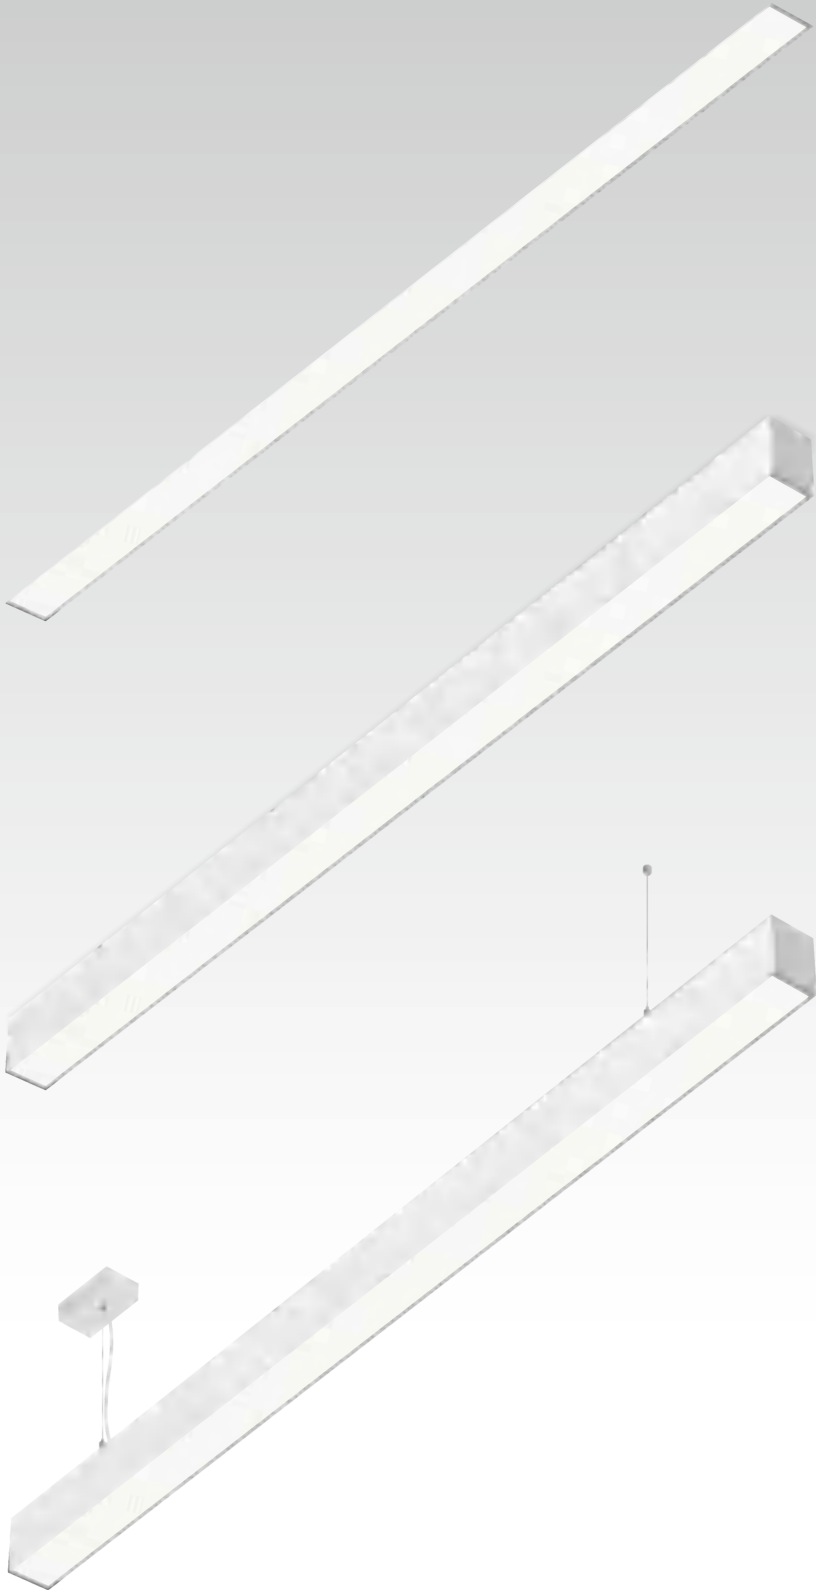

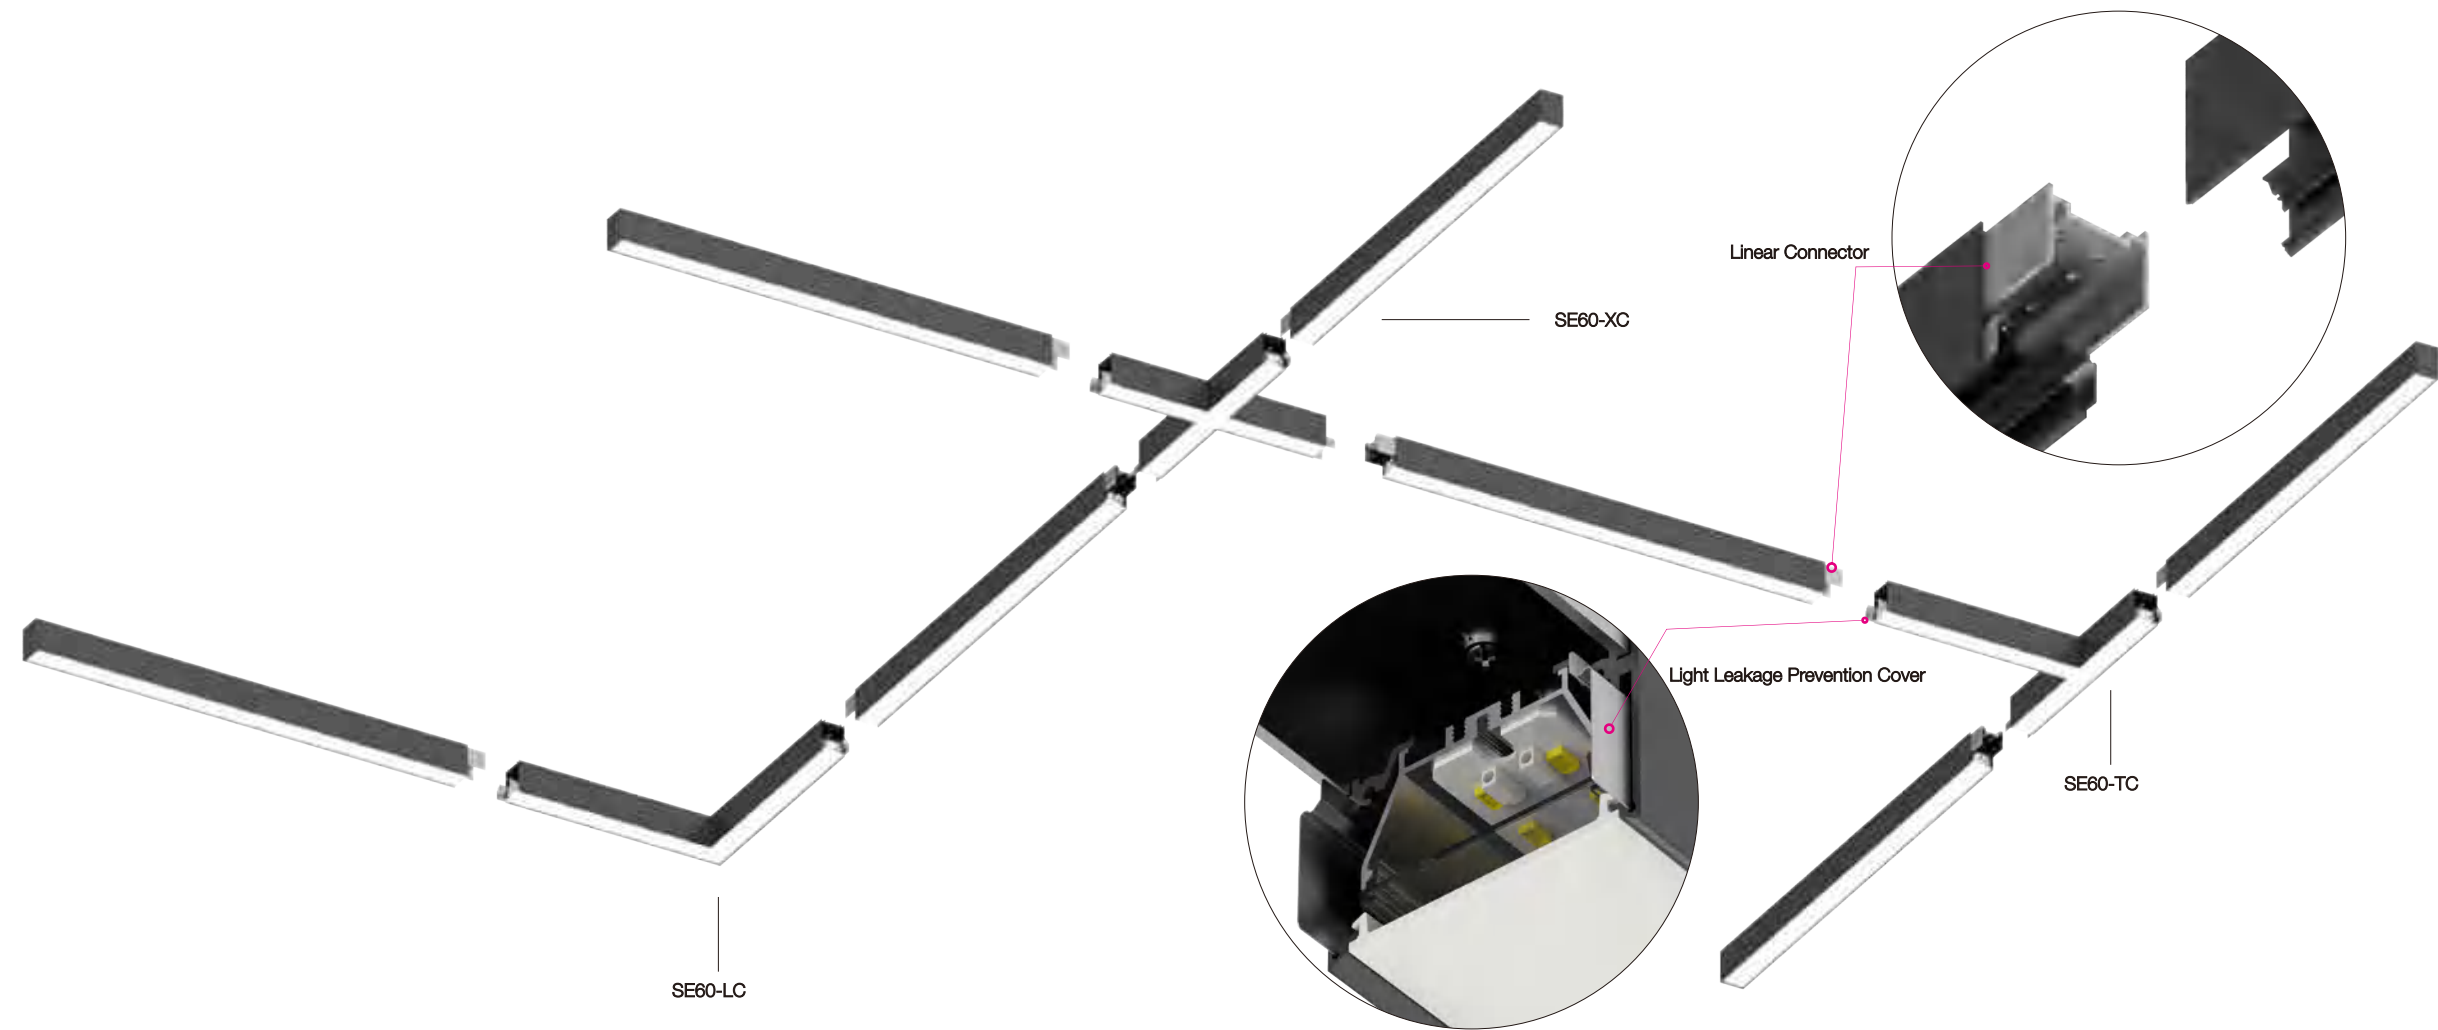

Corner Module of SPACE 60 Linear System

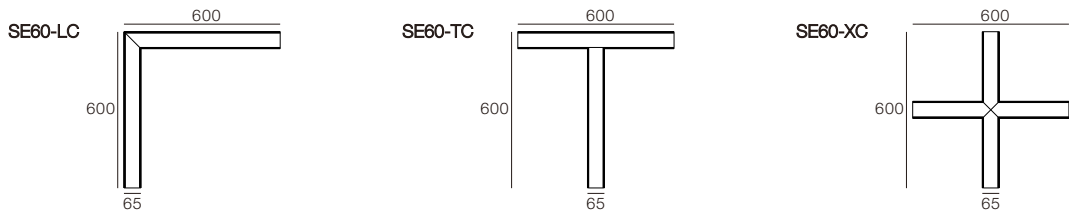

Module	LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
SE60-LC	23 W	26 W	33V	700mA	600x600mm	White	80	3000K	80°	2300lm	SELC-8308026F-WN
								4000K	80°	2500lm	SELC-8408026F-WN
						90	3000K	80°	2000lm	SELC-9308026F-WN	
								4000K	80°	2200lm	SELC-9408026F-WN
	23 W	26 W	33V	700mA	600x600mm	Black	80	3000K	80°	2300lm	SELC-8308026F-BN
								4000K	80°	2500lm	SELC-8408026F-BN
						90	3000K	80°	2000lm	SELC-9308026F-BN	
								4000K	80°	2200lm	SELC-9408026F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Module	LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
SE60-TC	23 W	26 W	33V	700mA	600x600mm	White	80	3000K	80°	2300lm	SETC-8308026F-WN
								4000K	80°	2500lm	SETC-8408026F-WN
						90	3000K	80°	2000lm	SETC-9308026F-WN	
								4000K	80°	2200lm	SETC-9408026F-WN
	23 W	26 W	33V	700mA	600x600mm	Black	80	3000K	80°	2300lm	SETC-8308026F-BN
								4000K	80°	2500lm	SETC-8408026F-BN
						90	3000K	80°	2000lm	SETC-9308026F-BN	
								4000K	80°	2200lm	SETC-9408026F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)


SE60-XC	23 W	26 W	33V	700mA	600x600mm	White	80	3000K	80°	2300lm	SEXC-8308026F-WN
								4000K	80°	2500lm	SEXC-8408026F-WN
						90	3000K	80°	2000lm	SEXC-9308026F-WN	
								4000K	80°	2200lm	SEXC-9408026F-WN
	23 W	26 W	33V	700mA	600x600mm	Black	80	3000K	80°	2300lm	SEXC-8308026F-BN
								4000K	80°	2500lm	SEXC-8408026F-BN
						90	3000K	80°	2000lm	SEXC-9308026F-BN	
								4000K	80°	2200lm	SEXC-9408026F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)


NEKO / SPACE 60

Linear Light System Pendant

UGR<19

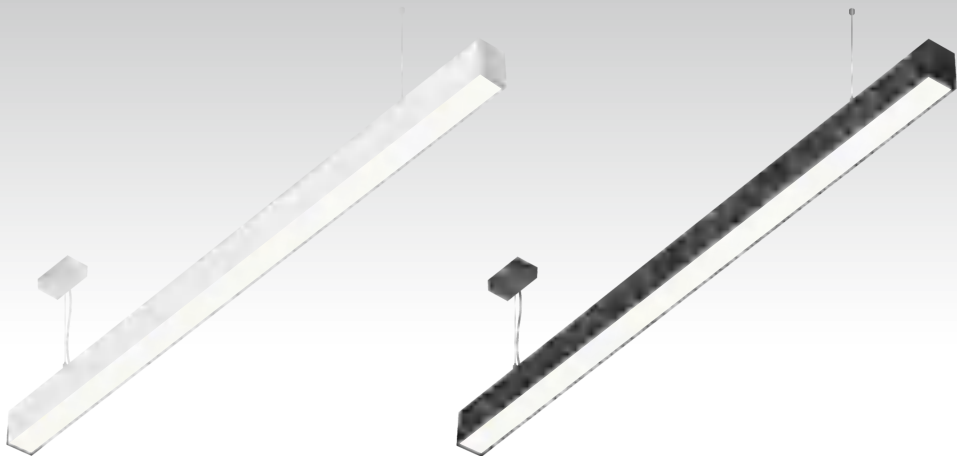

26W	CRI80	3000K	105°	50,000h@L80B10	UGR < 19	IP20	5 YEARS GUARANTEE	CB	CE
34W	CRI90	4000K	80°						

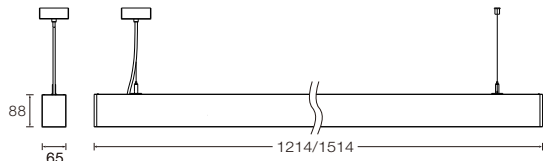

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
23 W	26 W	33V	700mA	1214mm	White	80	3000K	80° ↓	2300lm	SEAP-8308026F-WN
								80° ↓	2500lm	SEAP-8408026F-WN
						90	3000K	80° ↓	2000lm	SEAP-9308026F-WN
								80° ↓	2200lm	SEAP-9408026F-WN
					Black	80	3000K	80° ↓	2300lm	SEAP-8308026F-BN
								80° ↓	2500lm	SEAP-8408026F-BN
						90	3000K	80° ↓	2000lm	SEAP-9308026F-BN
								80° ↓	2200lm	SEAP-9408026F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

30 W	34 W	33V	900mA	1514mm	White	80	3000K	80° ↓	3100lm	SEBP-8308034F-WN
								80° ↓	3400lm	SEBP-8408034F-WN
						90	3000K	80° ↓	2700lm	SEBP-9308034F-WN
								80° ↓	2900lm	SEBP-9408034F-WN
					Black	80	3000K	80° ↓	3100lm	SEBP-8308034F-BN
								80° ↓	3400lm	SEBP-8408034F-BN
						90	3000K	80° ↓	2700lm	SEBP-9308034F-BN
								80° ↓	2900lm	SEBP-9408034F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)


LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
35 W	38 W	33V	1050mA	1214mm	White	80	3000K	80° ↓ 105° ↑	2300lm ↓ 1600lm ↑	SEAP-8308038F-WN-U
								80° ↓ 105° ↑	2500lm ↓ 1700lm ↑	SEAP-8408038F-WN-U
						90	3000K	80° ↓ 105° ↑	2000lm ↓ 1400lm ↑	SEAP-9308038F-WN-U
								80° ↓ 105° ↑	2200lm ↓ 1500lm ↑	SEAP-9408038F-WN-U
					Black	80	3000K	80° ↓ 105° ↑	2300lm ↓ 1600lm ↑	SEAP-8308038F-BN-U
								80° ↓ 105° ↑	2500lm ↓ 1700lm ↑	SEAP-8408038F-BN-U
						90	3000K	80° ↓ 105° ↑	2000lm ↓ 1400lm ↑	SEAP-9308038F-BN-U
								80° ↓ 105° ↑	2200lm ↓ 1500lm ↑	SEAP-9408038F-BN-U

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

43 W	47 W	33V	1300mA	1514mm	White	80	3000K	80° ↓ 105° ↑	3000lm ↓ 2100lm ↑	SEBP-8308047F-WN-U
								80° ↓ 105° ↑	3300lm ↓ 2300lm ↑	SEBP-8408047F-WN-U
						90	3000K	80° ↓ 105° ↑	2600lm ↓ 1800lm ↑	SEBP-9308047F-WN-U
								80° ↓ 105° ↑	2800lm ↓ 1900lm ↑	SEBP-9408047F-WN-U
					Black	80	3000K	80° ↓ 105° ↑	3000lm ↓ 2100lm ↑	SEBP-8308047F-BN-U
								80° ↓ 105° ↑	3300lm ↓ 2300lm ↑	SEBP-8408047F-BN-U
						90	3000K	80° ↓ 105° ↑	2600lm ↓ 1800lm ↑	SEBP-9308047F-BN-U
								80° ↓ 105° ↑	2800lm ↓ 1900lm ↑	SEBP-9408047F-BN-U

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)



Installation Type: Pendant with Uplight



NEKO / SPACE 60

Linear Light System Surface & Trimless Recessed

UGR<19

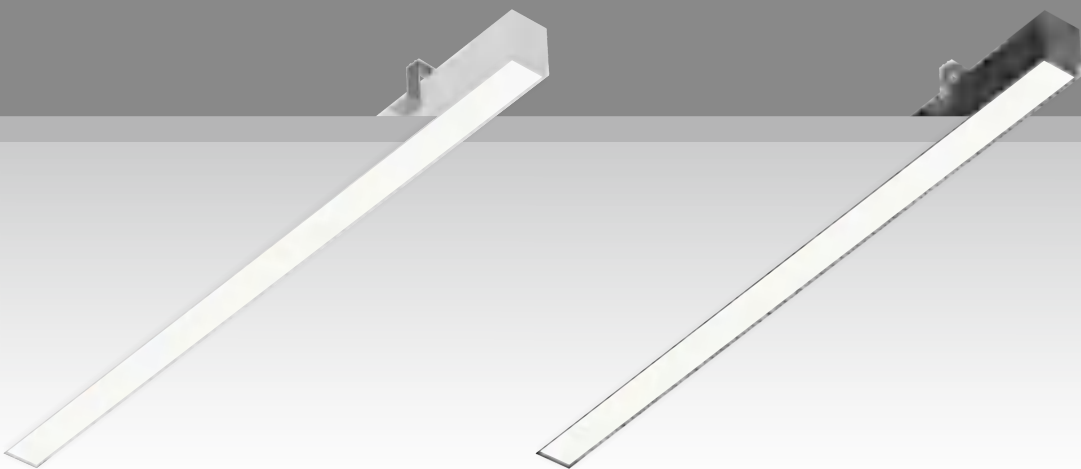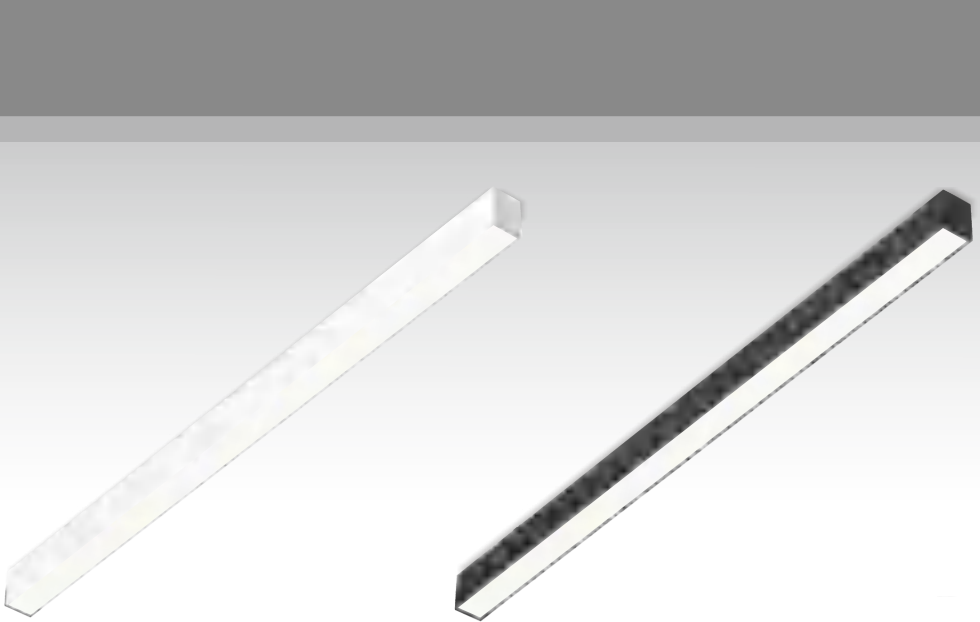

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
23 W	26 W	33V	700mA	1214mm	White	80	3000K	80° ↓	2300lm	SEAC-8308026F-WN
							4000K	80° ↓	2500lm	SEAC-8408026F-WN
						90	3000K	80° ↓	2000lm	SEAC-9308026F-WN
							4000K	80° ↓	2200lm	SEAC-9408026F-WN
					Black	80	3000K	80° ↓	2300lm	SEAC-8308026F-BN
							4000K	80° ↓	2500lm	SEAC-8408026F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

30 W	34 W	33V	900mA	1514mm	White	80	3000K	80° ↓	3100lm	SEBC-8308034F-WN
							4000K	80° ↓	3400lm	SEBC-8408034F-WN
						90	3000K	80° ↓	2700lm	SEBC-9308034F-WN
							4000K	80° ↓	2900lm	SEBC-9408034F-WN
					Black	80	3000K	80° ↓	3100lm	SEBC-8308034F-BN
							4000K	80° ↓	3400lm	SEBC-8408034F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)



LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
23 W	26 W	33V	700mA	1214mm	White	80	3000K	80° ↓	2300lm	SEAT-8308026F-WN
							4000K	80° ↓	2500lm	SEAT-8408026F-WN
						90	3000K	80° ↓	2000lm	SEAT-9308026F-WN
							4000K	80° ↓	2200lm	SEAT-9408026F-WN
					Black	80	3000K	80° ↓	2300lm	SEAT-8308026F-BN
							4000K	80° ↓	2500lm	SEAT-8408026F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

30 W	34 W	33V	900mA	1514mm	White	80	3000K	80° ↓	3100lm	SEBT-8308034F-WN
							4000K	80° ↓	3400lm	SEBT-8408034F-WN
						90	3000K	80° ↓	2700lm	SEBT-9308034F-WN
							4000K	80° ↓	2900lm	SEBT-9408034F-WN
					Black	80	3000K	80° ↓	3100lm	SEBT-8308034F-BN
							4000K	80° ↓	3400lm	SEBT-8408034F-BN


Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)









1 H Track




2 Standard Track




3 Slim Track





4 Trim Recessed Track










5 Trimless Recessed Track-EI



6 Trimless Recessed Track

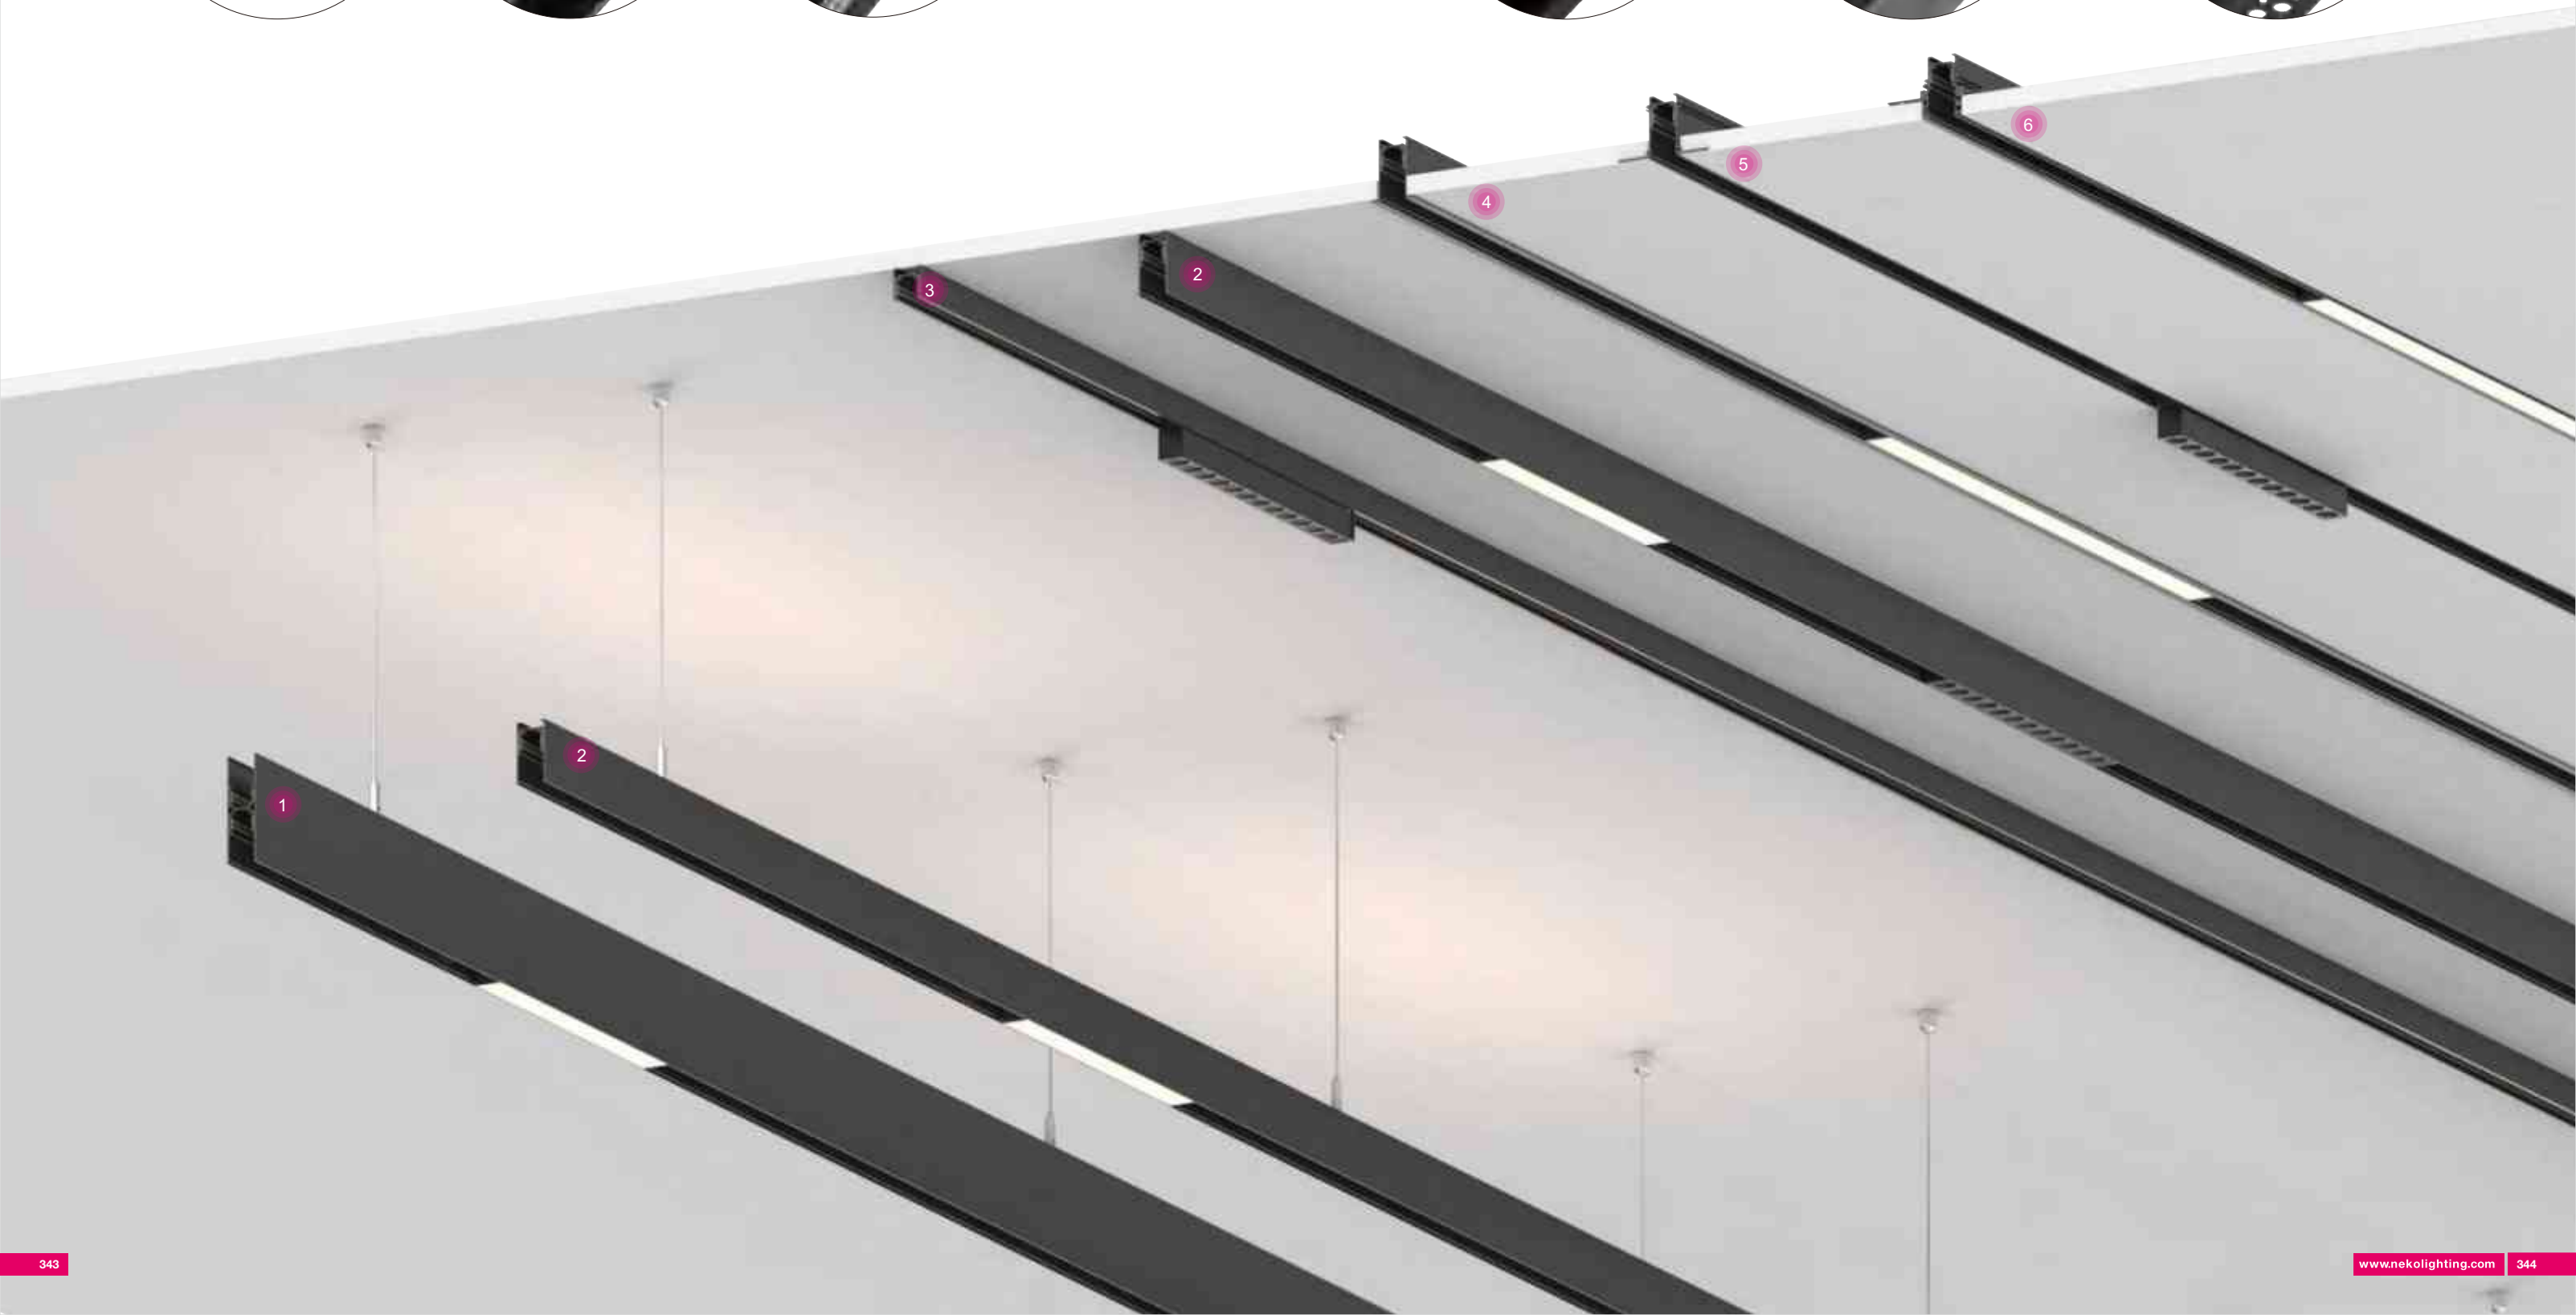


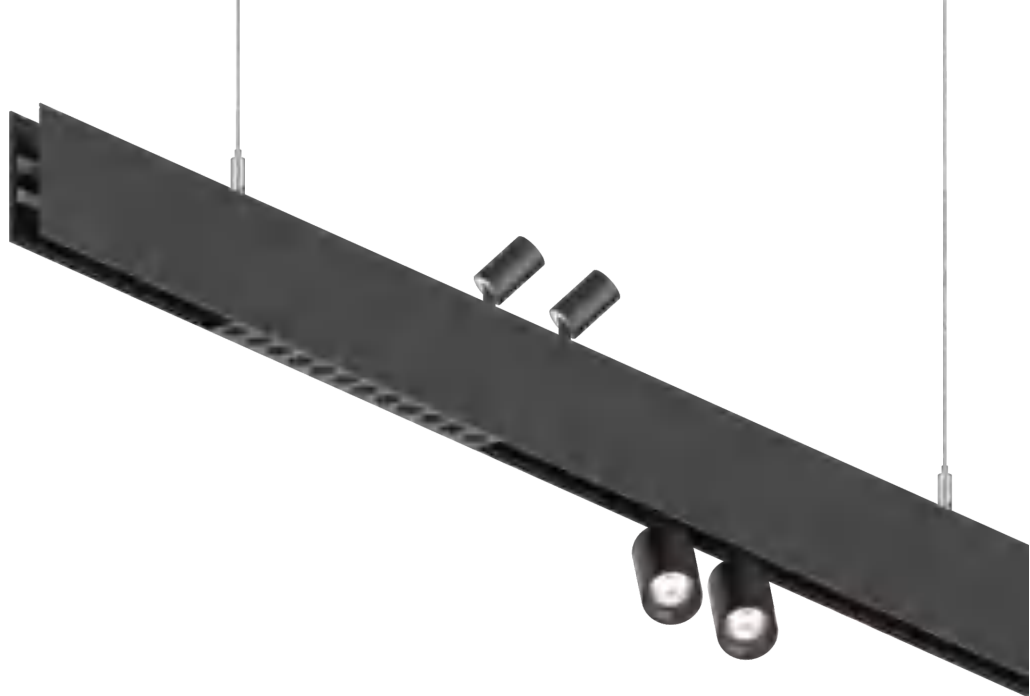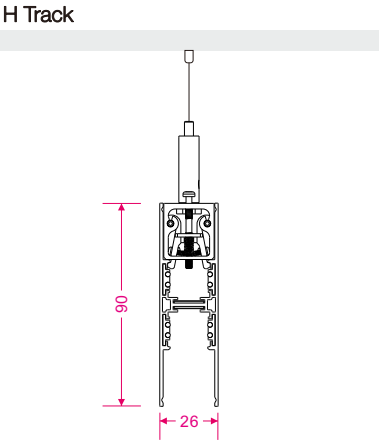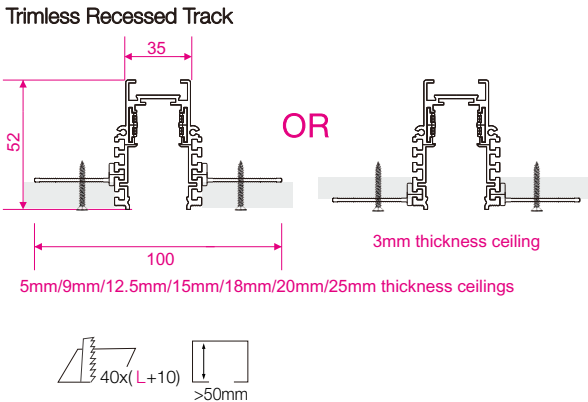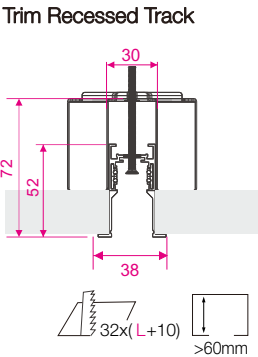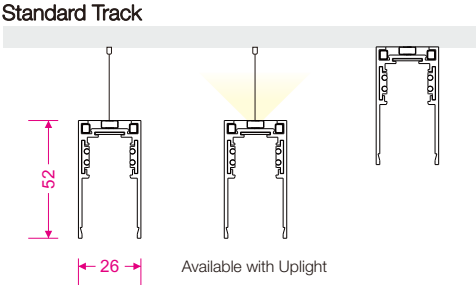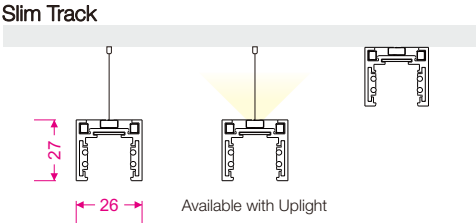

ML26-RS25-3W	ML26-RS25-5W	ML26-RS40-8W	ML26-RS40-16W	ML26-RS40-12W
ML26-FRS72-10W ML26-FRS72-20W	ML26-RS96-9W	ML26-RS40-24W	ML26-RT55-10W	ML26-RS72-26W
ML26-AL190-3W ML26-AL190-7W	ML26-AL280-9W ML26-AL280-13W	ML26-AA315-14W	ML26-SA280-13W	ML26-VW280-7W ML26-VW560-13W
ML26-GL280-7W/ 10W ML26-GL560-13W/ 19W ML26-GL840-19W/ 26W ML26-GL1120-26W	ML26-SG280-7W/ 10W	ML26-AG315-10W	ML26-PS40-12W ML26-PS55-14W	ML26-PD300-18W
ML26-PS60-5W	ML26-PAD150-12W	ML26-PB120-10W		





Slim Track

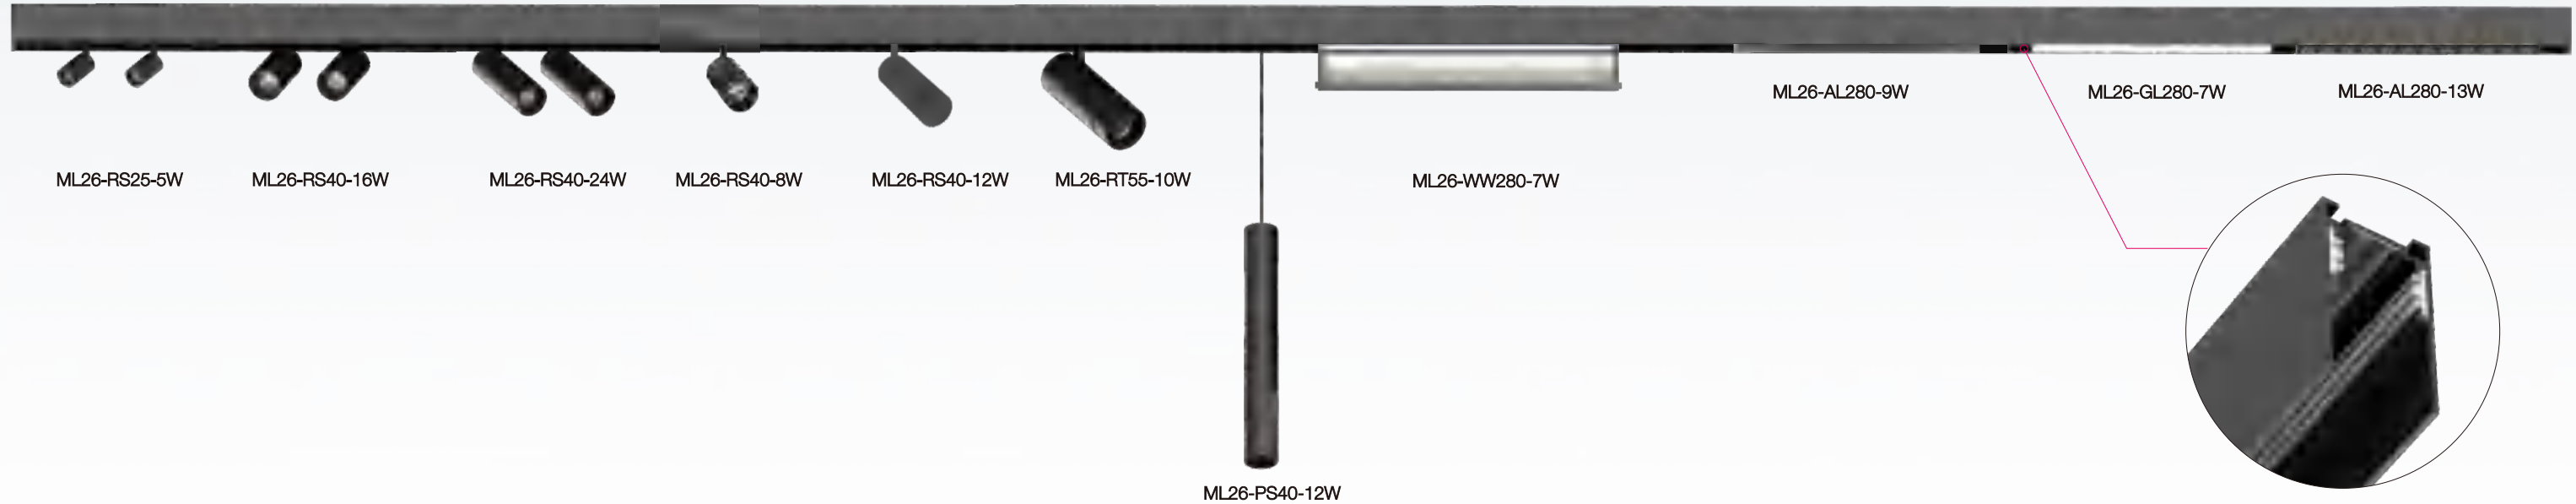

Standard Track



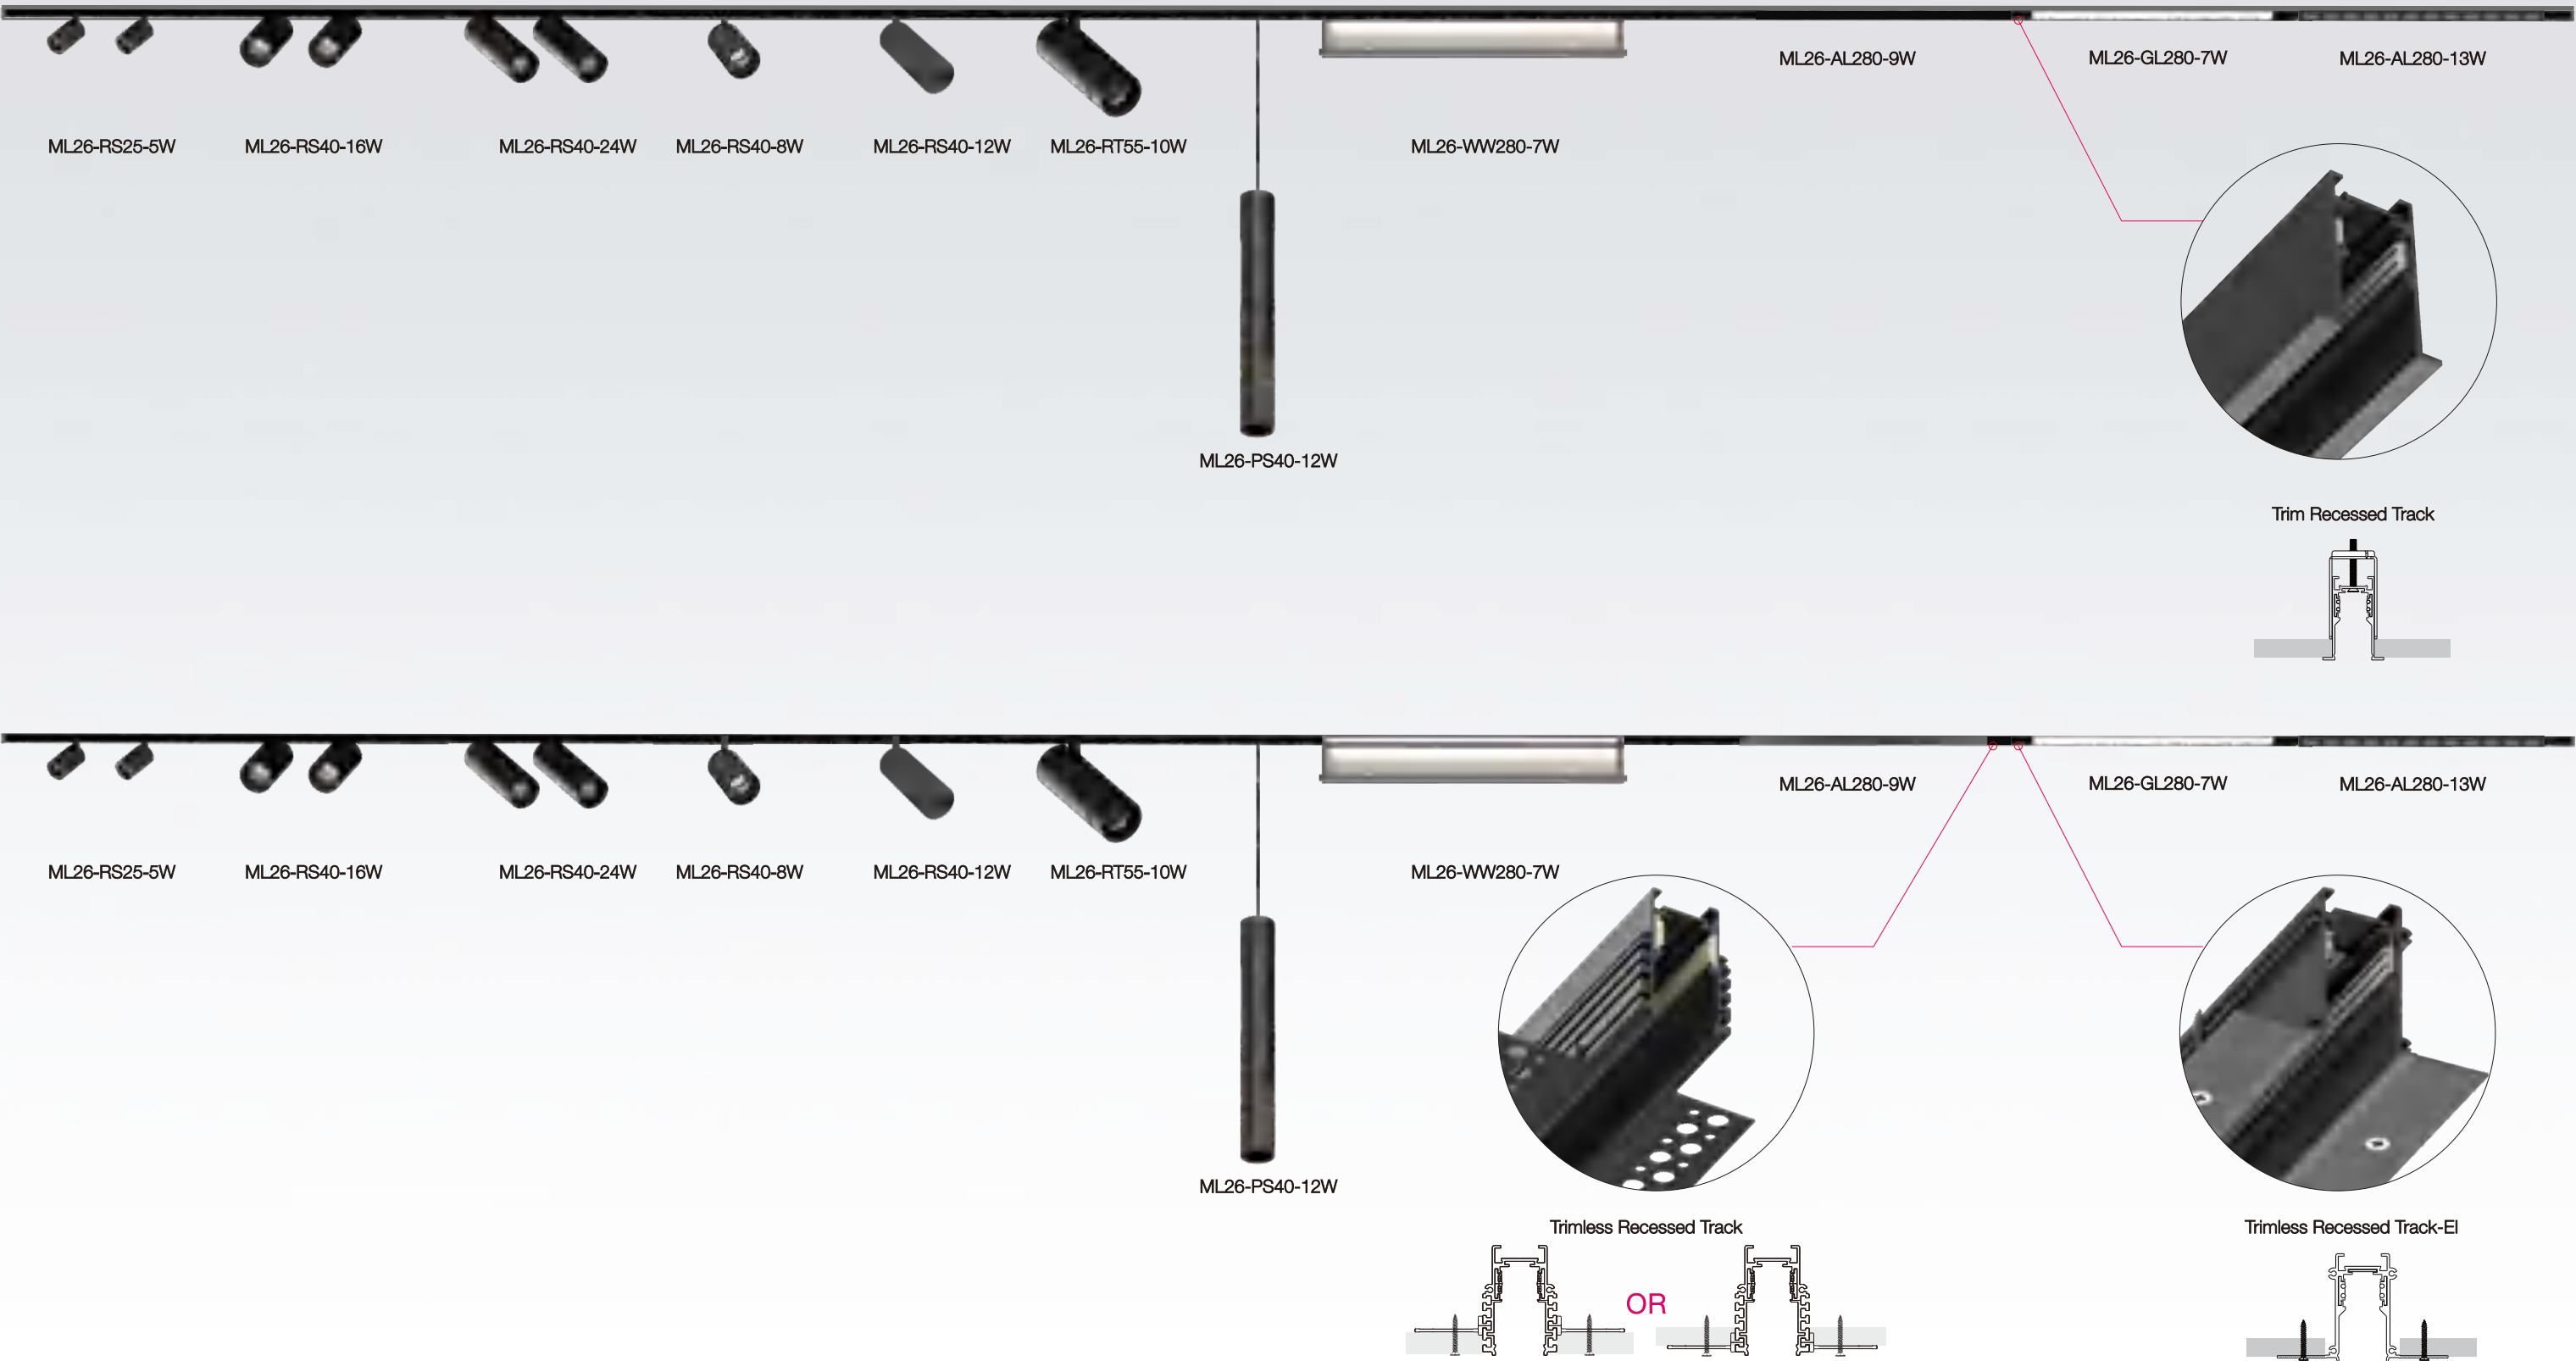


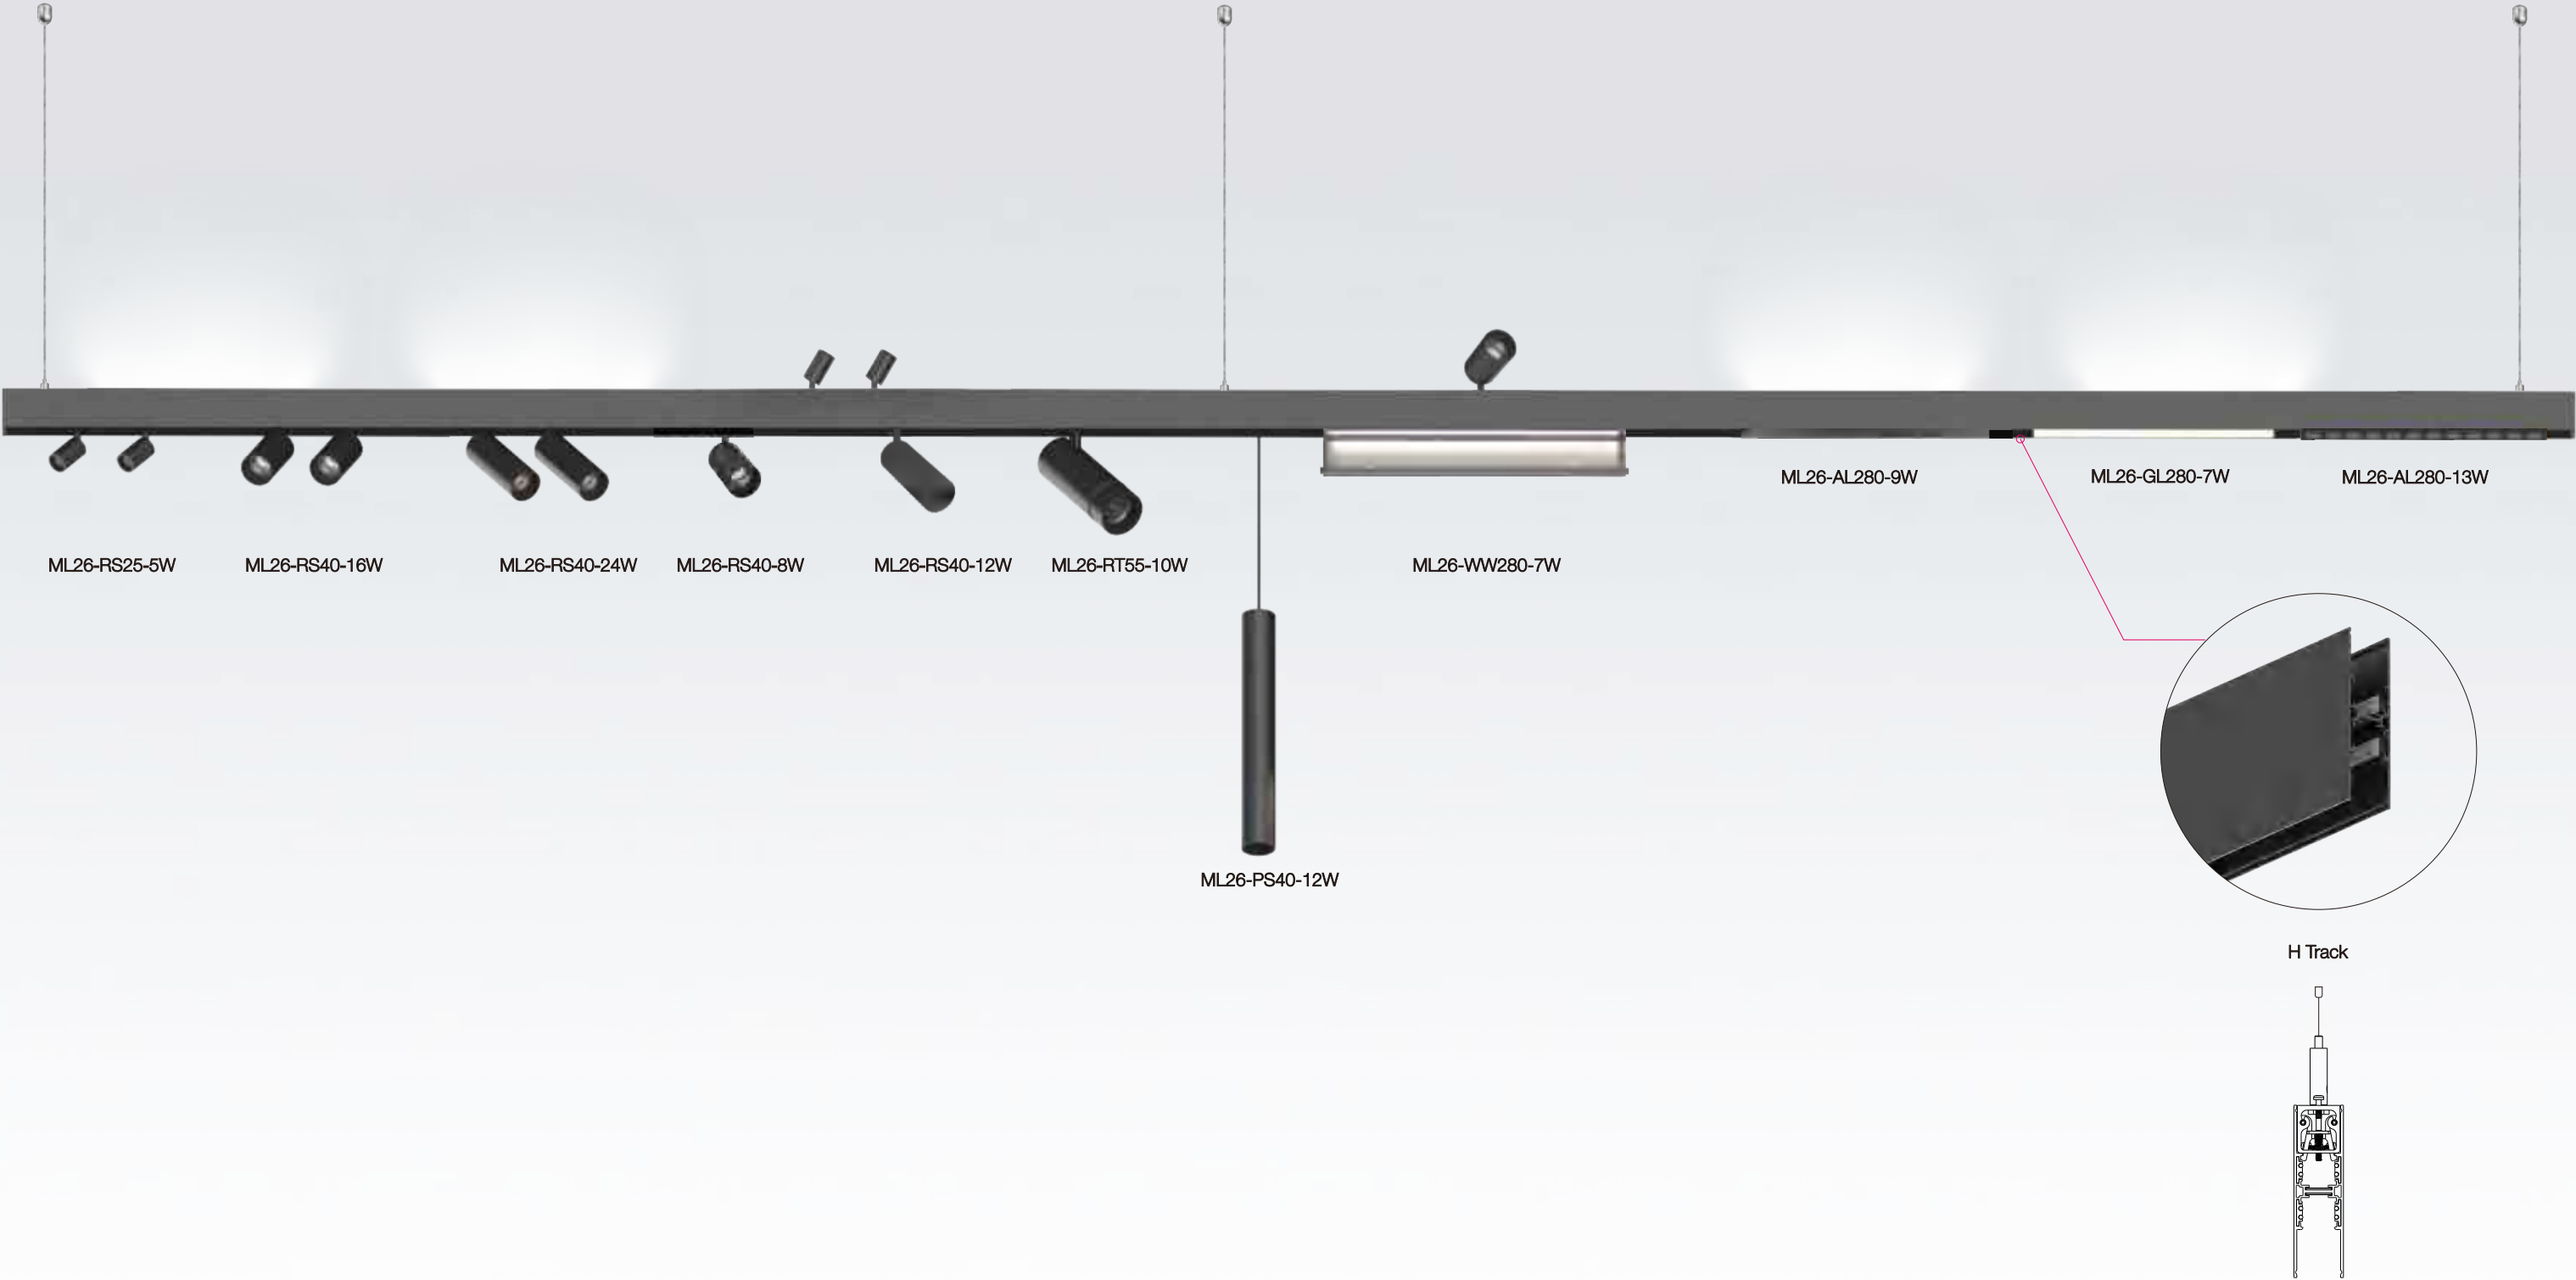

NEKO / MODULINE 26 Linear System

48V Low Voltage Modular Linear System

Slim Track Configuration

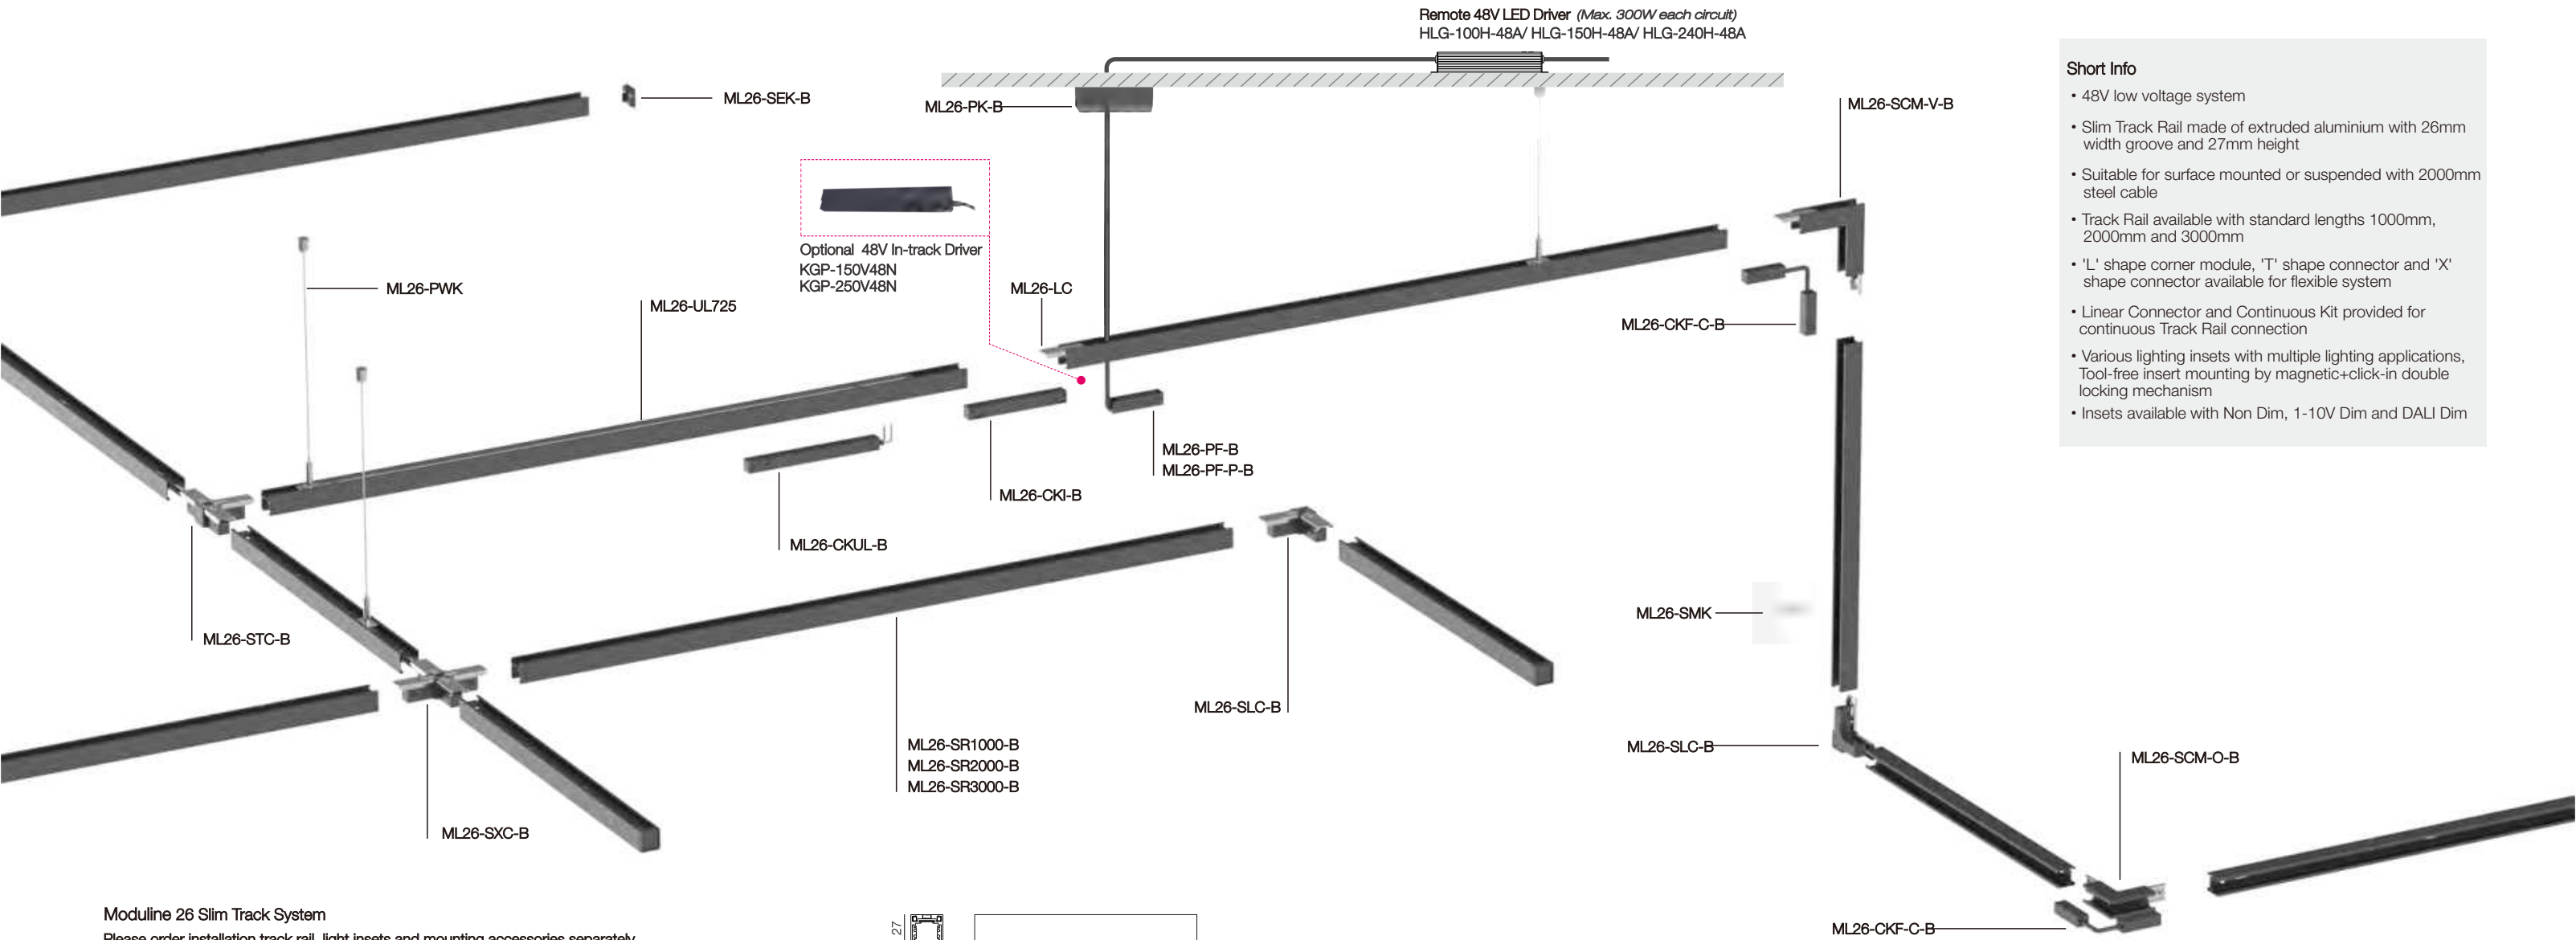


Short Info

- 48V low voltage system
- Slim Track Rail made of extruded aluminium with 26mm width groove and 27mm height
- Suitable for surface mounted or suspended with 2000mm steel cable
- Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
- 'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, Tool-free insert mounting by magnetic+click-in double locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

Moduline 26 Slim Track System

Please order installation track rail, light insets and mounting accessories separately.



Slim Track System Installation Track Rail | for surface or pendant mounting

Tracks can be shortened on site	Code/ Model (Black-Standard)	Code/ Model (White-Option)
L x W x H : 1000 x 26 x 27mm	ML26-SR1000-B	ML26-SR1000-W
L x W x H : 2000 x 26 x 27mm	ML26-SR2000-B	ML26-SR2000-W
L x W x H : 3000 x 26 x 27mm	ML26-SR3000-B	ML26-SR3000-W
•Track Rail including endcaps.		

Accessories of Slim Track System

Vertical 'L' Shape Corner Module-Inner, 80 x 80mm	ML26-SCM-V-B	ML26-SCM-V-W
Vertical 'L' Shape Corner Module-Outter, 80 x 80mm	ML26-SCM-V-O-B	ML26-SCM-V-O-W
'L' Shape Connector Set, 26 x 26mm	ML26-SLC-B	ML26-SLC-W
'T' Shape Connector Set, 26 x 26mm	ML26-STC-B	ML26-STC-W
'X' Shape Connector Set, 26 x 26mm	ML26-SXC-B	ML26-SXC-W
Endcap Kit (2pcs/ set) of Slim Track Rail	ML26-SEK-B	ML26-SEK-W
Power Feeder Unit with feeder cables 500mm for surface mounted	ML26-PF-B	ML26-PF-W
Power Feeder Unit with feeder cables 2000mm for pendant	ML26-PF-P-B	ML26-PF-P-W
Linear Connector with screws	ML26-LC	ML26-LC
Straight Continuous Kit*, Electrical	ML26-CKI-B	ML26-CKI-W
Flexible Continuous Kit*, Electrical	ML26-CKF-C-B	ML26-CKF-C-W
Surface mounted installation kit, 1set for 1000mm track	ML26-SMK	ML26-SMK
Moduline 26 Pendant Installation Kits, with 1pcs Ceiling Box & 2pcs Pendant Wire (2000mm) Kits	ML26-PK-B	ML26-PK-W
Pendant Wire Kit, Wire in 2000mm Length, 2pcs/ set for 1000mm Track	ML26-PWK	ML26-PWK
48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black	KGP-100V48N	
48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black	KGP-150V48N	
48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black	KGP-250V48N	
48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	HLG-100H-48A	
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	HLG-150H-48A	
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	HLG-240H-48A	
•Continuous Kit needs to be used together with Linear Connector as a set.		

Insets

Spotlight

● Page 371-375

Accent Light

● Page 385-388

General Light


● Page 389-392

Wall Wash Light

● Page 401-402

Pendant Spotlight

● Page 393-394

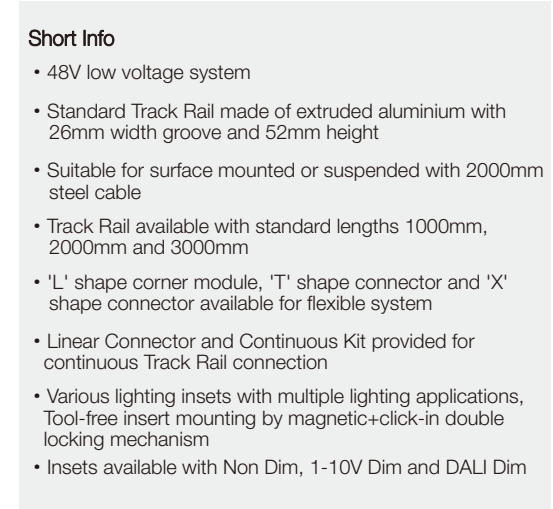


Please order installation track rail, light insets and mounting accessories separately.

26

1000/2000/3000mm

Track Rail Cover 1000mm/2000mm/3000mm, can be shortened at site	ML26-RC1000-B	ML26-RC1000-W
48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black	KGP-100V48N	
48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black	KGP-150V48N	
48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black	KGP-250V48N	
48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	HLG-100H-48A	
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	HLG-150H-48A	
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	HLG-240H-48A	

NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
H Track Configuration

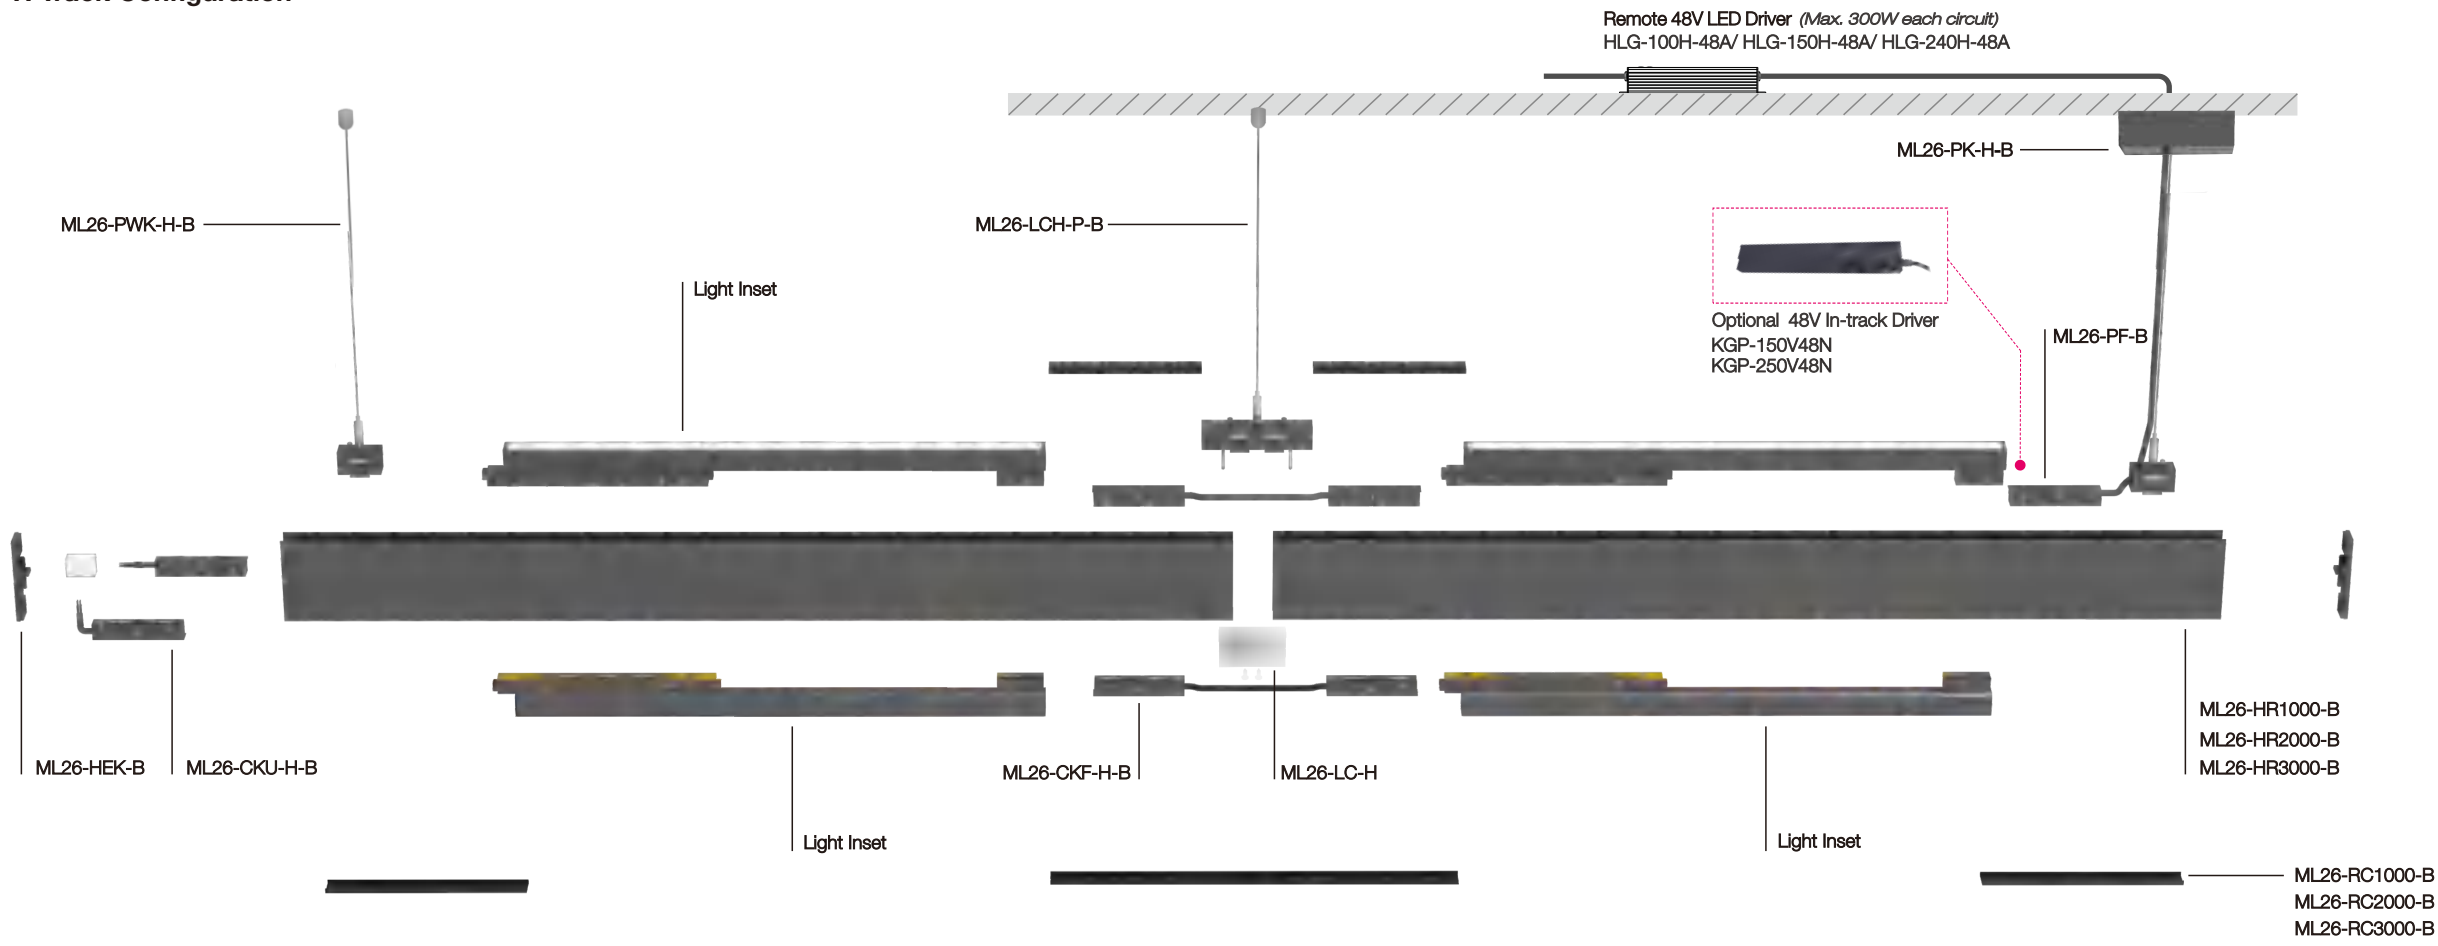


Short Info

- 48V low voltage system
- H Track Rail made of extruded aluminium with 26mm width groove and 90mm height
- Suitable for surface mounted or suspended with 2000mm steel cable
- Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, Tool-free insert mounting by magnetic+click-in double locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

Moduline 26 H Track System

Please order installation track rail, light insets and mounting accessories separately.

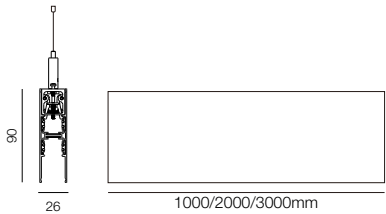

Standard Track System Installation Track Rail | for surface or pendant mounting

Tracks can be shortened on site	Code/ Model (Black-Standard)	Code/ Model (White-Option)
L x W x H : 1000 x 26 x 90mm	ML26-HR1000-B	ML26-HR1000-W
L x W x H : 2000 x 26 x 90mm	ML26-HR2000-B	ML26-HR2000-W
L x W x H : 3000 x 26 x 90mm	ML26-HR3000-B	ML26-HR3000-W

•Track Rail including endcaps.

Accessories of Slim Track System

Endcap Kit (2pcs/ set) of H Track Rail	ML26-HEK-B	ML26-HEK-W
Power Feeder Unit with feeder cables 2000mm for pendant	ML26-PF-P-B	ML26-PF-P-W
Flexible Continuous Kit, Electrical, for Up Track and Down Track connection	ML26-CKU-H-B	ML26-CKU-H-W
Flexible Continuous Kit, Electrical, for straight connection	ML26-CKF-H-B	ML26-CKF-H-W
Linear Connector with Pendant Kit of H Track System	ML26-LCH-P-B	ML26-LCH-P-W
Linear Connector Kit of H Track System•	ML26-LC-H	ML26-LC-H
Moduline 26 Pendant Installation Kits, with 1pcs Ceiling Box & 1pcs H Track Pendant Wire (2000mm) Kits	ML26-PK-H-B	ML26-PK-H-W
H Track Pendant Wire Kit, Wire in 2000mm Length, 2pcs/ set for 1000mm Track	ML26-PWK-H-B	ML26-PWK-H-W
Track Rail Cover 1000mm/2000mm/3000mm, can be shortened at site	ML26-RC1000-B	ML26-RC1000-W
48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black	KGP-100V48N	
48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black	KGP-150V48N	
48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black	KGP-250V48N	
48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	HLG-100H-48A	
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	HLG-150H-48A	
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	HLG-240H-48A	

•Linear Connector Kit needs to be used together with Linear Connector with Pendant Kit

Insets

Spotlight
● Page 371-375

Accent Light
● Page 385-388


General Light
● Page 389-392

Wall Wash Light
● Page 401-402


Pendant Spotlight
● Page 393-394




Installation



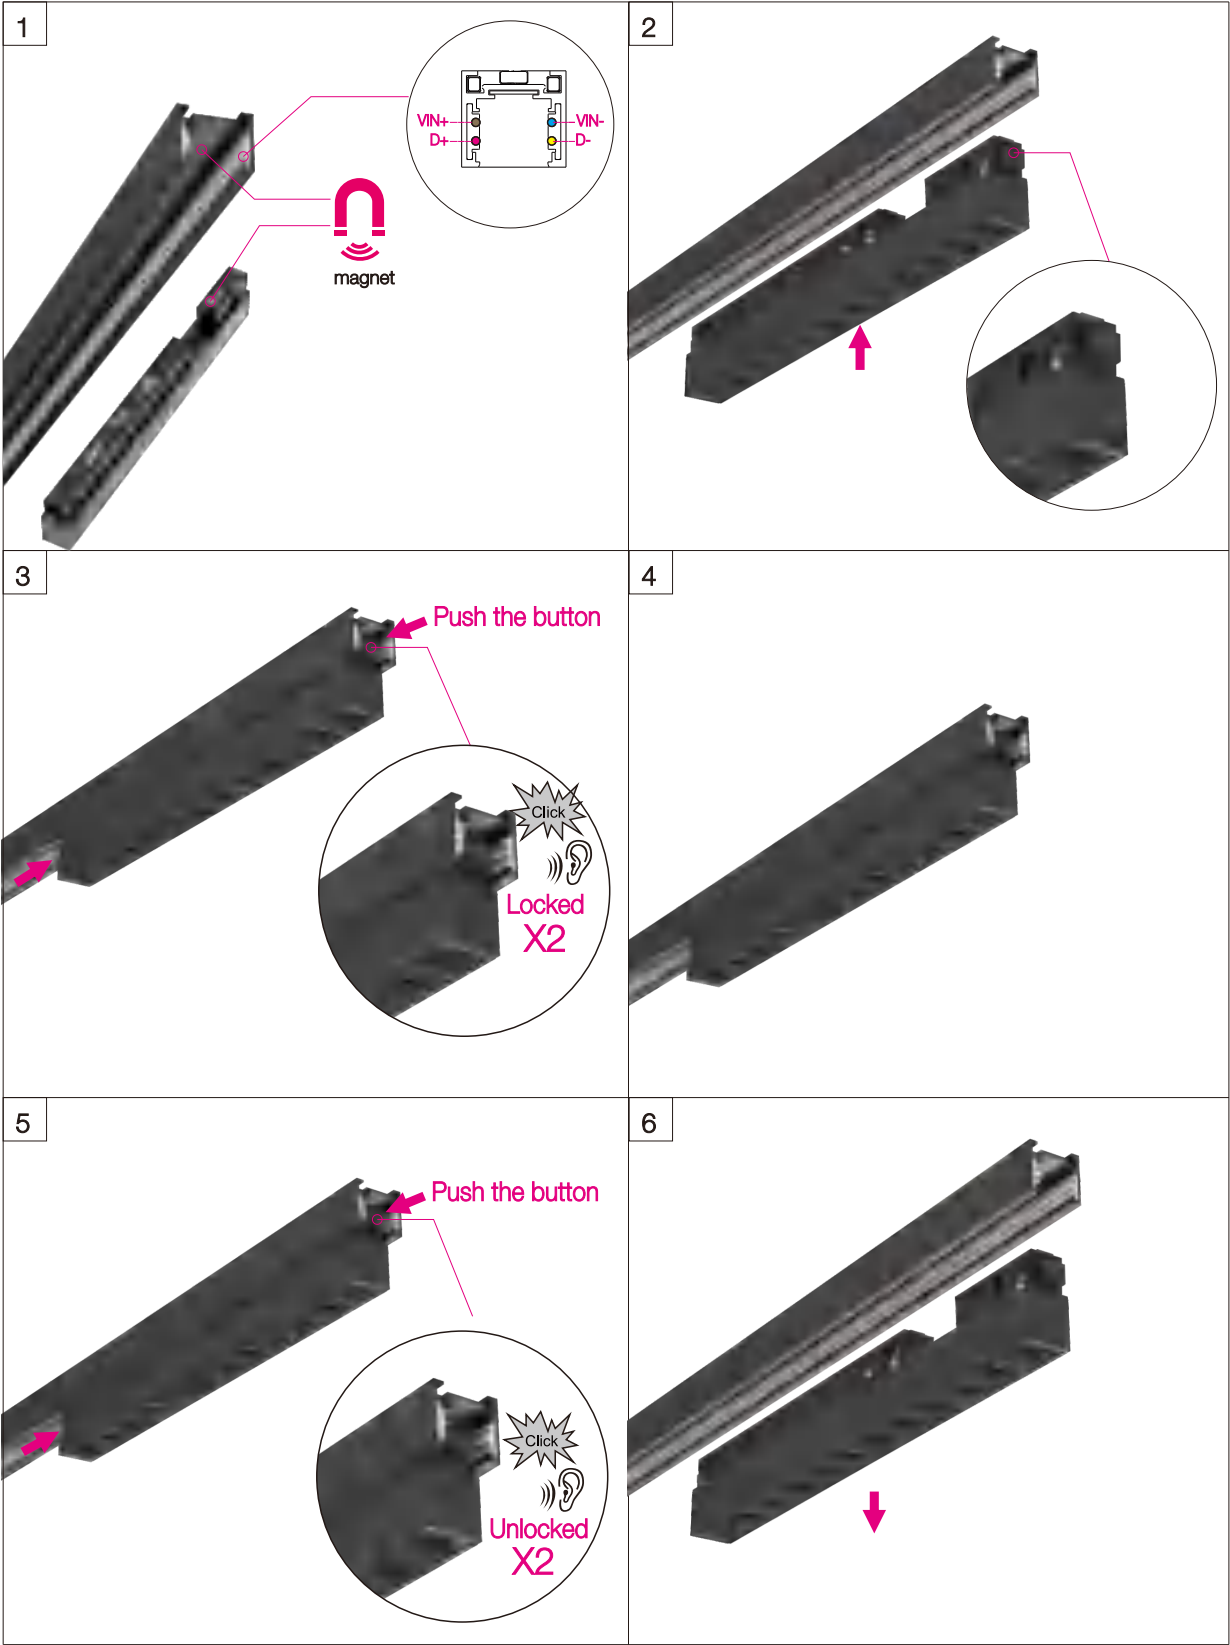


·Tool-free insert mounting by magnetic+click-in double locking mechanism

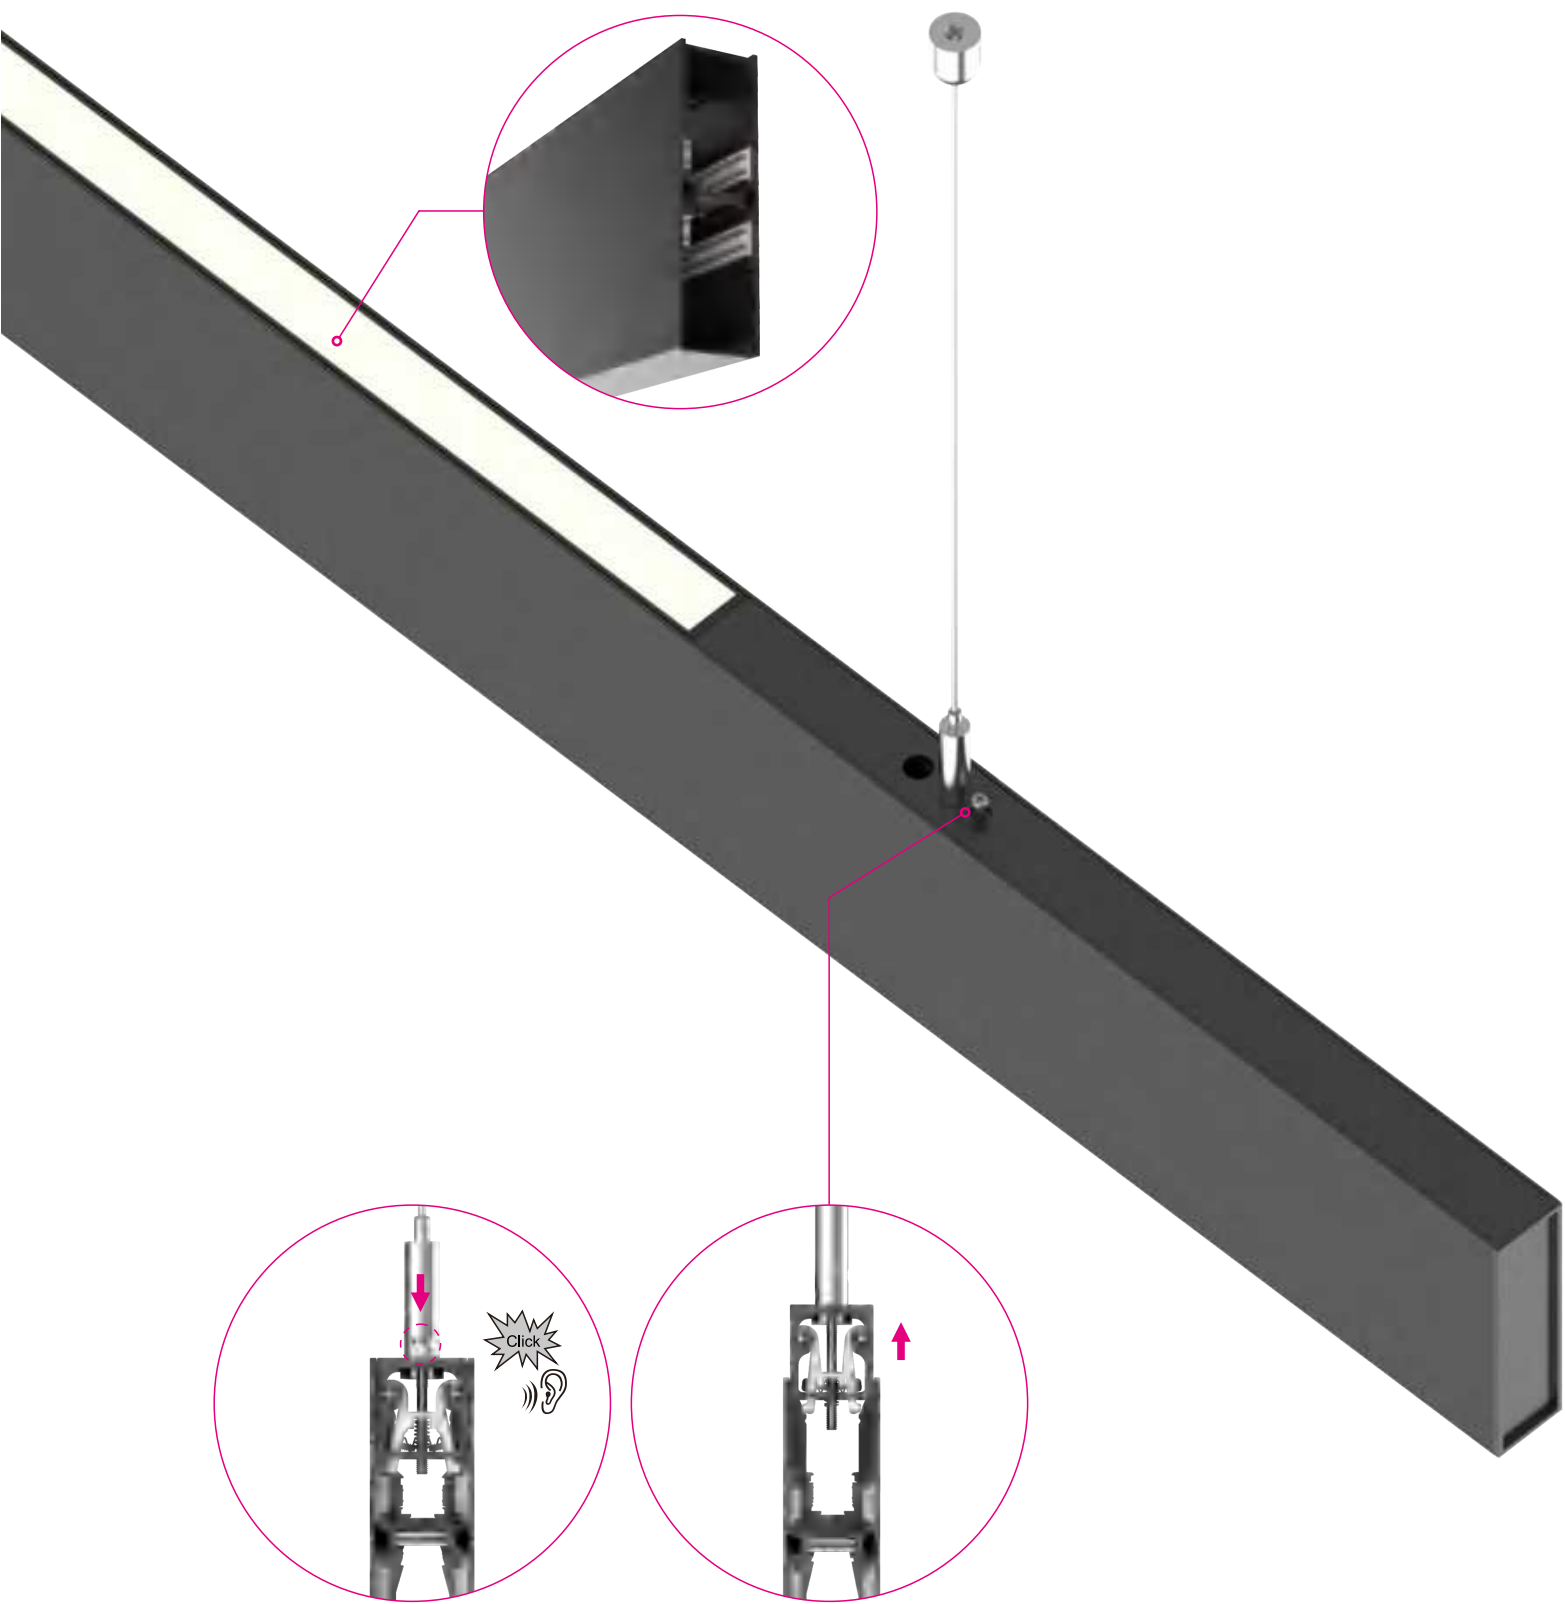

Installation


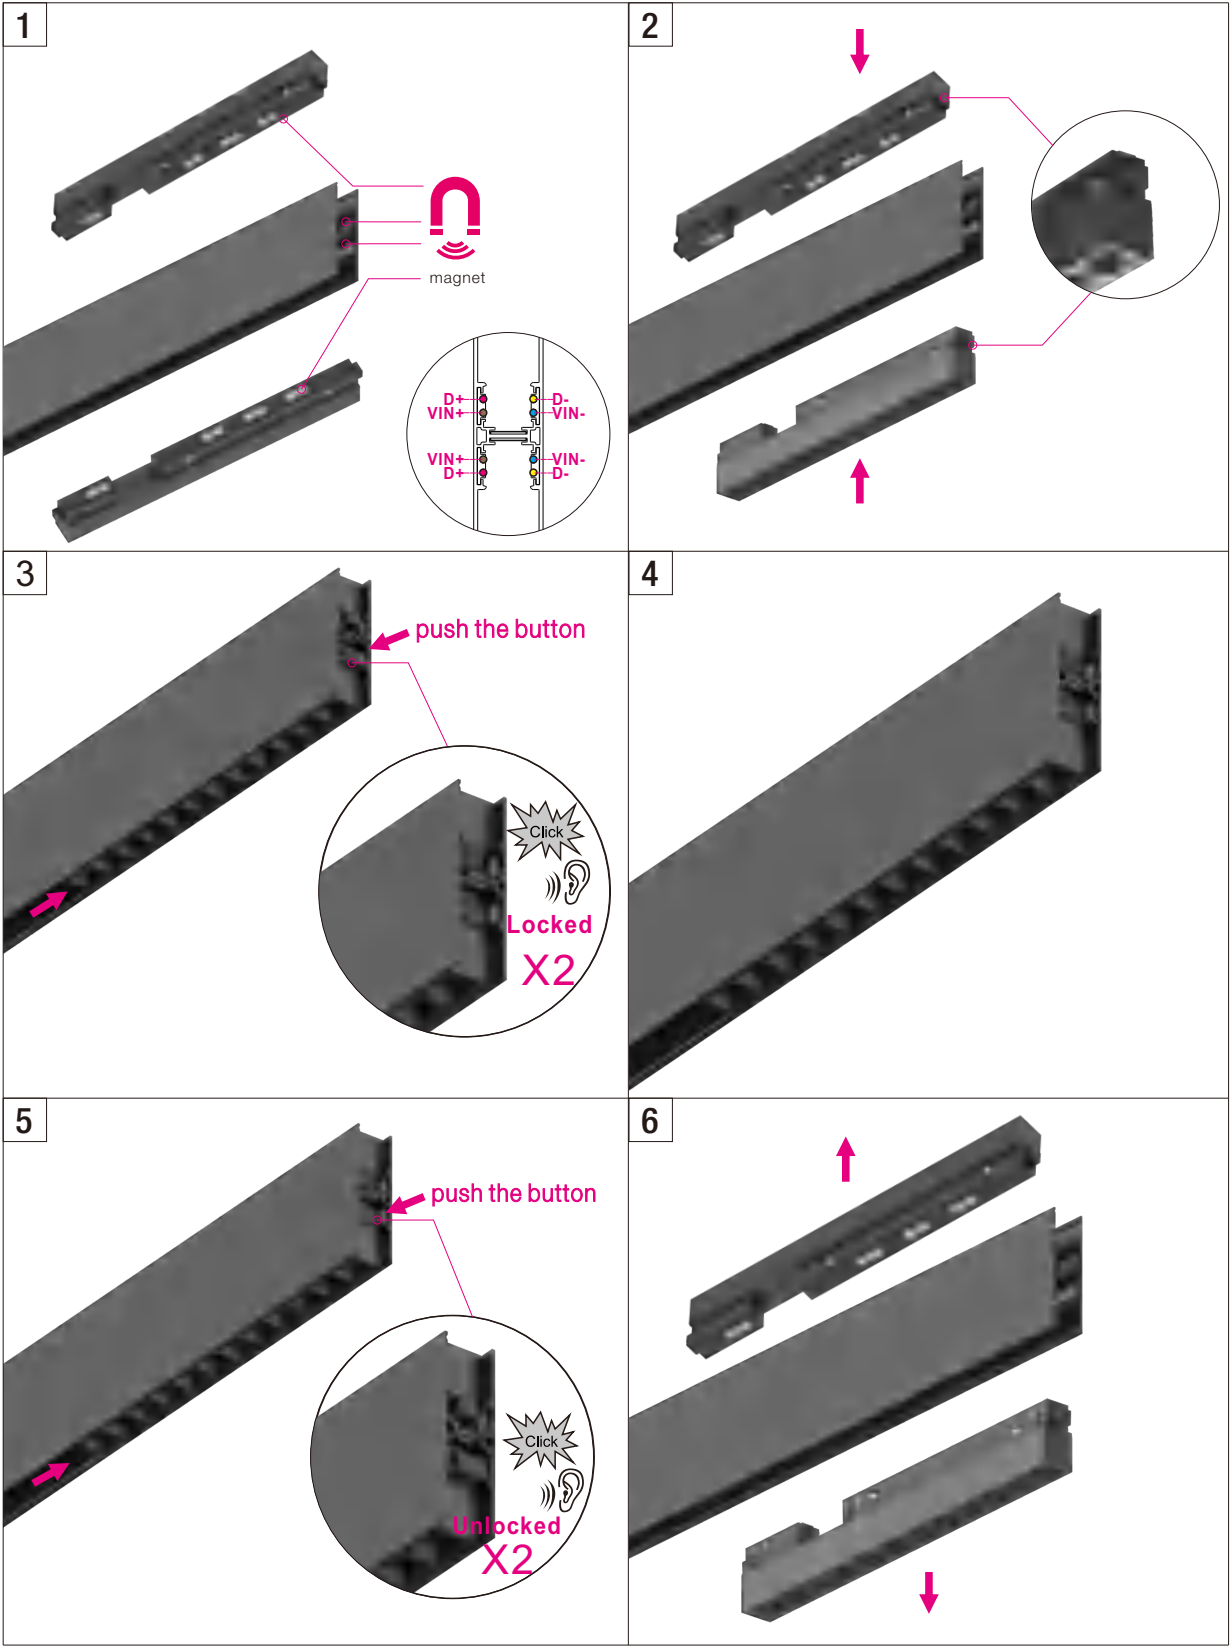


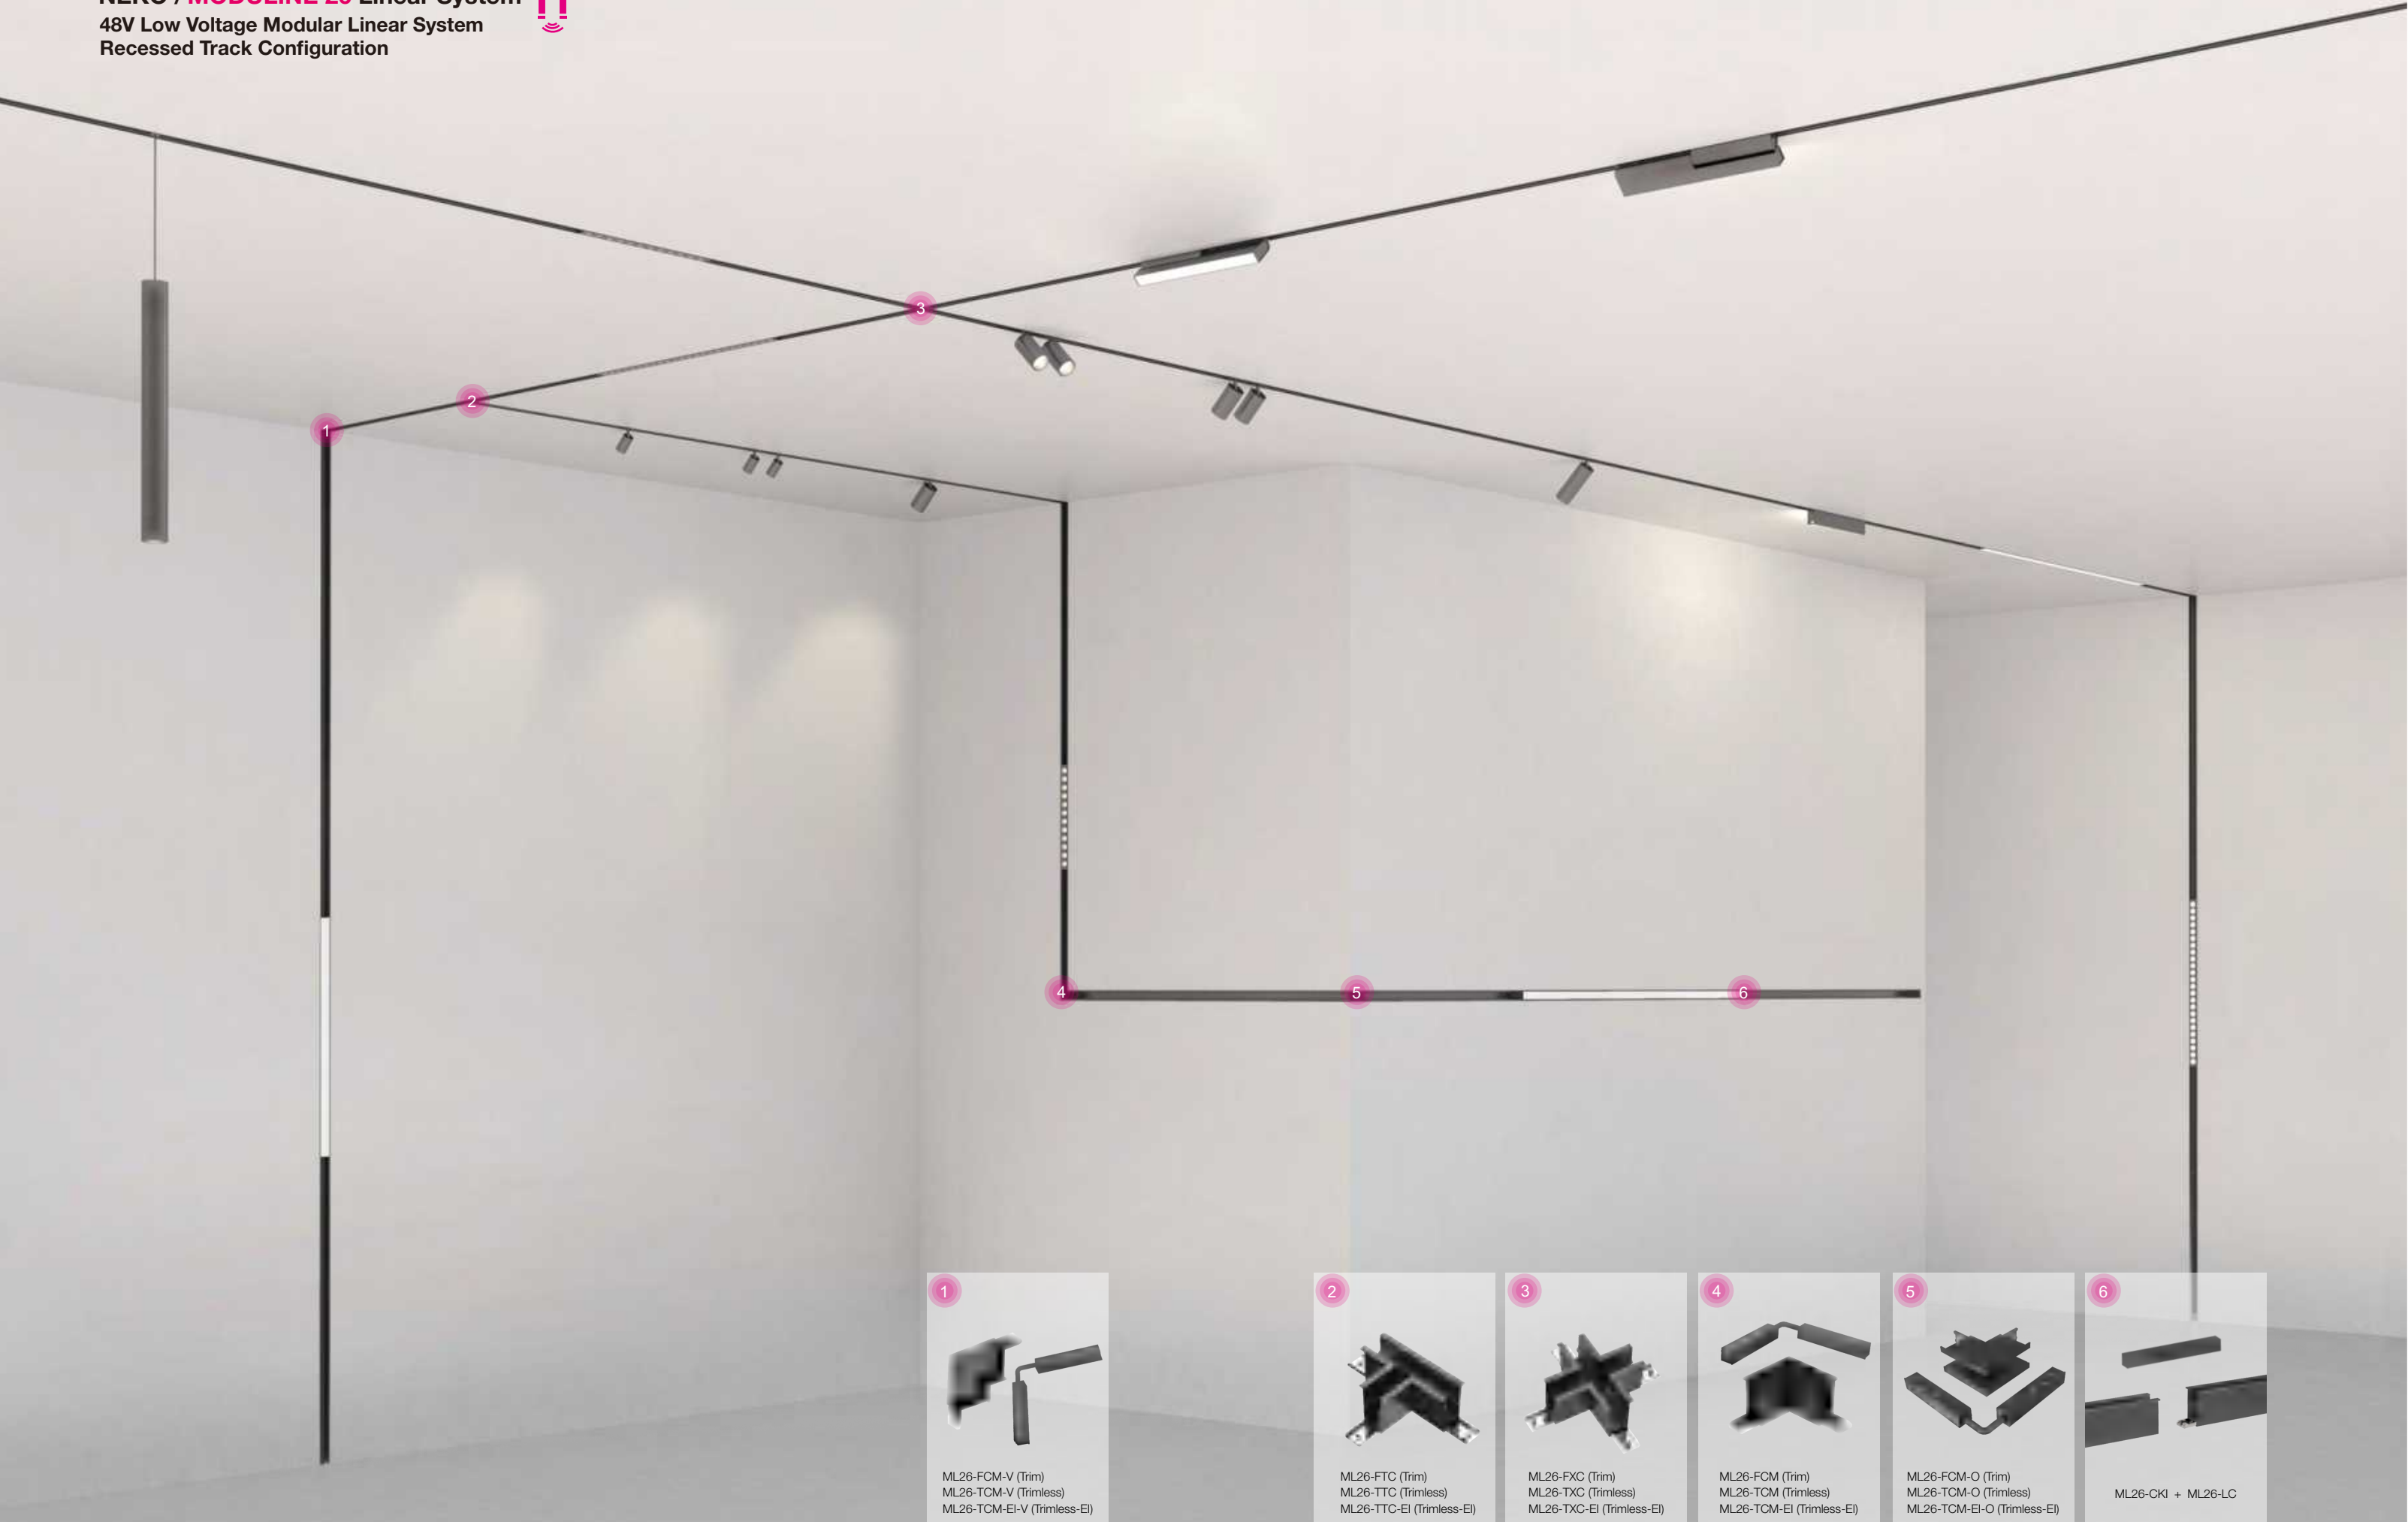

NEKO /MODULINE 26 Linear System

48V Low Voltage Modular Linear System


Trim Recessed Track System




Short Info

- 48V low voltage system
- Trim Recessed Track Rail Version made of extruded aluminium with 26mm width groove and 52mm height
- Mounted from inner track , suitable for all thickness ceiling heights
- Track Rail available with standard lengths 1000mm, 2000mm and 1000mm
- 'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, Tool-free insert mounting by magnetic+click-in double locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets

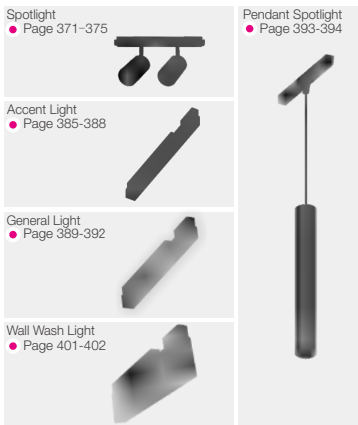

Features

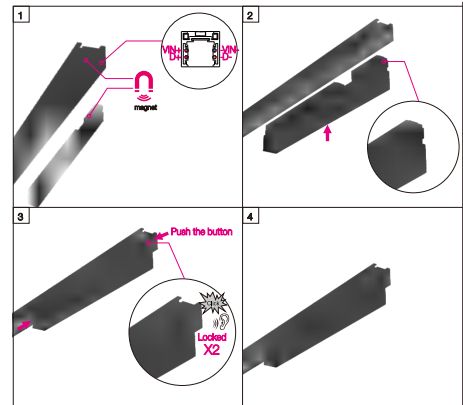

·Magnetic+click-in double locking mechanism

Short Info


Moduline 26 Trim Recessed Track System

Electrical

- Non Dim
- 1-10V Dim
- DALI Dim

Fixture Colour

Black White(Optional)



Moduline 26 Trim Recessed Track System

Please order installation track rail, light insets and mounting accessories separately.

Trim Recessed Track System Version Installation Track Rail

L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
1000	Trim Recessed Track Rail	ML26-FR1000-B	ML26-FR1000-W
2000	Trim Recessed Track Rail	ML26-FR2000-B	ML26-FR2000-W
3000	Trim Recessed Track Rail	ML26-FR3000-B	ML26-FR3000-W

*Track Rail including endcaps.

Accessories of Trim Recessed Track System

L (mm)	Cutout (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
80x80	(32x28)+(32x28)	Vertical 'L' shape corner module-Inner	ML26-FCM-V-B	ML26-FCM-V-W
80x80	(32x80)+(32x80)	Vertical 'L' shape corner module-Outer	ML26-FCM-O-B	ML26-FCM-O-W
80x80	(32x77)+(32x45)	Horizontal 'L' shape corner module	ML26-FCM-B	ML26-FCM-W
120x80	(32x120)+(32x45)	'T' Shape Connector Set	ML26-FTC-B	ML26-FTC-W
120x120	(32x120)+(32x120)	'X' Shape Connector Set	ML26-FXC-B	ML26-FXC-W

Flexible Continuous Kit, Electrical	ML26-CKF-C-B	ML26-CKF-C-W
*For Corner Connection.		

Trim Recessed Track Rail Mounting Kit, 2pcs/ set	ML26-FIK	ML26-FIK
--	----------	----------

Endcap Kit (2pcs/ set) of Trim Recessed Track	ML26-FEK-B	ML26-FEK-W
---	------------	------------

Power Feeder Unit with feeder cables 500mm	ML26-PF-B	ML26-PF-W
--	-----------	-----------

Track Rail Cover 1000mm	ML26-RC1000-B	ML26-RC1000-W
Track Rail Cover 2000mm	ML26-RC2000-B	ML26-RC2000-W
Track Rail Cover 3000mm	ML26-RC3000-B	ML26-RC3000-W
*Track Rail Cover can be shortened as desired.		

Linear Connector with screws	ML26-LC	ML26-LC
Straight Continuous Kit*, Electrical	ML26-CKI-B	ML26-CKI-W

*Continuous Kit needs to be used together with Linear Connector as a set.

48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black	KGP-100V48N
48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black	KGP-150V48N
48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black	KGP-250V48N


48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	HLG-100H-48A
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	HLG-150H-48A
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	HLG-240H-48A

NEKO / **MODULINE 26** Linear System

48V Low Voltage Modular Linear System

Trimless Recessed Track System-EI

Easy Installation

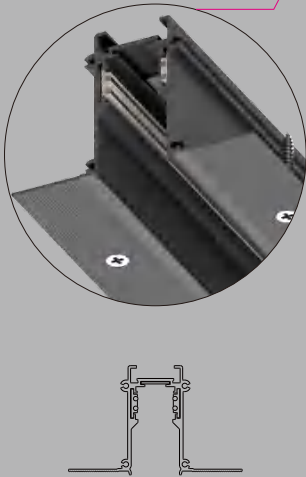


Short Info

- 48V low voltage system
- Trimless Recessed Track Rail Easy Installation Version made of extruded aluminium with 26mm width groove and 52mm height
- Mounted from surface, suitable for all thickness ceiling heights
- Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
- 'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, Tool-free insert mounting by magnetic+click-in double locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets



Features

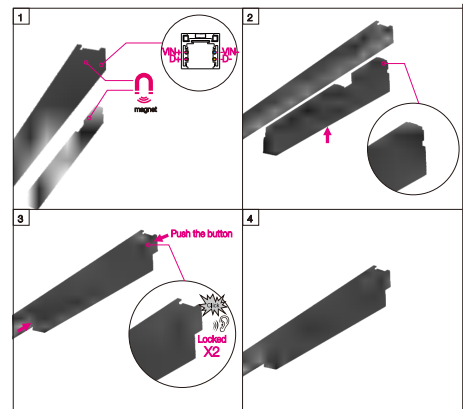

·Magnetic+click-in double locking mechanism

Short Info

Moduline 26 Trimless Recessed Track System

Easy Installation Version

Electrical



Non Dim

1-10V Dim

DALI Dim

Fixture Colour

Black White(Optional)



Moduline 26 Trimless Recessed Track System

Easy Installation Version

Please order installation track rail, light insets and mounting accessories separately.

Trimless Recessed Track System Easy Installation Version Installation Track Rail

L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
1000	Trimless Recessed Track Rail-EI	ML26-TR1000-EI-B	ML26-TR1000-EI-W
2000	Trimless Recessed Track Rail-EI	ML26-TR2000-EI-B	ML26-TR2000-EI-W
3000	Trimless Recessed Track Rail-EI	ML26-TR3000-EI-B	ML26-TR3000-EI-W

*Track Rail including endcaps.


Accessories of Easy Installation Version Trimless Recessed Track System

L (mm)	Cutout (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
100x100	(40x48)+(40x48)	Vertical 'L' shape corner module-Inner	ML26-TCM-EI-V-B	ML26-TCM-EI-V-W
100x100	(40x100)+(40x100)	Vertical 'L' shape corner module-Outter	ML26-TCM-EI-O-B	ML26-TCM-EI-O-W
100x100	(40x80)+(40x40)	Horizontal 'L' shape corner module	ML26-TCM-EI-B	ML26-TCM-EI-W
100x120	(40x120)+(40x40)	'T' Shape Connector Set	ML26-TTC-EI-B	ML26-TTC-EI-W
120X120	(40x120)+(40x120)	'X' Shape Connector Set	ML26-TXC-EI-B	ML26-TXC-EI-W
Flexible Continuous Kit, Electrical *For Corner Connection.			ML26-CKF-C-B	ML26-CKF-C-W
Endcap Kit (2pcs/ set) of Trim Recessed Track			ML26-TEK-EI-B	ML26-TEK-EI-W
Power Feeder Unit with feeder cables 500mm			ML26-PF-B	ML26-PF-W
Track Rail Cover 1000mm			ML26-RC1000-B	ML26-RC1000-W
Track Rail Cover 2000mm			ML26-RC2000-B	ML26-RC2000-W
Track Rail Cover 3000mm			ML26-RC3000-B	ML26-RC3000-W
*Track Rail Cover can be shortened as desired.				
Linear Connector with screws			ML26-LC	ML26-LC
Straight Continuous Kit*, Electrical			ML26-CKI-B	ML26-CKI-W
*Continuous Kit needs to be used together with Linear Connector as a set.				
Trimless Recessed Track mounting kit 1set for 1000mm track			ML26-RMK	ML26-RMK
48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black			KGP-100V48N	
48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black			KGP-150V48N	
48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black			KGP-250V48N	
48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver			HLG-100H-48A	
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver			HLG-150H-48A	
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver			HLG-240H-48A	

NEKO / **MODULINE 26** Linear System

48V Low Voltage Modular Linear System


Trimless Recessed Track System-Ceiling Thickness Adjustable

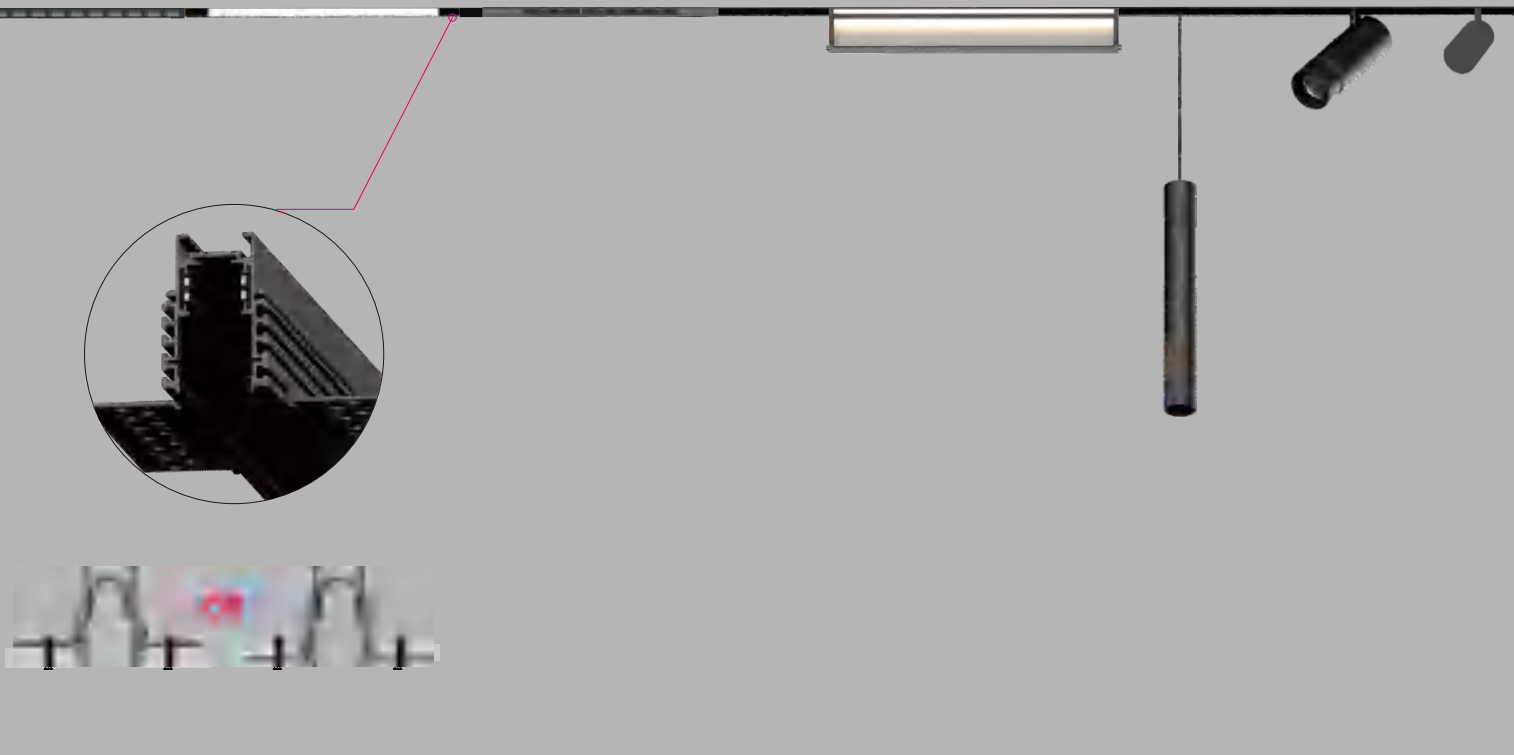


Short Info

- 48V low voltage system
- Trimless Recessed Track Rail Version made of extruded aluminium with 35mm width groove and 52mm height
- Suitable for 3mm/5mm/9mm/12.5mm/15mm/18mm/20mm/25mm thickness ceilings heights
- Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
- 'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, Tool-free insert mounting by magnetic+click-in double locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets

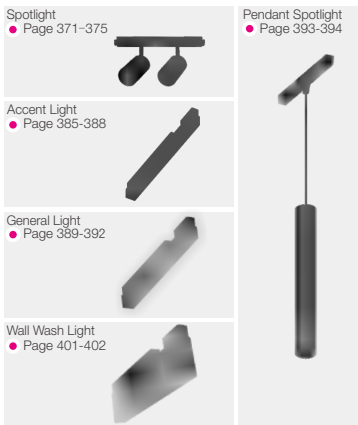

Features

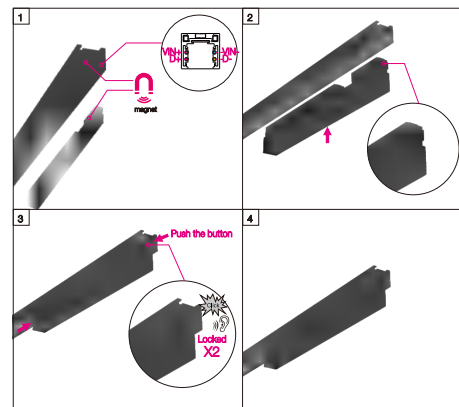

·Magnetic+click-in double locking mechanism

Short Info

Moduline 26 Trimless Recessed Track System
Ceiling Thickness Adjustable

Electrical


Non Dim

1-10V Dim

DALI Dim

Fixture Colour

Black White(Optional)



Moduline 26 Trimless Recessed Track System
Ceiling Thickness Adjustable

Please order installation track rail, light insets and mounting accessories separately.

Trimless Recessed Track System Ceiling Thickness Adjustable Version Installation Track Rail

L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
1000	Trimless Recessed Track Rail	ML26-TAR1000-B	ML26-TAR1000-W
2000	Trimless Recessed Track Rail	ML26-TAR2000-B	ML26-TAR2000-W
3000	Trimless Recessed Track Rail	ML26-TAR3000-B	ML26-TAR3000-W

*Track Rail including endcaps.

Accessories of Ceiling Thickness Adjustable Trimless Recessed Track System

L (mm)	Cutout (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
80x80	(40x28)+(40x28)	Vertical 'L' shape corner module-Inner	ML26-TACM-V-B	ML26-TACM-V-W
80x80	(40x80)+(40x80)	Vertical 'L' shape corner module-Outer	ML26-TACM-O-B	ML26-TACM-O-W
80x80	(40x82)+(40x42)	Horizontal 'L' shape corner module	ML26-TACM-B	ML26-TACM-W
80x120	(40x120)+(40x42)	'T' Shape Connector Set	ML26-TATC-B	ML26-TATC-W
120x120	(40x120)+(40x120)	'X' Shape Connector Set	ML26-TAXC-B	ML26-TAXC-W
Flexible Continuous Kit, Electrical *For Corner Connection.			ML26-CKF-C-B	ML26-CKF-C-W
Endcap Kit (2pcs/ set) of Trim Recessed Track			ML26-TAEK-B	ML26-TAEK-W
Power Feeder Unit with feeder cables 500mm			ML26-PF-B	ML26-PF-W
Track Rail Cover 1000mm			ML26-RC1000-B	ML26-RC1000-W
Track Rail Cover 2000mm			ML26-RC2000-B	ML26-RC2000-W
Track Rail Cover 3000mm			ML26-RC3000-B	ML26-RC3000-W
*Track Rail Cover can be shortened as desired.				
Linear Connector with screws			ML26-LC	ML26-LC
Straight Continuous Kit*, Electrical			ML26-CKI-B	ML26-CKI-W
*Continuous Kit needs to be used together with Linear Connector as a set.				
Trimless Recessed installation kit 1set for 1000mm track			ML26-TAIK	ML26-TAIK
48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black			KGP-100V48N	
48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black			KGP-150V48N	
48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black			KGP-250V48N	
48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver			HLG-100H-48A	
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver			HLG-150H-48A	
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver			HLG-240H-48A	

NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Spotlight Inset



ML26-RS25-3W
Single Spot



ML26-RS25-5W
Double Spot






ML26-RS25-3W

LED	Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code		
	2W	3W	48 V	90	2700K	18°	220lm	170lm	MLR0-9271803F-BB		
						30°	220lm	170lm	MLR0-9273003F-BB		
						45°	220lm	170lm	MLR0-9274503F-BB		
					3000K	18°	230lm	180lm	MLR0-9301803F-BB		
						30°	230lm	180lm	MLR0-9303003F-BB		
						45°	230lm	180lm	MLR0-9304503F-BB		
	4000K	18°	250lm	190lm	MLR0-9401803F-BB						
		30°	250lm	190lm	MLR0-9403003F-BB						
		45°	250lm	190lm	MLR0-9404503F-BB						
		Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)									
			4W	5W	48 V	90	2700K	18°	420lm	330lm	MLR1-9271805F-BB
								30°	420lm	330lm	MLR1-9273005F-BB
45°	420lm							330lm	MLR1-9274505F-BB		
3000K	18°						450lm	350lm	MLR1-9301805F-BB		
	30°						450lm	350lm	MLR1-9303005F-BB		
	45°						450lm	350lm	MLR1-9304505F-BB		
4000K	18°		500lm	380lm	MLR1-9401805F-BB						
	30°		500lm	380lm	MLR1-9403005F-BB						
	45°		500lm	380lm	MLR1-9404505F-BB						
	Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)										

Optional



NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Spotlight Inset



ML26-RS40-8W
Single Spot




ML26-RS40-16W
Double Spot



	LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code		
	7.5W	8W	48 V	90	2700K	18°	700lm	550lm	MLR2-9271808F-BB		
						30°	700lm	550lm	MLR2-9273008F-BB		
						45°	700lm	400lm	MLR2-9274508F-BB		
					3000K	18°	750lm	580lm	MLR2-9301808F-BB		
						30°	750lm	580lm	MLR2-9303008F-BB		
						45°	750lm	420lm	MLR2-9304508F-BB		
	4000K	18°	800lm	640lm	MLR2-9401808F-BB						
		30°	800lm	640lm	MLR2-9403008F-BB						
		45°	800lm	460lm	MLR2-9404508F-BB						
		Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)									
			15W	16W	48 V	90	2700K	18°	1400lm	1000lm	MLR3-9271816F-BB
								30°	1400lm	1000lm	MLR3-9273016F-BB
45°	1400lm							800lm	MLR3-9274516F-BB		
3000K	18°						1500lm	1100lm	MLR3-9301816F-BB		
	30°						1500lm	1100lm	MLR3-9303016F-BB		
	45°						1500lm	850lm	MLR3-9304516F-BB		
4000K	18°		1600lm	1200lm	MLR3-9401816F-BB						
	30°		1600lm	1200lm	MLR3-9403016F-BB						
	45°		1600lm	900lm	MLR3-9404516F-BB						
	Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)										

Optional



NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Spotlight Inset



ML26-RS40-12W
Single Spot



ML26-RS40-24W
Double Spot



ML26-RS40-12W



ML26-RS40-24W

Optional



Brushed Gold



White

NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Spotlight Inset



ML26-RT55-10W
Zooming Spot



ML26-RT55-10W


Optional




White



ML26-RS72-19W
ML26-RS72-26W



White

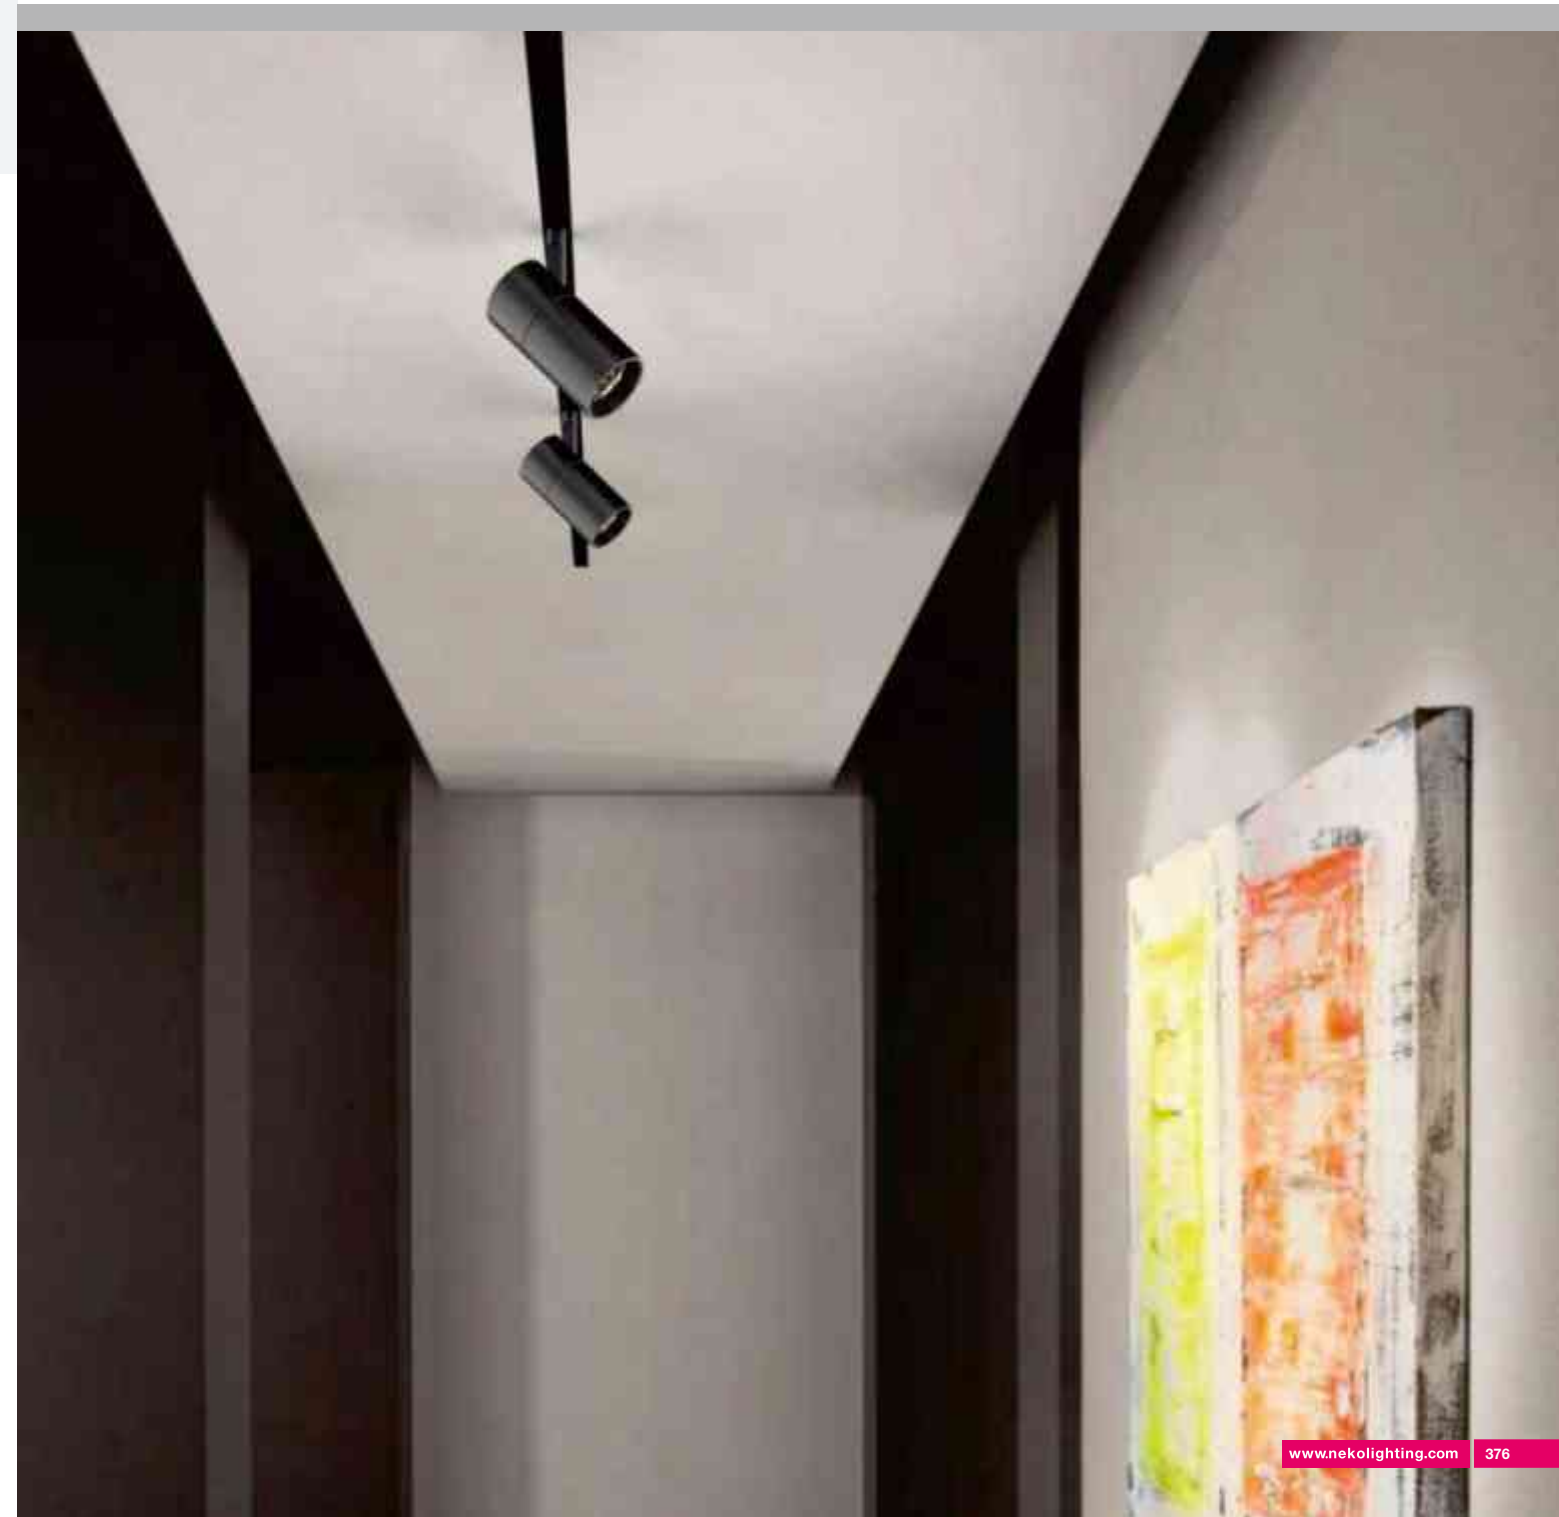

NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
ML26-RS96 Spotlight Inset



NEW



ML26-RS96-9W



9W

CRI90

2700K
3000K
4000K

15°

25°

35°

CITIZEN

60,000h@L80B10

IP20

5

GUARANTEE

CB

CE

ETL

Intertek

190/ 230 (DALI 2.0)

Ø96

30



ML26-RS96-10W


LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
8W	9W	48 V	90	2700K	15°	900lm	700lm	MLR9-9271509F-BN
					25°	900lm	720lm	MLR9-9272509F-BN
					35°	900lm	720lm	MLR9-9273509F-BN
				3000K	15°	950lm	720lm	MLR9-9301509F-BN
					25°	950lm	750lm	MLR9-9302509F-BN
					35°	950lm	750lm	MLR9-9303509F-BN
				4000K	15°	1050lm	780lm	MLR9-9401509F-BN
					25°	1050lm	830lm	MLR9-9402509F-BN
					35°	1050lm	830lm	MLR9-9403509F-BN

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Optional



Brushed Gold



White



Accessory



Honeycomb


Reflector




Black



White



Dark Light



Specular



Matt

NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
ML26-FRS72 Spotlight Inset



ML26-FRS72-10W
Single Spot



Dark Light Reflector



White Reflector

LED	Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48 V	90	2700K	25°	900lm	620lm	MLF1-9272510	F-BC
					36°	900lm	650lm	MLF1-9273610	F-BC
					50°	900lm	650lm	MLF1-9275010	F-BC
				3000K	25°	950lm	650lm	MLF1-9302510	F-BC
					36°	950m	700lm	MLF1-9303610	F-BC
					50°	950lm	700lm	MLF1-9305010	F-BC
				4000K	25°	1050lm	700lm	MLF1-9402510	F-BC
					36°	1050lm	780lm	MLF1-9403610	F-BC
					50°	1050lm	780lm	MLF1-9405010	F-BC
				Code Remark:					F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)


9W	10W	48 V	90	2700K	25°	900lm	620lm	MLF1-9272510	F-BW
					36°	900lm	650lm	MLF1-9273610	F-BW
					50°	900lm	650lm	MLF1-9275010	F-BW
				3000K	25°	950lm	650lm	MLF1-9302510	F-BW
					36°	950m	700lm	MLF1-9303610	F-BW
					50°	950lm	700lm	MLF1-9305010	F-BW
				4000K	25°	1050lm	700lm	MLF1-9402510	F-BW
					36°	1050lm	780lm	MLF1-9403610	F-BW
					50°	1050lm	780lm	MLF1-9405010	F-BW
				Code Remark:					F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Accessory



Honeycomb

Optional




Brushed Gold



White

10W	CRI90	2700K 3000K 4000K	25° 36° 50°	CITIZEN 60,000h@L80B10	UGR < 19	IP20	5 YEAR GUARANTEE	CB	CE	Intertek
-----	-------	-------------------------	-------------------	---------------------------	-------------	------	---------------------	----	----	----------



LED	Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48 V	90	2700K	25°	900lm	620lm	MLF1-9272510	F-BS
					36°	900lm	650lm	MLF1-9273610	F-BS
					50°	900lm	650lm	MLF1-9275010	F-BS
				3000K	25°	950lm	650lm	MLF1-9302510	F-BS
					36°	950m	700lm	MLF1-9303610	F-BS
					50°	950lm	700lm	MLF1-9305010	F-BS
				4000K	25°	1050lm	700lm	MLF1-9402510	F-BS
					36°	1050lm	780lm	MLF1-9403610	F-BS
					50°	1050lm	780lm	MLF1-9405010	F-BS
				Code Remark:					F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

9W	10W	48 V	90	2700K	25°	900lm	620lm	MLF1-9272510	F-BM
					36°	900lm	650lm	MLF1-9273610	F-BM
					50°	900lm	650lm	MLF1-9275010	F-BM
				3000K	25°	950lm	650lm	MLF1-9302510	F-BM
					36°	950m	700lm	MLF1-9303610	F-BM
					50°	950lm	700lm	MLF1-9305010	F-BM
				4000K	25°	1050lm	700lm	MLF1-9402510	F-BM
					36°	1050lm	780lm	MLF1-9403610	F-BM
					50°	1050lm	780lm	MLF1-9405010	F-BM
				Code Remark:					F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

9W	10W	48 V	90	2700K	25°	900lm	620lm	MLF1-9272510	F-BB
					36°	900lm	650lm	MLF1-9273610	F-BB
					50°	900lm	650lm	MLF1-9275010	F-BB
				3000K	25°	950lm	650lm	MLF1-9302510	F-BB
					36°	950m	700lm	MLF1-9303610	F-BB
					50°	950lm	700lm	MLF1-9305010	F-BB
				4000K	25°	1050lm	700lm	MLF1-9402510	F-BB
					36°	1050lm	780lm	MLF1-9403610	F-BB
					50°	1050lm	780lm	MLF1-9405010	F-BB
				Code Remark:					F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
ML26-FRS72 Double Spotlight Inset



ML26-FRS72-20W
Double Inset



Dark Light Reflector



White Reflector

LED	Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code	
18W	20W	48 V	90	2700K	25°	1800lm	1250lm	MLF2-9272520	F-BC	
					36°	1800lm	1300lm	MLF2-9273620	F-BC	
					50°	1800lm	1300lm	MLF2-9275020	F-BC	
					3000K	25°	1900lm	1300lm	MLF2-9302520	F-BC
						36°	1900m	1400lm	MLF2-9303620	F-BC
						50°	1900lm	1400lm	MLF2-9305020	F-BC
					4000K	25°	2100lm	1400lm	MLF2-9402520	F-BC
						36°	2100lm	1550lm	MLF2-9403620	F-BC
						50°	2100lm	1550lm	MLF2-9405020	F-BC
					Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)					

18W	20W	48 V	90	2700K	25°	1800lm	1250lm	MLF2-9272520	F-BW			
					36°	1800lm	1300lm	MLF2-9273620	F-BW			
					50°	1800lm	1300lm	MLF2-9275020	F-BW			
				3000K	25°	1900lm	1300lm	MLF2-9302520	F-BW			
					36°	1900m	1400lm	MLF2-9303620	F-BW			
					50°	1900lm	1400lm	MLF2-9305020	F-BW			
				4000K	25°	2100lm	1400lm	MLF2-9402520	F-BW			
					36°	2100lm	1550lm	MLF2-9403620	F-BW			
					50°	2100lm	1550lm	MLF2-9405020	F-BW			

Accessory



Honeycomb

Optional




Brushed Gold



White

20W	CRI90	2700K 3000K 4000K	25° 36° 50°	CITIZEN 60,000h@L80B10	UGR < 19	IP20	5 YEAR GUARANTEE	CB	CE	Intertek
-----	-------	-------------------------	-------------------	---------------------------	-------------	------	---------------------	----	----	----------



LED	Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code	
18W	20W	48 V	90	2700K	25°	1800lm	1250lm	MLF2-9272520	F-BS	
					36°	1800lm	1300lm	MLF2-9273620	F-BS	
					50°	1800lm	1300lm	MLF2-9275020	F-BS	
					3000K	25°	1900lm	1300lm	MLF2-9302520	F-BS
						36°	1900m	1400lm	MLF2-9303620	F-BS
						50°	1900lm	1400lm	MLF2-9305020	F-BS
					4000K	25°	2100lm	1400lm	MLF2-9402520	F-BS
						36°	2100lm	1550lm	MLF2-9403620	F-BS
						50°	2100lm	1550lm	MLF2-9405020	F-BS
					Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)					

18W	20W	48 V	90	2700K	25°	1800lm	1250lm	MLF2-9272520	F-BM			
					36°	1800lm	1300lm	MLF2-9273620	F-BM			
					50°	1800lm	1300lm	MLF2-9275020	F-BM			
				3000K	25°	1900lm	1300lm	MLF2-9302520	F-BM			
					36°	1900m	1400lm	MLF2-9303620	F-BM			
					50°	1900lm	1400lm	MLF2-9305020	F-BM			
				4000K	25°	2100lm	1400lm	MLF2-9402520	F-BM			
					36°	2100lm	1550lm	MLF2-9403620	F-BM			
					50°	2100lm	1550lm	MLF2-9405020	F-BM			
									Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)			

18W	20W	48 V	90	2700K	25°	1800lm	1250lm	MLF2-9272520	F-BB			
					36°	1800lm	1300lm	MLF2-9273620	F-BB			
					50°	1800lm	1300lm	MLF2-9275020	F-BB			
				3000K	25°	1900lm	1300lm	MLF2-9302520	F-BB			
					36°	1900m	1400lm	MLF2-9303620	F-BB			
					50°	1900lm	1400lm	MLF2-9305020	F-BB			
				4000K	25°	2100lm	1400lm	MLF2-9402520	F-BB			
					36°	2100lm	1550lm	MLF2-9403620	F-BB			
					50°	2100lm	1550lm	MLF2-9405020	F-BB			
				Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)								

NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Accent Light Inset



ML26-AL190-3W



ML26-AL190-7W



ML26-AL280-9W



ML26-AL280-13W



ML26-AL190-3W



ML26-AL190-7W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
2W	3W	48 V	90	2700K	20°	230lm	170lm	MLA3-9272003F-BB
				35°	230lm	170lm		MLA3-9273503F-BB
				55°	230lm	160lm		MLA3-9275503F-BB
				3000K	20°	250lm	180lm	MLA3-9302003F-BB
				35°	250lm	180lm		MLA3-9303503F-BB
				55°	250lm	170lm		MLA3-9305503F-BB
				4000K	20°	270lm	200lm	MLA3-9402003F-BB
				35°	270lm	200lm		MLA3-9403503F-BB
				55°	270lm	190lm		MLA3-9405503F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)


LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48 V	90	2700K	20°	700lm	500lm	MLA4-9272007F-BB
				35°	700lm	500lm		MLA4-9273507F-BB
				55°	700lm	470lm		MLA4-9275507F-BB
				3000K	20°	750lm	550lm	MLA4-9302007F-BB
				35°	750lm	550lm		MLA4-9303507F-BB
				55°	750lm	500lm		MLA4-9305507F-BB
				4000K	20°	820lm	600lm	MLA4-9402007F-BB
				35°	820lm	600lm		MLA4-9403507F-BB
				55°	820lm	550lm		MLA4-9405507F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Optional



White



ML26-AL280-9W



ML26-AL280-13W


LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
8W	9W	48 V	90	2700K	20°	950lm	700lm	MLA1-9272009F-BB
				35°	950lm	700lm		MLA1-9273509F-BB
				55°	950lm	650lm		MLA1-9275509F-BB
				3000K	20°	1000lm	750lm	MLA1-9302009F-BB
				35°	1000lm	750lm		MLA1-9303509F-BB
				55°	1000lm	680lm		MLA1-9305509F-BB
				4000K	20°	1100lm	800lm	MLA1-9402009F-BB
				35°	1100lm	800lm		MLA1-9403509F-BB
				55°	1100lm	750lm		MLA1-9405509F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	48 V	90	2700K	20°	1400lm	1000lm	MLA2-9272013F-BB
				35°	1400lm	1000lm		MLA2-9273513F-BB
				55°	1400lm	950lm		MLA2-9275513F-BB
				3000K	20°	1500lm	1100lm	MLA2-9302013F-BB
				35°	1500lm	1100lm		MLA2-9303513F-BB
				55°	1500lm	1000lm		MLA2-9305513F-BB
				4000K	20°	1600lm	1200lm	MLA2-9402013F-BB
				35°	1600lm	1200lm		MLA2-9403513F-BB
				55°	1600lm	1100lm		MLA2-9405513F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Optional




White


NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Adjustable Accent Light Inset




ML26-SA280-13W
Adjustable Accent Light Inset



NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
ML26-AA315 Accent Light Inset

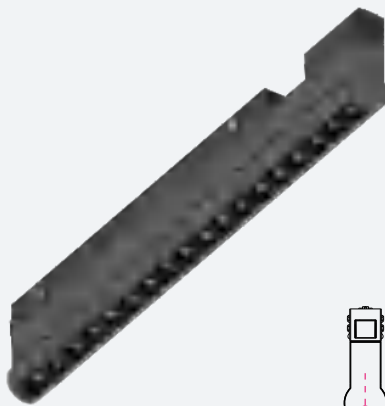

ML26-AA315-14W



Adjustable range 150°

Technical specifications for ML26-SA280-13W including power (13W), CRI (90), color temperatures (2700K, 3000K, 4000K), beam angles (20°, 35°, 55°), OSRAM logo, UGR < 19, IP20, beam angle diagram, 5-year warranty logo, CB, CE, and Intertek marks. Dimensions: 283mm length, 22mm width, 80mm height.




ML26-SA280-13W

Table with 10 columns: LED, Power, System Power, LED Voltage, CRI, CCT, Beam, LED Output, System Output, Code. Rows include specifications for 2700K, 3000K, and 4000K color temperatures with various beam angles.


Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Optional



White

Technical specifications for ML26-AA315-14W including power (14W), CRI (90), color temperatures (2700K, 3000K, 4000K), beam angle (30°), OSRAM logo, UGR < 19, IP20, 5-year warranty logo, CB, CE, and Intertek marks. Dimensions: 315mm length, 22mm width, 61mm height.



ML26-AA315-14W


Table with 10 columns: LED, Power, System Power, LED Voltage, CRI, CCT, Beam, LED Output, System Output, Code. Rows include specifications for 2700K, 3000K, and 4000K color temperatures with 30° beam angle.

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)


NEKO / **MODULINE 26** Linear System
48V Low Voltage Modular Linear System
ML26-AG315 General Light Inset



NEW

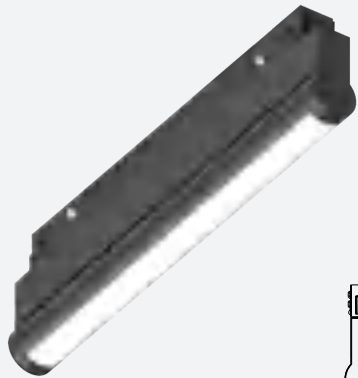

ML26-AG315-10W




Adjustable range 150°

NEKO / **MODULINE 26** Linear System
48V Low Voltage Modular Linear System
Adjustable General Light Inset



ML26-SG280-7W
Adjustable General Light Inset



10W

CRI90

2700K
3000K
4000K

 50,000h@L80B10



IP20



CB

CE





ML26-AG315-10W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48 V	90	2700K	120°	750lm	500lm	MLG6-927A210F-BB
				3000K	120°	800lm	550lm	MLG6-930A210F-BB
				4000K	120°	850lm	600lm	MLG6-940A210F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

7W

CRI90

2700K
3000K
4000K

 50,000h@L80B10


IP20



CB

CE





ML26-SG280-7W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48 V	90	2700K	110°	550lm	430lm	MLG5-927A107F-BN
				3000K	110°	600lm	400lm	MLG5-930A107F-BN
				4000K	110°	650lm	450lm	MLG5-940A107F-BN

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Optional



White

NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
General Light Inset



ML26-GL280-7W



ML26-GL560-13W



ML26-GL840-19W



ML26-GL1120-26W





Table with 10 columns: LED Power, System Power, LED Voltage, CRI, CCT, Beam, LED Output, System Output, Code. Rows include ML26-GL280-7W and ML26-GL560-13W with various specifications and code remarks.

Table with 10 columns: LED Power, System Power, LED Voltage, CRI, CCT, Beam, LED Output, System Output, Code. Rows include ML26-GL840-19W and ML26-GL1120-26W with various specifications and code remarks.

Optional



White

Optional



White

NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Pendant Spot Inset



ML26-PS40-12W


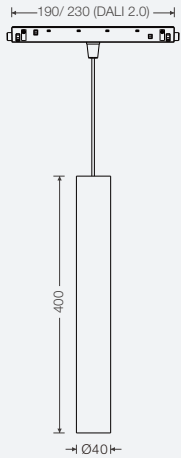



Table with 12 columns: 12W, CRI90, 2700K, 3000K, 4000K, beam angle icons, CITIZEN logo, UGR < 19, IP20, 5-year warranty logo, CB, CE, ENEC logo.

Table with 11 columns: LED, Power, System Power, LED Voltage, CRI, CCT, Beam, LED Output, System Output, Code. Includes Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)



ML26-PS40-12W

Optional



Brushed Gold

White

NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Pendant Spot Inset



ML26-PS55-14W

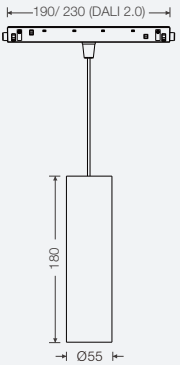


Table with 12 columns: 14W, CRI90, 2700K, 3000K, 4000K, beam angle icons, CITIZEN logo, UGR < 19, IP20, 5-year warranty logo, CB, CE, ENEC logo.

Table with 11 columns: LED, Power, System Power, LED Voltage, CRI, CCT, Beam, LED Output, System Output, Code. Includes Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)



ML26-PS55-14W

Optional




White

NEKO / **MODULINE 26** Linear System
48V Low Voltage Modular Linear System
ML26-PS60 Pendant Light Inset



ML26-PS60-5W



5W	CRI90	2700K 3000K 4000K		OSRAM 50,000h@L80B10	UGR < 19	IP20		CB	CE	
----	-------	-------------------------	--	-------------------------	-------------	------	--	----	----	--



ML26-PS60-5W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
4.5W	5W	48 V	90	2700K	18°	470lm	370lm	MLP3-9271805F-BB
					24°	470lm	370lm	MLP3-9272405F-BB
					36°	470lm	370lm	MLP3-9273605F-BB
					50°	470lm	370lm	MLP3-9275005F-BB
				3000K	18°	500lm	400lm	MLP3-9301805F-BB
					24°	500lm	400lm	MLP3-9302405F-BB
					36°	500lm	400lm	MLP3-9303605F-BB
					50°	500lm	400lm	MLP3-9305005F-BB
				4000K	18°	550lm	450lm	MLP3-9401805F-BB
					24°	550lm	450lm	MLP3-9402405F-BB
					36°	550lm	450lm	MLP3-9403605F-BB
					50°	550lm	450lm	MLP3-9405005F-BB

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Optional




White

NEKO / **MODULINE 26** Linear System
48V Low Voltage Modular Linear System
ML26-PAD150 Pendant Light Inset



ML26-PAD150-12W



12W	CRI90	2700K 3000K 4000K		OSRAM 50,000h@L80B10	IP20		CB	CE	
-----	-------	-------------------------	--	-------------------------	------	--	----	----	--



ML26-PAD150-12W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
11W	12W	48 V	90	2700K	110°	900lm	720lm	MLPA-927A112F-BN
					3000K	950lm	750lm	MLPA-930A112F-BN
				4000K	110°	1050lm	800lm	MLPA-940A112F-BN

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Optional



Brushed Gold




White

NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
ML26-PD300 Pendant Light Inset

NEW



ML26-PD300-18W



18W

CRI90

2700K
3000K
4000K




50,000h@L80B10

UGR < 19

IP20



CB


CE





LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
17W	18W	48 V	90	2700K	60°	1600lm	1050lm	MLPD-9276018F-BB-H
				3000K	60°	1700lm	1100lm	MLPD-9306018F-BB-H
				4000K	60°	1800lm	1200lm	MLPD-9406018F-BB-H
Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)								
17W	18W	48 V	90	2700K	60°	1600lm	1050lm	MLPD-9276018F-BW-H
				3000K	60°	1700lm	1100lm	MLPD-9306018F-BW-H
				4000K	60°	1800lm	1200lm	MLPD-9406018F-BW-H
Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)								

Optional




White



NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
ML26-PB120 Pendant Light Inset

NEW



ML26-PB120-10W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48 V	90	2700K	180°	900lm	620lm	MLPB-927A810F-BN
				3000K	180°	950lm	650lm	MLPB-930A810F-BN
				4000K	180°	1050lm	700lm	MLPB-940A810F-BN

Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Optional




White




NEKO / MODULINE 26 Linear System
48V Low Voltage Modular Linear System
Wall Washer Inset



ML26-WW280-7W

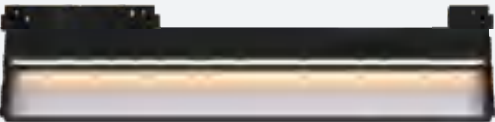

ML26-WW560-13W



ML26-WW280-7W




ML26-WW560-13W

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48 V	90	2700K	Wall Washer	550lm	330lm	MLW1-927A107F-BM
				3000K	Wall Washer	600lm	350lm	MLW1-930A107F-BM
				4000K	Wall Washer	650lm	400lm	MLW1-940A107F-BM
Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)								
12W	13W	48 V	90	2700K	Wall Washer	1100lm	670lm	MLW2-927A113F-BM
				3000K	Wall Washer	1200lm	700lm	MLW2-930A113F-BM
				4000K	Wall Washer	1300lm	750lm	MLW2-940A113F-BM
Code Remark: F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)								

Optional



White

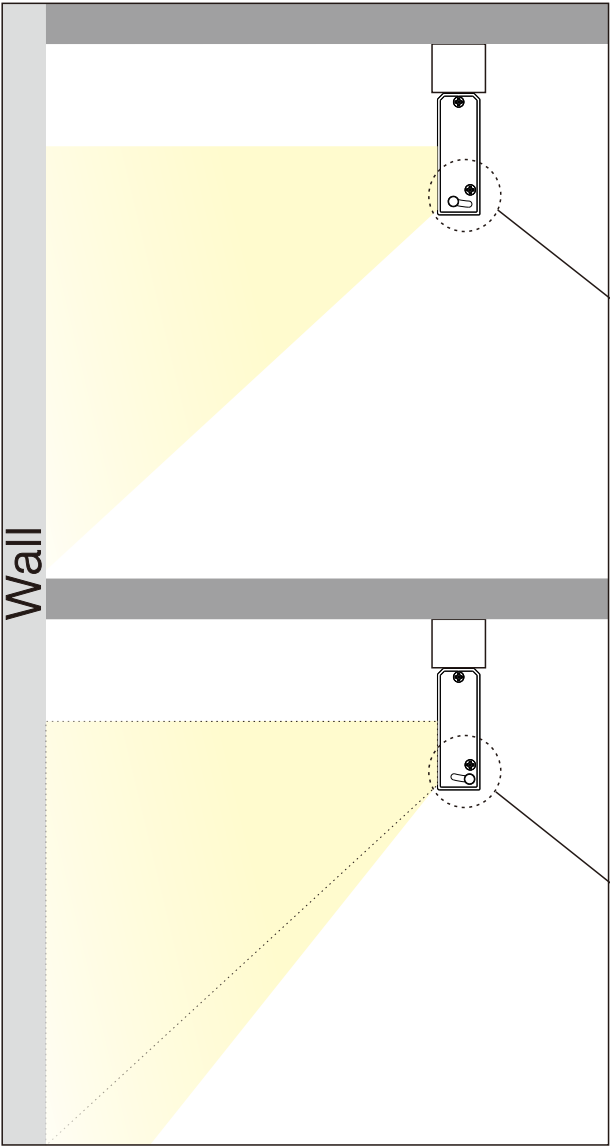


Adjustable Wall Washer






Microprismatic Cover
UGR<19

NEKO / GAME & SUGAR
Ceiling Light System
Modular Design

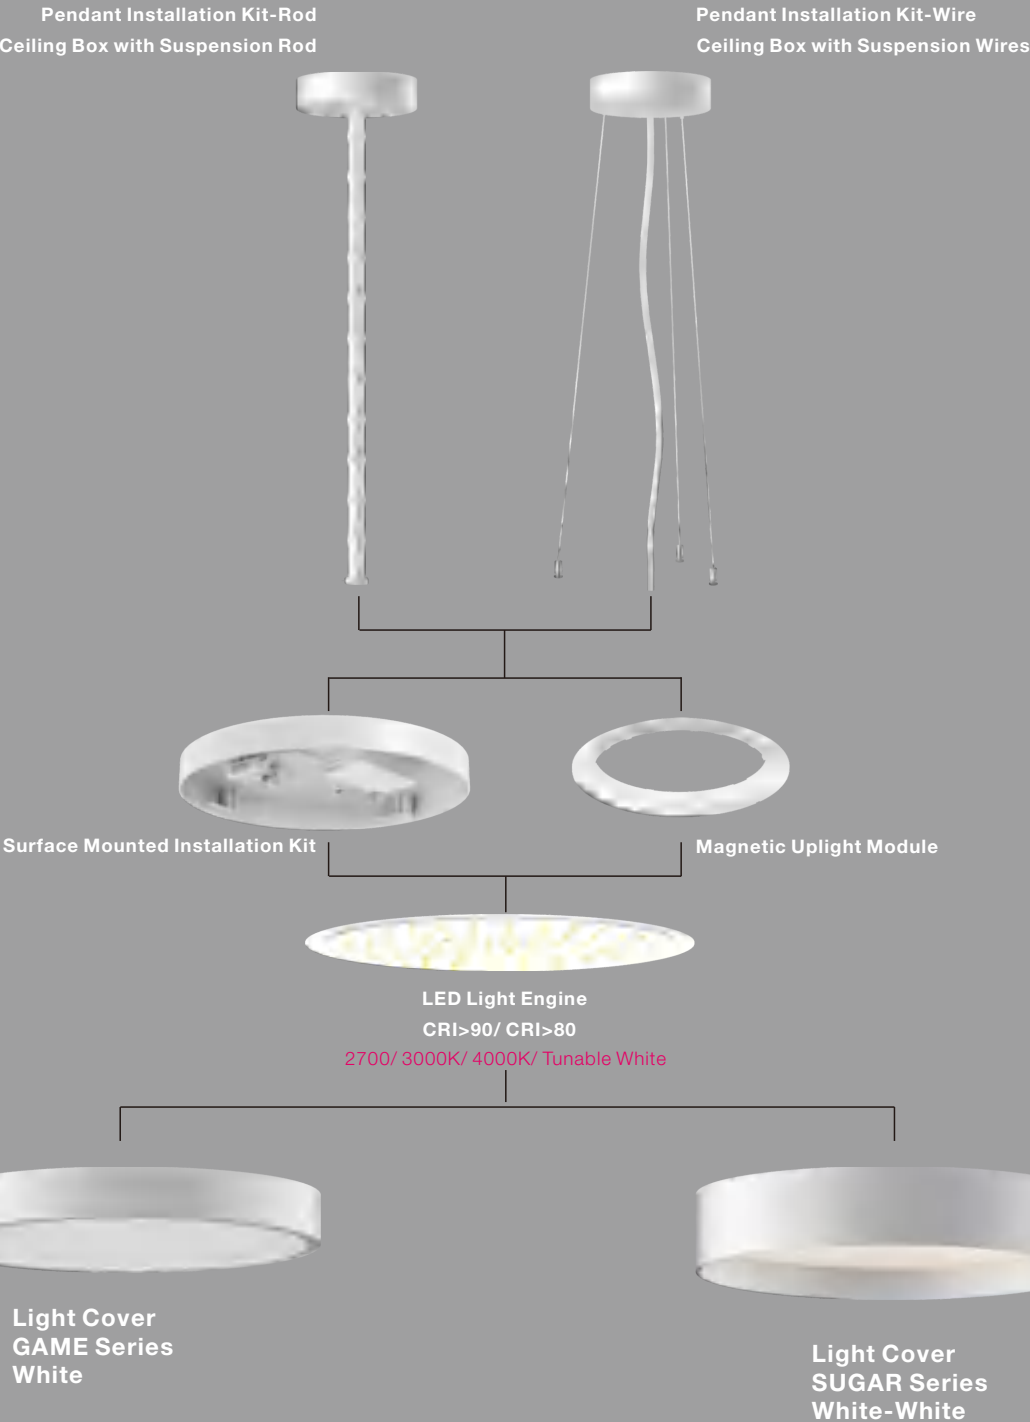


Installation :

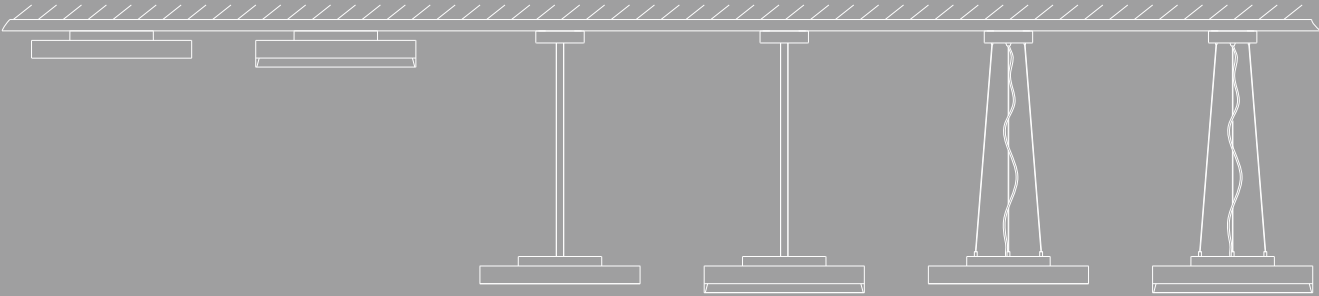


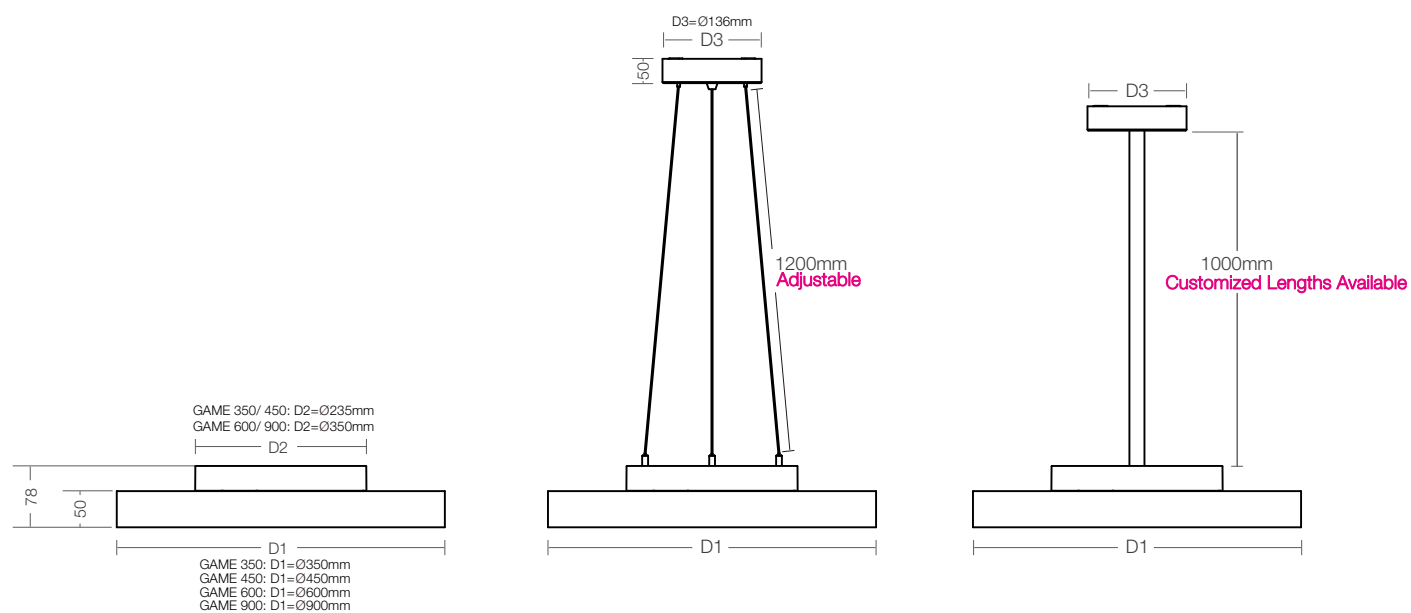


8W Up Light(250mA) 850lm
12W Down Light(350mA) 1400lm
16W Down Light(500mA) 2000lm
ON-OFF/Phase Dim/1-10V/DALI Dim



11W Up Light(350mA) 1100lm
16W Down Light(500mA) 2000lm
24W Down Light(700mA) 2800lm
ON-OFF/Phase Dim/1-10V/DALI Dim

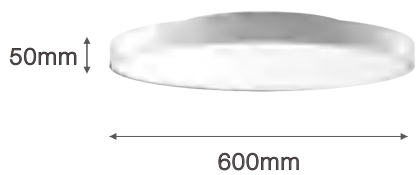


18W Up Light(500mA) 1700lm
24W Down Light(700mA) 2800lm
36W Down Light(1050mA) 4700lm
46W Down Light(1050mA) 6100lm
ON-OFF/Phase Dim/1-10V/DALI Dim

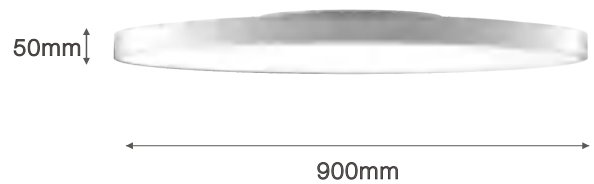

25W Up Light(700mA) 2400lm
65W Down Light(1400mA) 8000lm
ON-OFF/1-10V/DALI Dim

Magnetic Uplight Module





(GAME 350 for Reference)




(GAME 450 for Reference)


NEKO / SUGAR
Ceiling Light System

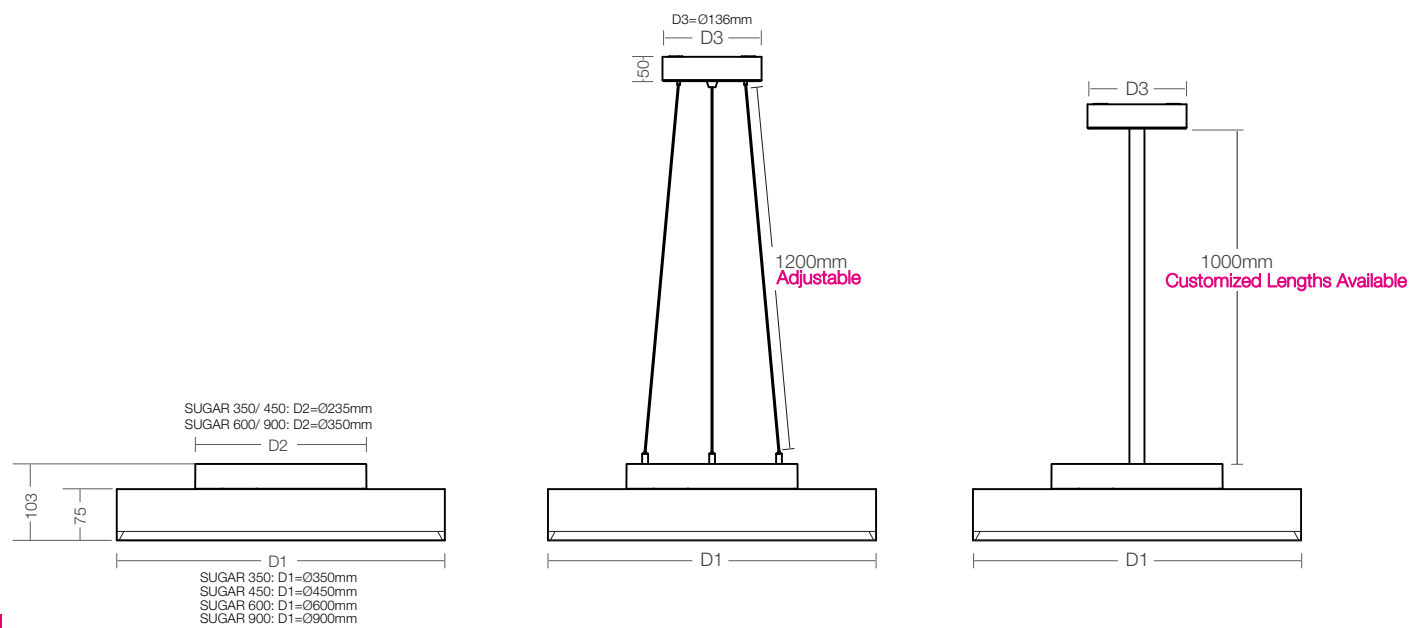

8W Up Light(250mA) 850lm
12W Down Light(350mA) 1400lm
16W Down Light(500mA) 2000lm
ON-OFF/Phase Dim/1-10V/DALI Dim

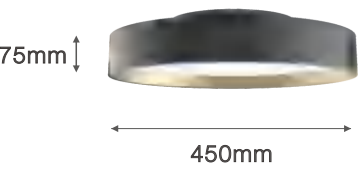

11W Up Light(350mA) 1100lm
16W Down Light(500mA) 2000lm
24W Down Light(700mA) 2800lm
ON-OFF/Phase Dim/1-10V/DALI Dim

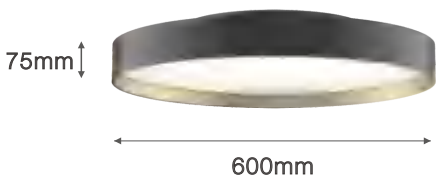


18W Up Light(500mA) 1700lm
24W Down Light(700mA) 2800lm
36W Down Light(1050mA) 4700lm
46W Down Light(1050mA) 6100lm
ON-OFF/Phase Dim/1-10V/DALI Dim



25W Up Light(700mA) 2400lm
65W Down Light(1400mA) 8000lm
ON-OFF/1-10V/DALI Dim

Magnetic Uplight Module

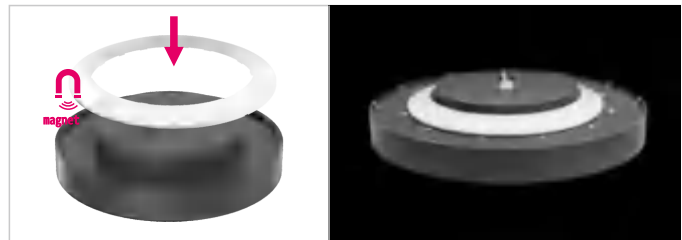


(SUGAR 350 for Reference)


(SUGAR 450 for Reference)



NEKO / GAME350
Ceiling Light System

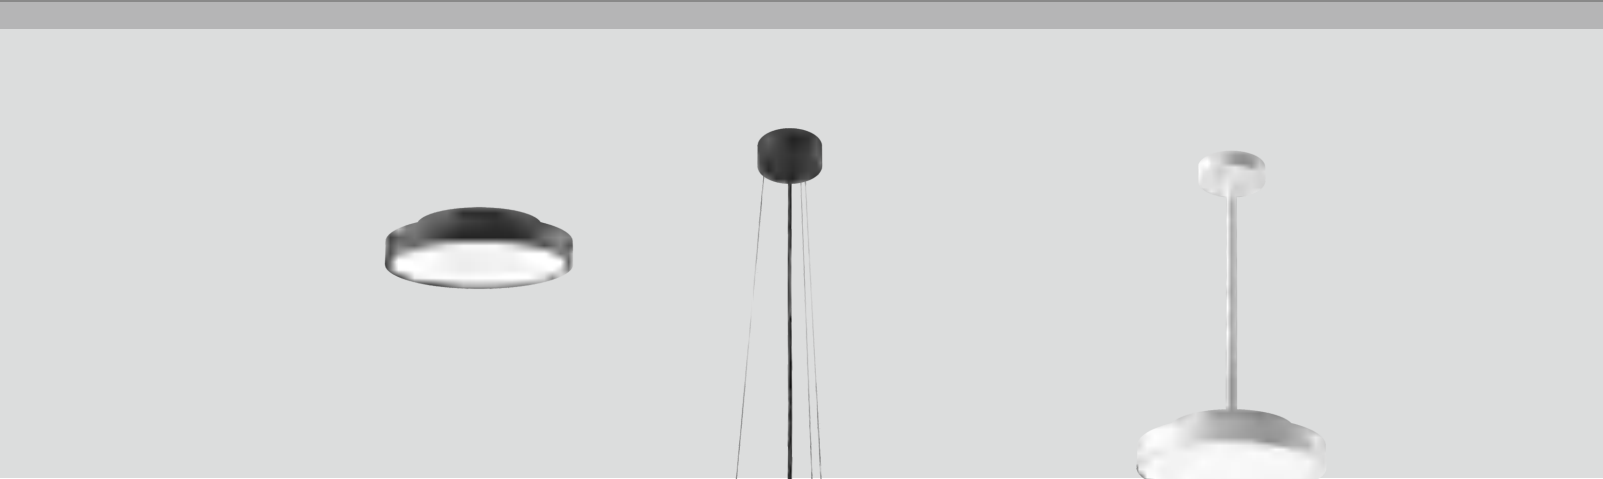


12W	CRI80	2700K	Tunable White Available			UGR < 19	IP 40		CB	CE	
16W	CRI90	3000K 4000K									




	LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
 Black	12 W	14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	GASM-8279012N-BN	
						3000K	90°	1900lm	1400lm	GASM-8309012N-BN	
						4000K	90°	2000lm	1500lm	GASM-8409012N-BN	
	16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	GASM-8279016N-BN	
						3000K	90°	2600lm	2000lm	GASM-8309016N-BN	
						4000K	90°	2800lm	2200lm	GASM-8409016N-BN	
 White	12 W	14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	GASM-8279012N-WN	
						3000K	90°	1900lm	1400lm	GASM-8309012N-WN	
						4000K	90°	2000lm	1500lm	GASM-8409012N-WN	
	16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	GASM-8279016N-WN	
						3000K	90°	2600lm	2000lm	GASM-8309016N-WN	
						4000K	90°	2800lm	2200lm	GASM-8409016N-WN	

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



Black



White



Black



White

Optional accessory



Magnetic Uplight Module 350

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	34 V	350 mA	80	2700K	90°	90°	1800lm	1300lm	GAPW-8279012N-BN
							90°	1900lm	1400lm	GAPW-8309012N-BN
							90°	2000lm	1500lm	GAPW-8409012N-BN
16 W	18 W	34 V	500 mA	80	2700K	90°	90°	2400lm	1900lm	GAPW-8279016N-BN
							90°	2600lm	2000lm	GAPW-8309016N-BN
							90°	2800lm	2200lm	GAPW-8409016N-BN

Standard pendant length: 1200mm

12 W	14 W	34 V	350 mA	80	2700K	90°	90°	1800lm	1300lm	GAPW-8279012N-WN
							90°	1900lm	1400lm	GAPW-8309012N-WN
							90°	2000lm	1500lm	GAPW-8409012N-WN
16 W	18 W	34 V	500 mA	80	2700K	90°	90°	2400lm	1900lm	GAPW-8279016N-WN
							90°	2600lm	2000lm	GAPW-8309016N-WN
							90°	2800lm	2200lm	GAPW-8409016N-WN

Standard pendant length: 1200mm

12 W	14 W	34 V	350 mA	80	2700K	90°	90°	1800lm	1300lm	GAPR-8279012N-BN
							90°	1900lm	1400lm	GAPR-8309012N-BN
							90°	2000lm	1500lm	GAPR-8409012N-BN
16 W	18 W	34 V	500 mA	80	2700K	90°	90°	2400lm	1900lm	GAPR-8279016N-BN
							90°	2600lm	2000lm	GAPR-8309016N-BN
							90°	2800lm	2200lm	GAPR-8409016N-BN

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

12 W	14 W	34 V	350 mA	80	2700K	90°	90°	1800lm	1300lm	GAPR-8279012N-WN
							90°	1900lm	1400lm	GAPR-8309012N-WN
							90°	2000lm	1500lm	GAPR-8409012N-WN
16 W	18 W	34 V	500 mA	80	2700K	90°	90°	2400lm	1900lm	GAPR-8279016N-WN
							90°	2600lm	2000lm	GAPR-8309016N-WN
							90°	2800lm	2200lm	GAPR-8409016N-WN

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W	10 W	33 V	250 mA	80	2700K	110°	110°	900lm	800lm	UM35-827A108N-NN
							110°	950lm	850lm	UM35-830A108N-NN
							110°	1050lm	950lm	UM35-840A108N-NN


Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for GAPR-8309012N-WN with Uplight Module
GAPR-8309012N-WN-U

NEKO / GAME450
Ceiling Light System




16W 24W	CRI80 CRI90	2700K 3000K 4000K	Tunable White Available			UGR < 19	IP 40				
------------	----------------	-------------------------	----------------------------	---	---	-------------	-------	---	---	---	---




LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W	18 W	34 V	500 mA	80	2700K	90°	90°	2400lm	1900lm	GBSM-8279016N-BN
					3000K	90°	90°	2600lm	2000lm	GBSM-8309016N-BN
					4000K	90°	90°	2800lm	2200lm	GBSM-8409016N-BN
24 W	26 W	34 V	700 mA	80	2700K	90°	90°	3500lm	2600lm	GBSM-8279024N-BN
					3000K	90°	90°	3700lm	2800lm	GBSM-8309024N-BN
					4000K	90°	90°	4000lm	3000lm	GBSM-8409024N-BN
16 W	18 W	34 V	500 mA	80	2700K	90°	90°	2400lm	1900lm	GBSM-8279016N-WN
					3000K	90°	90°	2600lm	2000lm	GBSM-8309016N-WN
					4000K	90°	90°	2800lm	2200lm	GBSM-8409016N-WN
24 W	26 W	34 V	700 mA	80	2700K	90°	90°	3500lm	2600lm	GBSM-8279024N-WN
					3000K	90°	90°	3700lm	2800lm	GBSM-8309024N-WN
					4000K	90°	90°	4000lm	3000lm	GBSM-8409024N-WN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



Black



White



Black



White

Optional accessory



Magnetic Uplight Module 450

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W	18 W	34 V	500 mA	80	2700K	90°	90°	2400lm	1900lm	GBPW-8279016N-BN
					3000K	90°	90°	2600lm	2000lm	GBPW-8309016N-BN
					4000K	90°	90°	2800lm	2200lm	GBPW-8409016N-BN
24 W	26 W	34 V	700 mA	80	2700K	90°	90°	3500lm	2600lm	GBPW-8279024N-BN
					3000K	90°	90°	3700lm	2800lm	GBPW-8309024N-BN
					4000K	90°	90°	4000lm	3000lm	GBPW-8409024N-BN

Standard pendant length: 1200mm

16 W	18 W	34 V	500 mA	80	2700K	90°	90°	2400lm	1900lm	GBPW-8279016N-WN
					3000K	90°	90°	2600lm	2000lm	GBPW-8309016N-WN
					4000K	90°	90°	2800lm	2200lm	GBPW-8409016N-WN
24 W	26 W	34 V	700 mA	80	2700K	90°	90°	3500lm	2600lm	GBPW-8279024N-WN
					3000K	90°	90°	3700lm	2800lm	GBPW-8309024N-WN
					4000K	90°	90°	4000lm	3000lm	GBPW-8409024N-WN

Standard pendant length: 1200mm

16 W	18 W	34 V	500 mA	80	2700K	90°	90°	2400lm	1900lm	GBPR-8279016N-BN
					3000K	90°	90°	2600lm	2000lm	GBPR-8309016N-BN
					4000K	90°	90°	2800lm	2200lm	GBPR-8409016N-BN
24 W	26 W	364 V	700 mA	80	2700K	90°	90°	3500lm	2600lm	GBPR-8279024N-BN
					3000K	90°	90°	3700lm	2800lm	GBPR-8309024N-BN
					4000K	90°	90°	4000lm	3000lm	GBPR-8409024N-BN

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

16 W	18 W	34 V	500 mA	80	2700K	90°	90°	2400lm	1900lm	GBPR-8279016N-WN
					3000K	90°	90°	2600lm	2000lm	GBPR-8309016N-WN
					4000K	90°	90°	2800lm	2200lm	GBPR-8409016N-WN
24 W	26 W	34 V	700 mA	80	2700K	90°	90°	3500lm	2600lm	GBPR-8279024N-WN
					3000K	90°	90°	3700lm	2800lm	GBPR-8309024N-WN
					4000K	90°	90°	4000lm	3000lm	GBPR-8409024N-WN

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional


Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	33 V	350 mA	80	2700K	110°	110°	1100lm	1000lm	UM45-827A111N-NN
					3000K	110°	110°	1200lm	1100lm	UM45-830A111N-NN
					4000K	110°	110°	1300lm	1200lm	UM45-840A111N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for GBPR-8309016N-WN with Uplight Module
GBPR-8309016N-WN-U

NEKO / GAME600
Ceiling Light System

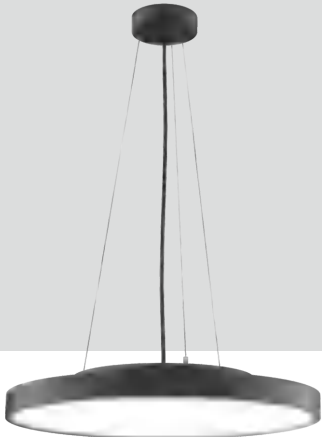

24W
36W
46W

CRI80
CRI90

2700K
3000K
4000K

Tunable White
Available




OSRAM
50,000h@L80B10

UGR
< 19

IP 40



CB



Black



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	GCSM-8279024	N-BN
										N-BN
										N-BN
36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	GCSM-8279036	N-BN
										N-BN
										N-BN
46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	GCSM-8279046	N-BN
										N-BN
										N-BN
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	GCSM-8279024	N-WN
										N-WN
										N-WN
36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	GCSM-8279036	N-WN
										N-WN
										N-WN
46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	GCSM-8279046	N-WN
										N-WN
										N-WN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



Black



White



Black



White

Optional accessory



Magnetic Uplight Module 600

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	GCPW-8279024	N-BN
										N-BN
										N-BN
36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	GCPW-8279036	N-BN
										N-BN
										N-BN
46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	GCPW-8279046	N-BN
										N-BN
										N-BN

Standard pendant length: 1200mm

24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	GCPW-8279024	N-WN
					3000K	90°	3700lm	2800lm	GCPW-8309024	N-WN
					4000K	90°	4000lm	3000lm	GCPW-8409024	N-WN
36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	GCPW-8279036	N-WN
					3000K	90°	6200lm	4700lm	GCPW-8309036	N-WN
					4000K	90°	6600lm	4900lm	GCPW-8409036	N-WN
46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	GCPW-8279046	N-WN
					3000K	90°	8100lm	6100lm	GCPW-8309046	N-WN
					4000K	90°	8600lm	6400lm	GCPW-8409046	N-WN

Standard pendant length: 1200mm

24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	G CPR-8279024	N-BN
					3000K	90°	3700lm	2800lm	G CPR-8309024	N-BN
					4000K	90°	4000lm	3000lm	G CPR-8409024	N-BN
36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	G CPR-8279036	N-BN
					3000K	90°	6200lm	4700lm	G CPR-8309036	N-BN
					4000K	90°	6600lm	4900lm	G CPR-8409036	N-BN
46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	G CPR-8279046	N-BN
					3000K	90°	8100lm	6100lm	G CPR-8309046	N-BN
					4000K	90°	8600lm	6400lm	G CPR-8409046	N-BN

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	G CPR-8279024	N-WN
					3000K	90°	3700lm	2800lm	G CPR-8309024	N-WN
					4000K	90°	4000lm	3000lm	G CPR-8409024	N-WN
36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	G CPR-8279036	N-WN
					3000K	90°	6200lm	4700lm	G CPR-8309036	N-WN
					4000K	90°	6600lm	4900lm	G CPR-8409036	N-WN
46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	G CPR-8279046	N-WN
					3000K	90°	8100lm	6100lm	G CPR-8309046	N-WN
					4000K	90°	8600lm	6400lm	G CPR-8409046	N-WN

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	80	2700K	110°	1800lm	1600lm	UM60-827A118	N-NN
										N-NN
										N-NN
					3000K	110°	1900lm	1700lm	UM60-830A118	N-NN
					4000K	110°	2000lm	1800lm	UM60-840A118	N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for G CPR-8309036N-WN with Uplight Module
G CPR-8309036N-WN-U

NEKO / GAME900
Ceiling Light System



65W	CRI80 CRI90	2700K 3000K 4000K		OSRAM 50,000h@L80B10	UGR < 19	IP40		CB	CE	
-----	----------------	-------------------------	--	-------------------------	-------------	------	--	----	----	--



Black



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	GDSM-8279065N-BN	
					3000K	90°	10500lm	8000lm	GDSM-8309065N-BN	
					4000K	90°	11000lm	8400lm	GDSM-8409065N-BN	

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)



Black



White



Black



White

Optional accessory



Magnetic Uplight Module 900

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
65 W	68 W	46 V	1400 mA	80	2700K	90°		9900lm	7600lm	GDPW-8279065N-BN
					3000K	90°		10500lm	8000lm	GDPW-8309065N-BN
					4000K	90°		11000lm	8400lm	GDPW-8409065N-BN

Standard pendant length: 1200mm

65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	GDPW-8279065N-WN
					3000K	90°	10500lm	8000lm	GDPW-8309065N-WN
					4000K	90°	11000lm	8400lm	GDPW-8409065N-WN

Standard pendant length: 1200mm

65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	GDPR-8279065N-BN
					3000K	90°	10500lm	8000lm	GDPR-8309065N-BN
					4000K	90°	11000lm	8400lm	GDPR-8409065N-BN

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	GDPR-8279065N-WN
					3000K	90°	10500lm	8000lm	GDPR-8309065N-WN
					4000K	90°	11000lm	8400lm	GDPR-8409065N-WN

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	80	2700K	110°	2500lm	2200lm	UM90-827A125N-NN	
					3000K	110°	2700lm	2400lm	UM90-830A125N-NN	
					4000K	110°	2900lm	2600lm	UM90-840A125N-NN	

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for GDPR-8309065N-WN with Uplight Module
GDPR-8309065N-WN-U






NEKO / SUGAR350
Ceiling Light System



12W	CRI80	2700K	Tunable White Available		50,000h@L80B10	UGR < 19	IP 40		CB	CE	
16W	CRI90	3000K									
		4000K									



Black




Black-Gold




White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	SASM-8279012N-BB	
										SASM-8309012N-BB
										SASM-8409012N-BB
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SASM-8279016N-BB	
										SASM-8309016N-BB
										SASM-8409016N-BB
12 W	14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	SASM-8279012N-BG	
										SASM-8309012N-BG
										SASM-8409012N-BG
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SASM-8279016N-BG	
										SASM-8309016N-BG
										SASM-8409016N-BG
12 W	14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	SASM-8279012N-WW	
										SASM-8309012N-WW
										SASM-8409012N-WW
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SASM-8279016N-WW	
										SASM-8309016N-WW
										SASM-8409016N-WW


Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



Black



Black-Gold



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	SAPW-8279012N-BB	
										SAPW-8309012N-BB
										SAPW-8409012N-BB
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SAPW-8279016N-BB	
										SAPW-8309016N-BB
										SAPW-8409016N-BB

Standard pendant length: 1200mm

12 W	14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	SAPW-8279012N-BG	
										SAPW-8309012N-BG
										SAPW-8409012N-BG
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SAPW-8279016N-BG	
										SAPW-8309016N-BG
										SAPW-8409016N-BG

Standard pendant length: 1200mm

12 W	14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	SAPW-8279012N-WW	
										SAPW-8309012N-WW
										SAPW-8409012N-WW
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SAPW-8279016N-WW	
										SAPW-8309016N-WW
										SAPW-8409016N-WW

Standard pendant length: 1200mm

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Optional accessory



Magnetic Uplight Module 350

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W	10 W	33 V	250 mA	80	2700K	110°	900lm	800lm	UM35-827A108N-NN	
										UM35-830A108N-NN
										UM35-840A108N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for SAPW-8309012N-WW with Uplight Module
SAPW-8309012N-WW-U



Black



Black-Gold



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	SAPR-8279012	N-BB
					3000K	90°	1900lm	1400lm	SAPR-8309012	N-BB
					4000K	90°	2000lm	1500lm	SAPR-8409012	N-BB
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SAPR-8279016	N-BB
					3000K	90°	2600lm	2000lm	SAPR-8309016	N-BB
					4000K	90°	2800lm	2200lm	SAPR-8409016	N-BB

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

12 W	14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	SAPR-8279012N-BG
					3000K	90°	1900lm	1400lm	SAPR-8309012N-BG
					4000K	90°	2000lm	1500lm	SAPR-8409012N-BG
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SAPR-8279016N-BG
					3000K	90°	2600lm	2000lm	SAPR-8309016N-BG
					4000K	90°	2800lm	2200lm	SAPR-8409016N-BG

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

12 W	14 W	34 V	350 mA	80	2700K	90°	1800lm	1300lm	SAPR-8279012N-WW
					3000K	90°	1900lm	1400lm	SAPR-8309012N-WW
					4000K	90°	2000lm	1500lm	SAPR-8409012N-WW
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SAPR-8279016N-WW
					3000K	90°	2600lm	2000lm	SAPR-8309016N-WW
					4000K	90°	2800lm	2200lm	SAPR-8409016N-WW

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Optional accessory



Magnetic Uplight Module 350

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W	10 W	33 V	250 mA	80	2700K	110°	900lm	800lm	UM35-827A108N-NN	
					3000K	110°	950lm	850lm	UM35-830A108N-NN	
					4000K	110°	1050lm	950lm	UM35-840A108N-NN	


Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for SAPW-8309012N-WW with Uplight Module
SAPW-8309012N-WW-U


SUGAR with
UPLIGHT




NEKO / SUGAR450
Ceiling Light System

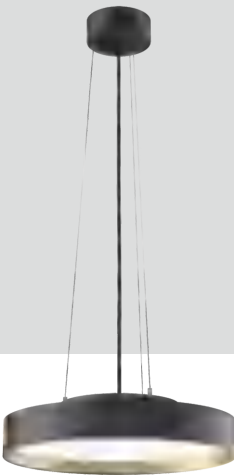

16W 24W	CRI80 CRI90	2700K 3000K 4000K	Tunable White Available	90°	OSRAM 50,000h@L80B10	UGR < 19	IP 40		CB	CE	
------------	----------------	-------------------------	----------------------------	-----	--------------------------------	-------------	-------	--	----	----	--



Black




Black-Gold




White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBSM-8279016N-BB	
					3000K	90°	2600lm	2000lm	SBSM-8309016N-BB	
					4000K	90°	2800lm	2200lm	SBSM-8409016N-BB	
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBSM-8279024N-BB	
					3000K	90°	3700lm	2800lm	SBSM-8309024N-BB	
					4000K	90°	4000lm	3000lm	SBSM-8409024N-BB	
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBSM-8279016N-BG	
					3000K	90°	2600lm	2000lm	SBSM-8309016N-BG	
					4000K	90°	2800lm	2200lm	SBSM-8409016N-BG	
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBSM-8279024N-BG	
					3000K	90°	3700lm	2800lm	SBSM-8309024N-BG	
					4000K	90°	4000lm	3000lm	SBSM-8409024N-BG	
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBSM-8279016N-WW	
					3000K	90°	2600lm	2000lm	SBSM-8309016N-WW	
					4000K	90°	2800lm	2200lm	SBSM-8409016N-WW	
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBSM-8279024N-WW	
					3000K	90°	3700lm	2800lm	SBSM-8309024N-WW	
					4000K	90°	4000lm	3000lm	SBSM-8409024N-WW	


Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



Black



Black-Gold



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPW-8279016N-BB	
					3000K	90°	2600lm	2000lm	SBPW-8309016N-BB	
					4000K	90°	2800lm	2200lm	SBPW-8409016N-BB	
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPW-8279024N-BB	
					3000K	90°	3700lm	2800lm	SBPW-8309024N-BB	
					4000K	90°	4000lm	3000lm	SBPW-8409024N-BB	

Standard pendant length: 1200mm

16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPW-8279016N-BG
					3000K	90°	2600lm	2000lm	SBPW-8309016N-BG
					4000K	90°	2800lm	2200lm	SBPW-8409016N-BG
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPW-8279024N-BG
					3000K	90°	3700lm	2800lm	SBPW-8309024N-BG
					4000K	90°	4000lm	3000lm	SBPW-8409024N-BG

Standard pendant length: 1200mm

16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPW-8279016N-WW
					3000K	90°	2600lm	2000lm	SBPW-8309016N-WW
					4000K	90°	2800lm	2200lm	SBPW-8409016N-WW
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPW-8279024N-WW
					3000K	90°	3700lm	2800lm	SBPW-8309024N-WW
					4000K	90°	4000lm	3000lm	SBPW-8409024N-WW

Standard pendant length: 1200mm

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Optional accessory



Magnetic Uplight Module 450

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	33 V	350 mA	80	2700K	110°	1100lm	1000lm	UM45-827A111N-NN	
					3000K	110°	1200lm	1100lm	UM45-830A111N-NN	
					4000K	110°	1300lm	1200lm	UM45-840A111N-NN	

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for SBPW-8309016N-WN with Uplight Module
SBPW-8309016N-WN-U



Black



Black-Gold



White

Optional accessory



Magnetic Uplight Module 450

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPR-8279016N-BB
					3000K	90°	2600lm	2000lm	SBPR-8309016N-BB
					4000K	90°	2800lm	2200lm	SBPR-8409016N-BB
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPR-8279024N-BB
					3000K	90°	3700lm	2800lm	SBPR-8309024N-BB
					4000K	90°	4000lm	3000lm	SBPR-8409024N-BB

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPR-8279016N-BG
					3000K	90°	2600lm	2000lm	SBPR-8309016N-BG
					4000K	90°	2800lm	2200lm	SBPR-8409016N-BG
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPR-8279024N-BG
					3000K	90°	3700lm	2800lm	SBPR-8309024N-BG
					4000K	90°	4000lm	3000lm	SBPR-8409024N-BG

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

16 W	18 W	34 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPR-8279016N-WW
					3000K	90°	2600lm	2000lm	SBPR-8309016N-WW
					4000K	90°	2800lm	2200lm	SBPR-8409016N-WW
24 W	26 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPR-8279024N-WW
					3000K	90°	3700lm	2800lm	SBPR-8309024N-WW
					4000K	90°	4000lm	3000lm	SBPR-8409024N-WW

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	33 V	350 mA	80	2700K	110°	1100lm	1000lm	UM45-827A111N-NN
					3000K	110°	1200lm	1100lm	UM45-830A111N-NN
					4000K	110°	1300lm	1200lm	UM45-840A111N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for SBPR-8309016N-WW with Uplight Module
SBPR-8309016N-WW-U



NEKO / SUGAR600
Ceiling Light System



24W 36W 46W	CRI80 CRI90	2700K 3000K 4000K	Tunable White Available	90°	OSRAM 50,000h@L80B10	UGR < 19	IP 40	5 YEARS GUARANTEE	CB	CE	ETL intertek	Ø350 103 75 Ø600
-------------------	----------------	-------------------------	----------------------------	-----	-------------------------	-------------	-------	----------------------	----	----	-----------------	---------------------------

	LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
 Black	24 W	24 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SCSM-8279024N-BB	
						3000K	90°	3700lm	2800lm	SCSM-8309024N-BB	
						4000K	90°	4000lm	3000lm	SCSM-8409024N-BB	
	36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCSM-8279036N-BB	
						3000K	90°	6200lm	4700lm	SCSM-8309036N-BB	
						4000K	90°	6600lm	4900lm	SCSM-8409036N-BB	
	46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCSM-8279046N-BB	
						3000K	90°	8100lm	6100lm	SCSM-8309046N-BB	
						4000K	90°	8600lm	6400lm	SCSM-8409046N-BB	
 Black-Gold	24 W	24 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SCSM-8279024N-BG	
						3000K	90°	3700lm	2800lm	SCSM-8309024N-BG	
						4000K	90°	4000lm	3000lm	SCSM-8409024N-BG	
	36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCSM-8279036N-BG	
						3000K	90°	6200lm	4700lm	SCSM-8309036N-BG	
						4000K	90°	6600lm	4900lm	SCSM-8409036N-BG	
	46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCSM-8279046N-BG	
						3000K	90°	8100lm	6100lm	SCSM-8309046N-BG	
						4000K	90°	8600lm	6400lm	SCSM-8409046N-BG	
 White	24 W	24 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SCSM-8279024N-WW	
						3000K	90°	3700lm	2800lm	SCSM-8309024N-WW	
						4000K	90°	4000lm	3000lm	SCSM-8409024N-WW	
	36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCSM-8279036N-WW	
						3000K	90°	6200lm	4700lm	SCSM-8309036N-WW	
						4000K	90°	6600lm	4900lm	SCSM-8409036N-WW	
	46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCSM-8279046N-WW	
						3000K	90°	8100lm	6100lm	SCSM-8309046N-WW	
						4000K	90°	8600lm	6400lm	SCSM-8409046N-WW	
Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)											

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)



Black



Black-Gold



White

Optional accessory



Magnetic Uplight Module 600

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W	24 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SCPW-8279024N-BB	
					3000K	90°	3700lm	2800lm	SCPW-8309024N-BB	
					4000K	90°	4000lm	3000lm	SCPW-8409024N-BB	
36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCPW-8279036N-BB	
					3000K	90°	6200lm	4700lm	SCPW-8309036N-BB	
					4000K	90°	6600lm	4900lm	SCPW-8409036N-BB	
46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCPW-8279046N-BB	
					3000K	90°	8100lm	6100lm	SCPW-8309046N-BB	
					4000K	90°	8600lm	6400lm	SCPW-8409046N-BB	

Standard pendant length: 1200mm

24 W	24 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SCPW-8279024N-BG
					3000K	90°	3700lm	2800lm	SCPW-8309024N-BG
					4000K	90°	4000lm	3000lm	SCPW-8409024N-BG
36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCPW-8279036N-BG
					3000K	90°	6200lm	4700lm	SCPW-8309036N-BG
					4000K	90°	6600lm	4900lm	SCPW-8409036N-BG
46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCPW-8279046N-BG
					3000K	90°	8100lm	6100lm	SCPW-8309046N-BG
					4000K	90°	8600lm	6400lm	SCPW-8409046N-BG

Standard pendant length: 1200mm

24 W	24 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SCPW-8279024N-WW
					3000K	90°	3700lm	2800lm	SCPW-8309024N-WW
					4000K	90°	4000lm	3000lm	SCPW-8409024N-WW
36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCPW-8279036N-WW
					3000K	90°	6200lm	4700lm	SCPW-8309036N-WW
					4000K	90°	6600lm	4900lm	SCPW-8409036N-WW
46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCPW-8279046N-WW
					3000K	90°	8100lm	6100lm	SCPW-8309046N-WW
					4000K	90°	8600lm	6400lm	SCPW-8409046N-WW

Standard pendant length: 1200mm

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	80	2700K	110°	1800lm	1600lm	UM60-827A118N-NN	
					3000K	110°	1900lm	1700lm	UM60-830A118N-NN	
					4000K	110°	2000lm	1800lm	UM60-840A118N-NN	

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for SCPW-8279036N-WW with Uplight Module
SCPW-8279036N-WW-U



Black



Black-Gold



White

Optional accessory



Magnetic Uplight Module 800

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24 W	24 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SCPR-8279024	N-BB
										SCPR-8309024
										SCPR-8409024
36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCPR-8279036	N-BB
										SCPR-8309036
										SCPR-8409036
46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCPR-8279046	N-BB
										SCPR-8309046
										SCPR-8409046

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

24 W	24 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SCPR-8279024	N-BG
										SCPR-8309024
										SCPR-8409024
36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCPR-8279036	N-BG
										SCPR-8309036
										SCPR-8409036
46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCPR-8279046	N-BG
										SCPR-8309046
										SCPR-8409046

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

24 W	24 W	34 V	700 mA	80	2700K	90°	3500lm	2600lm	SCPR-8279024	N-WW
										SCPR-8309024
										SCPR-8409024
36 W	40 W	34 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCPR-8279036	N-WW
										SCPR-8309036
										SCPR-8409036
46 W	50 W	34 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCPR-8279046	N-WW
										SCPR-8309046
										SCPR-8409046

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	80	2700K	110°	1800lm	1600lm	UM60-827A118	N-NN
										UM60-830A118
										UM60-840A118

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for SCPR-8309036N-WW with Uplight Module
SCPR-8309036N-WW-U



White-Gold Optional

NEKO / SUGAR900

Ceiling Light System



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
	65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDSM-8279065N-BB
						3000K	90°	10500lm	8000lm	SDSM-8309065N-BB
						4000K	90°	11000lm	8400lm	SDSM-8409065N-BB

Black



Black-Gold



White

65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDSM-8279065N-BG
					3000K	90°	10500lm	8000lm	SDSM-8309065N-BG
					4000K	90°	11000lm	8400lm	SDSM-8409065N-BG

65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDSM-8279065N-WW
					3000K	90°	10500lm	8000lm	SDSM-8309065N-WW
					4000K	90°	11000lm	8400lm	SDSM-8409065N-WW

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)



Black



Black-Gold



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
65 W	68 W	46 V	1400 mA	80	2700K	90°	90°	9900lm	7600lm	SDPW-8279065N-BB
							90°	10500lm	8000lm	SDPW-8309065N-BB
							90°	11000lm	8400lm	SDPW-8409065N-BB

Standard pendant length: 1200mm

65 W	68 W	46 V	1400 mA	80	2700K	90°	90°	9900lm	7600lm	SDPW-8279065N-BG
					3000K	90°	90°	10500lm	8000lm	SDPW-8309065N-BG
					4000K	90°	90°	11000lm	8400lm	SDPW-8409065N-BG

Standard pendant length: 1200mm

65 W	68 W	46 V	1400 mA	80	2700K	90°	90°	9900lm	7600lm	SDPW-8279065N-WW
					3000K	90°	90°	10500lm	8000lm	SDPW-8309065N-WW
					4000K	90°	90°	11000lm	8400lm	SDPW-8409065N-WW

Standard pendant length: 1200mm

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

Optional accessory



Magnetic Uplight Module 900

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	80	2700K	110°	110°	2500lm	2200lm	UM90-827A125N-NN
							110°	2700lm	2400lm	UM90-830A125N-NN
							110°	2900lm	2600lm	UM90-840A125N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) A=(1-10V Dim) D=(DALI Dim)

Code for SDPW-8309065N-WW with Uplight Module
SDPW-8309065N-WW-U



Black



Black-Gold



White

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
65 W	68 W	46 V	1400 mA	80	2700K	90°		9900lm	7600lm	SDPR-8279065N-BB
					3000K	90°		10500lm	8000lm	SDPR-8309065N-BB
					4000K	90°		11000lm	8400lm	SDPR-8409065N-BB

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

65 W	68 W	46 V	1400 mA	80	2700K	90°		9900lm	7600lm	SDPR-8279065N-BG
					3000K	90°		10500lm	8000lm	SDPR-8309065N-BG
					4000K	90°		11000lm	8400lm	SDPR-8409065N-BG

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

65 W	68 W	46 V	1400 mA	80	2700K	90°		9900lm	7600lm	SDPR-8279065N-WW
					3000K	90°		10500lm	8000lm	SDPR-8309065N-WW
					4000K	90°		11000lm	8400lm	SDPR-8409065N-WW

Standard pendant length: 1000mm (customized lengths available)

Remark: Field cuttable pendant rod solution optional

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Optional accessory



Magnetic Uplight Module 900

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	80	2700K	110°		2500lm	2200lm	UM90-827A125N-NN
					3000K	110°		2700lm	2400lm	UM90-830A125N-NN
					4000K	110°		2900lm	2600lm	UM90-840A125N-NN

Code Remark: N=(NO Driver) F=(ON-OFF) P=(Phase Dim) A=(1-10V Dim) D=(DALI Dim)

Code for SDPR-8309065N-WW with Uplight Module
SDPR-8309065N-WW-U






GINGER 400 G4RC-30W



GINGER 600 G6RC-50W

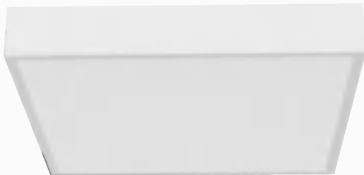

PEPPER 400 P4SC-30W

NEKO / GINGER 400

LED Ceiling Light


Aluminum Frame & Homogen Light
Incl. Phase Dim Driver




NEKO / GINGER 400

LED Ceiling Light

Aluminum Frame & Homogen Light
ON-OFF Driver+Microwave Sensor

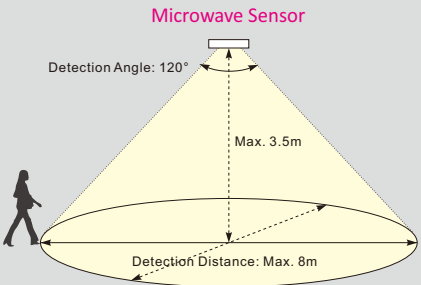

30W	CR190	3000K/3500K/4000K CCT Switchable	110°	bridgelux. 50,000h@L80B10	IP44	5 YEAR WARRANTY	CE	
Ø400								


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	72 V	380 mA	90	3000K	110°	3000lm	2400lm	G4RC-9S3A130P-WN
					3500K	110°	3200lm	2500lm	G4RC-9S3A130P-WN
					4000K	110°	3100lm	2400lm	G4RC-9S3A130P-WN


Code Remark: P=(Phase Dim)

28 W	30 W	72 V	380 mA	90	3000K	110°	3000lm	2400lm	G4RC-9S3A130P-BN
					3500K	110°	3200lm	2500lm	G4RC-9S3A130P-BN
					4000K	110°	3100lm	2400lm	G4RC-9S3A130P-BN

Code Remark: P=(Phase Dim)

Light Distribution

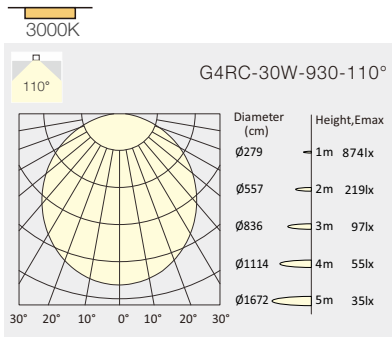

30W	CR190	3000K/3500K/4000K CCT Switchable	110°	bridgelux. 50,000h@L80B10	IP44	5 YEAR WARRANTY	CE		
Ø400									


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	72 V	380 mA	90	3000K	110°	3000lm	2400lm	G4RC-9S3A130S-WN
					3500K	110°	3200lm	2500lm	G4RC-9S3A130S-WN
					4000K	110°	3100lm	2400lm	G4RC-9S3A130S-WN

Code Remark: S=On-Off LED Driver+Microwave Sensor

28 W	30 W	72 V	380 mA	90	3000K	110°	3000lm	2400lm	G4RC-9S3A130S-BN
					3500K	110°	3200lm	2500lm	G4RC-9S3A130S-BN
					4000K	110°	3100lm	2400lm	G4RC-9S3A130S-BN

Code Remark: S=On-Off LED Driver+Microwave Sensor

Light Distribution

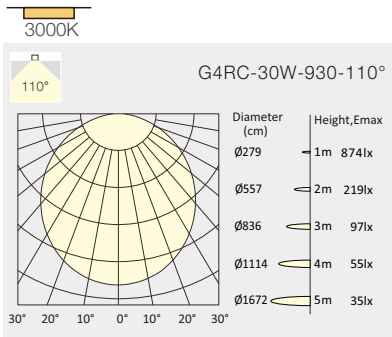


NEKO / GINGER 600

LED Ceiling Light

Aluminum Frame & Homogen Light

Incl. Phase Dim Driver



44W	CR190	3000K/3500K/4000K CCT Switchable	110°	bridgelux 50,000h@L80B10	IP44	5 YEAR WARRANTY	CE	
-----	-------	-------------------------------------	------	-----------------------------	------	-----------------------	----	--



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
40 W	44 W	95 V	480 mA	90	3000K	110°	4000lm	3350lm	G6RC-9S3A150P-WN
					3500K	110°	4200lm	3550lm	G6RC-9S3A150P-WN
					4000K	110°	4100lm	3350lm	G6RC-9S3A150P-WN


Code Remark: P=(Phase Dim)




40 W	44 W	95 V	480 mA	90	3000K	110°	4000lm	3350lm	G6RC-9S3A150P-BN
					3500K	110°	4200lm	3550lm	G6RC-9S3A150P-BN
					4000K	110°	4100lm	3350lm	G6RC-9S3A150P-BN

Code Remark: P=(Phase Dim)



Light Distribution

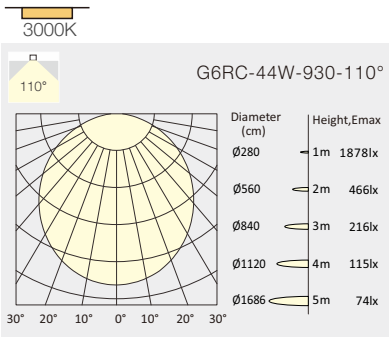


NEKO / PEPPER 400
LED Ceiling Light
Aluminum Frame & Homogen Light
Incl. Phase Dim Driver

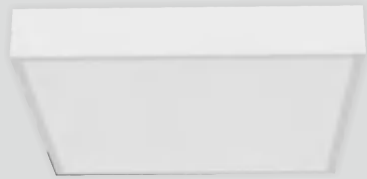

NEKO / PEPPER 400
LED Ceiling Light
Aluminum Frame & Homogen Light
ON-OFF Driver+Microwave Sensor

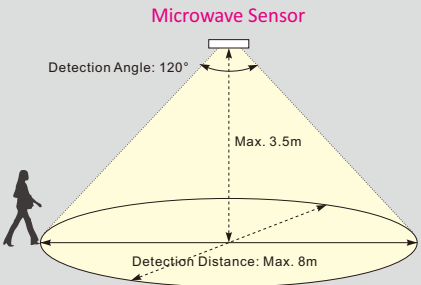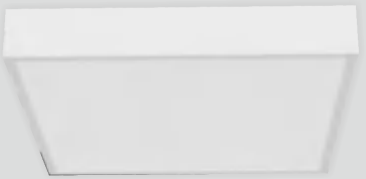

30W	CR190	3000K/3500K/4000K CCT Switchable	110°	bridgelux. 50,000h@L80B10	IP44	5 YEARS WARRANTY	CE	
Ø400X400								



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	78 V	350 mA	90	3000K	110°	2800lm	2000lm	P4SC-9S3A130P-WN
					3500K	110°	2900lm	2100lm	P4SC-9S3A130P-WN
					4000K	110°	2900lm	2100lm	P4SC-9S3A130P-WN


Code Remark: P=(Phase Dim)




28 W	30 W	78 V	350 mA	90	3000K	110°	2800lm	2000lm	P4SC-9S3A130P-BN
					3500K	110°	2900lm	2100lm	P4SC-9S3A130P-BN
					4000K	110°	2900lm	2100lm	P4SC-9S3A130P-BN

Code Remark: P=(Phase Dim)

Light Distribution

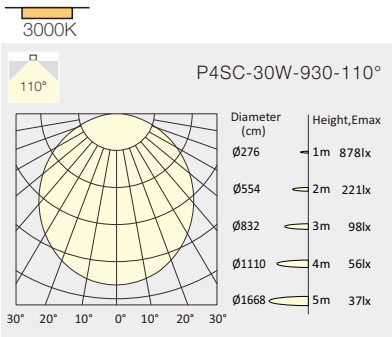

30W	CR190	3000K/3500K/4000K CCT Switchable	110°	bridgelux. 50,000h@L80B10	IP44	5 YEARS WARRANTY	CE		
Ø400X400									



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	78 V	350 mA	90	3000K	110°	2800lm	2000lm	P4SC-9S3A130S-WN
					3500K	110°	2900lm	2100lm	P4SC-9S3A130S-WN
					4000K	110°	2900lm	2100lm	P4SC-9S3A130S-WN


Code Remark: S=On-Off LED Driver+Microwave Sensor



28 W	30 W	78 V	350 mA	90	3000K	110°	2800lm	2000lm	P4SC-9S3A130S-BN
					3500K	110°	2900lm	2100lm	P4SC-9S3A130S-BN
					4000K	110°	2900lm	2100lm	P4SC-9S3A130S-BN

Code Remark: S=On-Off LED Driver+Microwave Sensor

Light Distribution

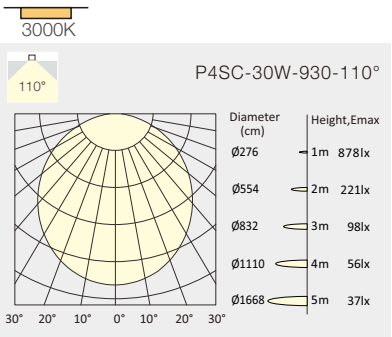



13W/18W/24W
Power Switchable


CRI80

2700K/3000K/4000K
CCT Switchable

120°

IP54


IK10




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	13 W	78 V	155 mA	80	2700K	120°	1600lm	1350lm	MASM-8S3A224F-WN
					3000K	120°	1700lm	1400lm	
					4000K	120°	1800lm	1500lm	
16 W	18 W	78 V	200 mA	80	2700K	120°	2000lm	1700lm	MASM-8S3A224F-WN
					3000K	120°	2100lm	1800lm	
					4000K	120°	2200lm	1900lm	
22 W	24 W	78 V	280 mA	80	2700K	120°	2400lm	2100lm	MASM-8S3A224F-WN
					3000K	120°	2550lm	2200lm	
					4000K	120°	2600lm	2350lm	

Code Remark: F=(On-Off LED Driver, Power Switchable)

Light Distribution

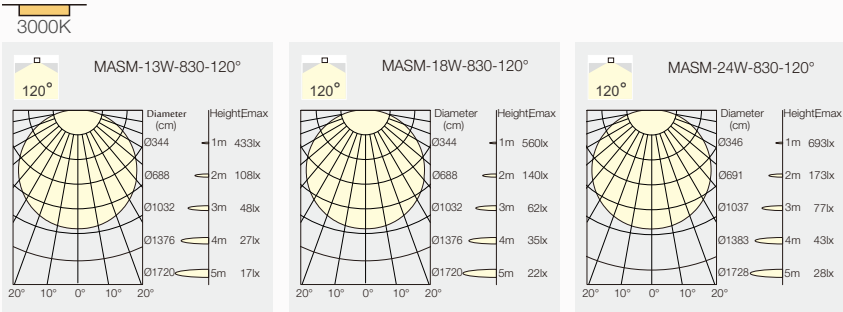

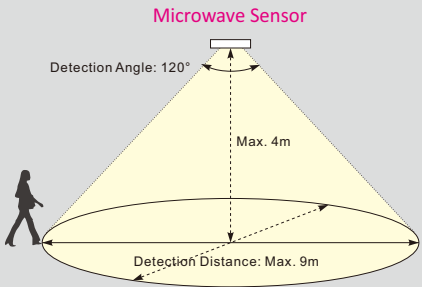

13W/18W/24W
Power Switchable

CRI80

2700K/3000K/4000K
CCT Switchable

120°

IP54

IK10

Ø240


Ø280

48

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	13 W	78 V	155 mA	80	2700K	120°	1600lm	1350lm	MASM-8S3A224S-WN
					3000K	120°	1700lm	1400lm	
					4000K	120°	1800lm	1500lm	
16 W	18 W	78 V	200 mA	80	2700K	120°	2000lm	1700lm	MASM-8S3A224S-WN
					3000K	120°	2100lm	1800lm	
					4000K	120°	2200lm	1900lm	
22 W	24 W	78 V	280 mA	80	2700K	120°	2400lm	2100lm	MASM-8S3A224S-WN
					3000K	120°	2550lm	2200lm	
					4000K	120°	2600lm	2350lm	

Code Remark: S=(On-Off LED Driver+Microwave Sensor)

Light Distribution

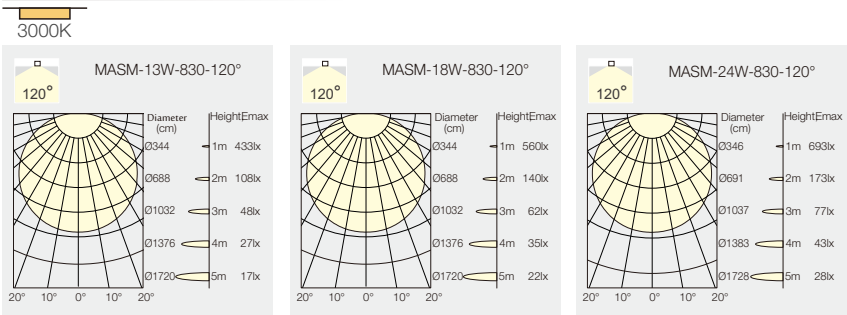


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	13 W	78 V	155 mA	80	2700K	120°	1600lm	1350lm	MASM-8S3A224E-WN
					3000K	120°	1700lm	1400lm	
					4000K	120°	1800lm	1500lm	
16 W	18 W	78 V	200 mA	80	2700K	120°	2000lm	1700lm	MASM-8S3A224E-WN
					3000K	120°	2100lm	1800lm	
					4000K	120°	2200lm	1900lm	
22 W	24 W	78 V	280 mA	80	2700K	120°	2400lm	2100lm	MASM-8S3A224E-WN
					3000K	120°	2550lm	2200lm	
					4000K	120°	2600lm	2350lm	

Emergency lighting duration : 120mins
Emergency power : 5W

Code Remark: E=(On-Off LED Driver+Emergency Backup)

Light Distribution

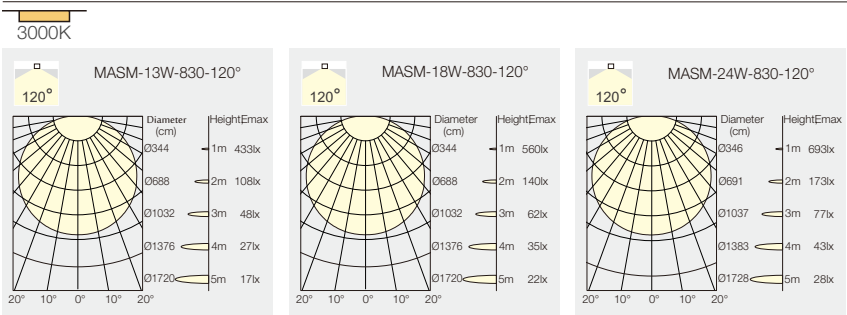



SKYDRIVER SDRC-10W




SKYDRIVER SDSC-10W



SKYJOY Single SJSC-8W




SKYJOY Double SJDC-16W



SKYLINE SL5C-10W

NEKO / SKYDRIVER SDRC
LED Ceiling Light
Incl. Phase Dim Driver



10W	CRI90	2700K 3000K	36°	 50,000hØL80B10	UGR < 19	IP20		
-----	-------	----------------	-----	---	-------------	------	--	--



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W	10 W	36 V	230 mA	90	2700K	36°	950lm	750lm	SDRC-9273610P-WW
					3000K	36°	1000lm	780lm	SDRC-9303610P-WW

Code Remark: P=(Phase Dim)



8 W	10 W	36 V	230 mA	90	2700K	36°	950lm	750lm	SDRC-9273610P-BB
					3000K	36°	1000lm	780lm	SDRC-9303610P-BB


Code Remark: P=(Phase Dim)

Feature




25°Tiltable and 355° Rotation

Light Distribution

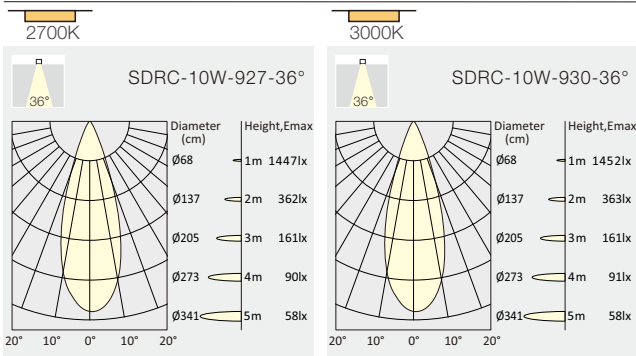

NEKO / SKYDRIVER SDSC
LED Ceiling Light
Incl. Phase Dim Driver



10W	CRI90	2700K 3000K	36°	 50,000hØL80B10	UGR < 19	IP20		
-----	-------	----------------	-----	---	-------------	------	--	--



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W	10 W	36 V	230 mA	90	2700K	36°	950lm	750lm	SDSC-9273610P-WW
					3000K	36°	1000lm	780lm	SDSC-9303610P-WW

Code Remark: P=(Phase Dim)



8 W	10 W	36 V	230 mA	90	2700K	36°	950lm	750lm	SDSC-9273610P-BB
					3000K	36°	1000lm	780lm	SDSC-9303610P-BB


Code Remark: P=(Phase Dim)

Feature



25°Tiltable and 355° Rotation


Light Distribution

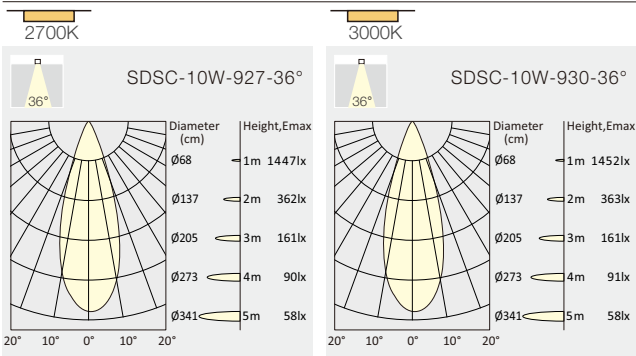

NEKO / SKYJOY Single SJSC

LED Ceiling Light

Incl. Phase Dim Driver



8W	CRI90	2700K	36°		UGR < 19	IP20		CE
50,000h@L80B10								


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	8 W	35 V	200 mA	90	2700K	36°	750lm	580lm	SJSC-9273608P-WW

Code Remark: P=(Phase Dim)

7 W	8 W	35 V	200 mA	90	2700K	36°	750lm	580lm	SJSC-9273608P-BB
-----	-----	------	--------	----	-------	-----	-------	-------	------------------


Code Remark: P=(Phase Dim)

Feature

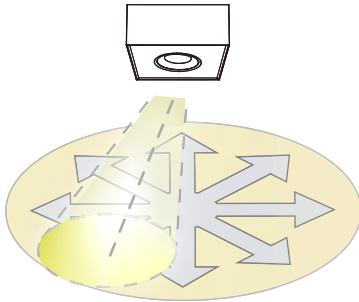


Tilt 25° in all direction (360°)

Light Distribution

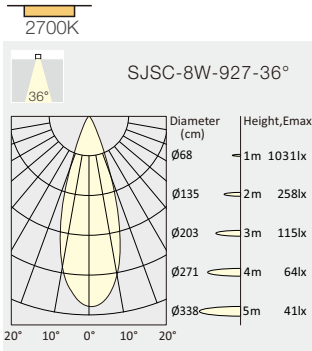

10W	CRI90	1800K-3000K Dim to Warm	36°		UGR < 19	IP20		CE
50,000h@L80B10								




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	10 W	35 V	250 mA	90	1800K-3000K	36°	850lm	Max.650lm	SJSC-9D33610P-WW

Code Remark: P=(Phase Dim)

9 W	10 W	35 V	250 mA	90	1800K-3000K	36°	850lm	Max.650lm	SJSC-9D33610P-BB
-----	------	------	--------	----	-------------	-----	-------	-----------	------------------


Code Remark: P=(Phase Dim)

Feature

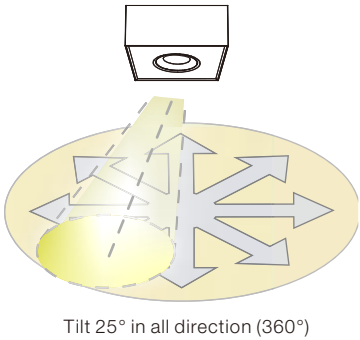

Tilt 25° in all direction (360°)

Light Distribution



DIM to WARM

1800K


2700K

3000K



NEKO / SKYJOY Double SJDC
LED Ceiling Light
Incl. Phase Dim Driver



16W	CRI90	2700K	36°		UGR < 19	IP20			
-----	-------	-------	-----	--	----------	------	--	--	--



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
14 W	16 W	35 V	400 mA	90	2700K	36°	1600lm	1300lm	SJDC-9273616P-WW


Code Remark: P=(Phase Dim)



14 W	16 W	35 V	400 mA	90	2700K	36°	1600lm	1300lm	SJDC-9273616P-BB
------	------	------	--------	----	-------	-----	--------	--------	------------------


Code Remark: P=(Phase Dim)

Feature

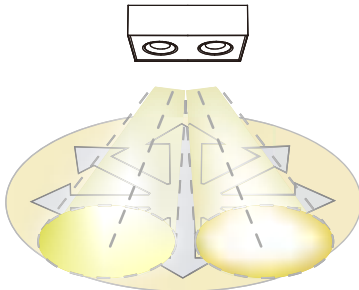


Tilt 25° in all direction (360°)

Light Distribution



20W	CRI90	1800K-3000K Dim to Warm	36°		UGR < 19	IP20		
-----	-------	----------------------------	-----	---	----------	------	---	---



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	35 V	500 mA	90	1800K -3000K	36°	1700lm	Max.1300lm	SJDC-9D33620P-WW


Code Remark: P=(Phase Dim)



18 W	20 W	35 V	500 mA	90	1800K -3000K	36°	1700lm	Max.1300lm	SJDC-9D33620P-BB
------	------	------	--------	----	-----------------	-----	--------	------------	------------------


Code Remark: P=(Phase Dim)

Feature

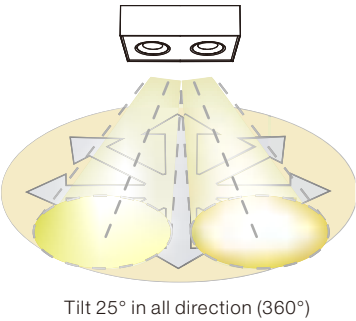

Tilt 25° in all direction (360°)

Light Distribution



DIM to WARM

1800K 2700K 3000K





NEKO / SKYLINE SL5C
LED Ceiling Light
Incl. Phase Dim Driver

Project: Hovenloen Restaurant, Norway



8.5W	CRI90	2700K 3000K	30°	bridgelux 50,000h@L80B10	UGR < 19	IP20	5 5 YEAR GUARANTEE	CE
------	-------	----------------	-----	-----------------------------	-------------	------	--------------------------	----





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8.5 W	10 W	14.5 V	600 mA	90	2700K	30°	950lm	720lm	SL5C-9273010P-WS
					3000K	30°	1000lm	750lm	SL5C-9303010P-WS

Code Remark: P=(Phase Dim)

8.5 W	10 W	14.5 V	600 mA	90	2700K	30°	950lm	720lm	SL5C-9273010P-BS
					3000K	30°	1000lm	750lm	SL5C-9303010P-BS

Code Remark: P=(Phase Dim)

Light Distribution

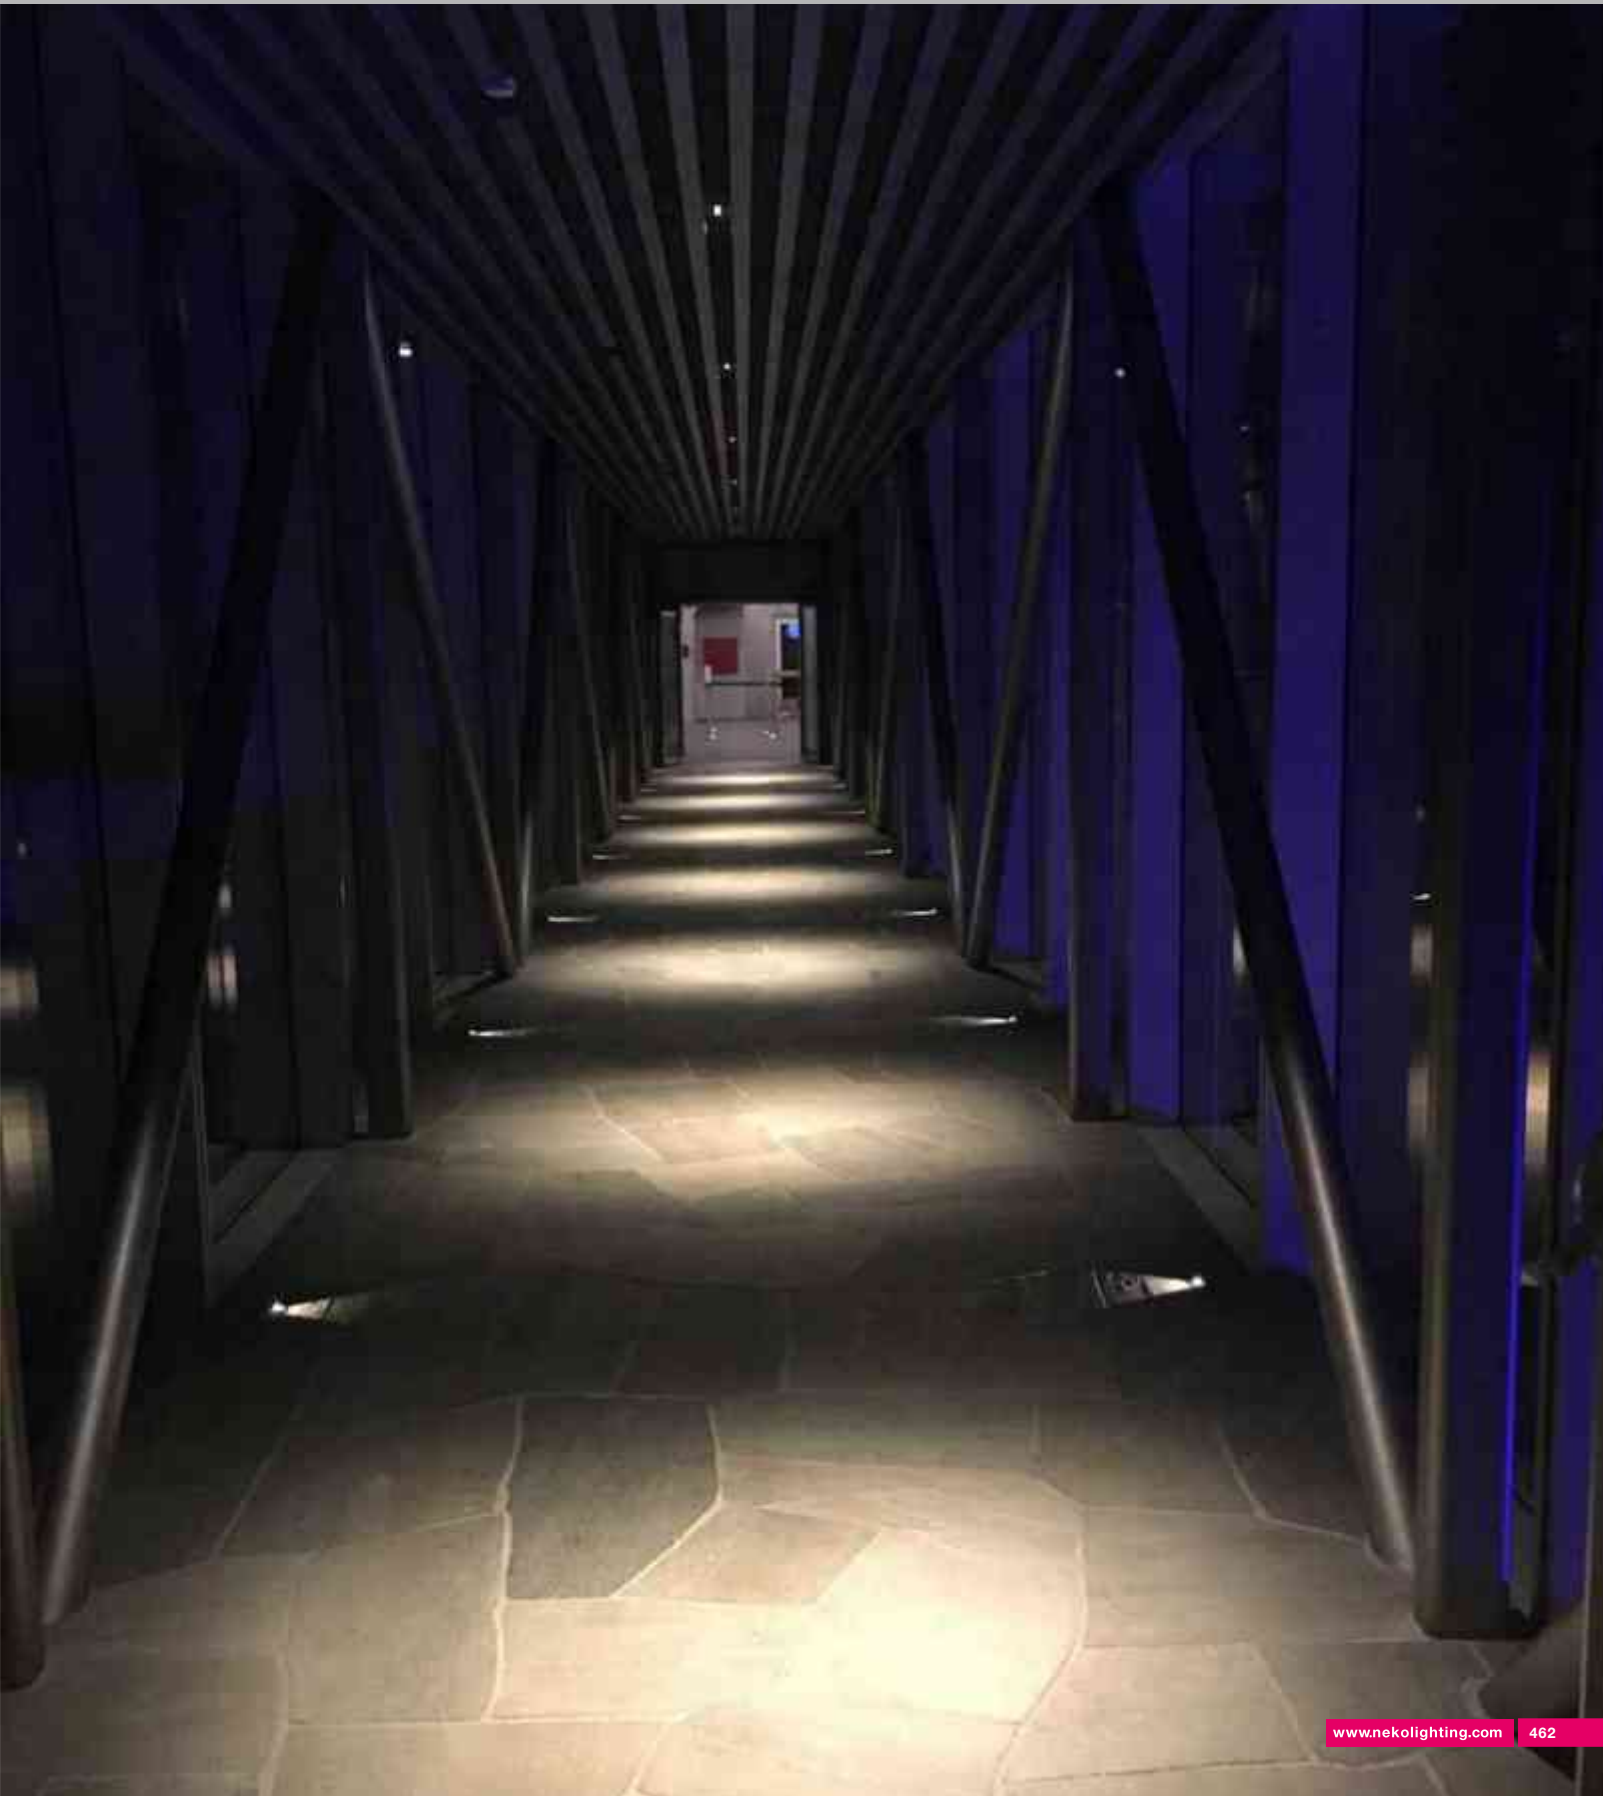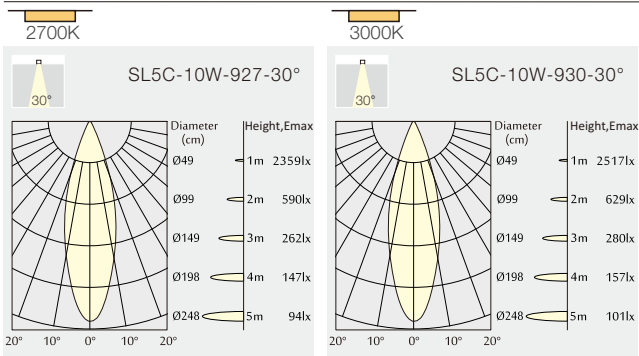



MIU-C M



MIU-C L



MIU-P S



MIU-P M



MIU-P L

NEKO / MIU / MIU-C M
Ceiling Mounted Light



Black



White



Gold

21W
15W

CRI90

2700K
3000K
4000K

15° 25° 30°

CITIZEN
50,000h L80B10


UGR
< 19

IP20

5 YEARS
GUARANTEE

CB

CE



LED Power System	Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code						
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MCM1-9271515F-BB						
						25°	1400lm	1100lm	MCM1-9272515F-BB						
						30°	1400lm	1100lm	MCM1-9273015F-BB						
						3000K	15°	1500lm	1200lm	MCM1-9301515F-BB					
							25°	1500lm	1200lm	MCM1-9302515F-BB					
							30°	1500lm	1200lm	MCM1-9303015F-BB					
						4000K	15°	1600lm	1300lm	MCM1-9401515F-BB					
							25°	1600lm	1300lm	MCM1-9402515F-BB					
							30°	1600lm	1300lm	MCM1-9403015F-BB					
						18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MCM2-9271521F-BB
												25°	1900lm	1500lm	MCM2-9272521F-BB
												30°	1900lm	1500lm	MCM2-9273021F-BB
3000K	15°	2000lm	1600lm	MCM2-9301521F-BB											
	25°	2000lm	1600lm	MCM2-9302521F-BB											
	30°	2000lm	1600lm	MCM2-9303021F-BB											
4000K	15°	2100lm	1700lm	MCM2-9401521F-BB											
	25°	2100lm	1700lm	MCM2-9402521F-BB											
	30°	2100lm	1700lm	MCM2-9403021F-BB											
13 W	15 W	36 V	350 mA	90	2700K							15°	1400lm	1100lm	MCM1-9271515F-BG
												25°	1400lm	1100lm	MCM1-9272515F-BG
												30°	1400lm	1100lm	MCM1-9273015F-BG
						3000K	15°	1500lm	1200lm	MCM1-9301515F-BG					
							25°	1500lm	1200lm	MCM1-9302515F-BG					
							30°	1500lm	1200lm	MCM1-9303015F-BG					
						4000K	15°	1600lm	1300lm	MCM1-9401515F-BG					
							25°	1600lm	1300lm	MCM1-9402515F-BG					
							30°	1600lm	1300lm	MCM1-9403015F-BG					
						18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MCM2-9271521F-BG
												25°	1900lm	1500lm	MCM2-9272521F-BG
												30°	1900lm	1500lm	MCM2-9273021F-BG
3000K	15°	2000lm	1600lm	MCM2-9301521F-BG											
	25°	2000lm	1600lm	MCM2-9302521F-BG											
	30°	2000lm	1600lm	MCM2-9303021F-BG											
4000K	15°	2100lm	1700lm	MCM2-9401521F-BG											
	25°	2100lm	1700lm	MCM2-9402521F-BG											
	30°	2100lm	1700lm	MCM2-9403021F-BG											

Code Remark: F=(ON-OFF) P=(Phase Dim)

LED Power System	Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MCM1-9271515F-WB
						25°	1400lm	1100lm	MCM1-9272515F-WB
						30°	1400lm	1100lm	MCM1-9273015F-WB
					3000K	15°	1500lm	1200lm	MCM1-9301515F-WB
						25°	1500lm	1200lm	MCM1-9302515F-WB
						30°	1500lm	1200lm	MCM1-9303015F-WB
					4000K	15°	1600lm	1300lm	MCM1-9401515F-WB
						25°	1600lm	1300lm	MCM1-9402515F-WB
						30°	1600lm	1300lm	MCM1-9403015F-WB
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MCM2-9271521F-WB
						25°	1900lm	1500lm	MCM2-9272521F-WB
						30°	1900lm	1500lm	MCM2-9273021F-WB
					3000K	15°	2000lm	1600lm	MCM2-9301521F-WB
						25°	2000lm	1600lm	MCM2-9302521F-WB
						30°	2000lm	1600lm	MCM2-9303021F-WB
					4000K	15°	2100lm	1700lm	MCM2-9401521F-WB
						25°	2100lm	1700lm	MCM2-9402521F-WB
						30°	2100lm	1700lm	MCM2-9403021F-WB
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MCM1-9271515F-WW
						25°	1400lm	1100lm	MCM1-9272515F-WW
						30°	1400lm	1100lm	MCM1-9273015F-WW
					3000K	15°	1500lm	1200lm	MCM1-9301515F-WW
						25°	1500lm	1200lm	MCM1-9302515F-WW
						30°	1500lm	1200lm	MCM1-9303015F-WW
					4000K	15°	1600lm	1300lm	MCM1-9401515F-WW
						25°	1600lm	1300lm	MCM1-9402515F-WW
						30°	1600lm	1300lm	MCM1-9403015F-WW
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MCM2-9271521F-WW
						25°	1900lm	1500lm	MCM2-9272521F-WW
						30°	1900lm	1500lm	MCM2-9273021F-WW
					3000K	15°	2000lm	1600lm	MCM2-9301521F-WW
						25°	2000lm	1600lm	MCM2-9302521F-WW
						30°	2000lm	1600lm	MCM2-9303021F-WW
					4000K	15°	2100lm	1700lm	MCM2-9401521F-WW
						25°	2100lm	1700lm	MCM2-9402521F-WW
						30°	2100lm	1700lm	MCM2-9403021F-WW
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MCM1-9271515F-WG
						25°	1400lm	1100lm	MCM1-9272515F-WG
						30°	1400lm	1100lm	MCM1-9273015F-WG
					3000K	15°	1500lm	1200lm	MCM1-9301515F-WG
						25°	1500lm	1200lm	MCM1-9302515F-WG
						30°	1500lm	1200lm	MCM1-9303015F-WG
					4000K	15°	1600lm	1300lm	MCM1-9401515F-WG
						25°	1600lm	1300lm	MCM1-9402515F-WG
						30°	1600lm	1300lm	MCM1-9403015F-WG
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MCM2-9271521F-WG
						25°	1900lm	1500lm	MCM2-9272521F-WG
						30°	1900lm	1500lm	MCM2-9273021F-WG
					3000K	15°	2000lm	1600lm	MCM2-9301521F-WG
						25°	2000lm	1600lm	MCM2-9302521F-WG
						30°	2000lm	1600lm	MCM2-9303021F-WG
					4000K	15°	2100lm	1700lm	MCM2-9401521F-WG
						25°	2100lm	1700lm	MCM2-9402521F-WG
						30°	2100lm	1700lm	MCM2-9403021F-WG

Code Remark: F=(ON-OFF) P=(Phase Dim)

Optional accessory



Honeycomb

Code for MCM1-930 1515F-WB with Honeycomb
MCM1-930 1515F-WB-H

NEKO / MIU / MIU-CL
Ceiling Mounted Light



28W

CRI90

2700K
3000K
4000K

18°

30°

45°

CITIZEN

50,000h@L80B10

UGR < 19

IP 20

5

GUARANTEED

CB

CE



Black



Gold

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code						
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MCL1-9271828F-BB							
							3200lm	2500lm	MCL1-9273028F-BB							
							3200lm	2500lm	MCL1-9274528F-BB							
						3000K	18°	3400lm	2700lm	MCL1-9301828F-BB						
							30°	3400lm	2700lm	MCL1-9303028F-BB						
							45°	3400lm	2700lm	MCL1-9304528F-BB						
						4000K	18°	3600lm	2900lm	MCL1-9401828F-BB						
							30°	3600lm	2900lm	MCL1-9403028F-BB						
							45°	3600lm	2900lm	MCL1-9404528F-BB						
						25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MCL1-9271828F-BG	
													3200lm	2500lm	MCL1-9273028F-BG	
													3200lm	2500lm	MCL1-9274528F-BG	
												3000K	18°	3400lm	2700lm	MCL1-9301828F-BG
													30°	3400lm	2700lm	MCL1-9303028F-BG
													45°	3400lm	2700lm	MCL1-9304528F-BG
												4000K	18°	3600lm	2900lm	MCL1-9401828F-BG
													30°	3600lm	2900lm	MCL1-9403028F-BG
													45°	3600lm	2900lm	MCL1-9404528F-BG

Code Remark: F=(ON-OFF) D=(DALI Dim)



Black



White



Gold

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code						
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MCL1-9271828F-WB							
						30°	3200lm	2500lm	MCL1-9273028F-WB							
						45°	3200lm	2500lm	MCL1-9274528F-WB							
						3000K	18°	3400lm	2700lm	MCL1-9301828F-WB						
							30°	3400lm	2700lm	MCL1-9303028F-WB						
							45°	3400lm	2700lm	MCL1-9304528F-WB						
						4000K	18°	3600lm	2900lm	MCL1-9401828F-WB						
							30°	3600lm	2900lm	MCL1-9403028F-WB						
							45°	3600lm	2900lm	MCL1-9404528F-WB						
						25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MCL1-9271828F-WW	
												30°	3200lm	2500lm	MCL1-9273028F-WW	
												45°	3200lm	2500lm	MCL1-9274528F-WW	
												3000K	18°	3400lm	2700lm	MCL1-9301828F-WW
													30°	3400lm	2700lm	MCL1-9303028F-WW
													45°	3400lm	2700lm	MCL1-9304528F-WW
												4000K	18°	3600lm	2900lm	MCL1-9401828F-WW
													30°	3600lm	2900lm	MCL1-9403028F-WW
													45°	3600lm	2900lm	MCL1-9404528F-WW
25 W	28 W	36 V	700 mA	90	2700K							18°	3200lm	2500lm	MCL1-9271828F-WG	
												30°	3200lm	2500lm	MCL1-9273028F-WG	
												45°	3200lm	2500lm	MCL1-9274528F-WG	
												3000K	18°	3400lm	2700lm	MCL1-9301828F-WG
													30°	3400lm	2700lm	MCL1-9303028F-WG
													45°	3400lm	2700lm	MCL1-9304528F-WG
												4000K	18°	3600lm	2900lm	MCL1-9401828F-WG
													30°	3600lm	2900lm	MCL1-9403028F-WG
													45°	3600lm	2900lm	MCL1-9404528F-WG

Code Remark: F=(ON-OFF) D=(DALI Dim)

Optional accessory



Honeycomb

Code for MCL1-930 1828F-WB with Honeycomb
MCL1-930 1828F-WB-H



NEKO / MIU / MIU-P S
Pendant Light





Black

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code	
 Gold	9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	700lm	MPS1-9271811F-BB	
							24°	850lm	700lm	MPS1-9272411F-BB	
							36°	850lm	700lm	MPS1-9273611F-BB	
	3000K	18°	950lm	720lm	MPS1-9301811F-BB						
		24°	950lm	720lm	MPS1-9302411F-BB						
		36°	950lm	720lm	MPS1-9303611F-BB						
	4000K	18°	1050lm	800lm	MPS1-9401811F-BB						
		24°	1050lm	800lm	MPS1-9402411F-BB						
		36°	1050lm	800lm	MPS1-9403611F-BB						

	 Gold	9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	700lm	MPS1-9271811F-BG
24°								850lm	700lm	MPS1-9272411F-BG	
36°								850lm	700lm	MPS1-9273611F-BG	
3000K		18°	950lm	720lm	MPS1-9301811F-BG						
		24°	950lm	720lm	MPS1-9302411F-BG						
		36°	950lm	720lm	MPS1-9303611F-BG						
4000K		18°	1050lm	800lm	MPS1-9401811F-BG						
		24°	1050lm	800lm	MPS1-9402411F-BG						
		36°	1050lm	800lm	MPS1-9403611F-BG						

Code Remark: F=(ON-OFF) P=(Phase Dim)											



Black



White



Gold

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	700lm	MPS1-9271811F-WB	
						24°	850lm	700lm	MPS1-9272411F-WB	
						36°	850lm	700lm	MPS1-9273611F-WB	
						3000K	18°	950lm	720lm	MPS1-9301811F-WB
							24°	950lm	720lm	MPS1-9302411F-WB
							36°	950lm	720lm	MPS1-9303611F-WB
						4000K	18°	1050lm	800lm	MPS1-9401811F-WB
							24°	1050lm	800lm	MPS1-9402411F-WB
							36°	1050lm	800lm	MPS1-9403611F-WB

9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	700lm	MPS1-9271811F-WW
						24°	850lm	700lm	MPS1-9272411F-WW
						36°	850lm	700lm	MPS1-9273611F-WW
					3000K	18°	950lm	720lm	MPS1-9301811F-WW
						24°	950lm	720lm	MPS1-9302411F-WW
						36°	950lm	720lm	MPS1-9303611F-WW
					4000K	18°	1050lm	800lm	MPS1-9401811F-WW
						24°	1050lm	800lm	MPS1-9402411F-WW
						36°	1050lm	800lm	MPS1-9403611F-WW

9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	700lm	MPS1-9271811F-WG
						24°	850lm	700lm	MPS1-9272411F-WG
						36°	850lm	700lm	MPS1-9273611F-WG
					3000K	18°	950lm	720lm	MPS1-9301811F-WG
						24°	950lm	720lm	MPS1-9302411F-WG
						36°	950lm	720lm	MPS1-9303611F-WG
					4000K	18°	1050lm	800lm	MPS1-9401811F-WG
						24°	1050lm	800lm	MPS1-9402411F-WG
						36°	1050lm	800lm	MPS1-9403611F-WG

Code Remark: F=(ON-OFF) P=(Phase Dim)

Optional accessory



Honeycomb

Code for MPS1-930 1811F-WB with Honeycomb
MPS1-930 1811F-WB-H

NEKO / MIU / MIU-P M
Pendant Light



	LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
 Black	13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MPM1-9271515F-BB	
							25°	1400lm	1100lm	MPM1-9272515F-BB	
							30°	1400lm	1100lm	MPM1-9273015F-BB	
						3000K	15°	1500lm	1200lm	MPM1-9301515F-BB	
							25°	1500lm	1200lm	MPM1-9302515F-BB	
							30°	1500lm	1200lm	MPM1-9303015F-BB	
						4000K	15°	1600lm	1300lm	MPM1-9401515F-BB	
							25°	1600lm	1300lm	MPM1-9402515F-BB	
							30°	1600lm	1300lm	MPM1-9403015F-BB	
	18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MPM2-9271521F-BB	
							25°	1900lm	1500lm	MPM2-9272521F-BB	
							30°	1900lm	1500lm	MPM2-9273021F-BB	
 Gold	13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MPM1-9271515F-BG	
							25°	1400lm	1100lm	MPM1-9272515F-BG	
							30°	1400lm	1100lm	MPM1-9273015F-BG	
						3000K	15°	1500lm	1200lm	MPM1-9301515F-BG	
							25°	1500lm	1200lm	MPM1-9302515F-BG	
							30°	1500lm	1200lm	MPM1-9303015F-BG	
						4000K	15°	1600lm	1300lm	MPM1-9401515F-BG	
							25°	1600lm	1300lm	MPM1-9402515F-BG	
							30°	1600lm	1300lm	MPM1-9403015F-BG	
	18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MPM2-9271521F-BG	
							25°	1900lm	1500lm	MPM2-9272521F-BG	
							30°	1900lm	1500lm	MPM2-9273021F-BG	
 Gold	13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MPM1-9271515F-BG	
							25°	1400lm	1100lm	MPM1-9272515F-BG	
							30°	1400lm	1100lm	MPM1-9273015F-BG	
						3000K	15°	1500lm	1200lm	MPM1-9301515F-BG	
							25°	1500lm	1200lm	MPM1-9302515F-BG	
							30°	1500lm	1200lm	MPM1-9303015F-BG	
						4000K	15°	1600lm	1300lm	MPM1-9401515F-BG	
							25°	1600lm	1300lm	MPM1-9402515F-BG	
							30°	1600lm	1300lm	MPM1-9403015F-BG	
	18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MPM2-9271521F-BG	
							25°	1900lm	1500lm	MPM2-9272521F-BG	
							30°	1900lm	1500lm	MPM2-9273021F-BG	

Code Remark: F=(ON-OFF) P=(Phase Dim)

Code Remark: F=(ON-OFF) P=(Phase Dim)



Black



White



Gold

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code					
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	MPM1-92715151	F-WB					
						25°	1400lm	1100lm	MPM1-92725151	F-WB					
						30°	1400lm	1100lm	MPM1-92730151	F-WB					
					3000K	15°	1500lm	1200lm	MPM1-93015151	F-WB					
						25°	1500lm	1200lm	MPM1-93025151	F-WB					
						30°	1500lm	1200lm	MPM1-93030151	F-WB					
					4000K	15°	1600lm	1300lm	MPM1-94015151	F-WB					
						25°	1600lm	1300lm	MPM1-94025151	F-WB					
						30°	1600lm	1300lm	MPM1-94030151	F-WB					
					18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MPM2-92715211	F-WB
											25°	1900lm	1500lm	MPM2-92725211	F-WB
											30°	1900lm	1500lm	MPM2-92730211	F-WB
3000K	15°	2000lm	1600lm	MPM2-93015211						F-WB					
	25°	2000lm	1600lm	MPM2-93025211						F-WB					
	30°	2000lm	1600lm	MPM2-93030211						F-WB					
4000K	15°	2100lm	1700lm	MPM2-94015211						F-WB					
	25°	2100lm	1700lm	MPM2-94025211						F-WB					
	30°	2100lm	1700lm	MPM2-94030211						F-WB					
13 W	15 W	36 V	350 mA	90						2700K	15°	1400lm	1100lm	MPM1-92715151	F-WW
											25°	1400lm	1100lm	MPM1-92725151	F-WW
											30°	1400lm	1100lm	MPM1-92730151	F-WW
					3000K	15°	1500lm	1200lm	MPM1-93015151	F-WW					
						25°	1500lm	1200lm	MPM1-93025151	F-WW					
						30°	1500lm	1200lm	MPM1-93030151	F-WW					
					4000K	15°	1600lm	1300lm	MPM1-94015151	F-WW					
						25°	1600lm	1300lm	MPM1-94025151	F-WW					
						30°	1600lm	1300lm	MPM1-94030151	F-WW					
					18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MPM2-92715211	F-WW
											25°	1900lm	1500lm	MPM2-92725211	F-WW
											30°	1900lm	1500lm	MPM2-92730211	F-WW
3000K	15°	2000lm	1600lm	MPM2-93015211						F-WW					
	25°	2000lm	1600lm	MPM2-93025211						F-WW					
	30°	2000lm	1600lm	MPM2-93030211						F-WW					
4000K	15°	2100lm	1700lm	MPM2-94015211						F-WW					
	25°	2100lm	1700lm	MPM2-94025211						F-WW					
	30°	2100lm	1700lm	MPM2-94030211						F-WW					
13 W	15 W	36 V	350 mA	90						2700K	15°	1400lm	1100lm	MPM1-92715151	F-WG
											25°	1400lm	1100lm	MPM1-92725151	F-WG
											30°	1400lm	1100lm	MPM1-92730151	F-WG
					3000K	15°	1500lm	1200lm	MPM1-93015151	F-WG					
						25°	1500lm	1200lm	MPM1-93025151	F-WG					
						30°	1500lm	1200lm	MPM1-93030151	F-WG					
					4000K	15°	1600lm	1300lm	MPM1-94015151	F-WG					
						25°	1600lm	1300lm	MPM1-94025151	F-WG					
						30°	1600lm	1300lm	MPM1-94030151	F-WG					
					18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	MPM2-92715211	F-WG
											25°	1900lm	1500lm	MPM2-92725211	F-WG
											30°	1900lm	1500lm	MPM2-92730211	F-WG
3000K	15°	2000lm	1600lm	MPM2-93015211						F-WG					
	25°	2000lm	1600lm	MPM2-93025211						F-WG					
	30°	2000lm	1600lm	MPM2-93030211						F-WG					
4000K	15°	2100lm	1700lm	MPM2-94015211						F-WG					
	25°	2100lm	1700lm	MPM2-94025211						F-WG					
	30°	2100lm	1700lm	MPM2-94030211						F-WG					

Code Remark: F=(ON-OFF) P=(Phase Dim)

Optional accessory



Honeycomb

Code for MCM1-930 1515F-WB with Honeycomb
MCM1-930 1515F-WB-H

NEKO / MIU / MIU-P L
Pendant Light



28W

CRI90

2700K
3000K
4000K

18°

30°

45°

CITIZEN

50,000h@L80B10


UGR < 19

IP 20

5 YEARS WARRANTY

CB

CE



Black



Gold

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code				
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MPL1-9271828F-BB					
						30°	3200lm	2500lm	MPL1-9273028F-BB					
						45°	3200lm	2500lm	MPL1-9274528F-BB					
					3000K	18°	3400lm	2700lm	MPL1-9301828F-BB					
						30°	3400lm	2700lm	MPL1-9303028F-BB					
						45°	3400lm	2700lm	MPL1-9304528F-BB					
					4000K	18°	3600lm	2900lm	MPL1-9401828F-BB					
						30°	3600lm	2900lm	MPL1-9403028F-BB					
						45°	3600lm	2900lm	MPL1-9404528F-BB					

					25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MPL1-9271828F-BG
											30°	3200lm	2500lm	MPL1-9273028F-BG
45°	3200lm	2500lm	MPL1-9274528F-BG											
3000K	18°	3400lm	2700lm	MPL1-9301828F-BG										
	30°	3400lm	2700lm	MPL1-9303028F-BG										
	45°	3400lm	2700lm	MPL1-9304528F-BG										
4000K	18°	3600lm	2900lm	MPL1-9401828F-BG										
	30°	3600lm	2900lm	MPL1-9403028F-BG										
	45°	3600lm	2900lm	MPL1-9404528F-BG										

Code Remark: F=(ON-OFF) D=D(DALI Dim)



Black



White



Gold


LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	MPL1-9271828F-WB	
						30°	3200lm	2500lm	MPL1-9273028F-WB	
						45°	3200lm	2500lm	MPL1-9274528F-WB	
						3000K	18°	3400lm	2700lm	MPL1-9301828F-WB
							30°	3400lm	2700lm	MPL1-9303028F-WB
							45°	3400lm	2700lm	MPL1-9304528F-WB
						4000K	18°	3600lm	2900lm	MPL1-9401828F-WB
							30°	3600lm	2900lm	MPL1-9403028F-WB
							45°	3600lm	2900lm	MPL1-9404528F-WB
					2700K	18°	3200lm	2500lm	MPL1-9271828F-WW	
						30°	3200lm	2500lm	MPL1-9273028F-WW	
						45°	3200lm	2500lm	MPL1-9274528F-WW	
						3000K	18°	3400lm	2700lm	MPL1-9301828F-WW
							30°	3400lm	2700lm	MPL1-9303028F-WW
							45°	3400lm	2700lm	MPL1-9304528F-WW
						4000K	18°	3600lm	2900lm	MPL1-9401828F-WW
							30°	3600lm	2900lm	MPL1-9403028F-WW
							45°	3600lm	2900lm	MPL1-9404528F-WW

Code Remark: F=(ON-OFF) D=D(DALI Dim)

Optional accessory



Code for MPL1-930 1828F-WB with Honeycomb
MPL1-930 1828F-WB-H

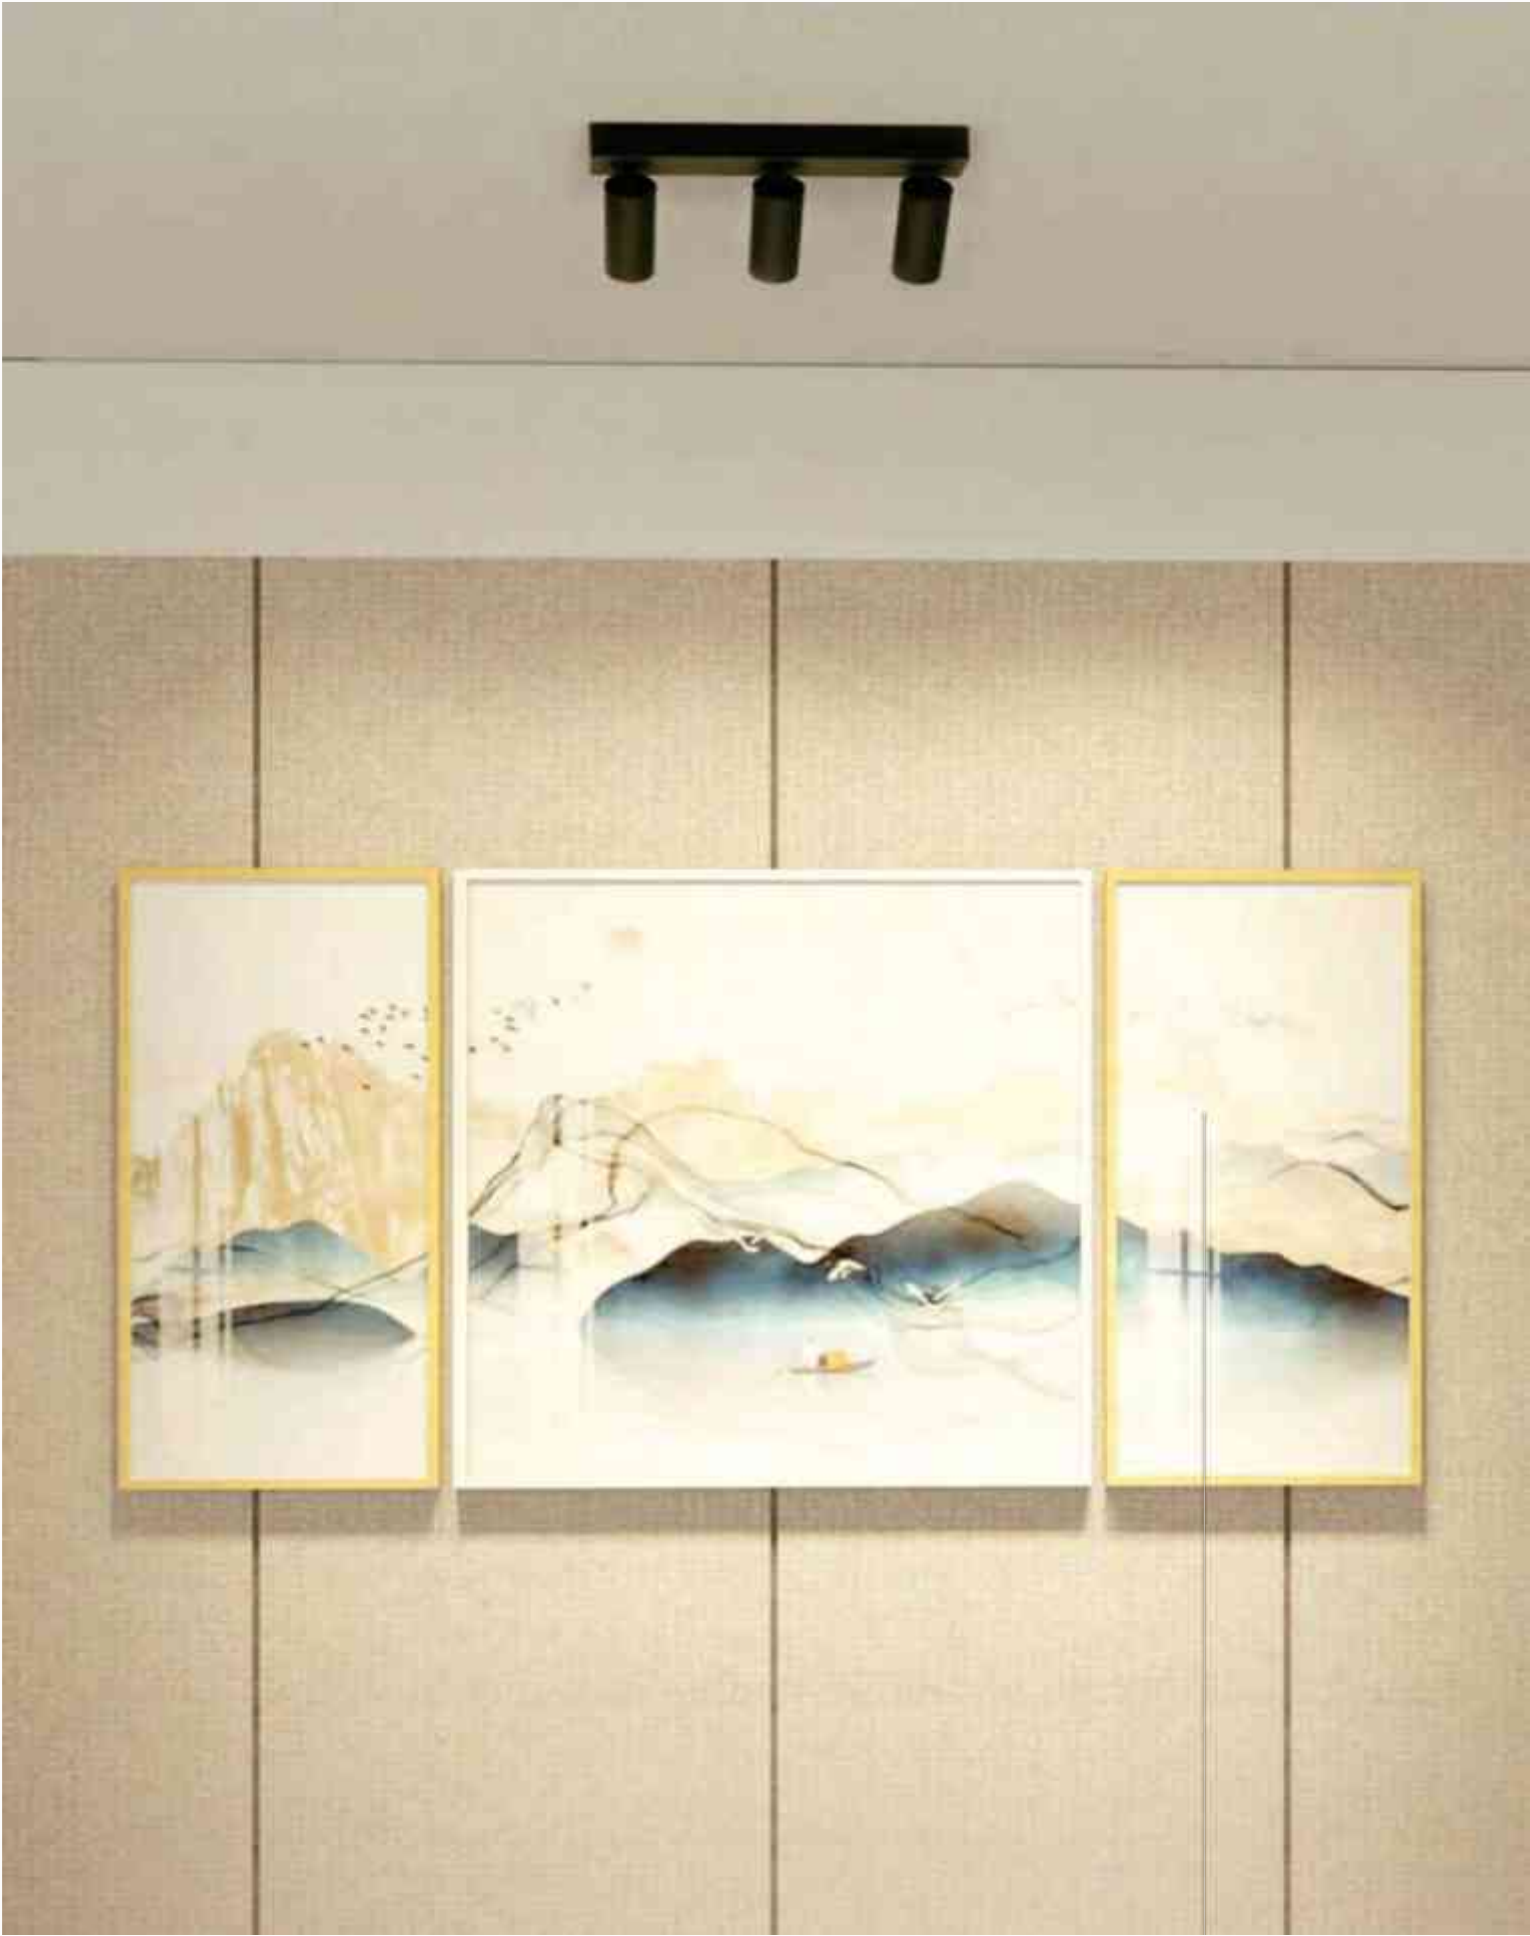

BREEZE Single



BREEZE Double



BREEZE Triple


NEKO / BREEZE
Ceiling Mounted Spotlight



NEKO / BREEZE Single
Ceiling Mounted Spotlight
Incl. Phase Dim Driver



9W	CRI90	2700K	36°	bridgelux 50,000h@L80B10	UGR < 19	IP20	5 YEAR WARRANTY	CE
----	-------	-------	-----	-----------------------------	-------------	------	-----------------------	----




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7 W	9 W	36 V	200 mA	90	2700K	36°	800lm	700lm	B1SC-9273609P-WB



Code Remark: P=(Phase Dim)

7 W	9 W	36 V	200 mA	90	2700K	36°	800lm	700lm	B1SC-9273609P-BB
-----	-----	------	--------	----	-------	-----	-------	-------	------------------

Code Remark: P=(Phase Dim)

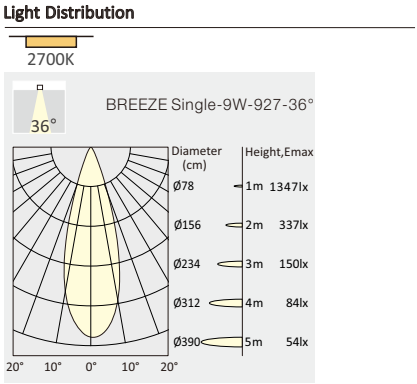

NEKO / BREEZE Double
Ceiling Mounted Spotlight
Incl. Phase Dim Driver

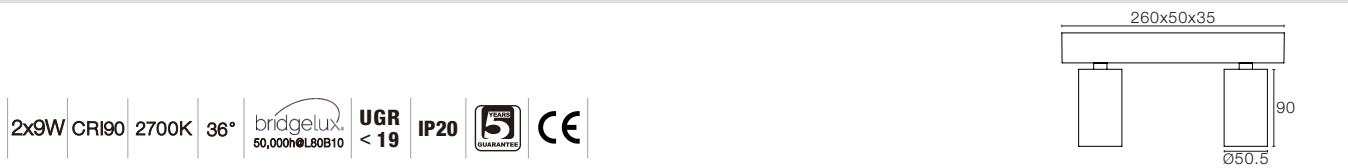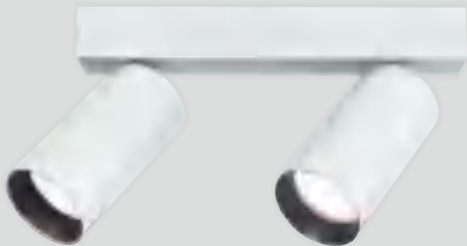

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x7 W	2x9 W	36 V	2x200 mA	90	2700K	36°	1600lm	1400lm	B2SC-9273618P-WB


Code Remark: P=(Phase Dim)



2x7 W	2x9 W	36 V	2x200 mA	90	2700K	36°	1600lm	1400lm	B2SC-9273618P-BB
-------	-------	------	----------	----	-------	-----	--------	--------	------------------

Code Remark: P=(Phase Dim)

Light Distribution

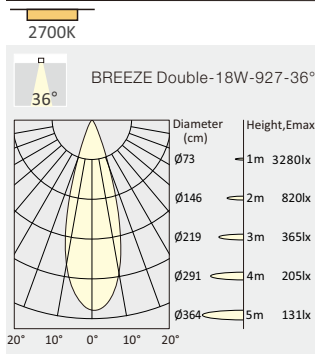

NEKO / BREEZE Triple
Ceiling Mounted Spotlight
Incl. Phase Dim Driver



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
3x7 W	3x9 W	36 V	3x200 mA	90	2700K	36°	2400lm	2100lm	B3SC-9273627P-WB


Code Remark: P=(Phase Dim)



3x7 W	3x9 W	36 V	3x200 mA	90	2700K	36°	2400lm	2100lm	B3SC-9273627P-BB
-------	-------	------	----------	----	-------	-----	--------	--------	------------------

Code Remark: P=(Phase Dim)

Light Distribution

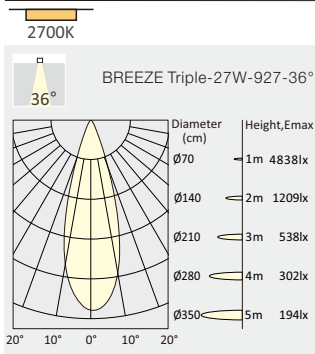




Tilting 90°

Rotation 360°




Different Mounting Bases (White/ Black) ☐ ☒

Surface Mounted



1RC Base



1SC Base




2RC Base



2SC Base

Recessed Mounted




1RR Base



1SR Base




2RR Base



2SR Base

Accessory



Honeycomb

Module Color



Black




Brushed Gold



Chrome



White



14W	CRI90	2700K 3000K	36°	IP20	CITIZEN 50,000h@L80B10	5 GUARANTEED	CE
-----	-------	----------------	-----	------	---------------------------	-----------------	----



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1RC-9273614P-WW
					3000K	36°	1500lm	1200lm	V1RC-9303614P-WW

Code Remark: P=(Phase Dim)



12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1RC-9273614P-BB
					3000K	36°	1500lm	1200lm	V1RC-9303614P-BB

Code Remark: P=(Phase Dim)



12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1RC-9273614P-CB
					3000K	36°	1500lm	1200lm	V1RC-9303614P-CB



Code Remark: P=(Phase Dim)



12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1RC-9273614P-GB
					3000K	36°	1500lm	1200lm	V1RC-9303614P-GB

Code Remark: P=(Phase Dim)

Light Distribution

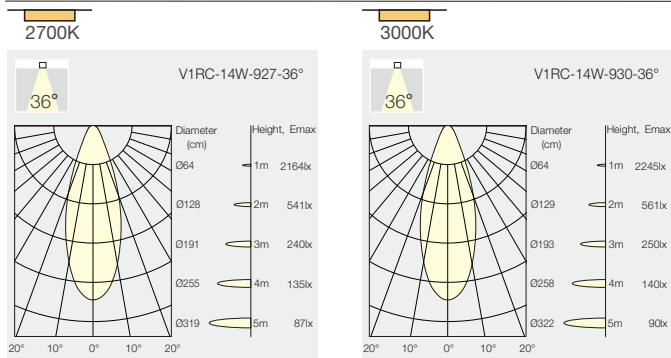

28W	CRI90	2700K 3000K	36°	IP20	CITIZEN 50,000h@L80B10	5 GUARANTEED	CE
-----	-------	----------------	-----	------	---------------------------	-----------------	----



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2RC-9273628P-WW
					3000K	36°	3000lm	2400lm	V2RC-9303628P-WW

Code Remark: P=(Phase Dim)



2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2RC-9273628P-BB
					3000K	36°	3000lm	2400lm	V2RC-9303628P-BB

Code Remark: P=(Phase Dim)



2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2RC-9273628P-CB
					3000K	36°	3000lm	2400lm	V2RC-9303628P-CB


Code Remark: P=(Phase Dim)




2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2RC-9273628P-GB
					3000K	36°	3000lm	2400lm	V2RC-9303628P-GB

Code Remark: P=(Phase Dim)

Light Distribution

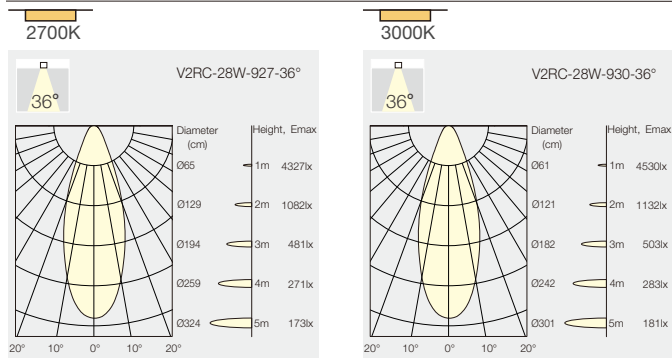



14W	CRI90	2700K 3000K	36°	IP20	CITIZEN 50,000h@L80B10	5 GUARANTEED	CE
-----	-------	----------------	-----	------	---------------------------	-----------------	----



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1SC-9273614P-WW
					3000K	36°	1500lm	1200lm	V1SC-9303614P-WW

Code Remark: P=(Phase Dim)



12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1SC-9273614P-BB
					3000K	36°	1500lm	1200lm	V1SC-9303614P-BB

Code Remark: P=(Phase Dim)



12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1SC-9273614P-CB
					3000K	36°	1500lm	1200lm	V1SC-9303614P-CB



Code Remark: P=(Phase Dim)



12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1SC-9273614P-GB
					3000K	36°	1500lm	1200lm	V1SC-9303614P-GB

Code Remark: P=(Phase Dim)

Light Distribution

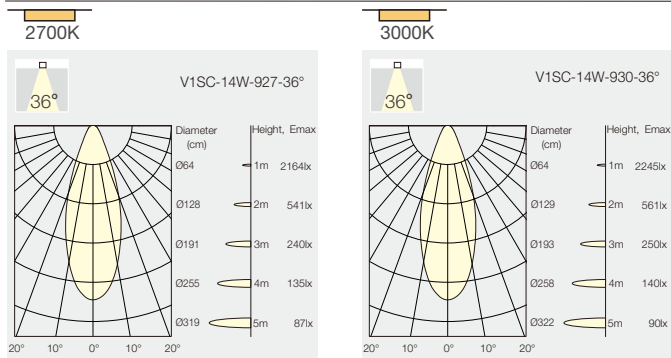


28W	CRI90	2700K 3000K	36°	IP20	CITIZEN 50,000h@L80B10	5 GUARANTEED	CE
-----	-------	----------------	-----	------	---------------------------	-----------------	----



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2SC-9273628P-WN
					3000K	36°	3000lm	2400lm	V2SC-9303628P-WN

Code Remark: P=(Phase Dim)



2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2SC-9273628P-BN
					3000K	36°	3000lm	2400lm	V2SC-9303628P-BN

Code Remark: P=(Phase Dim)



2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2SC-9273628P-CB
					3000K	36°	3000lm	2400lm	V2SC-9303628P-CB


Code Remark: P=(Phase Dim)




2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2SC-9273628P-GB
					3000K	36°	3000lm	2400lm	V2SC-9303628P-GB

Code Remark: P=(Phase Dim)

Light Distribution

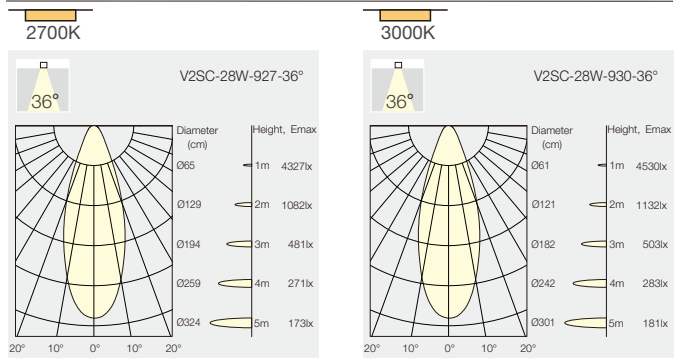



14W	CRI90	2700K 3000K	36°	IP20				
-----	-------	----------------	-----	------	--	--	--	--



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1RR-9273614P-WW
							1500lm	1200lm	V1RR-9303614P-WW

Code Remark: P=(Phase Dim)



12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1RR-9273614P-BB
							1500lm	1200lm	V1RR-9303614P-BB

Code Remark: P=(Phase Dim)



12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1RR-9273614P-CB
							1500lm	1200lm	V1RR-9303614P-CB


Code Remark: P=(Phase Dim)




12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1RR-9273614P-GB
							1500lm	1200lm	V1RR-9303614P-GB

Code Remark: P=(Phase Dim)

Light Distribution

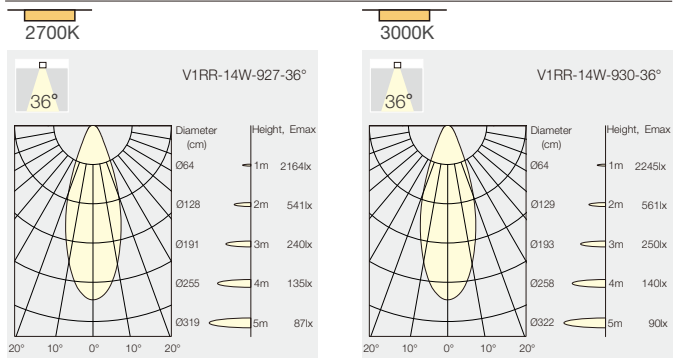

28W	CRI90	2700K 3000K	36°	IP20			
-----	-------	----------------	-----	------	--	--	--



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2RR-9273628P-WW
							3000lm	2400lm	V2RR-9303628P-WW

Code Remark: P=(Phase Dim)



2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2RR-9273628P-BB
							3000lm	2400lm	V2RR-9303628P-BB

Code Remark: P=(Phase Dim)



2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2RR-9273628P-CB
							3000lm	2400lm	V2RR-9303628P-CB


Code Remark: P=(Phase Dim)



2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2RR-9273628P-GB
							3000lm	2400lm	V2RR-9303628P-GB

Code Remark: P=(Phase Dim)

Light Distribution

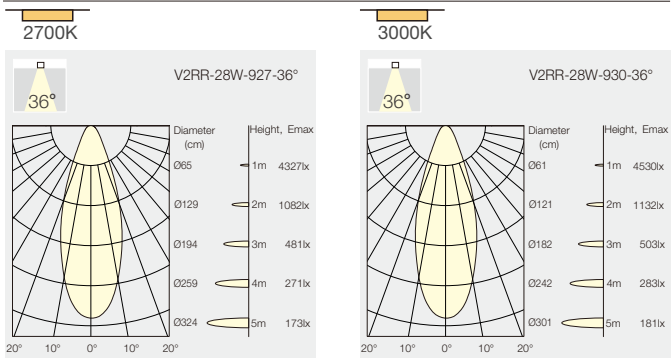



14W	CRI90	2700K 3000K	36°	IP20					
50,000h@L80B10									



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1SR-9273614P-WW
					3000K	36°	1500lm	1200lm	V1SR-9303614P-WW

Code Remark: P=(Phase Dim)



12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1SR-9273614P-BB
					3000K	36°	1500lm	1200lm	V1SR-9303614P-BB

Code Remark: P=(Phase Dim)



12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1SR-9273614P-CB
					3000K	36°	1500lm	1200lm	V1SR-9303614P-CB


Code Remark: P=(Phase Dim)



12.5 W	14 W	36 V	350 mA	90	2700K	36°	1400lm	1100lm	V1SR-9273614P-GB
					3000K	36°	1500lm	1200lm	V1SR-9303614P-GB

Code Remark: P=(Phase Dim)

Light Distribution

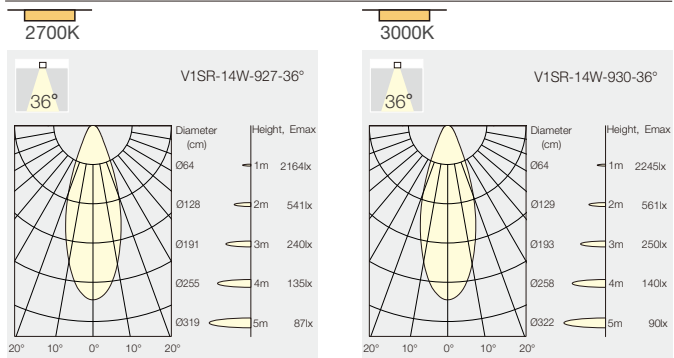

28W	CRI90	2700K 3000K	36°	IP20					
50,000h@L80B10									



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2SR-9273628P-WW
					3000K	36°	3000lm	2400lm	V2SR-9303628P-WW

Code Remark: P=(Phase Dim)



2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2SR-9273628P-BB
					3000K	36°	3000lm	2400lm	V2SR-9303628P-BB

Code Remark: P=(Phase Dim)



2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2SR-9273628P-CB
					3000K	36°	3000lm	2400lm	V2SR-9303628P-CB


Code Remark: P=(Phase Dim)



2x12.5 W	2x14 W	36 V	2x350 mA	90	2700K	36°	2900lm	2300lm	V2SR-9273628P-GB
					3000K	36°	3000lm	2400lm	V2SR-9303628P-GB

Code Remark: P=(Phase Dim)

Light Distribution

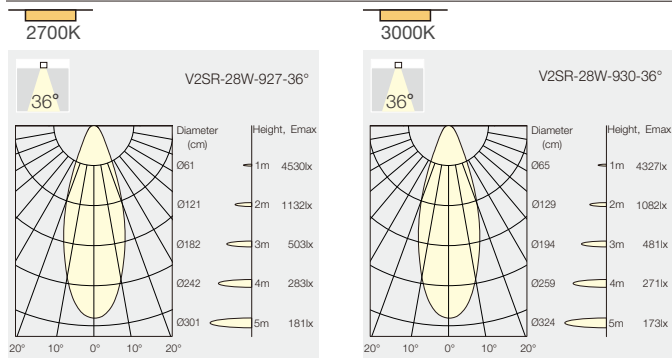



PURE Art-C



PURE S-C

Ceiling Mounted




NEKO / PURE Art-C

Ceiling Mounted PURE Art



11W 15W	CRI90	2700K 3000K 4000K	18° 24° 36°		UGR < 10	IP 20			
------------	-------	-------------------------	-------------------	--	-------------	-------	--	--	--



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	640lm	PUAC-9271811F-WB	
						24°	850lm	640lm	PUAC-9272411F-WB	
						36°	850lm	640lm	PUAC-9273611F-WB	
					3000K	18°	950lm	720lm	PUAC-9301811F-WB	
						24°	950lm	720lm	PUAC-9302411F-WB	
						36°	950lm	720lm	PUAC-9303611F-WB	
					4000K	18°	1050lm	800lm	PUAC-9401811F-WB	
						24°	1050lm	800lm	PUAC-9402411F-WB	
						36°	1050lm	800lm	PUAC-9403611F-WB	
13 W	15 W	36 V	350 mA	90	2700K	18°	1100lm	900lm	PUAC-9271815F-WB	
						24°	1100lm	900lm	PUAC-9272415F-WB	
						36°	1100lm	900lm	PUAC-9273615F-WB	
					3000K	18°	1200lm	950lm	PUAC-9301815F-WB	
						24°	1200lm	950lm	PUAC-9302415F-WB	
						36°	1200lm	950lm	PUAC-9303615F-WB	
					4000K	18°	1300lm	1000lm	PUAC-9401815F-WB	
						24°	1300lm	1000lm	PUAC-9402415F-WB	
						36°	1300lm	1000lm	PUAC-9403615F-WB	
9 W	11 W	36 V	250 mA	90	2700K	18°	850lm	640lm	PUAC-9271811F-BB	
						24°	850lm	640lm	PUAC-9272411F-BB	
						36°	850lm	640lm	PUAC-9273611F-BB	
					3000K	18°	950lm	720lm	PUAC-9301811F-BB	
						24°	950lm	720lm	PUAC-9302411F-BB	
						36°	950lm	720lm	PUAC-9303611F-BB	
					4000K	18°	1050lm	800lm	PUAC-9401811F-BB	
						24°	1050lm	800lm	PUAC-9402411F-BB	
						36°	1050lm	800lm	PUAC-9403611F-BB	
13 W	15 W	36 V	350 mA	90	2700K	18°	1100lm	900lm	PUAC-9271815F-BB	
						24°	1100lm	900lm	PUAC-9272415F-BB	
						36°	1100lm	900lm	PUAC-9273615F-BB	
					3000K	18°	1200lm	950lm	PUAC-9301815F-BB	
						24°	1200lm	950lm	PUAC-9302415F-BB	
						36°	1200lm	950lm	PUAC-9303615F-BB	
					4000K	18°	1300lm	1000lm	PUAC-9401815F-BB	
						24°	1300lm	1000lm	PUAC-9402415F-BB	
						36°	1300lm	1000lm	PUAC-9403615F-BB	

Code Remark: F=(ON-OFF) P=(Phase Dim)

Optional accessory



Honeycomb



Code for PUAC-9302511F-WB with Honeycomb
PUAC-9302511F-WB-**H**

NEKO / PURE S-C

Ceiling Mounted PURE S



15W 21W	CRI90	2700K 3000K 4000K	15° 25° 30°		UGR < 10	IP 20			
------------	-------	-------------------------	-------------------	--	-------------	-------	--	--	--



LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUSC-9271515F-WB	
						25°	1400lm	1100lm	PUSC-9272515F-WB	
						30°	1400lm	1100lm	PUSC-9273015F-WB	
					3000K	15°	1500lm	1200lm	PUSC-9301515F-WB	
						25°	1500lm	1200lm	PUSC-9302515F-WB	
						30°	1500lm	1200lm	PUSC-9303015F-WB	
					4000K	15°	1600lm	1300lm	PUSC-9401515F-WB	
						25°	1600lm	1300lm	PUSC-9402515F-WB	
						30°	1600lm	1300lm	PUSC-9403015F-WB	
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	PUSC-9271521F-WB	
						25°	1900lm	1500lm	PUSC-9272521F-WB	
						30°	1900lm	1500lm	PUSC-9273021F-WB	
					3000K	15°	2000lm	1600lm	PUSC-9301521F-WB	
						25°	2000lm	1600lm	PUSC-9302521F-WB	
						30°	2000lm	1600lm	PUSC-9303021F-WB	
					4000K	15°	2100lm	1700lm	PUSC-9401521F-WB	
						25°	2100lm	1700lm	PUSC-9402521F-WB	
						30°	2100lm	1700lm	PUSC-9403021F-WB	
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUSC-9271515F-BB	
						25°	1400lm	1100lm	PUSC-9272515F-BB	
						30°	1400lm	1100lm	PUSC-9273015F-BB	
					3000K	15°	1500lm	1200lm	PUSC-9301515F-BB	
						25°	1500lm	1200lm	PUSC-9302515F-BB	
						30°	1500lm	1200lm	PUSC-9303015F-BB	
					4000K	15°	1600lm	1300lm	PUSC-9401515F-BB	
						25°	1600lm	1300lm	PUSC-9402515F-BB	
						30°	1600lm	1300lm	PUSC-9403015F-BB	
18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	PUSC-9271521F-BB	
						25°	1900lm	1500lm	PUSC-9272521F-BB	
						30°	1900lm	1500lm	PUSC-9273021F-BB	
					3000K	15°	2000lm	1600lm	PUSC-9301521F-BB	
						25°	2000lm	1600lm	PUSC-9302521F-BB	
						30°	2000lm	1600lm	PUSC-9303021F-BB	
					4000K	15°	2100lm	1700lm	PUSC-9401521F-BB	
						25°	2100lm	1700lm	PUSC-9402521F-BB	
						30°	2100lm	1700lm	PUSC-9403021F-BB	

Code Remark: F=(ON-OFF) P=(Phase Dim) D=(DALI Dim)

Optional accessory



Honeycomb

Code for PUSC-9302515F-WB with Honeycomb
PUSC-9302515F-WB-**H**






PURE

PURE Art	PURE S	PURE M
15W 950-1000lm	15W 1200-1300lm 21W 1600-1700lm	28W 2700-2900lm

Narrow, medium and wide beam angles are available for different lighting applications

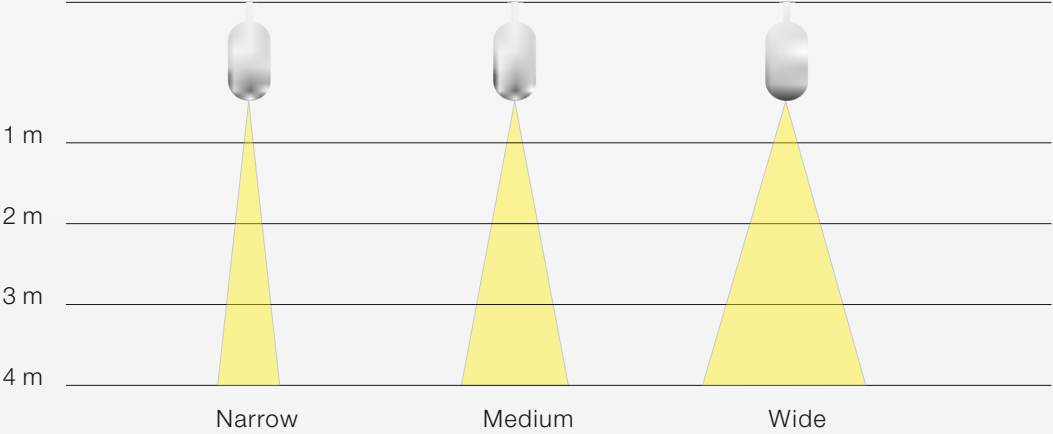

NEKO / PURE Art
LED Tracklight



15W	CRI90	2700K 3000K 4000K	18° 24° 36°	 50,000hL80B10	UGR < 19	IP 20		CB	CE
-----	-------	-------------------------	-------------------	---	-------------	-------	--	----	----



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1100lm	900lm	PUA2- 9271815F-WB
						24°	1100lm	900lm	PUA2- 9272415F-WB
						36°	1100lm	900lm	PUA2- 9273615F-WB
					3000K	18°	1200lm	950lm	PUA2- 9301815F-WB
						24°	1200lm	950lm	PUA2- 9302415F-WB
						36°	1200lm	950lm	PUA2- 9303615F-WB
					4000K	18°	1300lm	1000lm	PUA2- 9401815F-WB
						24°	1300lm	1000lm	PUA2- 9402415F-WB
						36°	1300lm	1000lm	PUA2- 9403615F-WB

13 W	15 W	36 V	350 mA	90	2700K	18°	1100lm	900lm	PUA2- 9271815F-BB
						24°	1100lm	900lm	PUA2- 9272415F-BB
						36°	1100lm	900lm	PUA2- 9273615F-BB
					3000K	18°	1200lm	950lm	PUA2- 9301815F-BB
						24°	1200lm	950lm	PUA2- 9302415F-BB
						36°	1200lm	950lm	PUA2- 9303615F-BB
					4000K	18°	1300lm	1000lm	PUA2- 9401815F-BB
						24°	1300lm	1000lm	PUA2- 9402415F-BB
						36°	1300lm	1000lm	PUA2- 9403615F-BB

Code Remark: F=(ON-OFF) P=(Phase Dim)

Optional accessory



Honeycomb

Code for PUA2-930 1815F-WB with Honeycomb
PUA2-930 1815F-WB-H

Track System




Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

Project: VALO Hotel Helsinki, Finland



NEKO / PURE S
LED Tracklight



21W 15W	CRI90	2700K 3000K 4000K	15° 25° 30°	CITIZEN 50,000h@L80B10	UGR < 19	IP20		CB	CE
------------	-------	-------------------------	-------------------	----------------------------------	-------------	------	---	----	----

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code						
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUS1- 9271515F-WB						
						25°	1400lm	1100lm	PUS1- 9272515F-WB						
						30°	1400lm	1100lm	PUS1- 9273015F-WB						
						3000K	15°	1500lm	1200lm	PUS1- 9301515F-WB					
							25°	1500lm	1200lm	PUS1- 9302515F-WB					
							30°	1500lm	1200lm	PUS1- 9303015F-WB					
						3000K	15°	1600lm	1300lm	PUS1- 9401515F-WB					
							25°	1600lm	1300lm	PUS1- 9402515F-WB					
							30°	1600lm	1300lm	PUS1- 9403015F-WB					
						18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	PUS2- 9271521F-WB
												25°	1900lm	1500lm	PUS2- 9272521F-WB
												30°	1900lm	1500lm	PUS2- 9273021F-WB
3000K	15°	2000lm	1600lm	PUS2- 9301521F-WB											
	25°	2000lm	1600lm	PUS2- 9302521F-WB											
	30°	2000lm	1600lm	PUS2- 9303021F-WB											
4000K	15°	2100lm	1700lm	PUS2- 9401521F-WB											
	25°	2100lm	1700lm	PUS2- 9402521F-WB											
	30°	2100lm	1700lm	PUS2- 9403021F-WB											
13 W	15 W	36 V	350 mA	90	2700K							15°	1400lm	1100lm	PUS1- 9271515F-BB
												25°	1400lm	1100lm	PUS1- 9272515F-BB
												30°	1400lm	1100lm	PUS1- 9273015F-BB
						3000K	15°	1500lm	1200lm	PUS1- 9301515F-BB					
							25°	1500lm	1200lm	PUS1- 9302515F-BB					
							30°	1500lm	1200lm	PUS1- 9303015F-BB					
						4000K	15°	1600lm	1300lm	PUS1- 9401515F-BB					
							25°	1600lm	1300lm	PUS1- 9402515F-BB					
							30°	1600lm	1300lm	PUS1- 9403015F-BB					
						18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	PUS2- 9271521F-BB
												25°	1900lm	1500lm	PUS2- 9272521F-BB
												30°	1900lm	1500lm	PUS2- 9273021F-BB
3000K	15°	2000lm	1600lm	PUS2- 9301521F-BB											
	25°	2000lm	1600lm	PUS2- 9302521F-BB											
	30°	2000lm	1600lm	PUS2- 9303021F-BB											
4000K	15°	2100lm	1700lm	PUS2- 9401521F-BB											
	25°	2100lm	1700lm	PUS2- 9402521F-BB											
	30°	2100lm	1700lm	PUS2- 9403021F-BB											

Code Remark: F=(ON-OFF) P=(Phase Dim)

Optional accessory



Code for PUS1-930 1515F-WB with Honeycomb
PUS1-930 1515F-WB-H


Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System.



21W 15W	CRI90	2700K 3000K 4000K	15° 25° 30°	CITIZEN 50,000h@L80B10	GLOBAL	UGR < 19	IP 20	DALI	5 YEARS GUARANTEE	CB	CE
------------	-------	-------------------------	-------------------	----------------------------------	---------------	--------------------	--------------	-------------	-----------------------------	-----------	-----------



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code						
13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	PUS1-9271515D-WB						
						25°	1400lm	1100lm	PUS1-9272515D-WB						
						30°	1400lm	1100lm	PUS1-9273015D-WB						
						3000K	15°	1500lm	1200lm	PUS1-9301515D-WB					
							25°	1500lm	1200lm	PUS1-9302515D-WB					
							30°	1500lm	1200lm	PUS1-9303015D-WB					
						4000K	15°	1600lm	1300lm	PUS1-9401515D-WB					
							25°	1600lm	1300lm	PUS1-9402515D-WB					
							30°	1600lm	1300lm	PUS1-9403015D-WB					
						18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	PUS2-9271521D-WB
												25°	1900lm	1500lm	PUS2-9272521D-WB
												30°	1900lm	1500lm	PUS2-9273021D-WB
3000K	15°	2000lm	1600lm	PUS2-9301521D-WB											
	25°	2000lm	1600lm	PUS2-9302521D-WB											
	30°	2000lm	1600lm	PUS2-9303021D-WB											
4000K	15°	2100lm	1700lm	PUS2-9401521D-WB											
	25°	2100lm	1700lm	PUS2-9402521D-WB											
	30°	2100lm	1700lm	PUS2-9403021D-WB											
13 W	15 W	36 V	350 mA	90	2700K							15°	1400lm	1100lm	PUS1-9271515D-BB
												25°	1400lm	1100lm	PUS1-9272515D-BB
												30°	1400lm	1100lm	PUS1-9273015D-BB
						3000K	15°	1500lm	1200lm	PUS1-9301515D-BB					
							25°	1500lm	1200lm	PUS1-9302515D-BB					
							30°	1500lm	1200lm	PUS1-9303015D-BB					
						4000K	15°	1600lm	1300lm	PUS1-9401515D-BB					
							25°	1600lm	1300lm	PUS1-9402515D-BB					
							30°	1600lm	1300lm	PUS1-9403015D-BB					
						18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	PUS2-9271521D-BB
												25°	1900lm	1500lm	PUS2-9272521D-BB
												30°	1900lm	1500lm	PUS2-9273021D-BB
3000K	15°	2000lm	1600lm	PUS2-9301521D-BB											
	25°	2000lm	1600lm	PUS2-9302521D-BB											
	30°	2000lm	1600lm	PUS2-9303021D-BB											
4000K	15°	2100lm	1700lm	PUS2-9401521D-BB											
	25°	2100lm	1700lm	PUS2-9402521D-BB											
	30°	2100lm	1700lm	PUS2-9403021D-BB											

Code Remark: D=(DALI Dim)

Optional accessory



Code for PUS1-930 1515D-WB with Honeycomb
PUS1-930 1515D-WB-H

Track System




Compatible with GLOBAL 3-Circuit Track System

NEKO / PURE M
LED Tracklight



28W	CRI90	2700K 3000K 4000K	18° 30° 45°		UGR < 19	IP 20			
50,000h@L80B10									



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	PUM1- 9271828F-WB
						30°	3200lm	2500lm	PUM1- 9273028F-WB
						45°	3200lm	2500lm	PUM1- 9274528F-WB
						3000K 18°	3400lm	2700lm	PUM1- 9301828F-WB
						30°	3400lm	2700lm	PUM1- 9303028F-WB
						45°	3400lm	2700lm	PUM1- 9304528F-WB
						4000K 18°	3600lm	2900lm	PUM1- 9401828F-WB
						30°	3600lm	2900lm	PUM1- 9403028F-WB
						45°	3600lm	2900lm	PUM1- 9404528F-WB

Code Remark: F=(ON-OFF)

Optional accessory



Honeycomb


Code for PUM1-930 1828F-WB with Honeycomb
PUM1-930 1828F-WB-H

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System ,

28W	CRI90	2700K 3000K 4000K	18° 30° 45°		UGR < 19	IP 20				
50,000h@L80B10										



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	2700K	18°	3200lm	2500lm	PUM1- 9271828D-WB
						30°	3200lm	2500lm	PUM1- 9273028D-WB
						45°	3200lm	2500lm	PUM1- 9274528D-WB
						3000K 18°	3400lm	2700lm	PUM1- 9301828D-WB
						30°	3400lm	2700lm	PUM1- 9303028D-WB
						45°	3400lm	2700lm	PUM1- 9304528D-WB
						4000K 18°	3600lm	2900lm	PUM1- 9401828D-WB
						30°	3600lm	2900lm	PUM1- 9403028D-WB
						45°	3600lm	2900lm	PUM1- 9404528D-WB

Code Remark: D=(DALI Dim)

Optional accessory



Honeycomb

Code for PUM1-930 1828D-WB with Honeycomb
PUM1-930 1828D-WB-H

Track System



Compatible with GLOBAL 3-Circuit Track System ,

NEKO / ROXY
In-track Driver LED Tracklight



ROXY Art
15W 950lm-1000lm

ROXY S
15W 1200lm-1300lm
21W 1600lm-1700lm

ROXY K
28W 2400lm-2600lm



On-Off Version

DALI Dim Version



15W

CRI90

2700K
3000K
4000K

18°
24°
36°
50°

CITIZEN

UGR
< 19

IP 20

15W

CRI90

2700K
3000K
4000K

18°
24°
36°
50°

CITIZEN

UGR
< 19

IP 20

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
	13 W	15 W	36 V	350 mA	90	2700K	18°	1200lm	900lm	ROA1-9271815F-WB
							24°	1200lm	900lm	ROA1-9272415F-WB
							36°	1200lm	900lm	ROA1-9273615F-WB
							50°	1200lm	900lm	ROA1-9275015F-WB
						3000K	18°	1300lm	950lm	ROA1-9301815F-WB
							24°	1300lm	950lm	ROA1-9302415F-WB
							36°	1300lm	950lm	ROA1-9303615F-WB
							50°	1300lm	950lm	ROA1-9306015F-WB
						4000K	18°	1400lm	1000lm	ROA1-9401815F-WB
							24°	1400lm	1000lm	ROA1-9402415F-WB
							36°	1400lm	1000lm	ROA1-9403615F-WB
							50°	1400lm	1000lm	ROA1-9405015F-WB
	13 W	15 W	36 V	350 mA	90	2700K	18°	1200lm	900lm	ROA1-9271815F-BB
							24°	1200lm	900lm	ROA1-9272415F-BB
							36°	1200lm	900lm	ROA1-9273615F-BB
							50°	1200lm	900lm	ROA1-9275015F-BB
						3000K	18°	1300lm	950lm	ROA1-9301815F-BB
							24°	1300lm	950lm	ROA1-9302415F-BB
							36°	1300lm	950lm	ROA1-9303615F-BB
							50°	1300lm	950lm	ROA1-9306015F-BB
						4000K	18°	1400lm	1000lm	ROA1-9401815F-BB
							24°	1400lm	1000lm	ROA1-9402415F-BB
							36°	1400lm	1000lm	ROA1-9403615F-BB
							50°	1400lm	1000lm	ROA1-9405015F-BB

Code Remark: F=(ON-OFF)

LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
	13 W	15 W	36 V	350 mA	90	2700K	18°	1200lm	900lm	ROA1-9271815D-WB
							24°	1200lm	900lm	ROA1-9272415D-WB
							36°	1200lm	900lm	ROA1-9273615D-WB
							50°	1200lm	900lm	ROA1-9275015D-WB
						3000K	18°	1300lm	950lm	ROA1-9301815D-WB
							24°	1300lm	950lm	ROA1-9302415D-WB
							36°	1300lm	950lm	ROA1-9303615D-WB
							50°	1300lm	950lm	ROA1-9306015D-WB
						4000K	18°	1400lm	1000lm	ROA1-9401815D-WB
							24°	1400lm	1000lm	ROA1-9402415D-WB
							36°	1400lm	1000lm	ROA1-9403615D-WB
							50°	1400lm	1000lm	ROA1-9405015D-WB
	13 W	15 W	36 V	350 mA	90	2700K	18°	1200lm	900lm	ROA1-9271815D-BB
							24°	1200lm	900lm	ROA1-9272415D-BB
							36°	1200lm	900lm	ROA1-9273615D-BB
							50°	1200lm	900lm	ROA1-9275015D-BB
						3000K	18°	1300lm	950lm	ROA1-9301815D-BB
							24°	1300lm	950lm	ROA1-9302415D-BB
							36°	1300lm	950lm	ROA1-9303615D-BB
							50°	1300lm	950lm	ROA1-9306015D-BB
						4000K	18°	1400lm	1000lm	ROA1-9401815D-BB
							24°	1400lm	1000lm	ROA1-9402415D-BB
							36°	1400lm	1000lm	ROA1-9403615D-BB
							50°	1400lm	1000lm	ROA1-9405015D-BB

Code Remark: D=(DALI Dim)

Optional accessory



Code for ROA1-930 1815D-WB with Honeycomb
ROA1-930 1815D-WB-H

Track System




Compatible with GLOBAL / POWERGEAR 3-Circuit Track System



15W 21W	CRI90	2700K 3000K 4000K	15° 30° 50°		UGR < 19	IP 20				
LED Power System Power LED Voltage LED Current CRI CCT Beam LED Output System Output Code										
	13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	ROS1-9271515F-WB
							30°	1400lm	1100lm	ROS1-9273015F-WB
							50°	1400lm	850lm	ROS1-9275015F-WB
						3000K	15°	1500lm	1200lm	ROS1-9301515F-WB
							30°	1500lm	1200lm	ROS1-9303015F-WB
							50°	1500lm	900lm	ROS1-9305015F-WB
						4000K	15°	1600lm	1300lm	ROS1-9401515F-WB
							30°	1600lm	1300lm	ROS1-9403015F-WB
							50°	1600lm	1000lm	ROS1-9405015F-WB
	18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	ROS2-9271521F-WB
							30°	1900lm	1500lm	ROS2-9273021F-WB
							50°	1900lm	1100lm	ROS2-9275021F-WB
						3000K	15°	2000lm	1600lm	ROS2-9301521F-WB
							30°	2000lm	1600lm	ROS2-9303021F-WB
							50°	2000lm	1200lm	ROS2-9305021F-WB
						4000K	15°	2100lm	1700lm	ROS2-9401821F-WB
							30°	2100lm	1700lm	ROS2-9403021F-WB
							50°	2100lm	1300lm	ROS2-9405021F-WB
	13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	ROS1-9271515F-BB
							30°	1400lm	1100lm	ROS1-9273015F-BB
							50°	1400lm	850lm	ROS1-9275015F-BB
						3000K	15°	1500lm	1200lm	ROS1-9301515F-BB
							30°	1500lm	1200lm	ROS1-9303015F-BB
							50°	1500lm	900lm	ROS1-9305015F-BB
						4000K	15°	1600lm	1300lm	ROS1-9401515F-BB
							30°	1600lm	1300lm	ROS1-9403015F-BB
							50°	1600lm	1000lm	ROS1-9405015F-BB
	18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	ROS2-9271521F-BB
							30°	1900lm	1500lm	ROS2-9273021F-BB
							50°	1900lm	1100lm	ROS2-9275021F-BB
						3000K	15°	2000lm	1600lm	ROS2-9301521F-BB
							30°	2000lm	1600lm	ROS2-9303021F-BB
							50°	2000lm	1200lm	ROS2-9305021F-BB
						4000K	15°	2100lm	1700lm	ROS2-9401821F-BB
							30°	2100lm	1700lm	ROS2-9403021F-BB
							50°	2100lm	1300lm	ROS2-9405021F-BB

Code Remark: F=(ON-OFF)

15W 21W	CRI90	2700K 3000K 4000K	15° 30° 50°	 50,000h@L80B10	UGR < 19	IP 20					
LED Power System Power LED Voltage LED Current CRI CCT Beam LED Output System Output Code											
	13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	ROS1-9271515D-WB	
							30°	1400lm	1100lm	ROS1-9273015D-WB	
							50°	1400lm	850lm	ROS1-9275015D-WB	
						3000K	15°	1500lm	1200lm	ROS1-9301515D-WB	
							30°	1500lm	1200lm	ROS1-9303015D-WB	
							50°	1500lm	900lm	ROS1-9305015D-WB	
						4000K	15°	1600lm	1300lm	ROS1-9401515D-WB	
							30°	1600lm	1300lm	ROS1-9403015D-WB	
							50°	1600lm	1000lm	ROS1-9405015D-WB	
	18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	ROS2-9271521D-WB	
							30°	1900lm	1500lm	ROS2-9273021D-WB	
							50°	1900lm	1500lm	ROS2-9275021D-WB	
						3000K	15°	2000lm	1600lm	ROS2-9301521D-WB	
							30°	2000lm	1600lm	ROS2-9303021D-WB	
							50°	2000lm	1600lm	ROS2-9305021D-WB	
						4000K	15°	2100lm	1700lm	ROS2-9401821D-WB	
							30°	2100lm	1700lm	ROS2-9403021D-WB	
							50°	2100lm	1700lm	ROS2-9405021D-WB	
	13 W	15 W	36 V	350 mA	90	2700K	15°	1400lm	1100lm	ROS1-9271515D-BB	
							30°	1400lm	1100lm	ROS1-9273015D-BB	
							50°	1400lm	850lm	ROS1-9275015D-BB	
						3000K	15°	1500lm	1200lm	ROS1-9301515D-BB	
							30°	1500lm	1200lm	ROS1-9303015D-BB	
							50°	1500lm	900lm	ROS1-9305015D-BB	
						4000K	15°	1600lm	1300lm	ROS1-9401515D-BB	
							30°	1600lm	1300lm	ROS1-9403015D-BB	
							50°	1600lm	1000lm	ROS1-9405015D-BB	
	18 W	21 W	36 V	500 mA	90	2700K	15°	1900lm	1500lm	ROS2-9271521D-BB	
							30°	1900lm	1500lm	ROS2-9273021D-BB	
							50°	1900lm	1100lm	ROS2-9275021D-BB	
						3000K	15°	2000lm	1600lm	ROS2-9301521D-BB	
							30°	2000lm	1600lm	ROS2-9303021D-BB	
							50°	2000lm	1200lm	ROS2-9305021D-BB	
						4000K	15°	2100lm	1700lm	ROS2-9401821D-BB	
							30°	2100lm	1700lm	ROS2-9403021D-BB	
							50°	2100lm	1300lm	ROS2-9405021D-BB	

Code Remark: D=(DALI Dim)

Code Remark: D=(DALI Dim)

Optional accessory



Honeycomb

Code for ROS1-9302515D-WB with Honeycomb
ROS1-9302515D-WB-H

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

NEKO / ROXY K

High Height Ceiling Shop Lighting

In-track Driver LED Tracklight

On-Off Version

DALI Dim Version



28W

CRI90

2700K
3000K
4000K

20°
35°
55°

CITIZEN

UGR
< 19

IP 20

CB

CE

28W

CRI90

2700K
3000K
4000K

20°
35°
55°

CITIZEN

UGR
< 19

IP 20

CB

CE

	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code		
	25 W	28 W	36 V	700 mA	90	2700K	20°	2500lm	2000lm	ROK1-9272028F-WB		
							35°	2500lm	2200lm	ROK1-9273528F-WB		
							55°	2500lm	2200lm	ROK1-9275528F-WB		
						3000K	20°	2700lm	2200lm	ROK1-9302028F-WB		
							35°	2700lm	2400lm	ROK1-9303528F-WB		
							55°	2700lm	2400lm	ROK1-9305528F-WB		
	4000K	20°	2900lm	2400lm	ROK1-9402028F-WB							
		35°	2900lm	2600lm	ROK1-9403528F-WB							
		55°	2900lm	2600lm	ROK1-9405528F-WB							

			25 W	28 W	36 V	700 mA	90	2700K	20°	2500lm	2000lm	ROK1-9272028F-BB
									35°	2500lm	2200lm	ROK1-9273528F-BB
55°	2500lm								2200lm	ROK1-9275528F-BB		
3000K	20°							2700lm	2200lm	ROK1-9302028F-BB		
	35°							2700lm	2400lm	ROK1-9303528F-BB		
	55°							2700lm	2400lm	ROK1-9305528F-BB		
4000K	20°		2900lm	2400lm	ROK1-9402028F-BB							
	35°		2900lm	2600lm	ROK1-9403528F-BB							
	55°		2900lm	2600lm	ROK1-9405528F-BB							

	Code Remark: F=(ON-OFF)											

	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code		
	25 W	28 W	36 V	700 mA	90	2700K	20°	2500lm	2000lm	ROK1-9272028D-WB		
							35°	2500lm	2200lm	ROK1-9273528D-WB		
							55°	2500lm	2200lm	ROK1-9275528D-WB		
						3000K	20°	2700lm	2200lm	ROK1-9302028D-WB		
							35°	2700lm	2400lm	ROK1-9303528D-WB		
							55°	2700lm	2400lm	ROK1-9305528D-WB		
	4000K	20°	2900lm	2400lm	ROK1-9402028D-WB							
		35°	2900lm	2600lm	ROK1-9403528D-WB							
		55°	2900lm	2600lm	ROK1-9405528D-WB							

			25 W	28 W	36 V	700 mA	90	2700K	20°	2500lm	2000lm	ROK1-9272028D-BB
									35°	2500lm	2200lm	ROK1-9273528D-BB
55°	2500lm								2200lm	ROK1-9275528D-BB		
3000K	20°							2700lm	2200lm	ROK1-9302028D-BB		
	35°							2700lm	2400lm	ROK1-9303528D-BB		
	55°							2700lm	2400lm	ROK1-9305528D-BB		
4000K	20°		2900lm	2400lm	ROK1-9402028D-BB							
	35°		2900lm	2600lm	ROK1-9403528D-BB							
	55°		2900lm	2600lm	ROK1-9405528D-BB							

	Code Remark: D=(DALI Dim)											

Optional accessory



Code for ROK1-9303528F-WB with Honeycomb
ROK1-9303528F-WB-H

Honeycomb

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

NEKO / ROXY-Z
In-track Driver LED Tracklight
Beam Angle Zooming Version



NEKO / ROXY Art-Z

In-track Driver LED Tracklight

Beam Angle Zooming Version



	LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
	13 W	15 W	36 V	350 mA	90	2700K	20°~35°	1200lm	1000lm	ROA1-927Z315F-WB	
						3000K	20°~35°	1300lm	1100lm	ROA1-930Z315F-WB	
						4000K	20°~35°	1400lm	1200lm	ROA1-940Z315F-WB	
						2700K	35°~60°	1200lm	950lm	ROA1-927Z615F-WB	
						3000K	35°~60°	1300lm	1000lm	ROA1-930Z615F-WB	
						4000K	35°~60°	1400lm	1100lm	ROA1-940Z615F-WB	
	13 W	15 W	36 V	350 mA	90	2700K	20°~35°	1200lm	1000lm	ROA1-927Z315F-BB	
						3000K	20°~35°	1300lm	1100lm	ROA1-930Z315F-BB	
						4000K	20°~35°	1400lm	1200lm	ROA1-940Z315F-BB	
						2700K	35°~60°	1200lm	950lm	ROA1-927Z615F-BB	
						3000K	35°~60°	1300lm	1000lm	ROA1-930Z615F-BB	
						4000K	35°~60°	1400lm	1100lm	ROA1-940Z615F-BB	

Code Remark: F=(ON-OFF) D=(DALI Dim)

Optional accessory



Code for ROA1-930 Z315F-WB with Honeycomb
ROA1-930 Z315F-WB-H

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System ,

NEKO / ROXY S-Z

In-track Driver LED Tracklight

Beam Angle Zooming Version





LED	Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°~35°	1400lm	1200lm	ROS1-927Z315F-WB	
							1500lm	1300lm	ROS1-930Z315F-WB	
							1600lm	1400lm	ROS1-940Z315F-WB	
						35°~60°	1400lm	1100lm	ROS1-927Z615F-WB	
							1500lm	1200lm	ROS1-930Z615F-WB	
							1600lm	1300lm	ROS1-940Z615F-WB	
					2700K	18°~35°	1900lm	1600lm	ROS2-927Z321F-WB	
							2000lm	1700lm	ROS2-930Z321F-WB	
							2100lm	1800lm	ROS2-940Z321F-WB	
						35°~60°	1900lm	1500lm	ROS2-927Z621F-WB	
							2000lm	1600lm	ROS2-930Z621F-WB	
							2100lm	1700lm	ROS2-940Z621F-WB	



13 W	15 W	36 V	350 mA	90	2700K	18°~35°	1400lm	1200lm	ROS1-927Z315F-BB
							1500lm	1300lm	ROS1-930Z315F-BB
							1600lm	1400lm	ROS1-940Z315F-BB
						35°~60°	1400lm	1100lm	ROS1-927Z615F-BB
							1500lm	1200lm	ROS1-930Z615F-BB
							1600lm	1300lm	ROS1-940Z615F-BB
					2700K	18°~35°	1900lm	1600lm	ROS2-927Z321F-BB
							2000lm	1700lm	ROS2-930Z321F-BB
							2100lm	1800lm	ROS2-940Z321F-BB
						35°~60°	1900lm	1500lm	ROS2-927Z621F-BB
							2000lm	1600lm	ROS2-930Z621F-BB
							2100lm	1700lm	ROS2-940Z621F-BB

Code Remark: F=(ON-OFF) D=(DALI Dim)

Optional accessory



Code for ROS1-930 Z315F-WB with Honeycomb
ROS1-930 Z315F-WB-H

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System ,

NEKO / INLINE
Single Phase LED Tracklight System

Incl. Phase Dim Driver
Direct Connection 230V – No External Driver



INLINE ST-11W

INLINE SP-8W


NEKO / INLINE
Single Phase LED Tracklight System
Incl. Phase Dim Driver
Direct Connection 230V – No External Driver




INLINE ST-11W
11W, 36°, 700lm at CRI>90 2700K

INLINE SP-8W
8W, 36°, 500lm at CRI>90 2700K

NEKO / **INLINE**
Single Phase LED Tracklight System

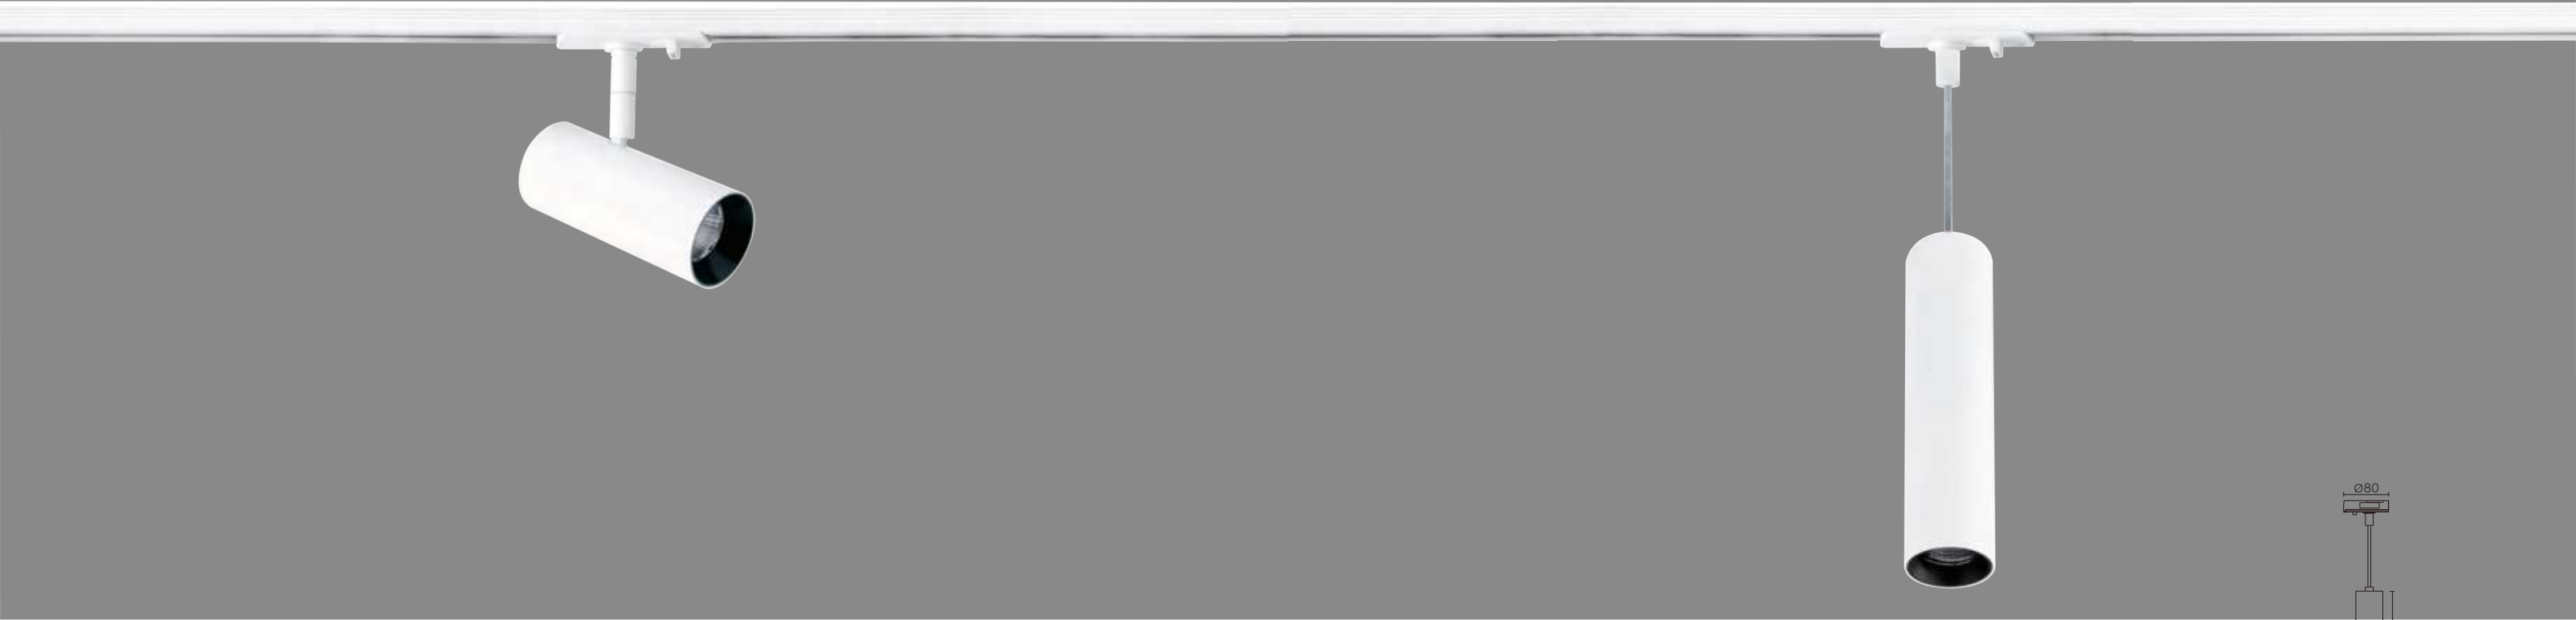

11W	CRI90	2700K	36°	 50,000h@L80B50	UGR < 19	IP20		CE
-----	-------	-------	-----	--	-------------	------	--	----




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K	36°	900lm	700lm	ILST-9273611 P -WB

Code Remark: **P**=(Phase Dim)

9 W	11 W	18 V	500 mA	90	2700K	36°	900lm	700lm	ILST-9273611 P -BB
-----	------	------	--------	----	-------	-----	-------	-------	---------------------------


Code Remark: **P**=(Phase Dim)

Track System




Compatible with NEKO INLINE Single Circuit Track System

Light Distribution

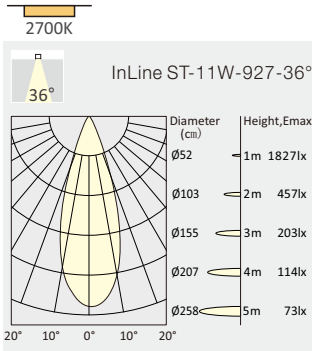

8W	CRI90	2700K	36°	 50,000h@L80B50	UGR < 19	IP20		CE
----	-------	-------	-----	--	-------------	------	--	----




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	18 V	350 mA	90	2700K	36°	700lm	500lm	ILSP-9273608 P -WB

Code Remark: **P**=(Phase Dim)

6 W	8 W	18 V	350 mA	90	2700K	36°	700lm	500lm	ILSP-9273608 P -BB
-----	-----	------	--------	----	-------	-----	-------	-------	---------------------------


Code Remark: **P**=(Phase Dim)

Track System




Compatible with NEKO INLINE Single Circuit Track System

Light Distribution




NEKO / **INLINE**
Single Phase LED Tracklight System

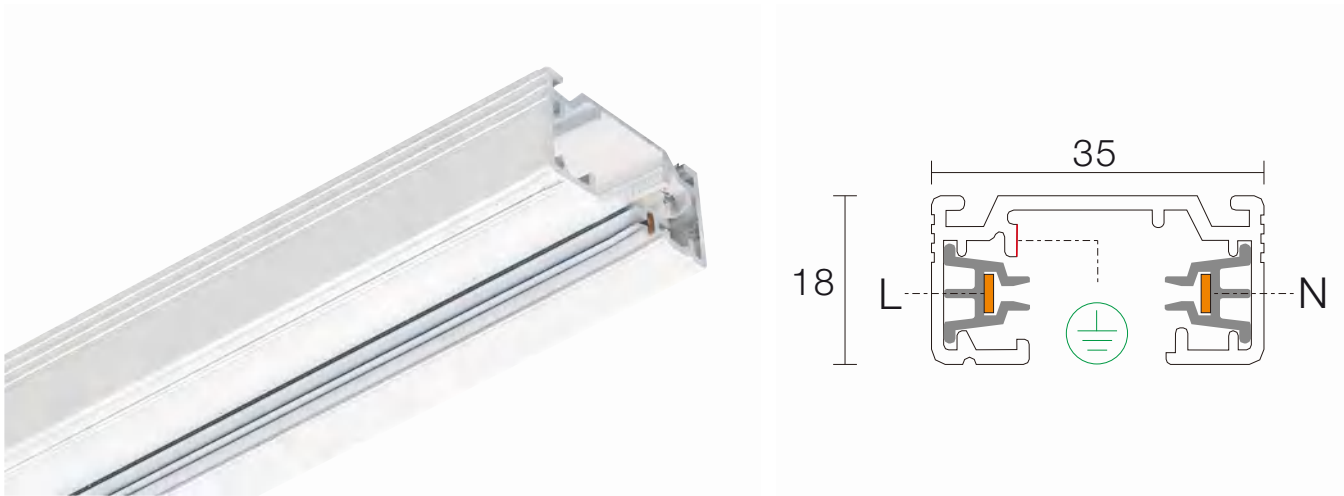






Quick Info

- Aluminum extrusion track shell
- 2 pieces copper busbars, insulated by plastic
- Single circuit track system for 16A (3500W) input
- Track length available in 1000mm and 2000mm
- Various connectors and accessories available for building comprehensive lighting system
- Color finish in White(RAL9003) or Black(RAL9005)
- Surface mounted

Load of Track

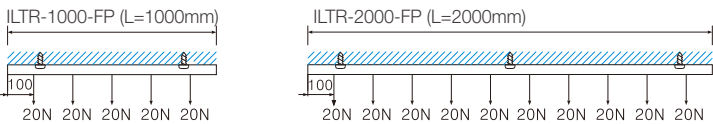

Connection Diagram

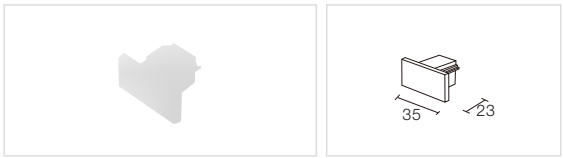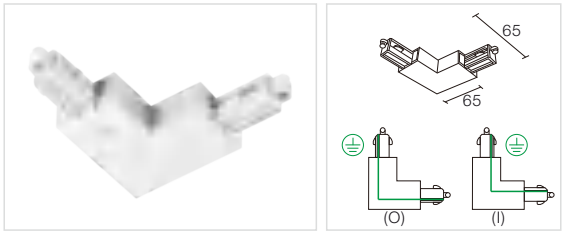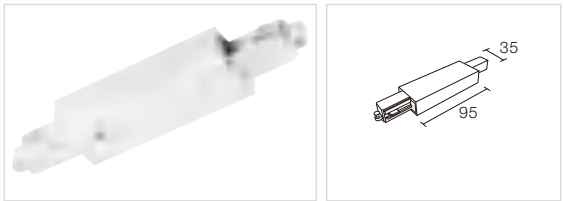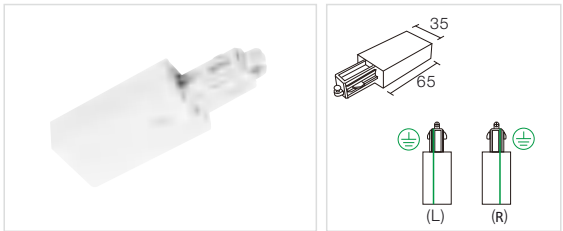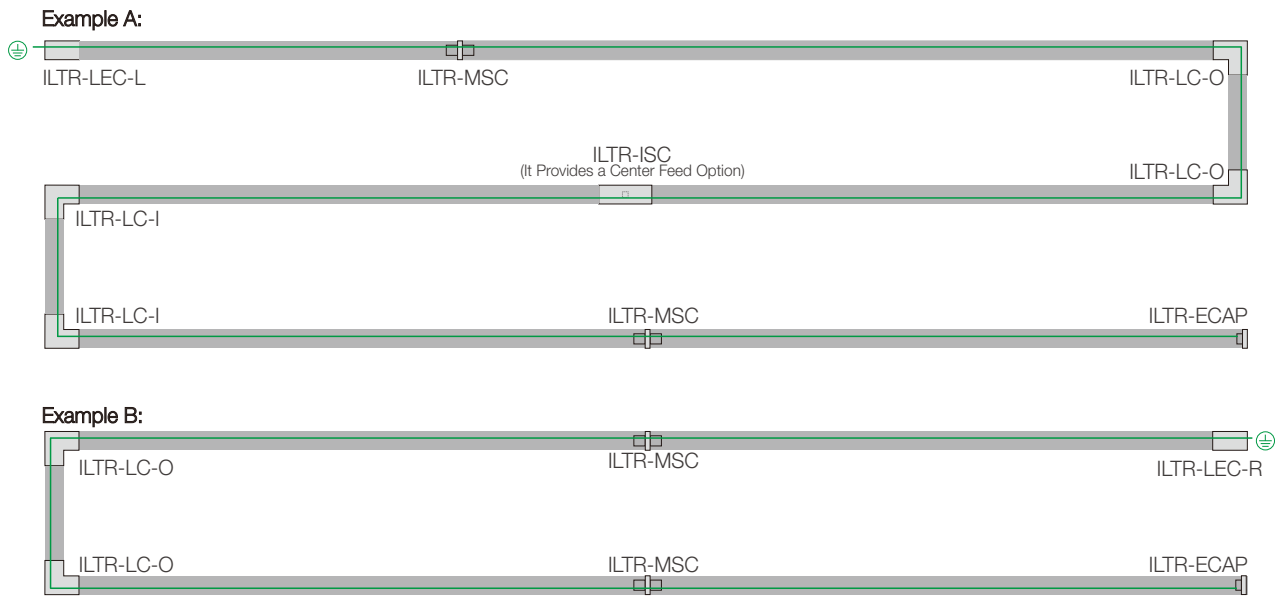

INLINE Single Phase Track

Description	Code/Model
INLINE Single Phase Track, 1000mm Length, White	ILTR-1000-FP-W
INLINE Single Phase Track, 1000mm Length, Black	ILTR-1000-FP-B
INLINE Single Phase Track, 2000mm Length, White	ILTR-2000-FP-W
INLINE Single Phase Track, 2000mm Length, Black	ILTR-2000-FP-B

Live End Connector

Description	Code/Model
Live End Connector, Left, White	ILTR-LEC-L-W
Live End Connector, Left, Black	ILTR-LEC-L-B
Live End Connector, Right, White	ILTR-LEC-R-W
Live End Connector, Right, Black	ILTR-LEC-R-B

I Straight Connector

Description	Code/Model
I Straight Connector, It Provides a Center Feed Option, White	ILTR-ISC-W
I Straight Connector, It Provides a Center Feed Option, Black	ILTR-ISC-B

L Connector


Description	Code/Model
L Connector, Outer, White	ILTR-LC-O-W
L Connector, Outer, Black	ILTR-LC-O-B
L Connector, Inner, White	ILTR-LC-I-W
L Connector, Inner, Black	ILTR-LC-I-B

Mini Straight Connector

Description	Code/Model
Mini Straight Connector, White	ILTR-MSC-W
Mini Straight Connector, Black	ILTR-MSC-B

Endcap

Description	Code/Model
Endcap, White	ILTR-ECAP-W
Endcap, Black	ILTR-ECAP-B



Small KOI SKOI-5W





Large KOI LKOI-18W


No Visible Screws
Slim Architectural Design
Powder Coated Matt Finish
Incl. Phase Dim Driver

NEKO / Small KOI
LED Wall Light




5W	CRI90	3000K			IP20				
LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
	5 W	7 W	9 V	500 mA	90 3000K	Up&Down	600lm	450lm	SKOI-930UD05F-WW
									Code Remark: F=(ON-OFF)
LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
	5 W	7 W	9 V	500 mA	90 3000K	Up&Down	600lm	280lm	SKOI-930UD05F-BB
									Code Remark: F=(ON-OFF)

9W	CRI90	2000K-3000K Dim to Warm			IP20				
LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
	9 W	11 W	36 V	250 mA	90	2000K-3000K Up&Down	950lm	650lm	SKOI-9D3UD09P-WW
									Code Remark: P=(Phase Dim)
LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
	9 W	11 W	36 V	250 mA	90	2000K-3000K Up&Down	950lm	400lm	SKOI-9D3UD09P-BB
									Code Remark: P=(Phase Dim)

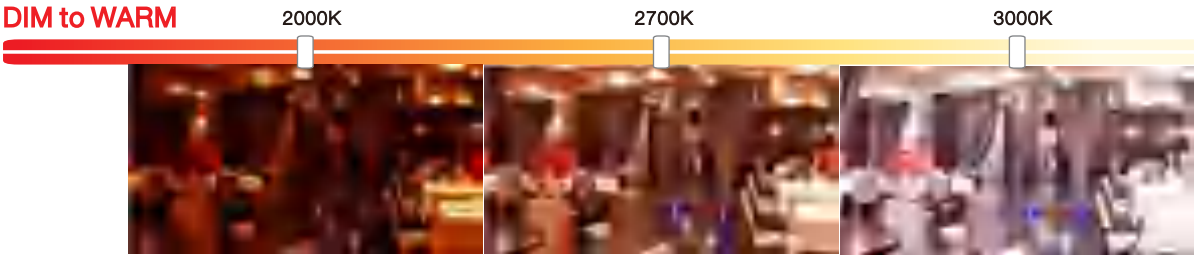

NEKO / Large KOI
LED Wall Light

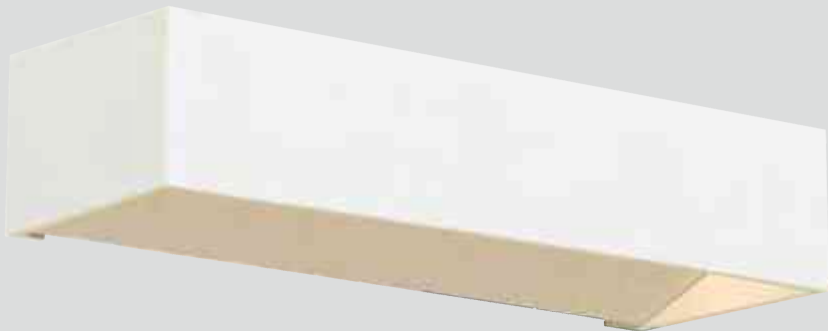

18W


CRI90

3000K











LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	90	3000K	30°	2100lm	1900lm	LKOI-930UD18P-WW

Code Remark: P=(Phase Dim)



18 W	20 W	36 V	500 mA	90	3000K	30°	2100lm	1300lm	LKOI-930UD18P-BB
------	------	------	--------	----	-------	-----	--------	--------	------------------

Code Remark: P=(Phase Dim)

NEKO / VANILLA
360° Circular Neon Strip Lighting

! NEW

Quick Info:

Wattage: 14.5W/ M

Voltage: 24VDC

IP65

CRI>90

Color Temperature: 3000K/ 4000K




Diameter: Ø23mm

Maximum Length: 5M (Arbitrary Cutting)




360° Light Emission




Output lumen: 1000lm/ M @3000K

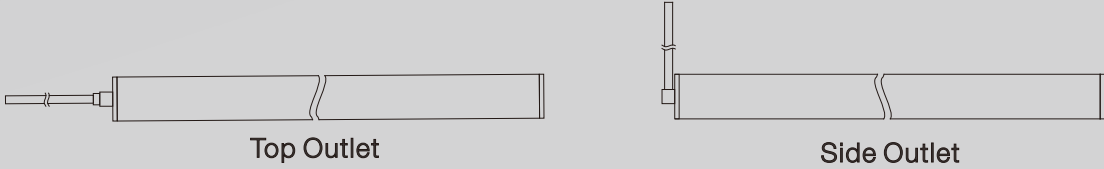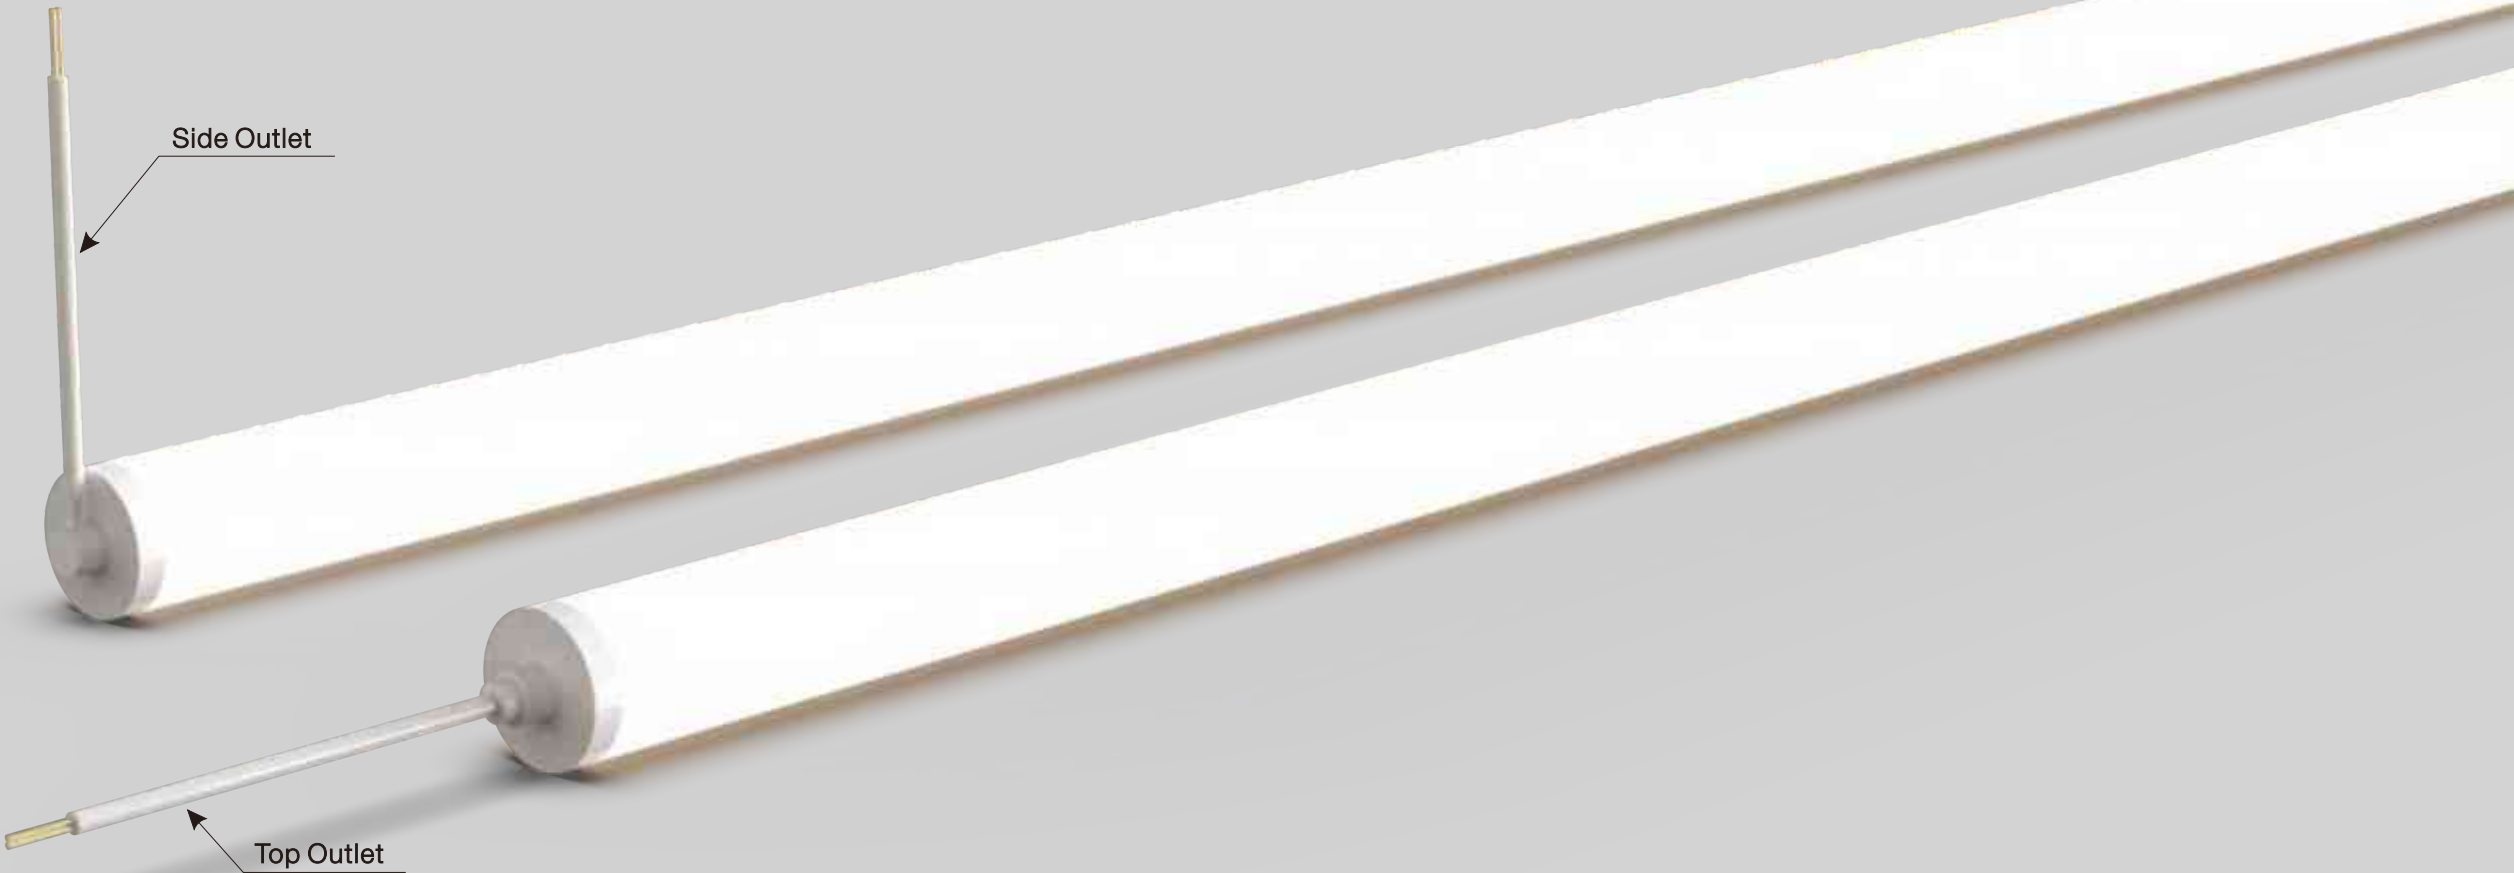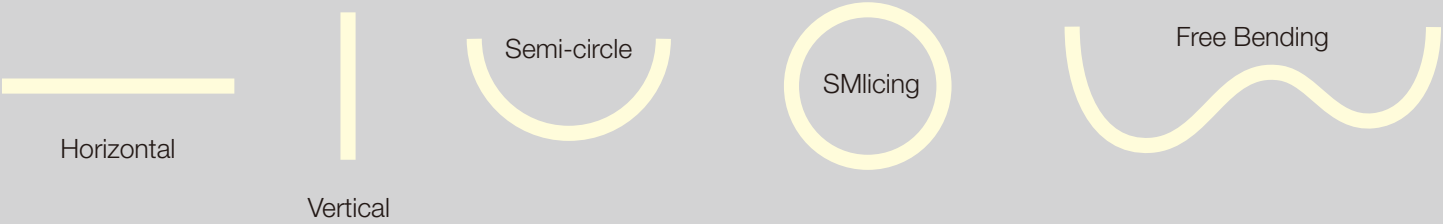

Housing/ Canopy Color:

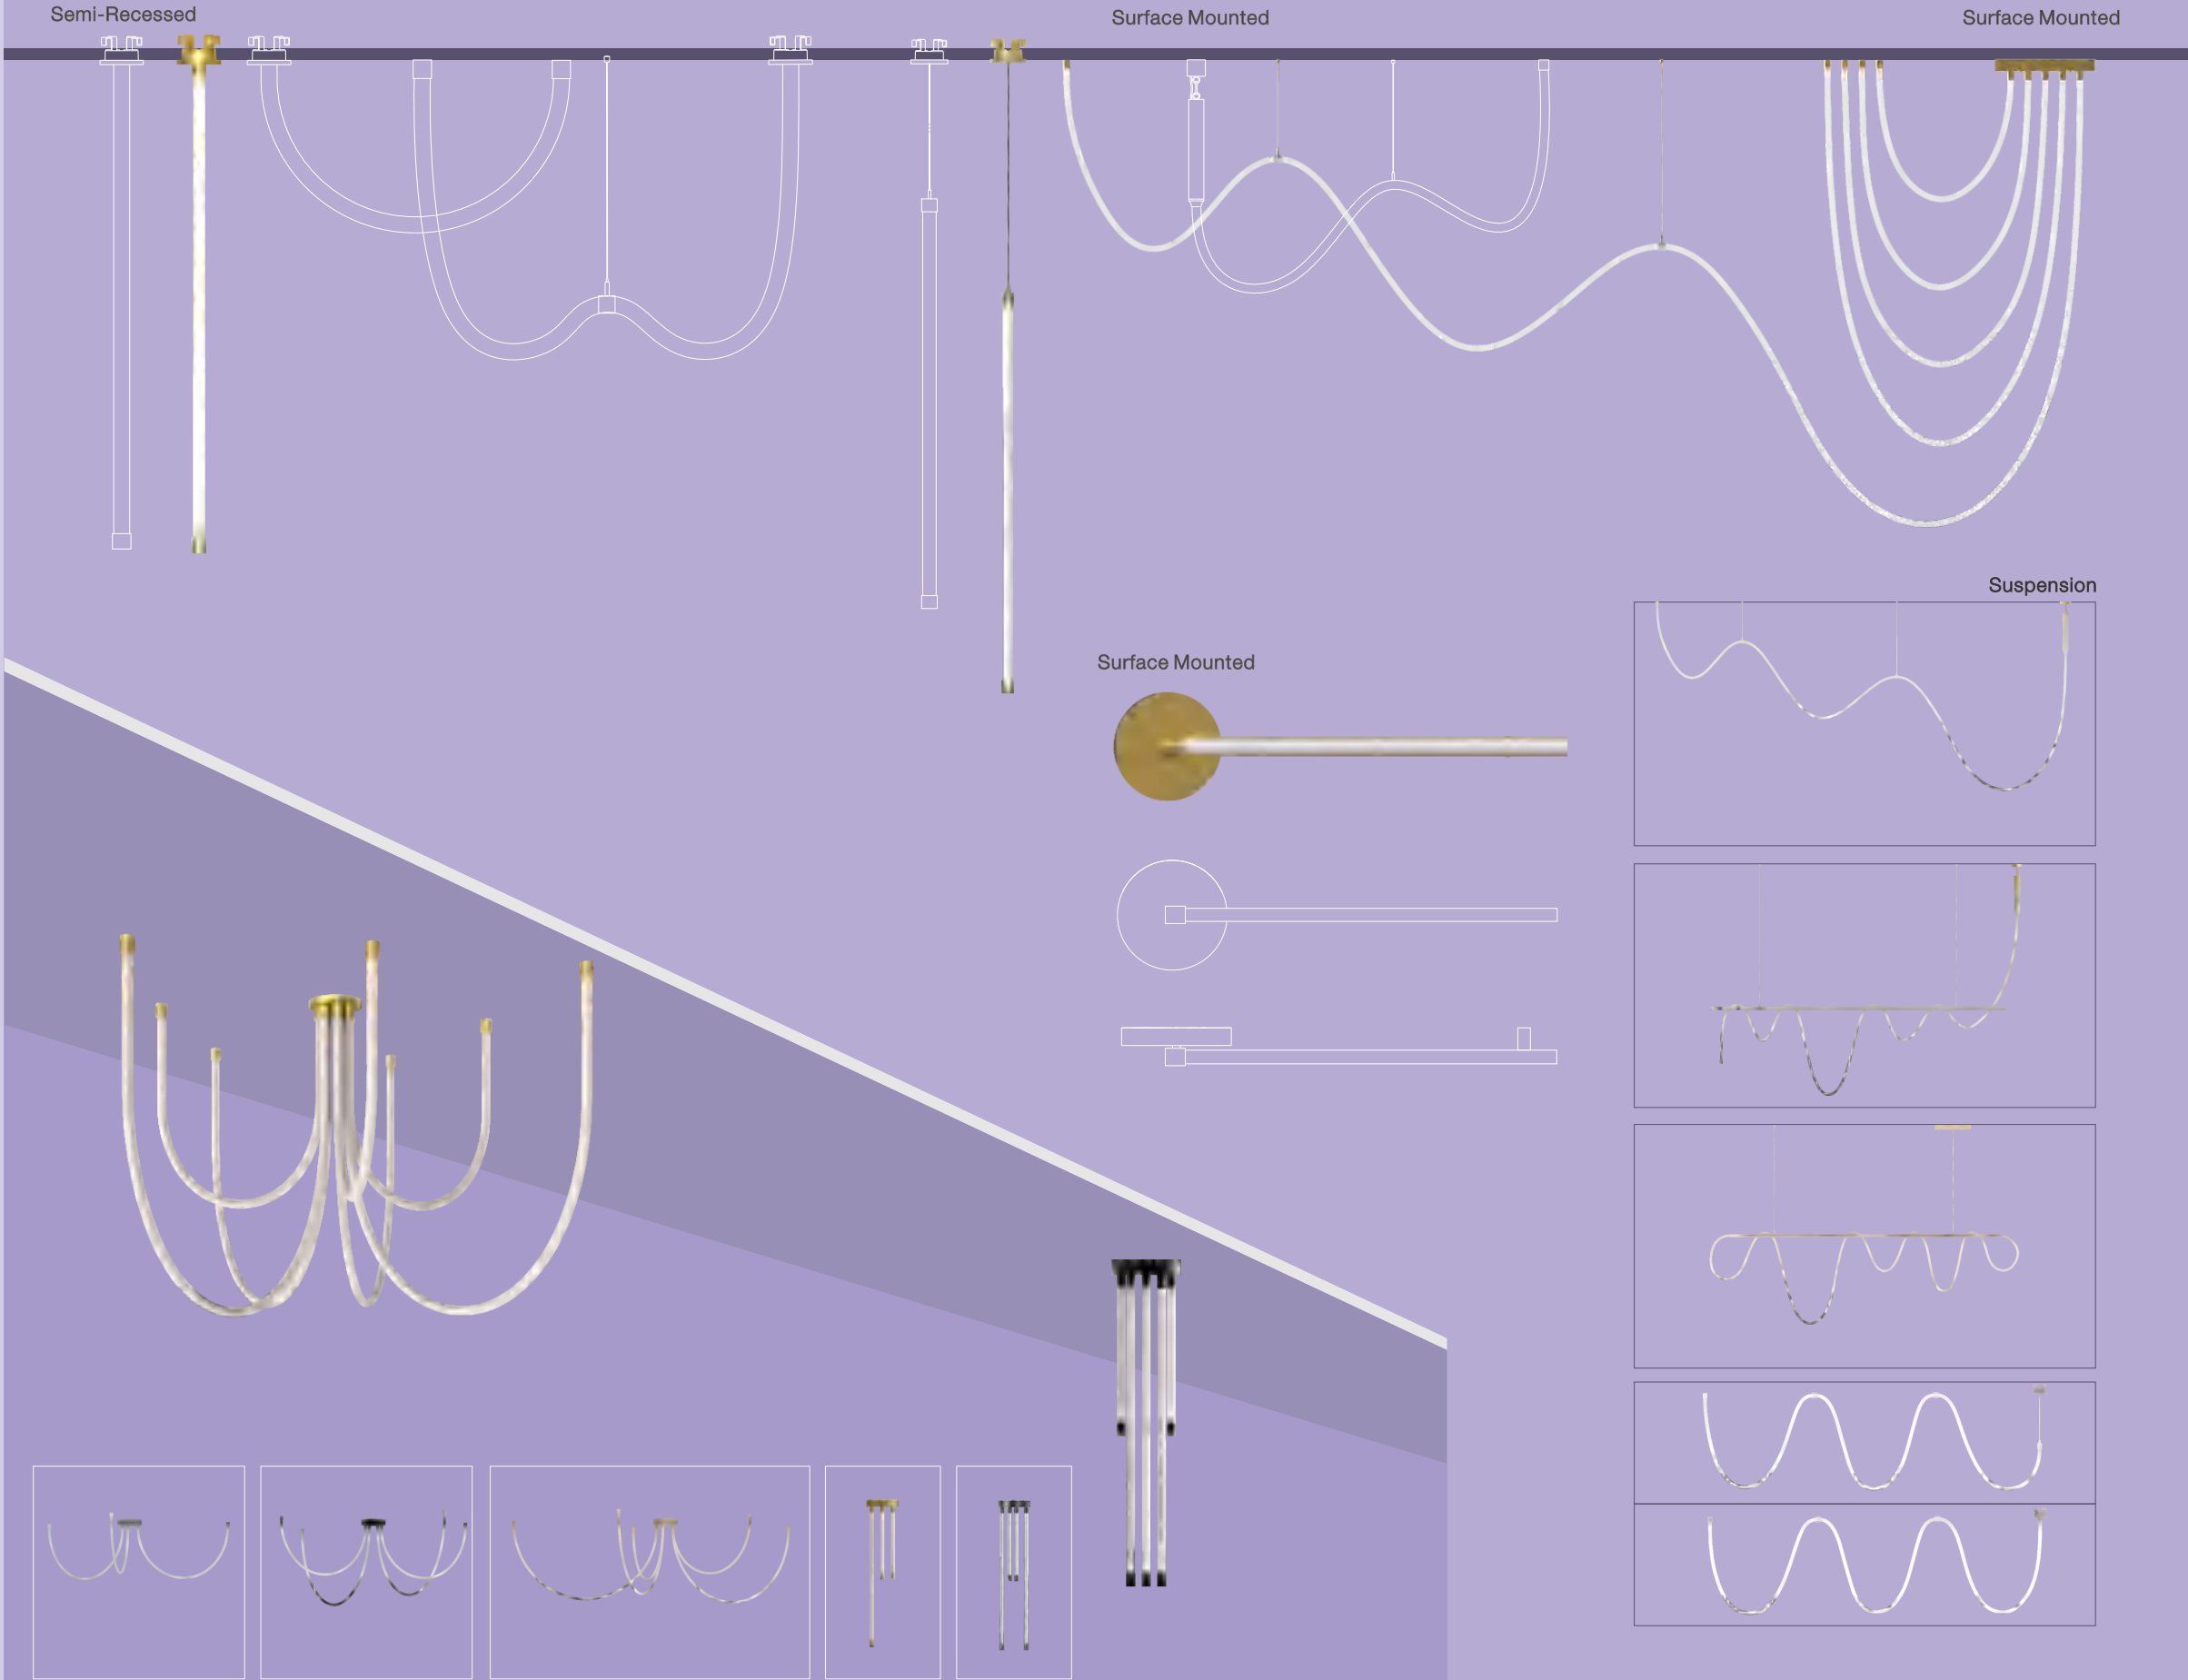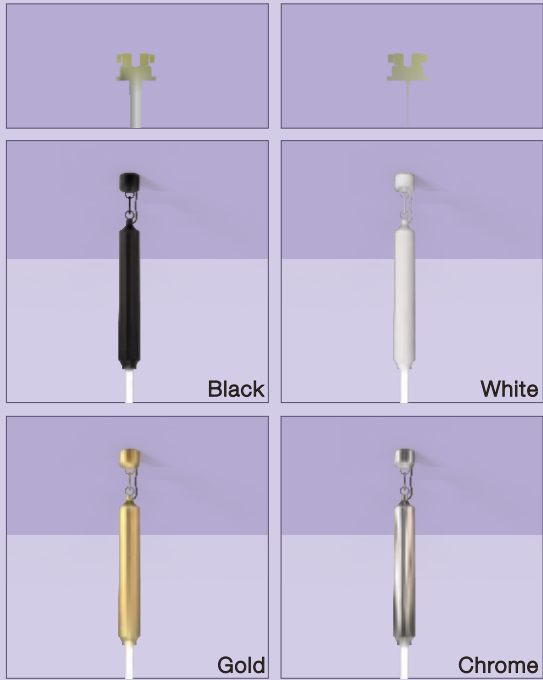


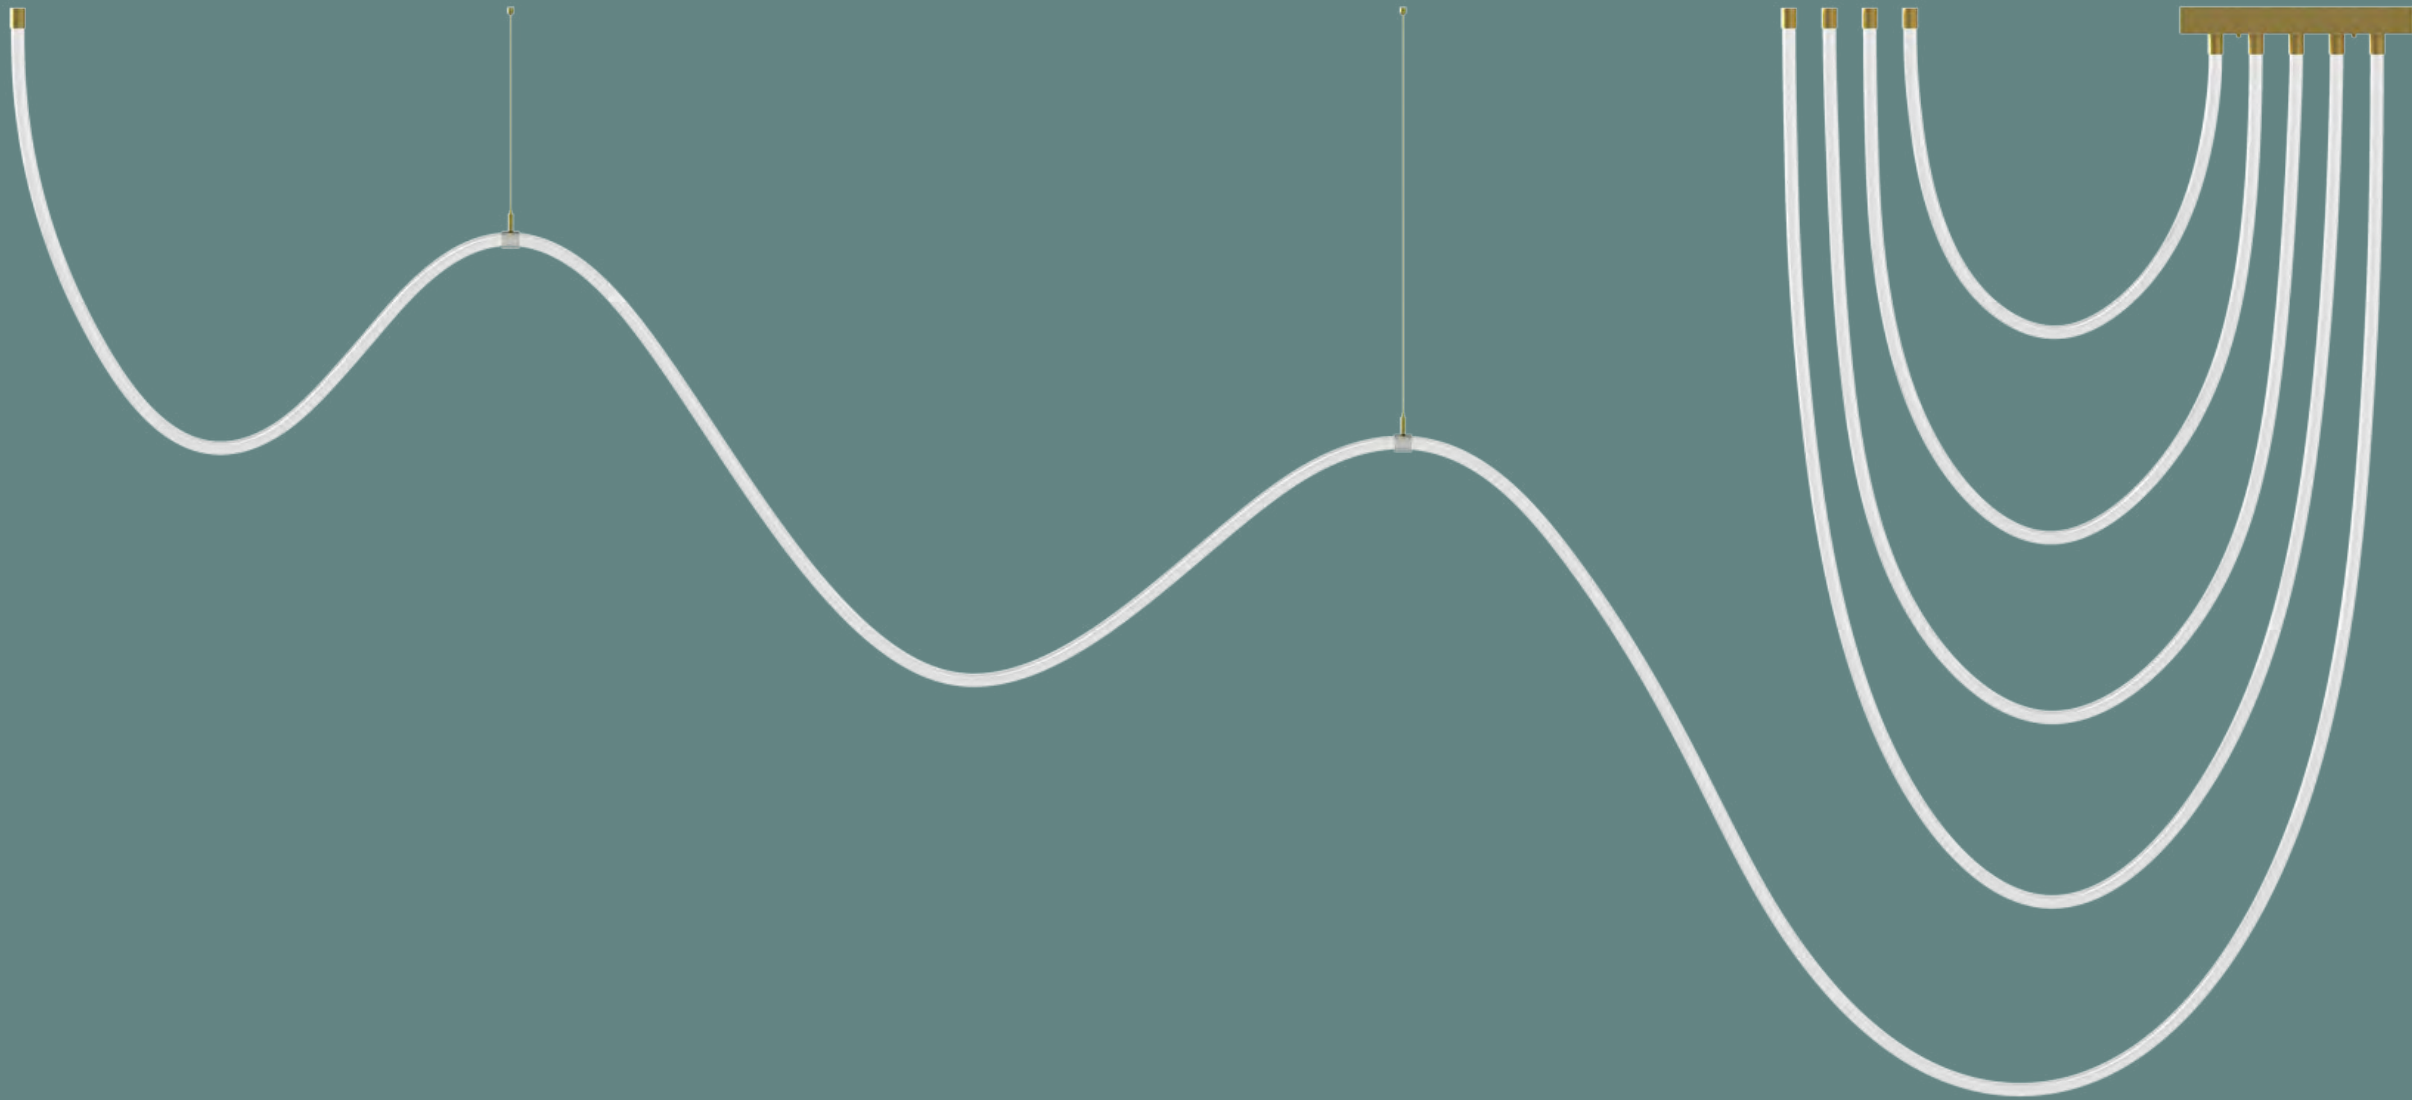



178W CRI90 3000K 4000K 360° IP 65 3 YEAR CB CE

LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
178 W	182 W	24 VDC	90	3000K	360°	12300lm	White	VANF-C5A3-178W-930-WN	VANF-C5A3-930C6A8 -WN
							Black	VANF-C5A3-178W-930-BN	VANF-C5A3-930C6A8 -BN
							Chrome	VANF-C5A3-178W-930-CN	VANF-C5A3-930C6A8 -CN
							Gold	VANF-C5A3-178W-930-GN	VANF-C5A3-930C6A8 -GN
			4000K	360°		13500lm	White	VANF-C5A3-178W-940-WN	VANF-C5A3-940C6A8 -WN
							Black	VANF-C5A3-178W-940-BN	VANF-C5A3-940C6A8 -BN
							Chrome	VANF-C5A3-178W-940-CN	VANF-C5A3-940C6A8 -CN
							Gold	VANF-C5A3-178W-940-GN	VANF-C5A3-940C6A8 -GN

Code Remark: N=N(No Driver) F=F(ON-OFF)

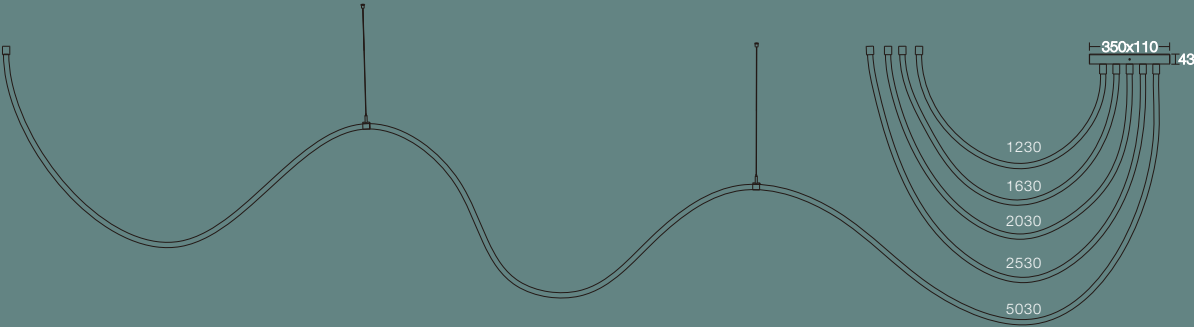



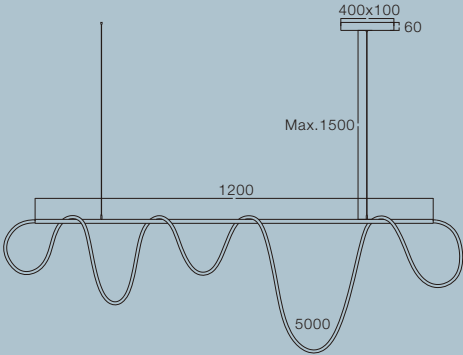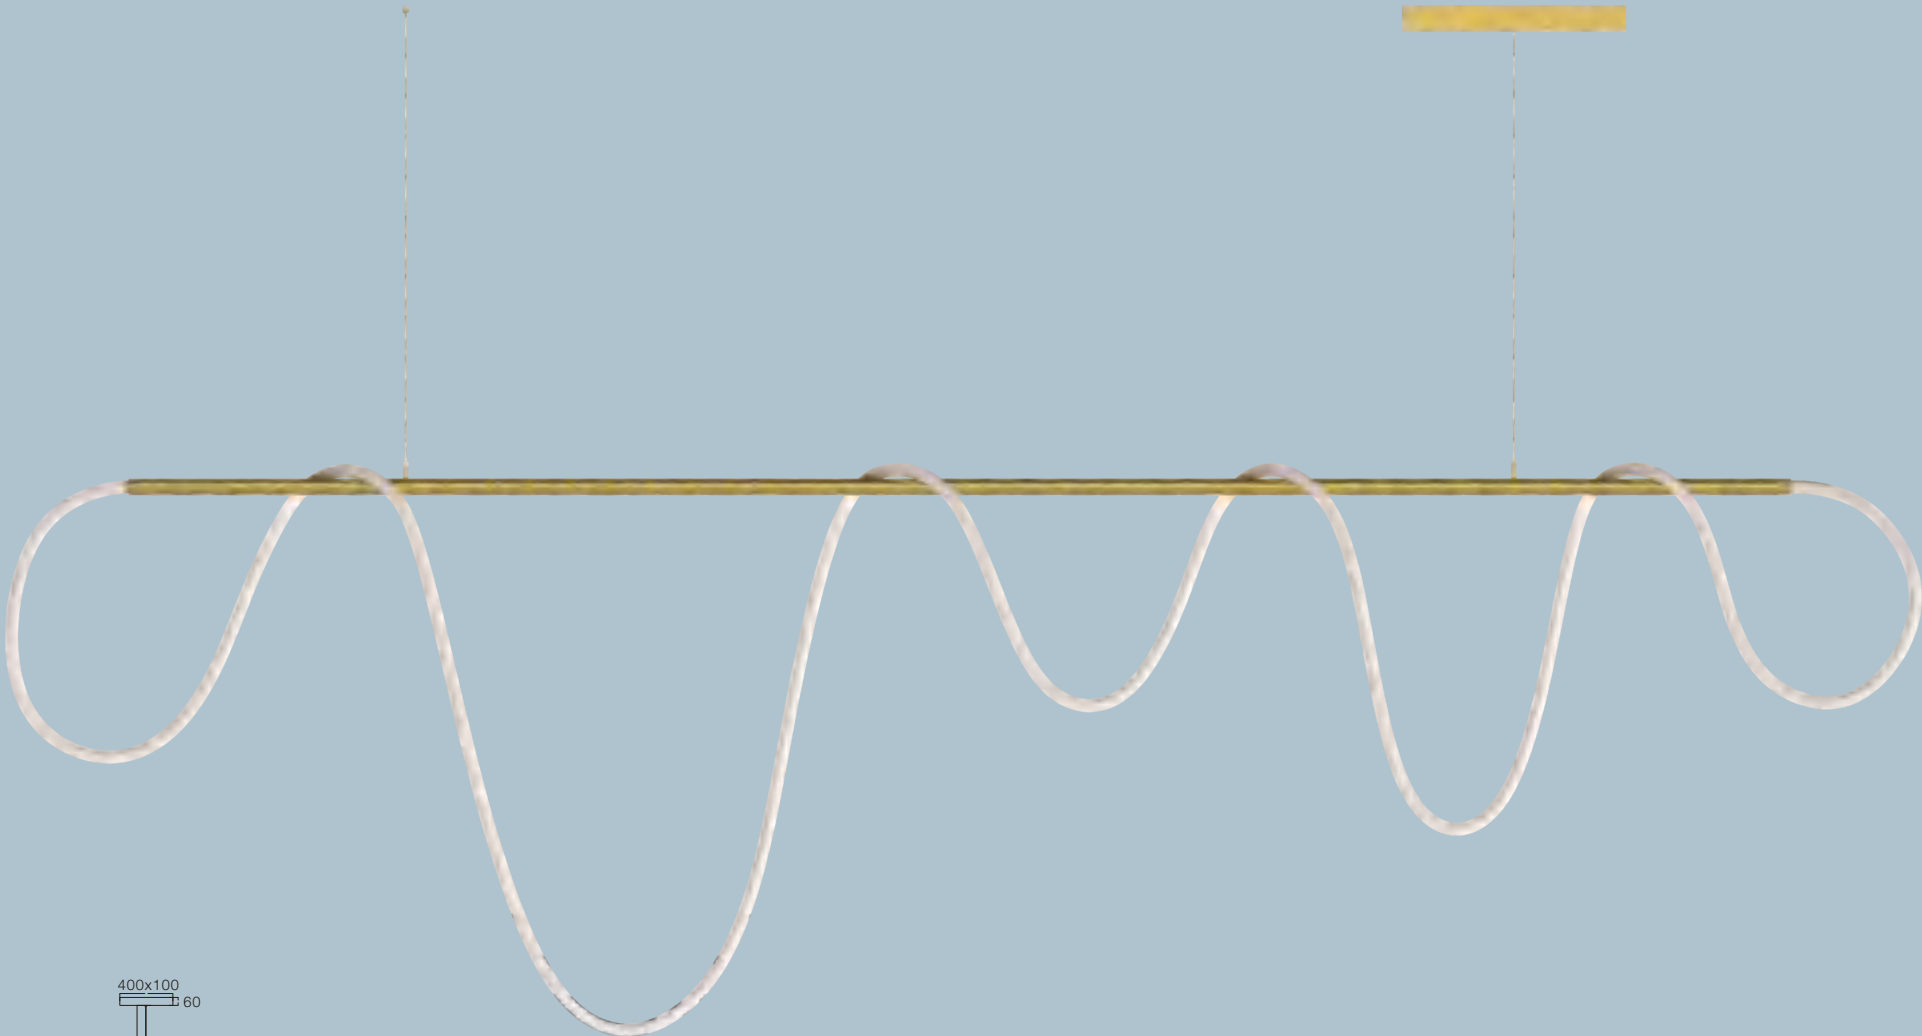

73W

CRI90

3000K
4000K


360°

IP65



CB


CE

LED	Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
73 W	77 W	24 VDC	90	3000K	360°	5000lm	White	VANF-C1A-73W-930-WN	VANF-C1A-930C673F-WN	
							Black	VANF-C1A-73W-930-BN	VANF-C1A-930C673F-BN	
							Chrome	VANF-C1A-73W-930-CN	VANF-C1A-930C673F-CN	
							Gold	VANF-C1A-73W-930-GN	VANF-C1A-930C673F-GN	
					4000K	360°	5500lm	White	VANF-C1A-73W-940-WN	VANF-C1A-940C673F-WN
								Black	VANF-C1A-73W-940-BN	VANF-C1A-940C673F-BN
								Chrome	VANF-C1A-73W-940-CN	VANF-C1A-940C673F-CN
								Gold	VANF-C1A-73W-940-GN	VANF-C1A-940C673F-GN

Code Remark: N=N(No Driver) F=F(ON-OFF)



NEKO / VANILLA / VANF-SV06-SM & VANF-SV06-SUS
360° Circular Neon Strip Lighting

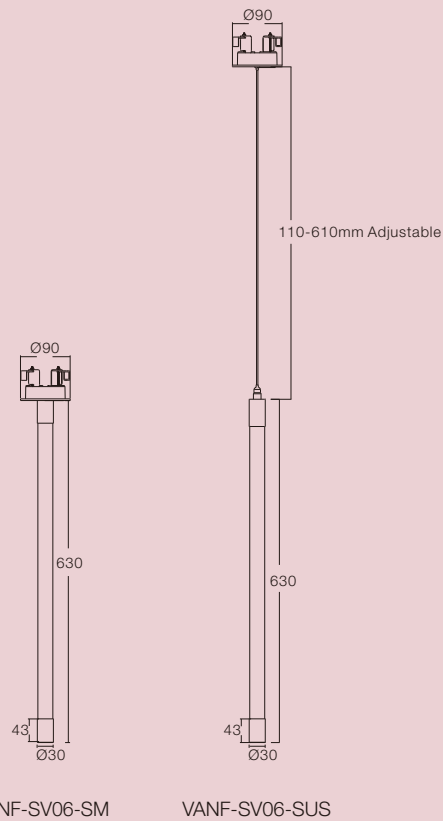


LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
8.5 W	10 W	24 VDC	90	3000K	360°	600lm	White	VANF-SV06-SM-8.5W-930-WN	VANF-SV06-SM-930C609F-WN
							Black	VANF-SV06-SM-8.5W-930-BN	VANF-SV06-SM-930C609F-BN
							Chrome	VANF-SV06-SM-8.5W-930-CN	VANF-SV06-SM-930C609F-CN
							Gold	VANF-SV06-SM-8.5W-930-GN	VANF-SV06-SM-930C609F-GN
			90	4000K	360°	650lm	White	VANF-SV06-SM-8.5W-940-WN	VANF-SV06-SM-940C609F-WN
							Black	VANF-SV06-SM-8.5W-940-BN	VANF-SV06-SM-940C609F-BN
							Chrome	VANF-SV06-SM-8.5W-940-CN	VANF-SV06-SM-940C609F-CN
							Gold	VANF-SV06-SM-8.5W-940-GN	VANF-SV06-SM-940C609F-GN
8.5 W	10 W	24 VDC	90	3000K	360°	600lm	White	VANF-SV06-SUS-8.5W-930-WN	VANF-SV06-SUS-930C609F-WN
							Black	VANF-SV06-SUS-8.5W-930-BN	VANF-SV06-SUS-930C609F-BN
							Chrome	VANF-SV06-SUS-8.5W-930-CN	VANF-SV06-SUS-930C609F-CN
							Gold	VANF-SV06-SUS-8.5W-930-GN	VANF-SV06-SUS-930C609F-GN
			90	4000K	360°	650lm	White	VANF-SV06-SUS-8.5W-940-WN	VANF-SV06-SUS-940C609F-WN
							Black	VANF-SV06-SUS-8.5W-940-BN	VANF-SV06-SUS-940C609F-BN
							Chrome	VANF-SV06-SUS-8.5W-940-CN	VANF-SV06-SUS-940C609F-CN
							Gold	VANF-SV06-SUS-8.5W-940-GN	VANF-SV06-SUS-940C609F-GN

Code Remark: N=N(No Driver) F=F(ON-OFF)



NEKO / VANILLA / VANF-C3A2 & C4A2 & C5A2
360° Circular Neon Strip Lighting

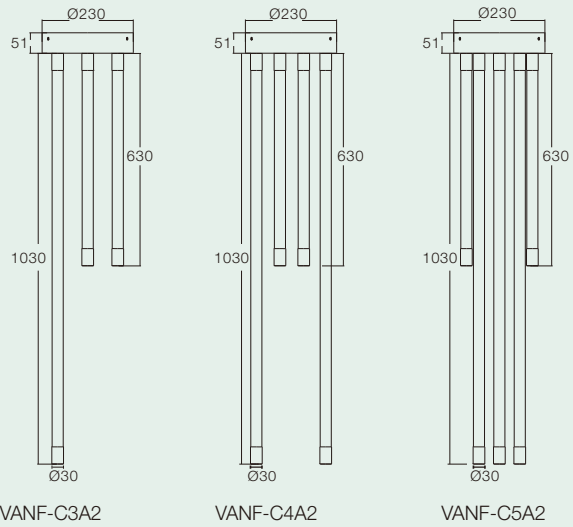





LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
32 W	34 W	24 VDC	90	3000K	360°	2150lm	White	VANF-C3A2-32W-930-WN	VANF-C3A2-930C632F-WN
							Black	VANF-C3A2-32W-930-BN	VANF-C3A2-930C632F-BN
							Chrome	VANF-C3A2-32W-930-CN	VANF-C3A2-930C632F-CN
							Gold	VANF-C3A2-32W-930-GN	VANF-C3A2-930C632F-GN
			4000K	360°	2350lm	White	VANF-C3A2-32W-940-WN	VANF-C3A2-940C632F-WN	
						Black	VANF-C3A2-32W-940-BN	VANF-C3A2-940C632F-BN	
						Chrome	VANF-C3A2-32W-940-CN	VANF-C3A2-940C632F-CN	
						Gold	VANF-C3A2-32W-940-GN	VANF-C3A2-940C632F-GN	
46 W	48 W	24 VDC	90	3000K	360°	3200lm	White	VANF-C4A2-46W-930-WN	VANF-C4A2-930C646F-WN
							Black	VANF-C4A2-46W-930-BN	VANF-C4A2-930C646F-BN
							Chrome	VANF-C4A2-46W-930-CN	VANF-C4A2-930C646F-CN
							Gold	VANF-C4A2-46W-930-GN	VANF-C4A2-930C646F-GN
			4000K	360°	3500lm	White	VANF-C4A2-46W-940-WN	VANF-C4A2-940C646F-WN	
						Black	VANF-C4A2-46W-940-BN	VANF-C4A2-940C646F-BN	
						Chrome	VANF-C4A2-46W-940-CN	VANF-C4A2-940C646F-CN	
						Gold	VANF-C4A2-46W-940-GN	VANF-C4A2-940C646F-GN	
61 W	64 W	24 VDC	90	3000K	360°	4200lm	White	VANF-C5A2-61W-930-WN	VANF-C5A2-930C661F-WN
							Black	VANF-C5A2-61W-930-BN	VANF-C5A2-930C661F-BN
							Chrome	VANF-C5A2-61W-930-CN	VANF-C5A2-930C661F-CN
							Gold	VANF-C5A2-61W-930-GN	VANF-C5A2-930C661F-GN
			4000K	360°	4600lm	White	VANF-C5A2-61W-940-WN	VANF-C5A2-940C661F-WN	
						Black	VANF-C5A2-61W-940-BN	VANF-C5A2-940C661F-BN	
						Chrome	VANF-C5A2-61W-940-CN	VANF-C5A2-940C661F-CN	
						Gold	VANF-C5A2-61W-940-GN	VANF-C5A2-940C661F-GN	

Code Remark: N=N(No Driver) F=F(ON-OFF)




NEKO / VANILLA / VANF-C3A1 & C4A1 & C5A1 & C7A1
360° Circular Neon Strip Lighting


NEW

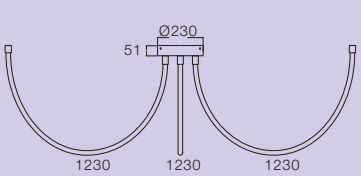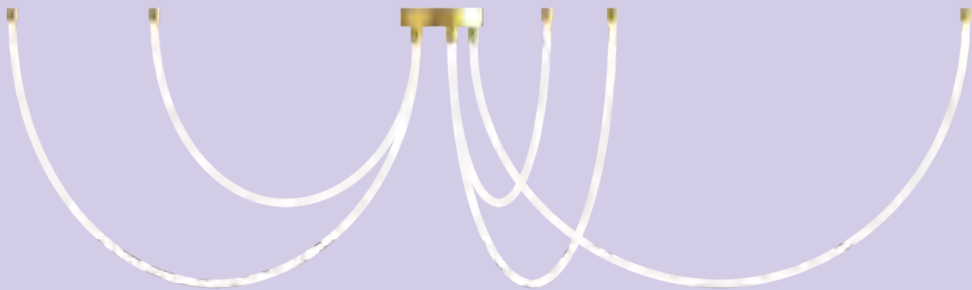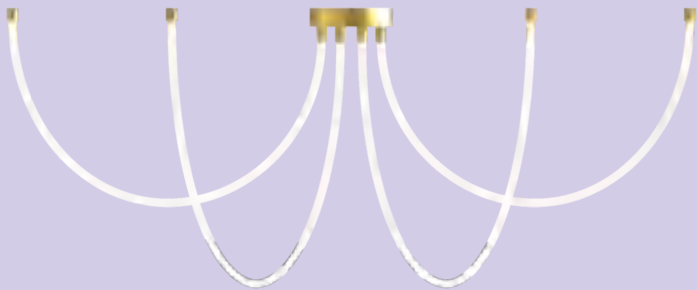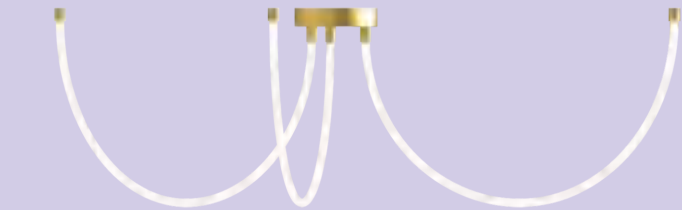


VANF-C3A1

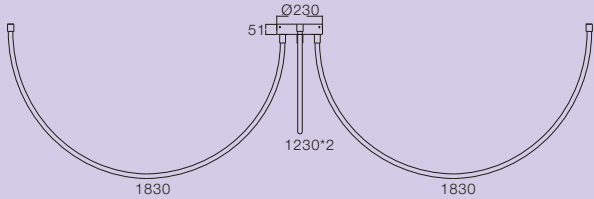

VANF-C4A1

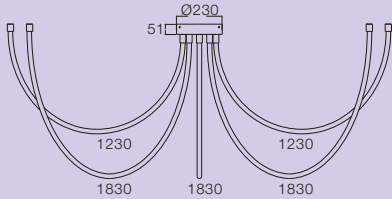

VANF-C5A1

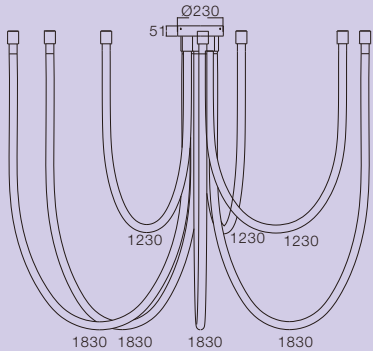

VANF-C7A1

52W
87W
113W
156W

CRI90

3000K
4000K

360°

IP65




CB

CE

LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
52 W	54 W	24 VDC	90	3000K	360°	3600lm	White	VANF-C3A1-52W-930-WN	VANF-C3A1-930C652F-WN
							Black	VANF-C3A1-52W-930-BN	VANF-C3A1-930C652F-BN
							Chrome Gold	VANF-C3A1-52W-930-CN	VANF-C3A1-930C652F-CN
							Gold	VANF-C3A1-52W-930-GN	VANF-C3A1-930C652F-GN
			4000K		360°	3900lm	White	VANF-C3A1-52W-940-WN	VANF-C3A1-940C652F-WN
							Black	VANF-C3A1-52W-940-BN	VANF-C3A1-940C652F-BN
							Chrome	VANF-C3A1-52W-940-CN	VANF-C3A1-940C652F-CN
							Gold	VANF-C3A1-52W-940-GN	VANF-C3A1-940C652F-GN
87 W	90 W	24 VDC	90	3000K	360°	6000lm	White	VANF-C4A1-87W-930-WN	VANF-C4A1-930C687F-WN
							Black	VANF-C4A1-87W-930-BN	VANF-C4A1-930C687F-BN
							Chrome Gold	VANF-C4A1-87W-930-CN	VANF-C4A1-930C687F-CN
							Gold	VANF-C4A1-87W-930-GN	VANF-C4A1-930C687F-GN
			4000K		360°	6500lm	White	VANF-C4A1-87W-940-WN	VANF-C4A1-940C687F-WN
							Black	VANF-C4A1-87W-940-BN	VANF-C4A1-940C687F-BN
							Chrome	VANF-C4A1-87W-940-CN	VANF-C4A1-940C687F-CN
							Gold	VANF-C4A1-87W-940-GN	VANF-C4A1-940C687F-GN
113 W	116 W	24 VDC	90	3000K	360°	7800lm	White	VANF-C5A1-113W-930-WN	VANF-C5A1-930C6A1F-WN
							Black	VANF-C5A1-113W-930-BN	VANF-C5A1-930C6A1F-BN
							Chrome Gold	VANF-C5A1-113W-930-CN	VANF-C5A1-930C6A1F-CN
							Gold	VANF-C5A1-113W-930-GN	VANF-C5A1-930C6A1F-GN
			4000K		360°	8500lm	White	VANF-C5A1-113W-940-WN	VANF-C5A1-940C6A1F-WN
							Black	VANF-C5A1-113W-940-BN	VANF-C5A1-940C6A1F-BN
							Chrome	VANF-C5A1-113W-940-CN	VANF-C5A1-940C6A1F-CN
							Gold	VANF-C5A1-113W-940-GN	VANF-C5A1-940C6A1F-GN
156 W	160 W	24 VDC	90	3000K	360°	11000lm	White	VANF-C7A1-156W-930-WN	VANF-C7A1-930C6A6F-WN
							Black	VANF-C7A1-156W-930-BN	VANF-C7A1-930C6A6F-BN
							Chrome Gold	VANF-C7A1-156W-930-CN	VANF-C7A1-930C6A6F-CN
							Gold	VANF-C7A1-156W-930-GN	VANF-C7A1-930C6A6F-GN
			4000K		360°	12000lm	White	VANF-C7A1-156W-940-WN	VANF-C7A1-940C6A6F-WN
							Black	VANF-C7A1-156W-940-BN	VANF-C7A1-940C6A6F-BN
							Chrome	VANF-C7A1-156W-940-CN	VANF-C7A1-940C6A6F-CN
							Gold	VANF-C7A1-156W-940-GN	VANF-C7A1-940C6A6F-GN

Code Remark: N=N(No Driver) F=F(ON-OFF)



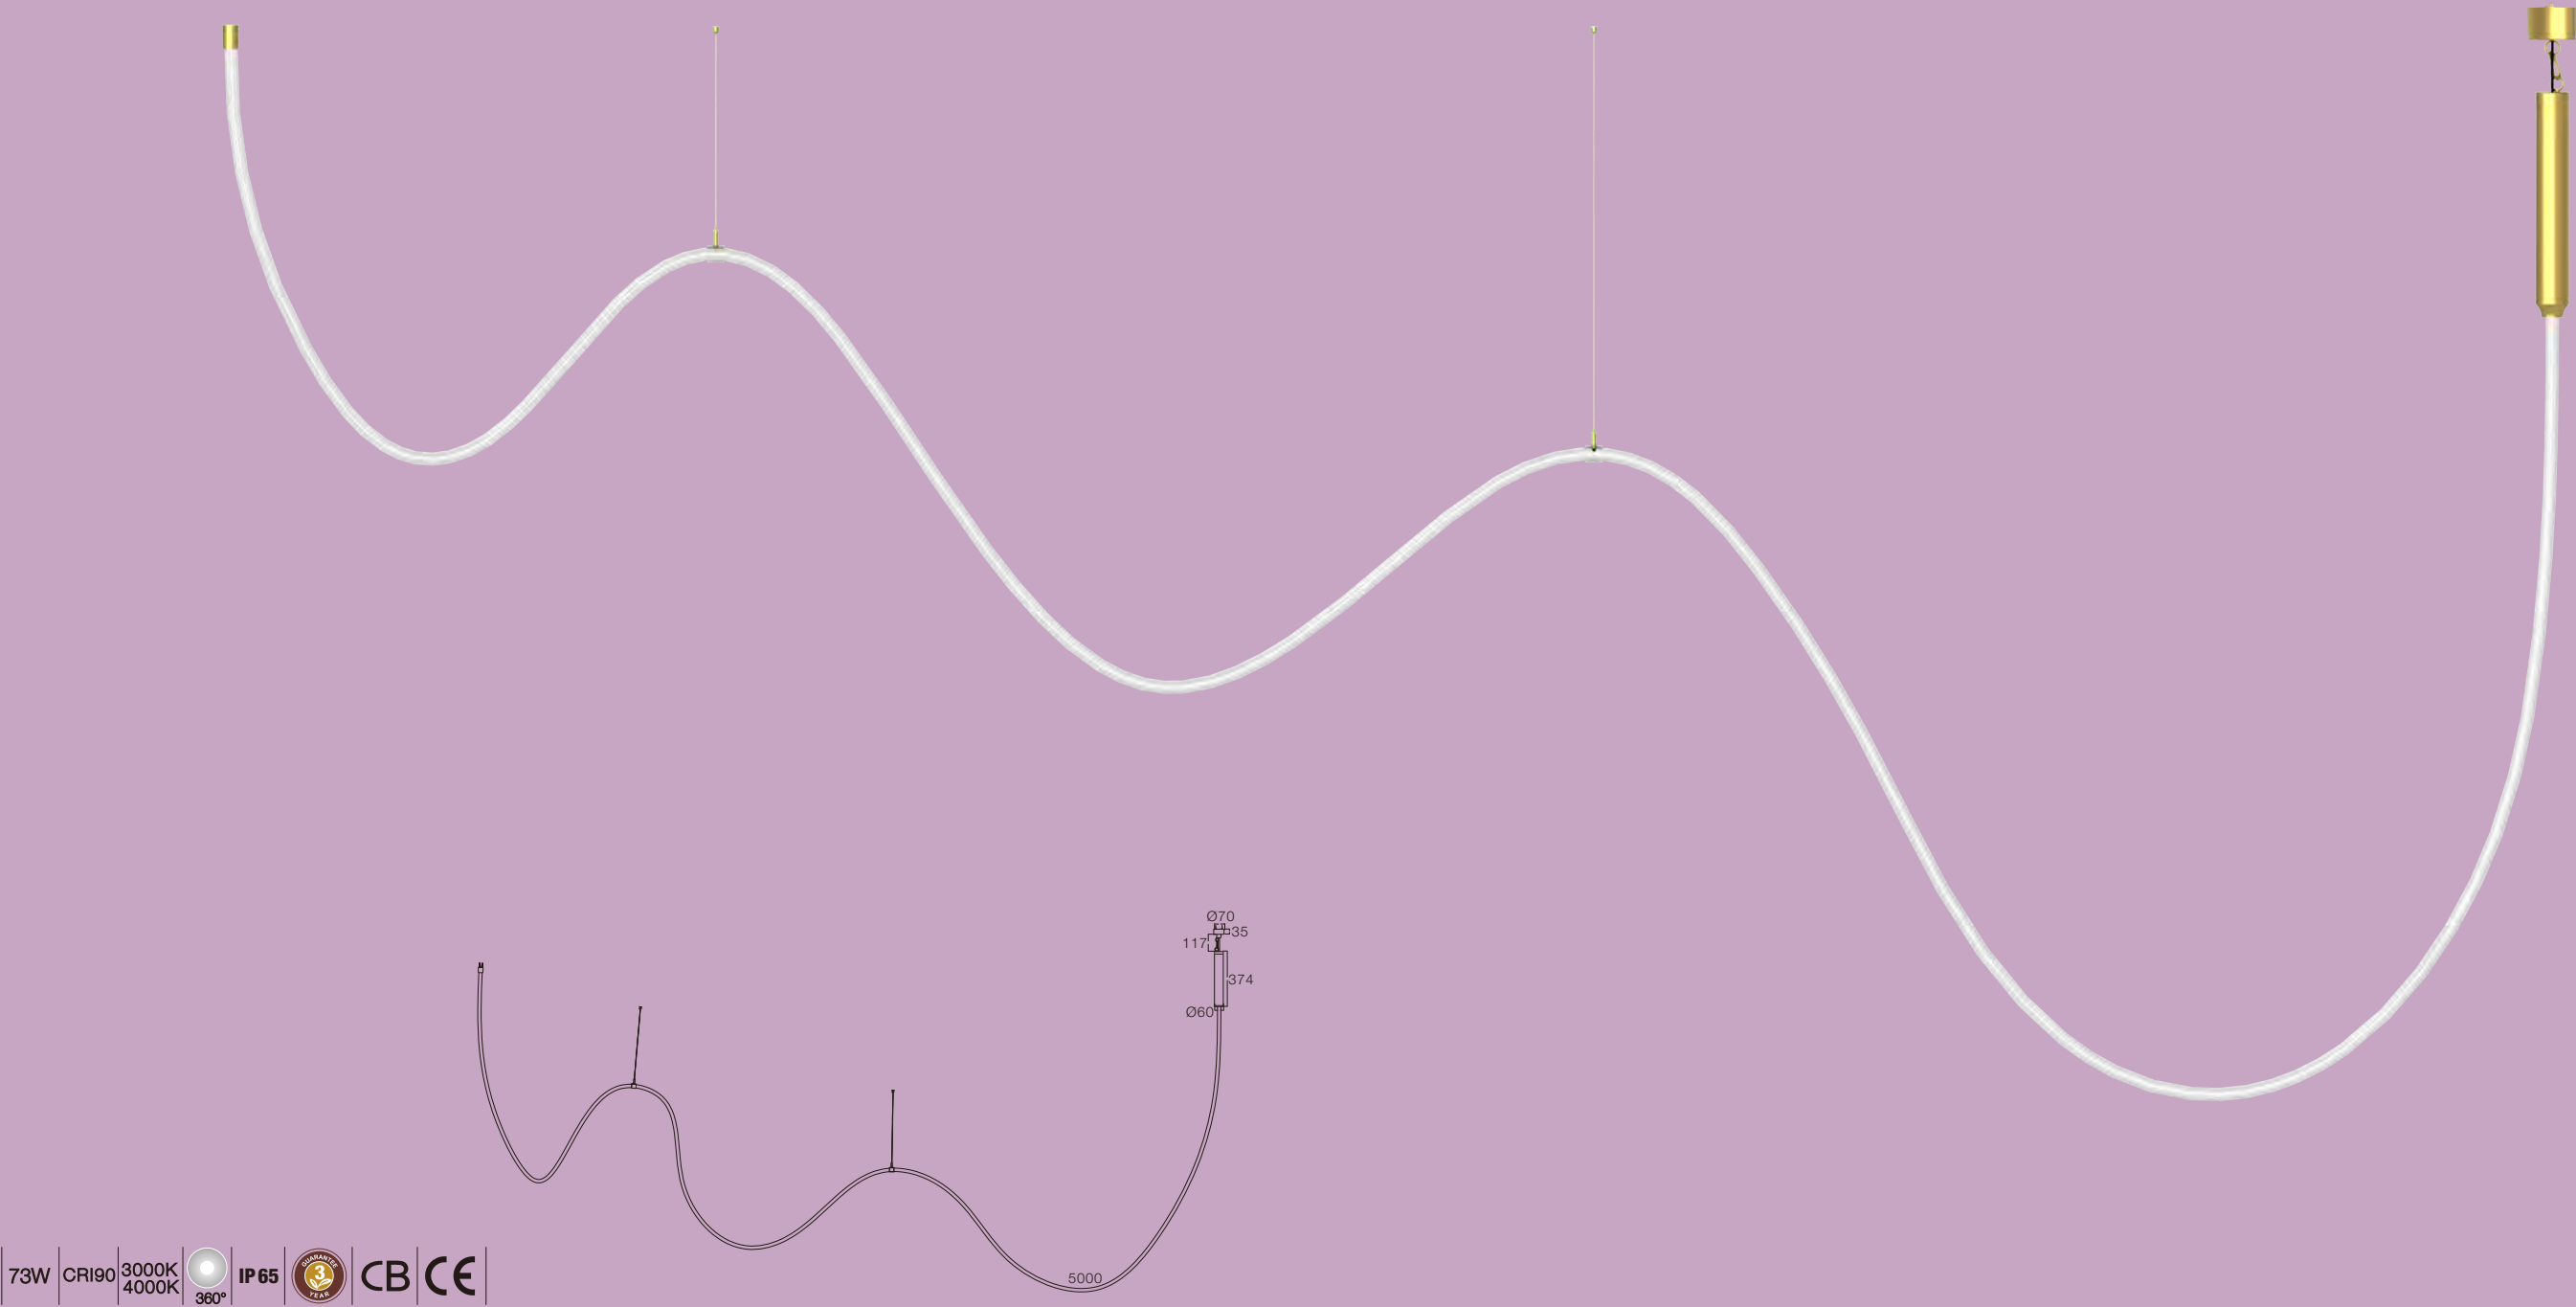

73W

CRI90

3000K
4000K

360°

IP65

3 YEAR


CB

CE

LED	Power	System power	LED Voltage	CRI	OCT	Beam	System Output	Canopy Color	Model	Code
73 W	77 W	24 VDC	90	3000K	360°	5000lm		White	VANF-SH50-SP-73W-930-WN	VANF-SH50-SP-930C673F-WN
								Black	VANF-SH50-SP-73W-930-BN	VANF-SH50-SP-930C673F-BN
								Chrome	VANF-SH50-SP-73W-930-CN	VANF-SH50-SP-930C673F-CN
								Gold	VANF-SH50-SP-73W-930-GN	VANF-SH50-SP-930C673F-GN
				4000K	360°	5500lm		White	VANF-SH50-SP-73W-940-WN	VANF-SH50-SP-940C673F-WN
								Black	VANF-SH50-SP-73W-940-BN	VANF-SH50-SP-940C673F-BN
								Chrome	VANF-SH50-SP-73W-940-CN	VANF-SH50-SP-940C673F-CN
								Gold	VANF-SH50-SP-73W-940-GN	VANF-SH50-SP-940C673F-GN

Code Remark: N=N(No Driver) F=F(ON-OFF)



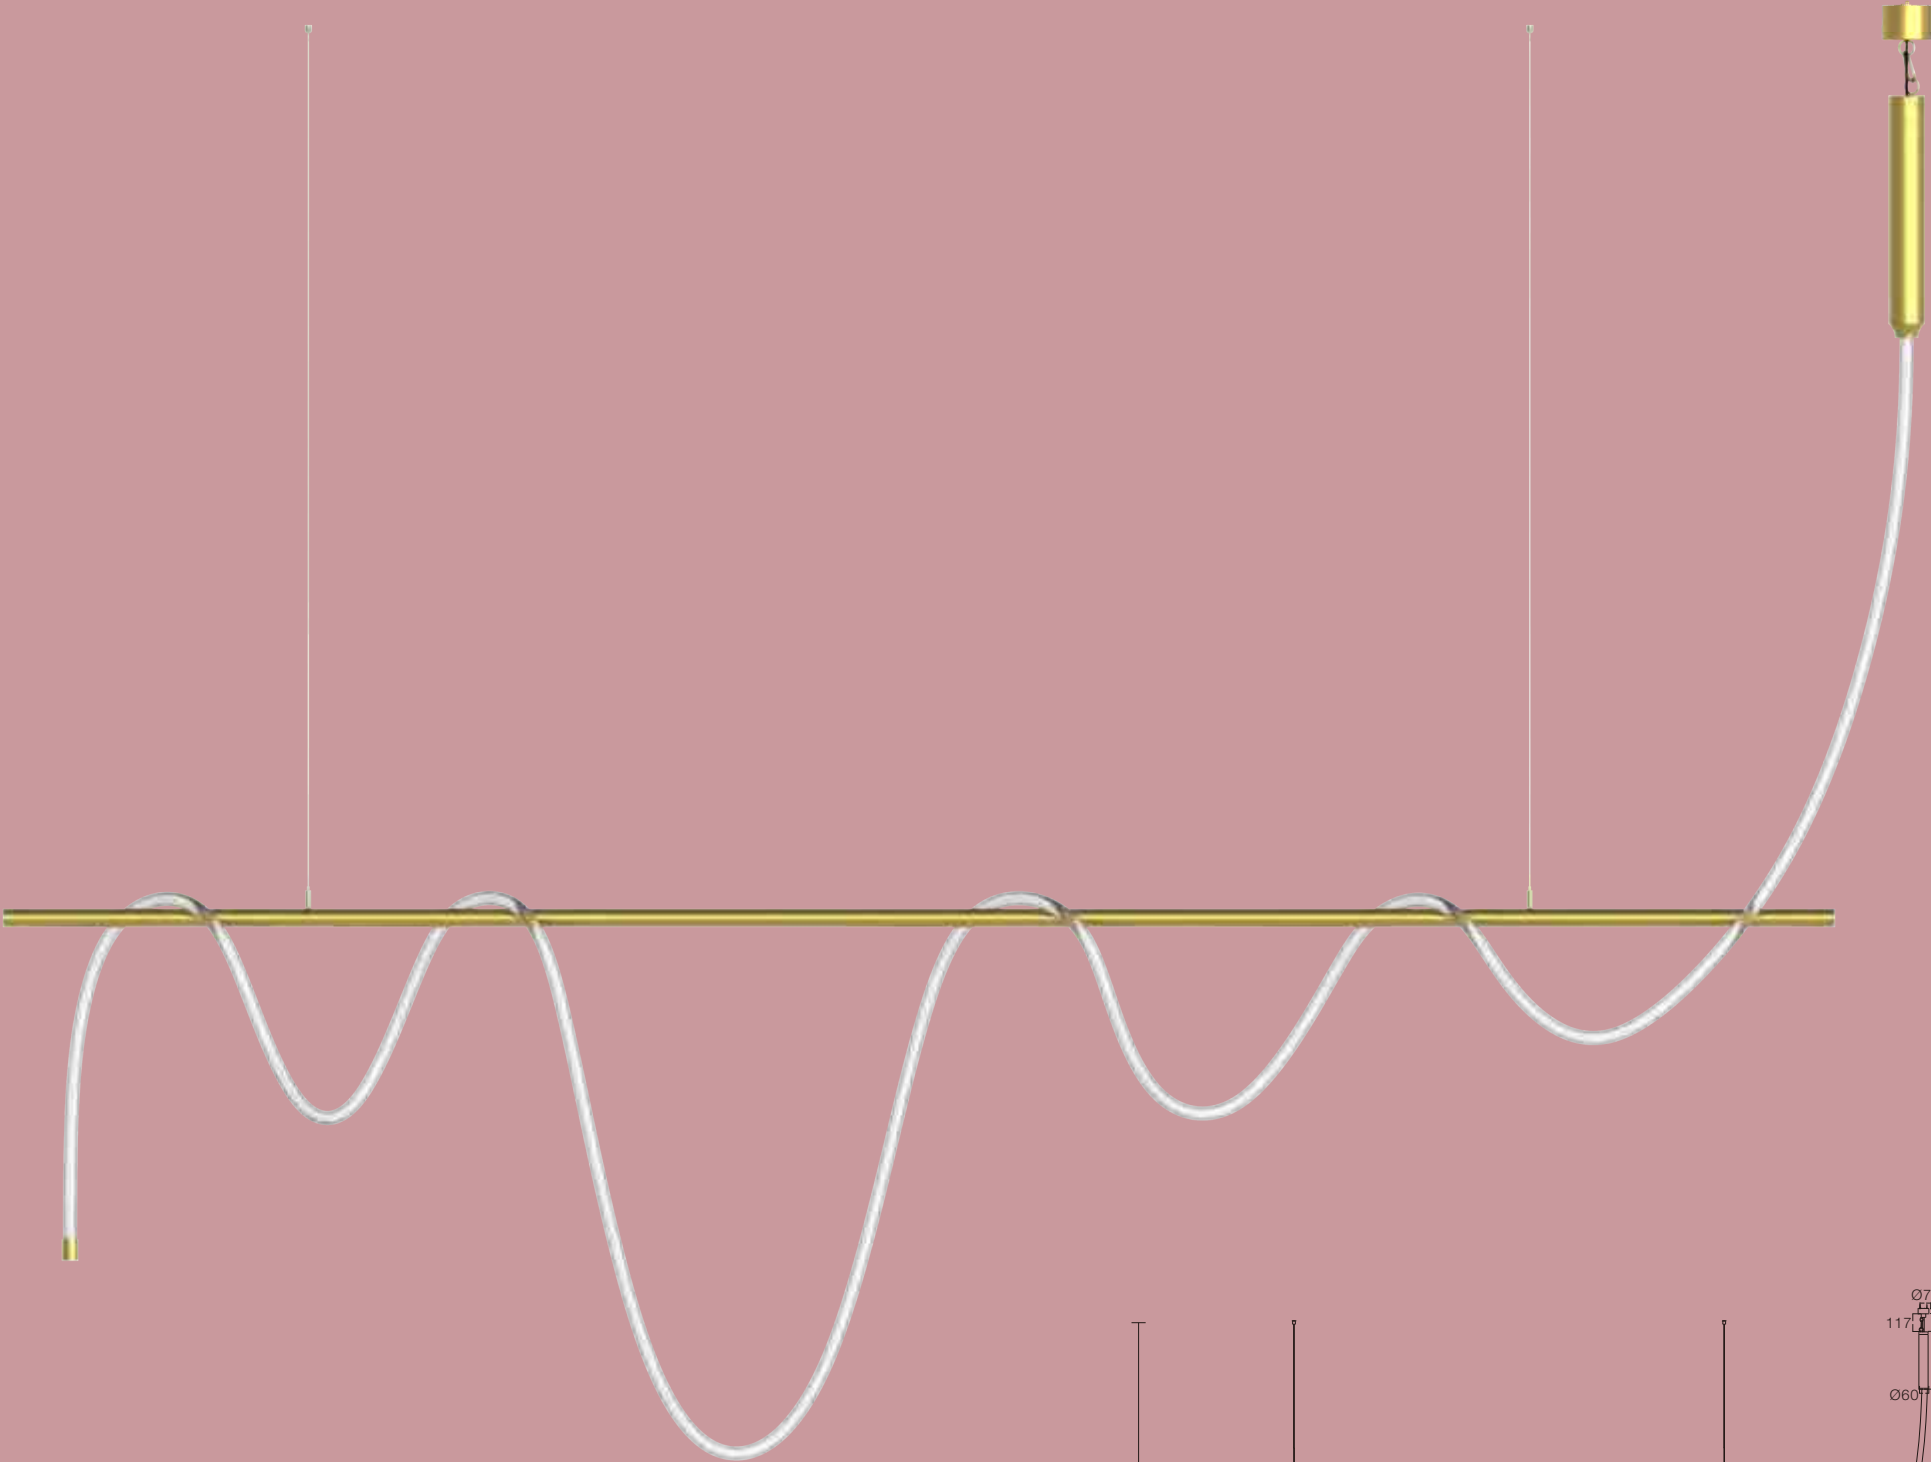

73W

CRI90

3000K
4000K

360°

IP65


3 Year Warranty

CB


CE

LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
73 W	77 W	24 VDC	90	3000K	360°	5000lm	White	VANF-C1B-73W-930-WN	VANF-C1B-930C673F-WN
							Black	VANF-C1B-73W-930-BN	VANF-C1B-930C673F-BN
							Chrome	VANF-C1B-73W-930-CN	VANF-C1B-930C673F-CN
							Gold	VANF-C1B-73W-930-GN	VANF-C1B-930C673F-GN
				4000K	360°	5500lm	White	VANF-C1B-73W-940-WN	VANF-C1B-940C673F-WN
							Black	VANF-C1B-73W-940-BN	VANF-C1B-940C673F-BN
							Chrome	VANF-C1B-73W-940-CN	VANF-C1B-940C673F-CN
							Gold	VANF-C1B-73W-940-GN	VANF-C1B-940C673F-GN

Code Remark: N=N(No Driver) F=F(ON-OFF)

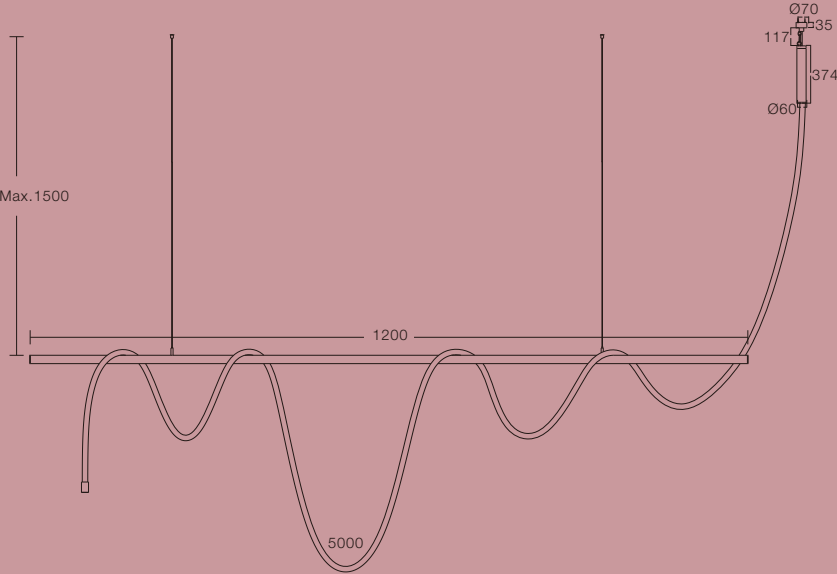

NEKO / VANILLA / VANF-SH50-SM & VANF-SH50-SUS
360° Circular Neon Strip Lighting

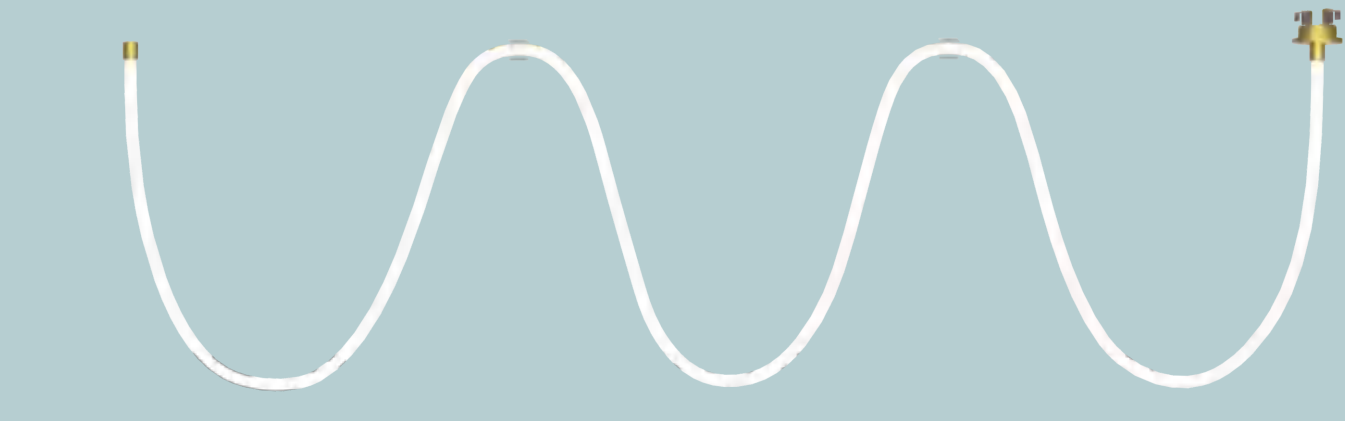

VANF-SH50-SM

LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
73 W	77 W	24 VDC	90	3000K	360°	5000lm	White	VANF-SH50-SM-73W-930-WN	VANF-SH50-SM-930C673F-WN
							Black	VANF-SH50-SM-73W-930-BN	VANF-SH50-SM-930C673F-BN
							Chrome	VANF-SH50-SM-73W-930-CN	VANF-SH50-SM-930C673F-CN
							Gold	VANF-SH50-SM-73W-930-GN	VANF-SH50-SM-930C673F-GN
				4000K	360°	5500lm	White	VANF-SH50-SM-73W-940-WN	VANF-SH50-SM-940C673F-WN
							Black	VANF-SH50-SM-73W-940-BN	VANF-SH50-SM-940C673F-BN
							Chrome	VANF-SH50-SM-73W-940-CN	VANF-SH50-SM-940C673F-CN
							Gold	VANF-SH50-SM-73W-940-GN	VANF-SH50-SM-940C673F-GN


Code Remark: N=N(No Driver) F=F(ON-OFF)





VANF-SH50-SUS

LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
73 W	77 W	24 VDC	90	3000K	360°	5000lm	White	VANF-SH50-SUS-73W-930-WN	VANF-SH50-SUS-930C673F-WN
							Black	VANF-SH50-SUS-73W-930-BN	VANF-SH50-SUS-930C673F-BN
							Chrome	VANF-SH50-SUS-73W-930-CN	VANF-SH50-SUS-930C673F-CN
							Gold	VANF-SH50-SUS-73W-930-GN	VANF-SH50-SUS-930C673F-GN
				4000K	360°	5500lm	White	VANF-SH50-SUS-73W-940-WN	VANF-SH50-SUS-940C673F-WN
							Black	VANF-SH50-SUS-73W-940-BN	VANF-SH50-SUS-940C673F-BN
							Chrome	VANF-SH50-SUS-73W-940-CN	VANF-SH50-SUS-940C673F-CN
							Gold	VANF-SH50-SUS-73W-940-GN	VANF-SH50-SUS-940C673F-GN

Code Remark: N=N(No Driver) F=F(ON-OFF)

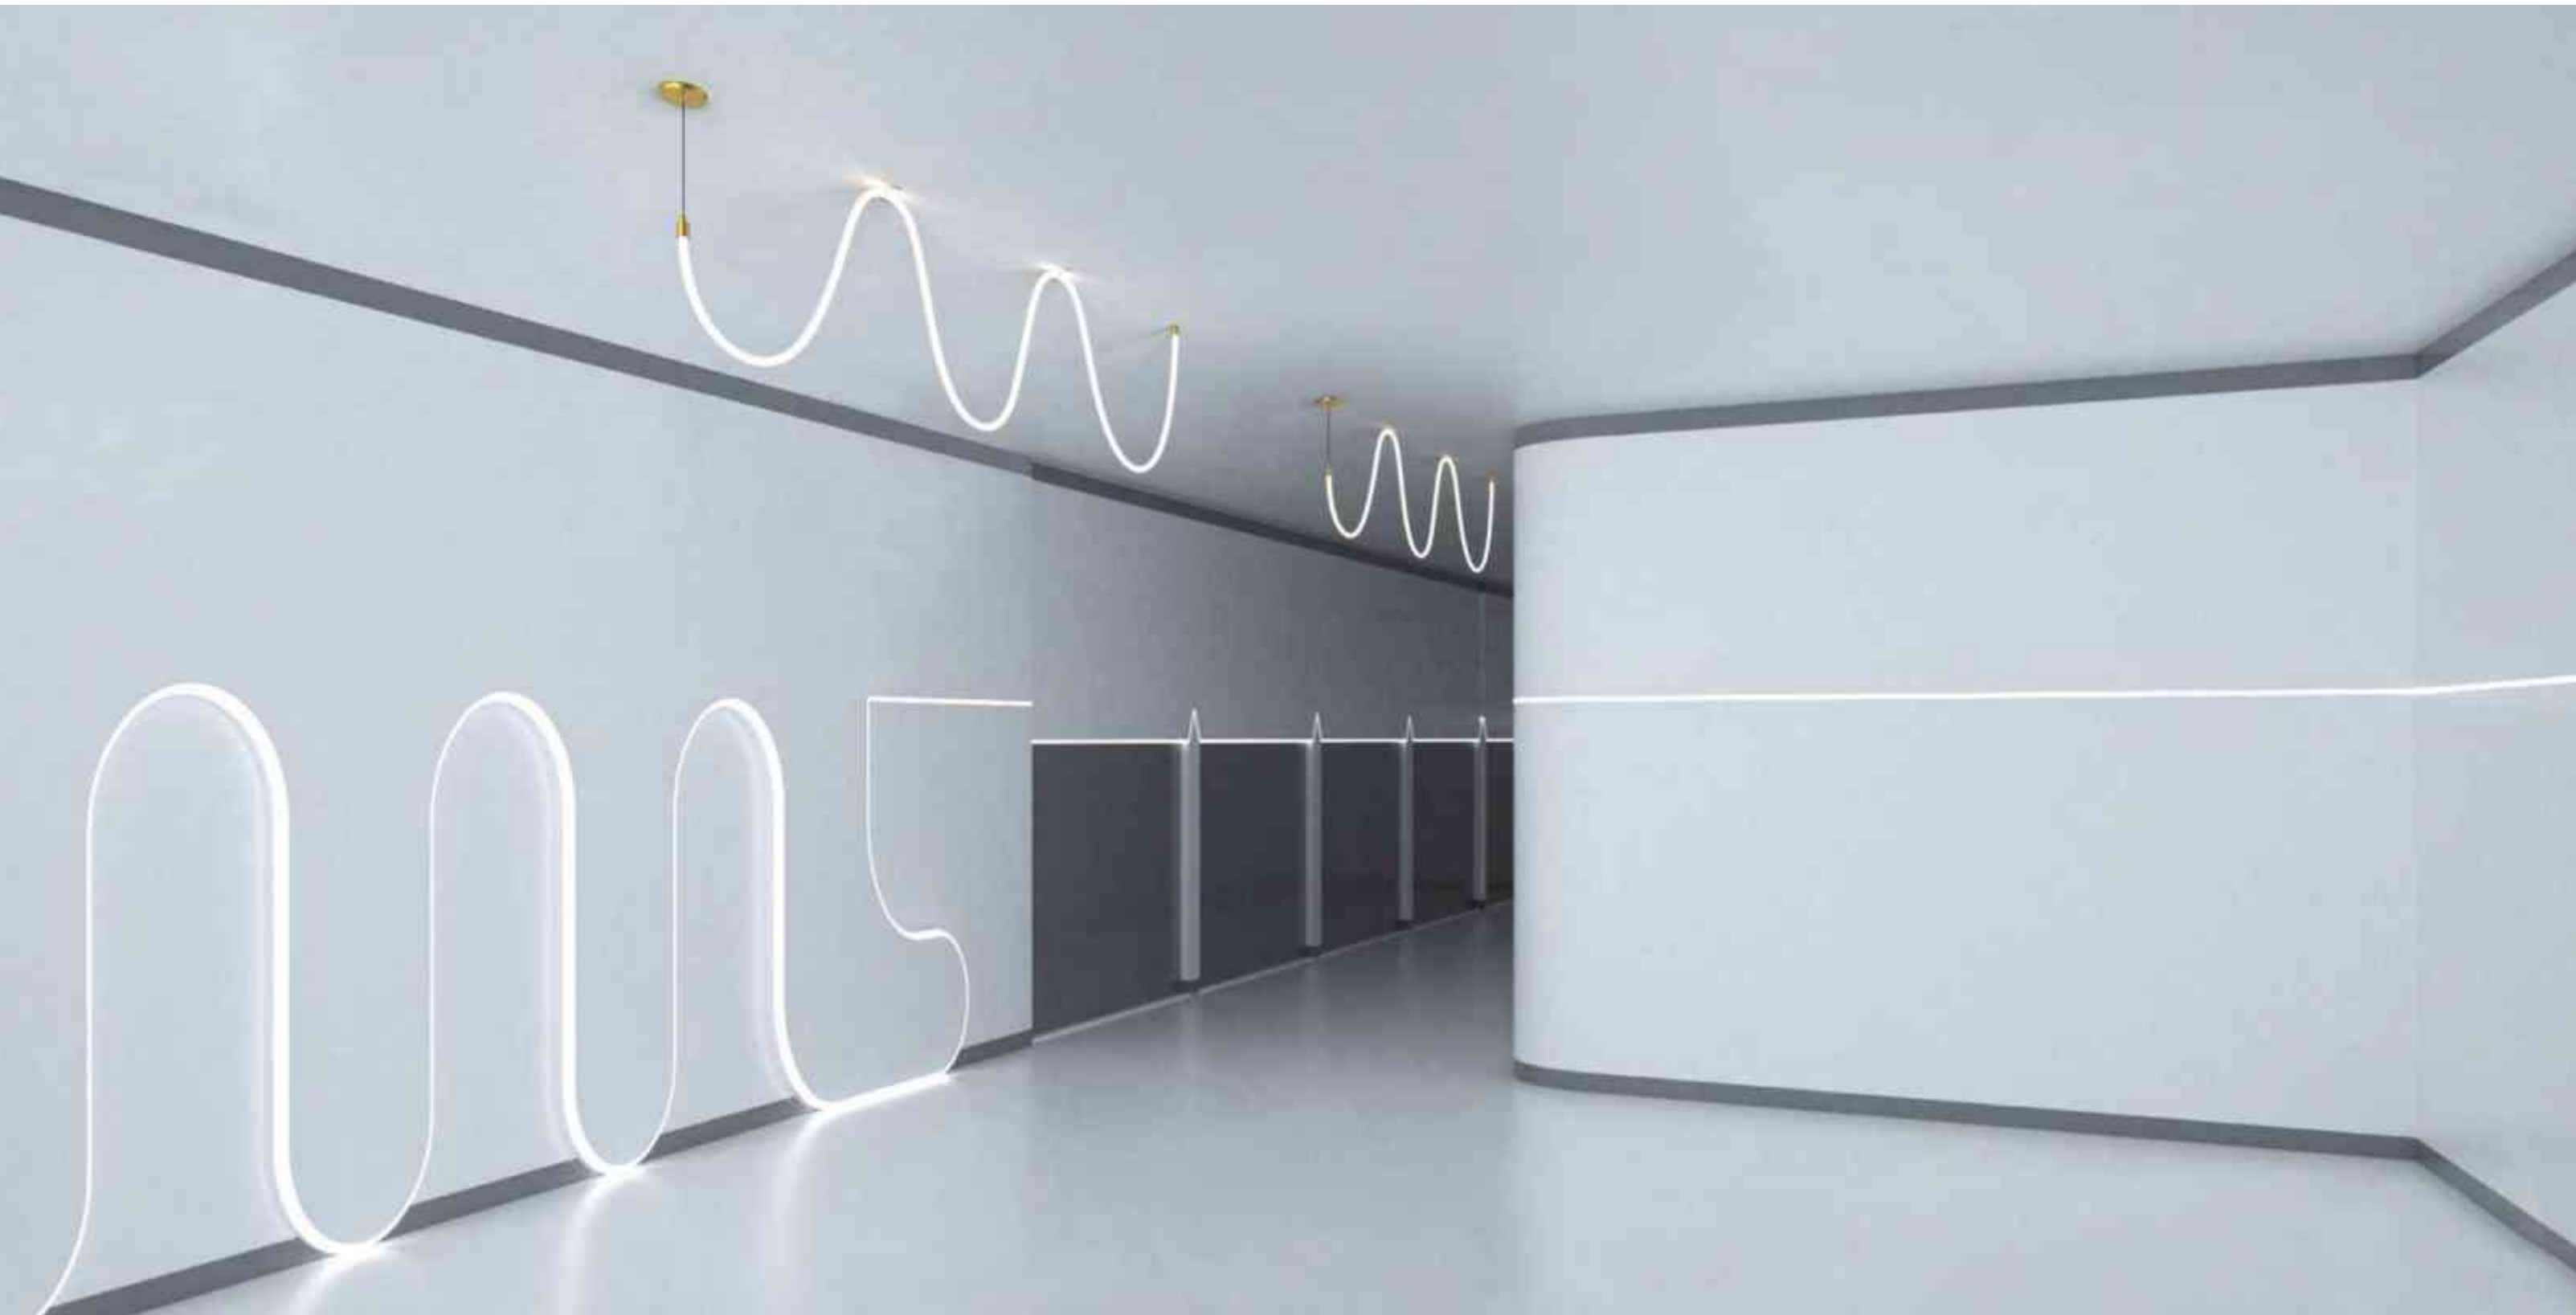

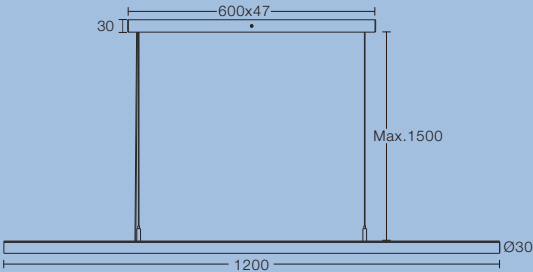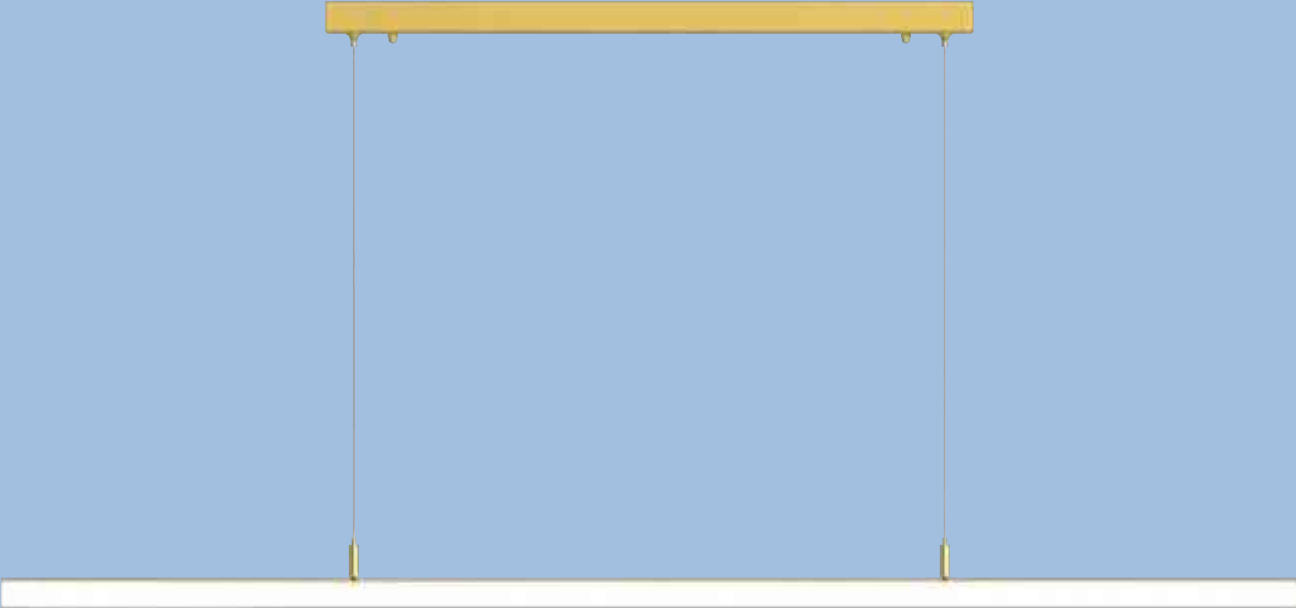

LED	Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code
17 W	19 W	24 VDC	90	3000K	360°	1150lm		White	VANF-SH12-SUS-17W-930-WN	VANF-SH12-SUS-930C617F-WN
								Black	VANF-SH12-SUS-17W-930-BN	VANF-SH12-SUS-930C617F-BN
								Chrome	VANF-SH12-SUS-17W-930-CN	VANF-SH12-SUS-930C617F-CN
								Gold	VANF-SH12-SUS-17W-930-GN	VANF-SH12-SUS-930C617F-GN
				4000K	360°	1250lm		White	VANF-SH12-SUS-17W-940-WN	VANF-SH12-SUS-940C617F-WN
								Black	VANF-SH12-SUS-17W-940-BN	VANF-SH12-SUS-940C617F-BN
								Chrome	VANF-SH12-SUS-17W-940-CN	VANF-SH12-SUS-940C617F-CN
								Gold	VANF-SH12-SUS-17W-940-GN	VANF-SH12-SUS-940C617F-GN

Code Remark: N=N(No Driver) F=F(ON-OFF)




NEKO / VANILLA / VANF-SH06-SM
360° Circular Neon Strip Lighting

NEW



9W	CRI90	3000K 4000K	 360°	IP65		CB	CE
----	-------	----------------	--	------	---	----	----




LED Power	System power	LED Voltage	CRI	CCT	Beam	System Output	Canopy Color	Model	Code	
9 W	11 W	24 VDC	90	3000K	360°	600lm	White	VANF-SH06-SM-9W-930-WN	VANF-SH06-SM-930C609F-WN	
							Black	VANF-SH06-SM-9W-930-BN	VANF-SH06-SM-930C609F-BN	
							Chrome	VANF-SH06-SM-9W-930-CN	VANF-SH06-SM-930C609F-CN	
							Gold	VANF-SH06-SM-9W-930-GN	VANF-SH06-SM-930C609F-GN	
				4000K	360°		650lm	White	VANF-SH06-SM-9W-940-WN	VANF-SH06-SM-940C609F-WN
								Black	VANF-SH06-SM-9W-940-BN	VANF-SH06-SM-940C609F-BN
								Chrome	VANF-SH06-SM-9W-940-CN	VANF-SH06-SM-940C609F-CN
								Gold	VANF-SH06-SM-9W-940-GN	VANF-SH06-SM-940C609F-GN

Code Remark: N=N(No Driver) F=F(ON-OFF)




EXTERIOR

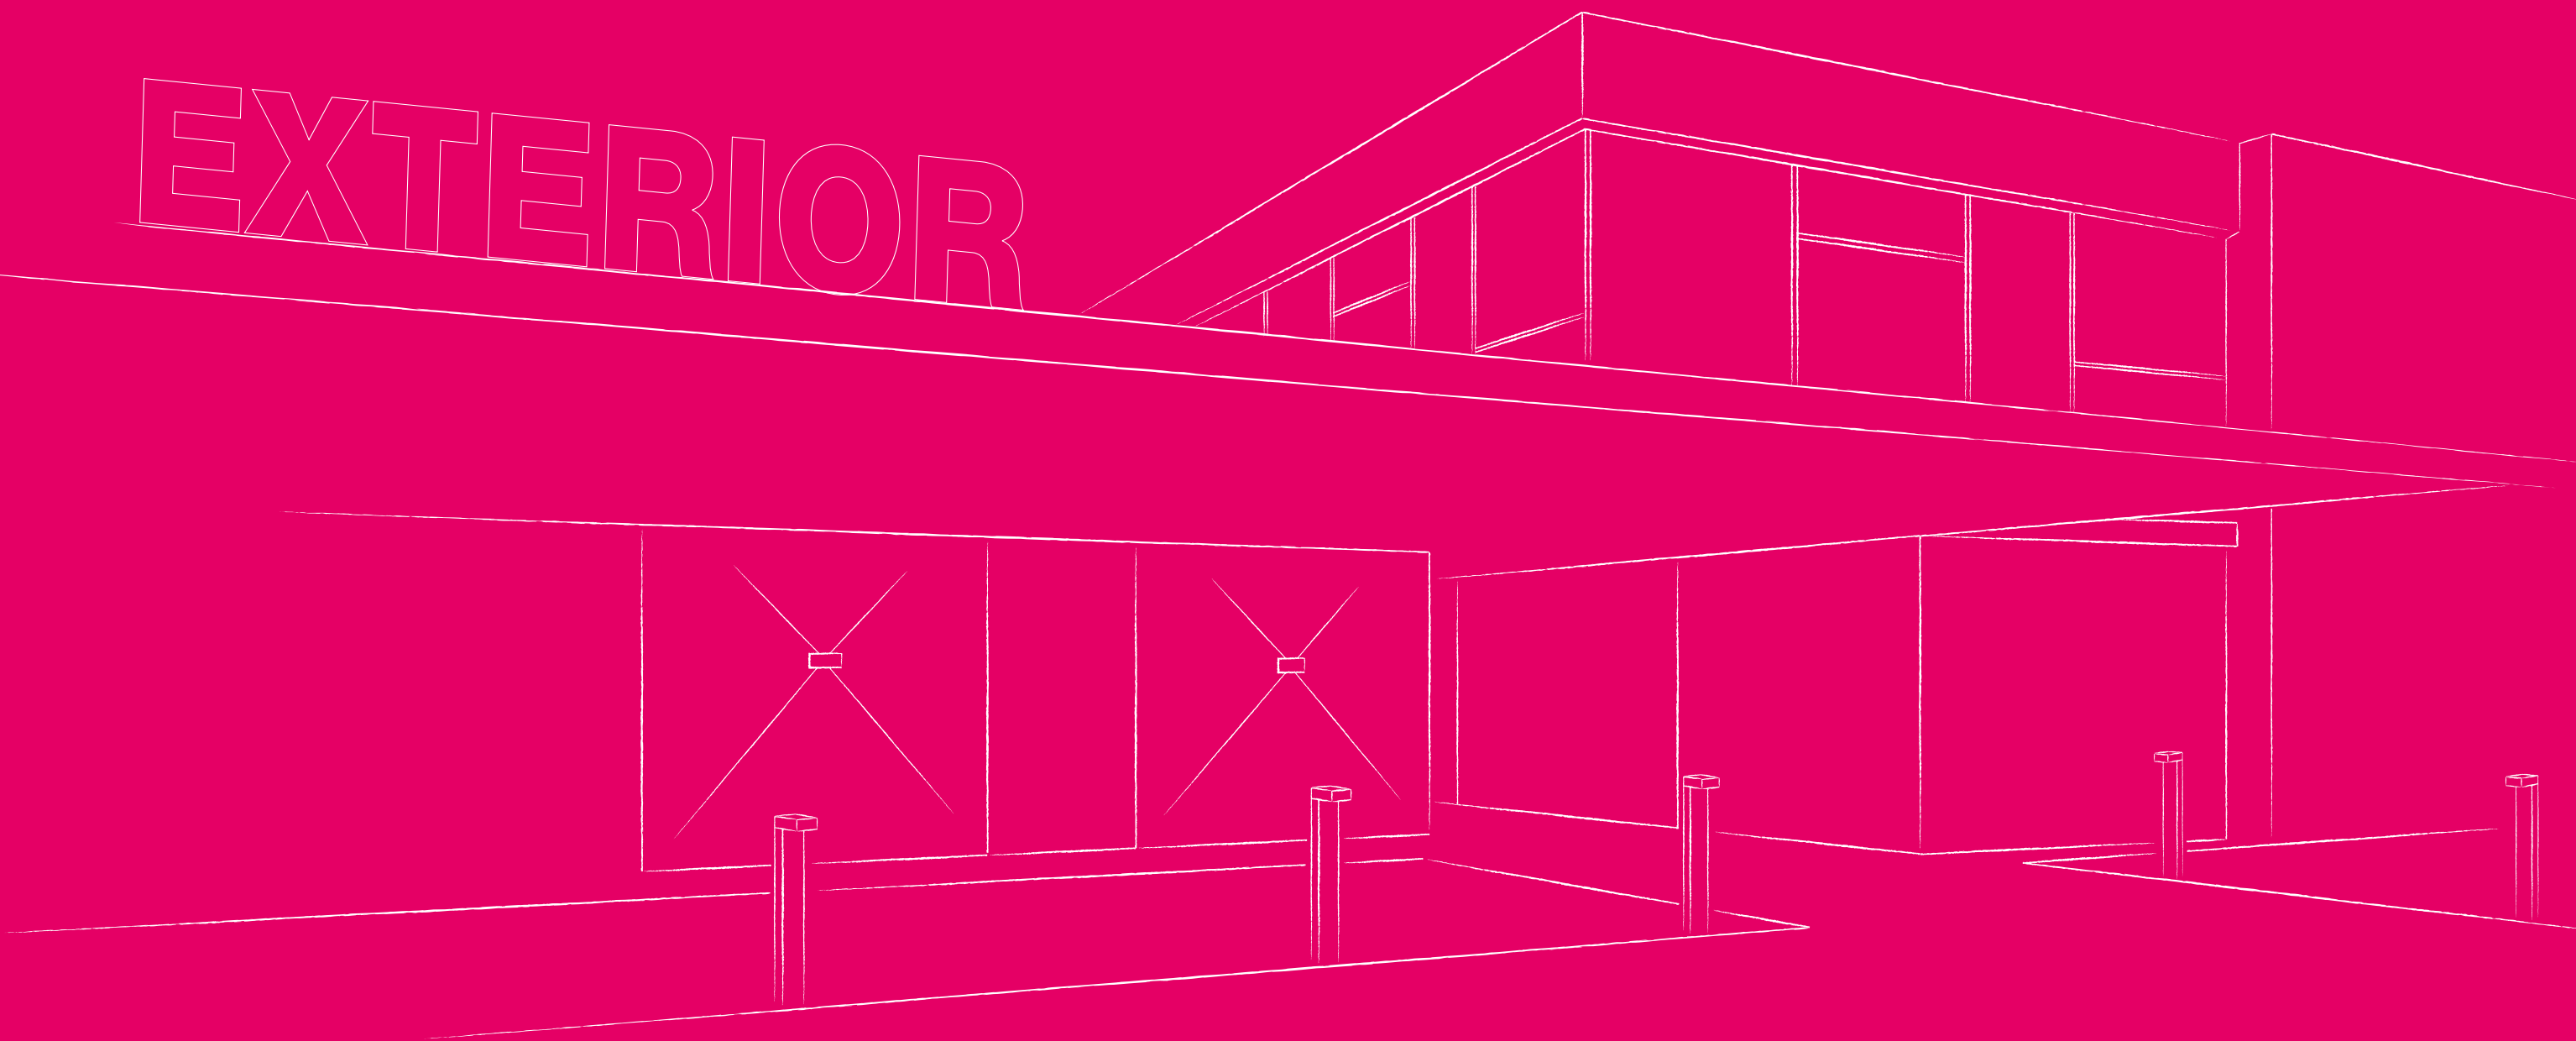

EXTERIOR RANGE

INDEX

SEAPOINT Series




SEAPOINT
■ 557

LAKEPOINT Series

! NEW




LAKEPOINT Fixed
■ 579



LAKEPOINT Adjustable
■ 581


CARMEL Series



SKYSURFER SSRC
■ 395



CARMEL Round
■ 585



CARMEL Square
■ 585

CLIFTON Series




CLIFTON
■ 587

RIVA Series

! NEW



RIVA Round
■ 589



RIVA Square
■ 591

CAMPSBAY Series



CAMPSBAY Single
■ 593



CAMPSBAY Double
■ 593

LAGOON Series



LAGOON
■ 595

CRUZ D Series


! NEW



CRUZ D
■ 597

CAPRI Series

! NEW



CAPRI
■ 599

BAY Series



BAY
■ 601

ASCONA Series



ASCONA
■ 603

NICE Series

! NEW



NICE 250S & NICE 250D
■ 605




NICE 500S & NICE 500D
■ 607

St.Tropez Series



St.Tropez
■ 609

Capetown-Recessed Series




Capetown Round-Recessed
■ 611



Capetown Square-Recessed
■ 611

Capetown-Surface Series



Capetown Round-Surface
■ 613



Capetown Square-Surface
■ 613

CALIFORNIA Series



CALIFORNIA 12
■ 615



CALIFORNIA 16
■ 615


DURBAN Series




DURBAN
■ 617

POSITANO Series

! NEW

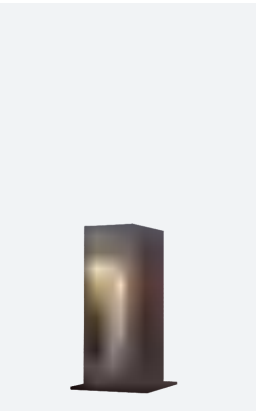


POSITANO 300
■ 619

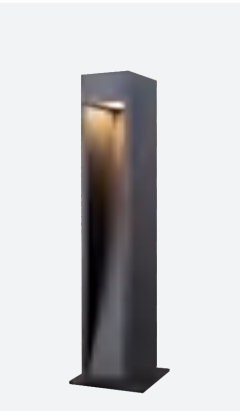


POSITANO 600
■ 619

PORTOFINO Series



PORTOFINO S
■ 621



PORTOFINO M
■ 621




PORTOFINO L
■ 621



PORTOFINO Adjustable
■ 623

AFTER7 Series



AFTER7 Mini
■ 625



AFTER7 Maxi
■ 626

TERARACE Series



TERARACE Micro
■ 627



TERARACE Nano
■ 628



TERARACE Mini
■ 629




TERARACE Maxi
■ 630





NEKO / SEAPPOINT
EXTERIOR LED Downlight



6W

CRI80

3000K

25°

IP67

Ik07

CREE

50,000h@L80B10

CE

3

Body: Aluminum
Color: Black

100


89mm

Ø106mm



LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5 W	6 W	220-240 VAC	80	3000K	25°	450lm	SEAPPOINT-830-25°	SEAP-8302506F-BN
Remark: With internal Non-Dimmable LED driver								

Light Distribution

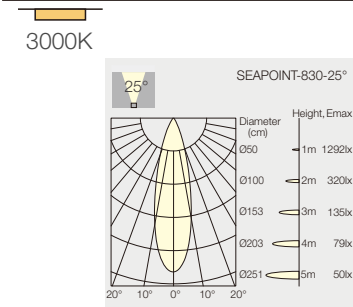


NEKO / LAKEPOINT Fixed
EXTERIOR LED Downlight

!NEW



8W | CRI80 | 3000K | 30° | IP65 | CREE 50,000h@L80B10 | CE | 3 Yr

Body: Aluminum
Color: White/Black




LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
6 W	8 W	220-240 VAC	80	3000K	30°	500lm	LAPF-8W-830-30°	LAPF-8303008F-VW
Remark: With internal Non-Dimmable LED driver								




6 W	8 W	220-240 VAC	80	3000K	30°	500lm	LAPF-8W-830-30°	LAPF-8303008F-BB
Remark: With internal Non-Dimmable LED driver								

Light Distribution

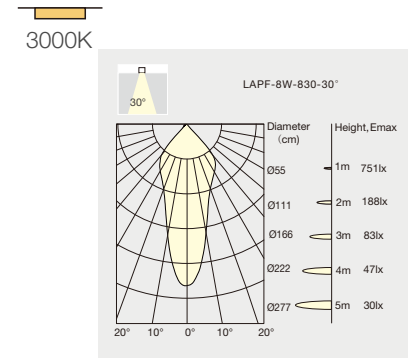



8W	CRI80	3000K	30°	IP65	 ±30° Tilttable	 CREE 50,000h L80B10			Body: Aluminum Color: White/Black		




LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
6 W	8 W	220-240 VAC	80	3000K	30°	500lm	LAPA-8W-830-30°	LAPA-8303008F-VVV
Remark: With internal Non-Dimmable LED driver								




6 W	8 W	220-240 VAC	80	3000K	30°	500lm	LAPA-8W-830-30°	LAPA-8303008F-BB
Remark: With internal Non-Dimmable LED driver								

Light Distribution

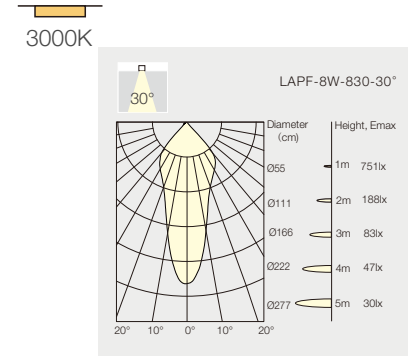

NEKO / SKYSURFER SSRC
IP65 LED Ceiling Light



10W	CRI90	3000K	36°	UGR < 19	IP65	 50,000h@L80B10			Body: Aluminum Color: Black
-----	-------	-------	-----	----------	------	---	--	--	--------------------------------




LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
8 W	10 W	220-240 VAC	90	3000K	36°	850lm	SSRC-10W-930-36°	SSRC-9303610F-BN

Remark: With internal Non-Dimmable LED driver

Light Distribution


3000K



NEKO / CARMEL
LED Ceiling Light



6W CRI80 3000K 55° IP54 IK07 CREE 50,000h L80B10 CE Body: Aluminum Color: Dark-Grey



CARMEL Round

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5 W	6 W	220-240 VAC	80	3000K	55°	500lm	CARMEL R-830-55°	CARR-8305506F-DN

Remark: With internal Non-Dimmable LED driver




CARMEL Square

5 W	6 W	220-240 VAC	80	3000K	55°	500lm	CARMEL S-830-55°	CARS-8305506F-DN
-----	-----	-------------	----	-------	-----	-------	------------------	------------------

Remark: With internal Non-Dimmable LED driver

Light Distribution


3000K

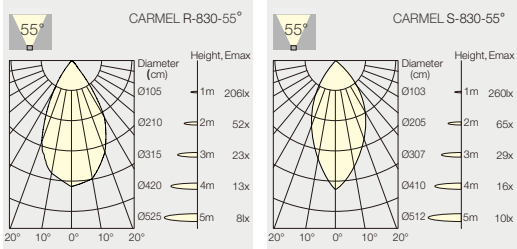

NEKO / CLIFTON
LED Ceiling Light



25W	CRI80	3000K	110°	IP54	Ik10	 EDISON 50,000h L80B10			Body: Aluminum Color: Dark-Grey
-----	-------	-------	------	------	------	---	---	---	------------------------------------





LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
22 W	25 W	220-240 VAC	80	3000K	110°	2350lm	CLIFTON-830-110°	CLIF-830A125F-DN

Remark: With internal Non-Dimmable LED driver



Light Distribution





14W CRI80 3000K 110° IP54 PHILIPS 50,000h@L80B10 CE Body: Aluminum Color: Dark-Grey





LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
12 W	14 W	220-240 VAC	80	3000K	110°	1150lm	RIVR-14W-830-110°	RIVR-830A114F-DN

Remark: With internal Non-Dimmable LED driver

Light Distribution

3000K





14W

CRI80

3000K

110°



IP54

PHILIPS
50,000h@L80B10

CE



Body: Aluminum
Color: Dark-Grey




LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
12 W	14 W	220-240 VAC	80	3000K	110°	1150lm	RIVS-14W-830-110°	RIVS-830A114F-DN

Remark: With internal Non-Dimmable LED driver

Light Distribution

3000K



NEKO / CAMPSBAY
LED Wall Light




CAMPSBAY Single



CAMPSBAY Double

6W 12W	CRI80	3000K	45°	IP65	IK07	 50,000h@L80B10			Body: Aluminum Color: Dark-Grey
-----------	-------	-------	-----	------	------	---	--	--	------------------------------------



CAMPSBAY Single

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5 W	6 W	220-240 VAC	80	3000K	45°	500lm	CAMPSBAY Single-830-45°	CAMS-8304506F-DN

Remark: With internal Non-Dimmable LED driver



CAMPSBAY Double


10 W	12 W	220-240 VAC	80	3000K	45°	1000lm	CAMPSBAY Double-830-45°	CAMD-8304512F-DN
------	------	-------------	----	-------	-----	--------	-------------------------	------------------

Remark: With internal Non-Dimmable LED driver



Light Distribution



3000K

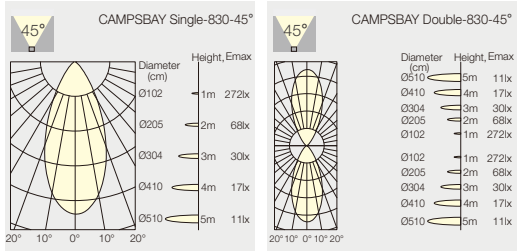


NEKO / LAGOON
LED Wall Light



11W	CRI80	3000K	100°	IP65	IK07	 50,000h@L80B10			Body: Aluminum Color: Dark-Grey
-----	-------	-------	------	------	------	---	--	--	------------------------------------



LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
9 W	11 W	220-240 VAC	80	3000K	100°	950lm	LAGOON-830-100°	LAG-830A011F-DN

Remark: With internal Non-Dimmable LED driver




Light Distribution

3000K

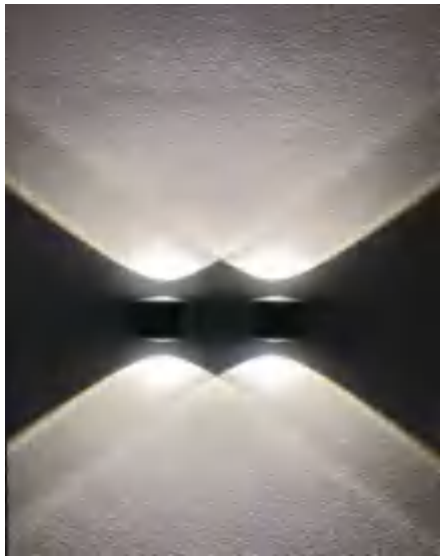



14W CRI80 3000K 120° IP65 OSRAM 50,000h@L80B10 CE Body: Aluminum Color: Dark-Grey





LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
12 W	14 W	220-240 VAC	80	3000K	120°	1400lm	RCRUD-830-120°	CRUD-830A214F-DN

Remark: With internal Non-Dimmable LED driver

Light Distribution

3000K





16W CRI80 3000K 100° IP65 CREE 50,000h@L80B10 CE 3 Body: Aluminum Color: Dark-Grey




LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
14 W	16 W	220-240 VAC	80	3000K	100°	1300lm	CAPRI-830-100°	CAPRI-830A016F-DN



Remark: With internal Non-Dimmable LED driver

Light Distribution

3000K



NEKO / BAY
LED Wall Light

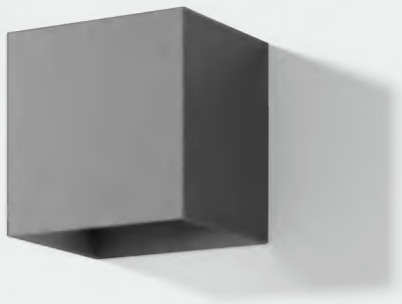


6W	CRI80	3000K	90°	IP65	IK07	 50,000h@L80B10			Body: Aluminum Color: Dark-Grey
----	-------	-------	-----	------	------	---	--	--	------------------------------------

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5 W	6 W	220-240 VAC	80	3000K	90°	430lm	BAY-830-90°	BAY-8309006F-DN


Remark: With internal Non-Dimmable LED driver

Light Distribution

3000K



NEKO / ASCONA
LED Wall Light



10W	CRI80	3000K	110°	IP65	IK10	 EDISON 50,000h@L80B10			Body: Aluminum Color: Dark-Grey
-----	-------	-------	------	------	------	--	--	--	------------------------------------




LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
8 W	10 W	220-240 VAC	80	3000K	110°	630lm	ASCONA-830-110°	ASCO-830A110F-DN


Remark: With internal Non-Dimmable LED driver

Light Distribution


3000K



NEKO / NICE 250
LED Wall Light

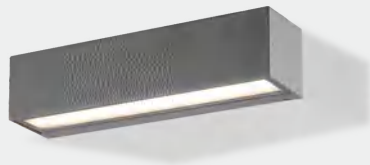

7W 14W	CRI80	3000K	110°	IP65	PHILIPS 60,000h@L80B10	CE	Body: Aluminum Color: Dark-Grey
-----------	-------	-------	------	------	---------------------------	----	------------------------------------



NICE 250 Single



NICE 250 Double

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5 W	7 W	220-240 VAC	80	3000K	110°	650lm	NICE 250S-830-110°	N25S-830A107F-DN

Remark: With internal Non-Dimmable LED driver


12 W	14 W	220-240 VAC	80	3000K	110°	1300lm	NICE 250D-830-110°	N25D-830A114F-DN
------	------	-------------	----	-------	------	--------	--------------------	------------------

Remark: With internal Non-Dimmable LED driver



Light Distribution




3000K

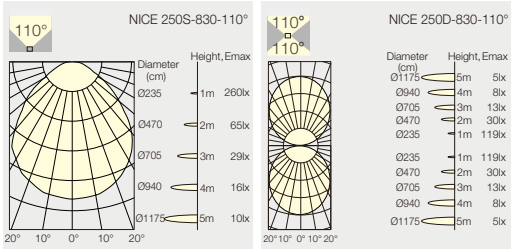


NEKO / NICE 500
LED Wall Light

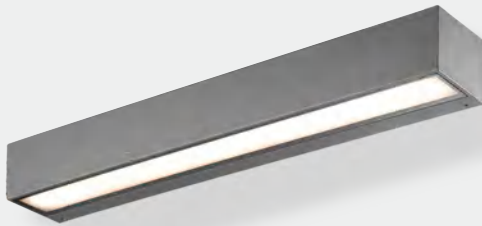

14W 20W	CRI80	3000K	110°	IP65	 PHILIPS 50,000h@L80B10			Body: Aluminum Color: Dark-Grey
------------	-------	-------	------	------	---	--	--	------------------------------------



NICE 500 Single



NICE 500 Double

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
12 W	14 W	220-240 VAC	80	3000K	110°	1300lm	NICE 500S-830-110°	N50S-830A114F-DN

Remark: With internal Non-Dimmable LED driver


18 W	20 W	220-240 VAC	80	3000K	110°	1800lm	NICE 500D-830-110°	N50D-830A120F-DN
------	------	-------------	----	-------	------	--------	--------------------	------------------

Remark: With internal Non-Dimmable LED driver

Light Distribution




3000K

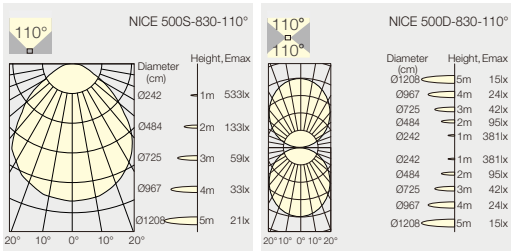

NEKO / St.Tropez
Window Light



6W	CR180	3000K	3°	IP65	IK10	 50,000h@L80B10			Body: Aluminum Color: Dark-Grey
----	-------	-------	----	------	------	---	--	--	------------------------------------




LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
4 W	6 W	220-240 VAC	80	3000K	3°	300lm	St.Tropez-830-3°	STTZ-8300306F-DN

Remark: With internal Non-Dimmable LED driver




Light Distribution

3000K




Ceiling / windows frame mounted light
Ideally lighting up the frame of doors, windows, corridors, etc
With its self-balancing system making the un-even surface a proper lighting effect



NEKO / Capetown-Recessed
Recessed LED Step Light



Capetown Round-Recessed




Capetown Square-Recessed

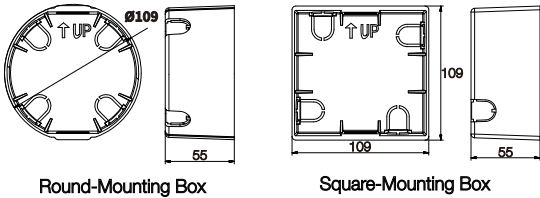

4.5W	CRI80	3000K	65°	IP65	IK07	 EDISON 50,000h@L80B10			Body: Aluminum Color: Dark-Grey	Round-Mounting Box	Square-Mounting Box
------	-------	-------	-----	------	------	---	---	---	------------------------------------	--------------------	---------------------

LED	Power	System Power	Input	Outout	CRI	CCT	Beam	System Output	Model	Code
3 W	4.5 W	220-240 VAC	Ø110*55	80	3000K	65°	155lm	Capetown RR-830-65°CTRR-8306505F-DN		

Remark: With internal Non-Dimmable LED driver




Capetown Round-Recessed



Capetown Square-Recessed

3 W	4.5 W	220-240 VAC	110*110*55	80	3000K	65°	165lm	Capetown SR-830-65°CTSR-8306505F-DN		
-----	-------	-------------	------------	----	-------	-----	-------	-------------------------------------	--	--

Remark: With internal Non-Dimmable LED driver

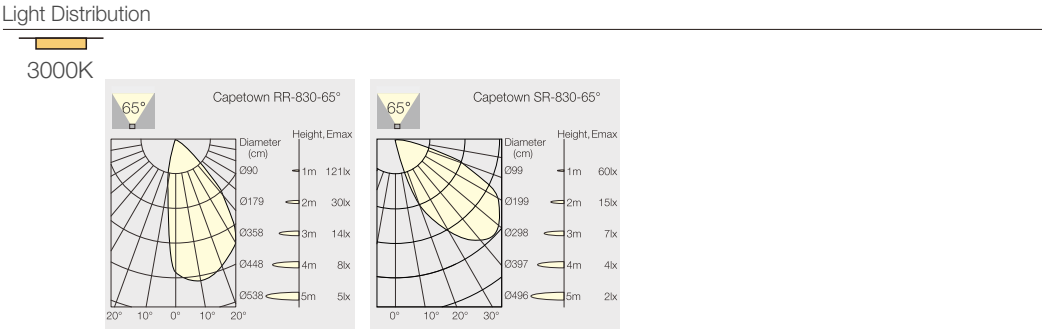


NEKO / Capetown-Surface
LED Step Light



Capetown Round-Surface



Capetown Square-Surface

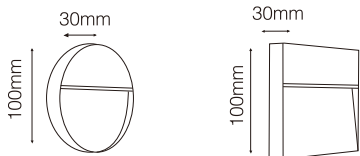

Capetown Round-Surface Capetown Square-Surface

4.5W	CRI80	3000K	65°	IP65	IK07	 50,000h@L80B10			Body: Aluminum Color: Dark-Grey
------	-------	-------	-----	------	------	---	--	--	------------------------------------

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
3 W	4.5 W	220-240 VAC	80	3000K	65°	150lm	Capetown RS-830-65°	CTRS-8306505F-DN

Remark: With internal Non-Dimmable LED driver



Capetown Round-Surface






Capetown Square-Surface

3 W	4.5 W	220-240 VAC	80	3000K	65°	170lm	Capetown SS-830-65°	CTSS-8306505F-DN
-----	-------	-------------	----	-------	-----	-------	---------------------	------------------



Remark: With internal Non-Dimmable LED driver

Light Distribution

3000K

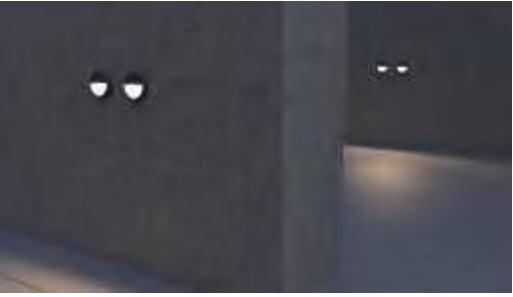

NEKO / CALIFORNIA
LED Bollard Lamp

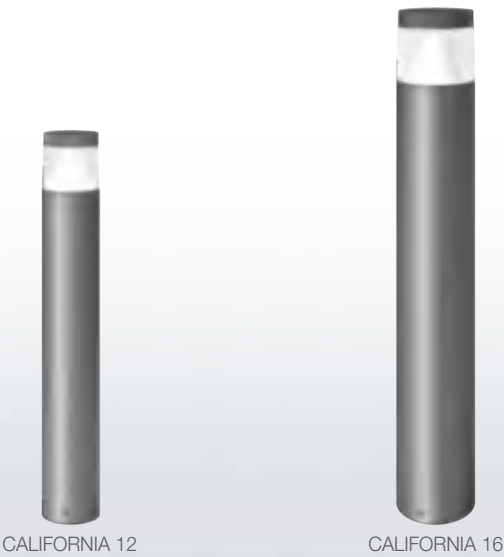

13W 19W	CRI80	3000K	IP65	IK10	 50,000h@L80B10			Body: Aluminum Color: Dark-Grey
------------	-------	-------	------	------	--	---	---	------------------------------------

LED Power	System Power	Input	CRI	CCT	System Output	Model	Code
11 W	13 W	220-240 VAC	80	3000K	660lm	CALIFORNIA 12-830	CA12-830C613F-DN

Remark: With internal Non-Dimmable LED driver



CALIFORNIA 12



CALIFORNIA 16




17 W	19 W	220-240 VAC	80	3000K	1220lm	CALIFORNIA 16-830	CA16-830C619F-DN
------	------	-------------	----	-------	--------	-------------------	------------------

Remark: With internal Non-Dimmable LED driver

Light Distribution




3000K

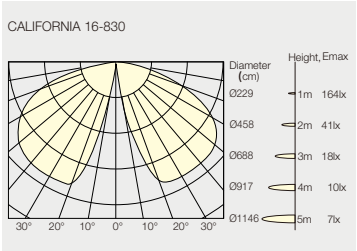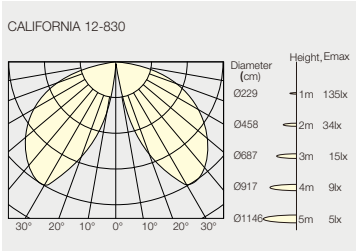

Light Emission 360



NEKO / DURBAN
LED Bollard Lamp

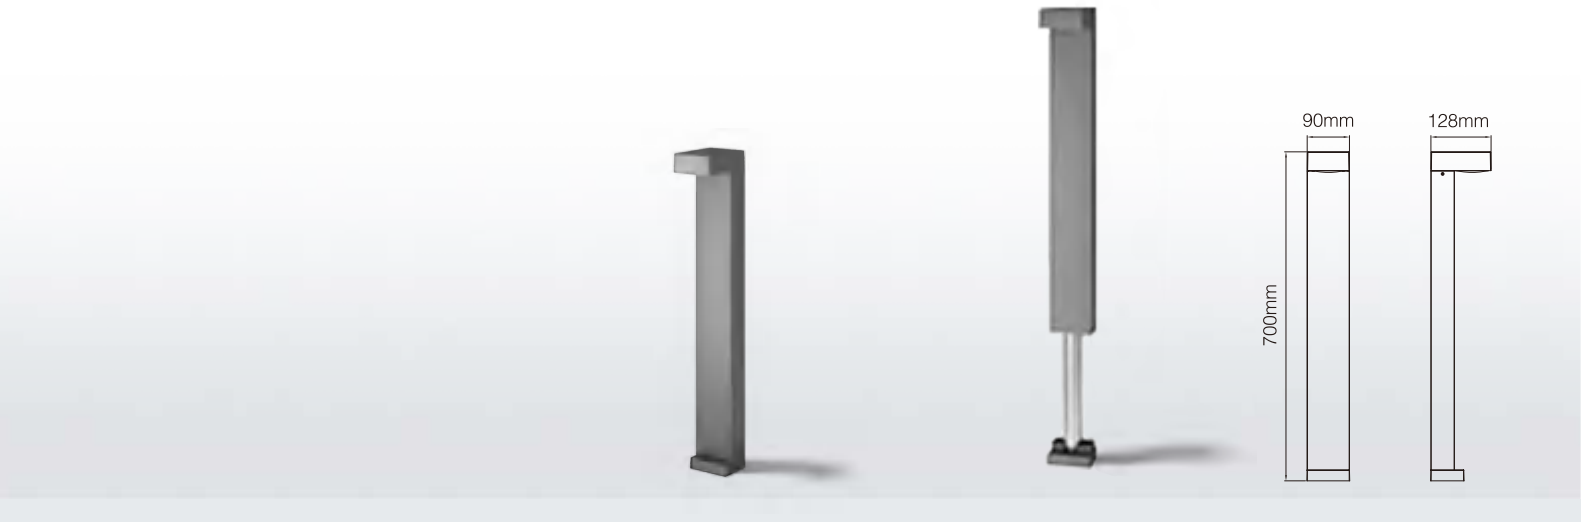

6W	CRI80	3000K	IP65	IK07	CREE 50,000h@L80B10	CE	Body: Aluminum Color: Dark-Grey
----	-------	-------	------	------	------------------------	----	------------------------------------



LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5 W	6 W	220-240 VAC	80	3000K		450lm	DURBAN-830	DURB-830B706F-DN

Remark: With internal Non-Dimmable LED driver





Light Distribution



3000K





Anchorage installation



Surface installation

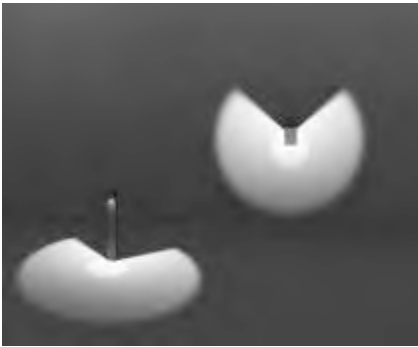



7W	CRI80	3000K	50°	IP65	 50,000h@L80B10			Body: Aluminum Color: Dark-Grey		
----	-------	-------	-----	------	---	---	---	------------------------------------	---	---

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5 W	7 W	220-240 VAC	80	3000K	50°	200lm	PTO3-830-50°	PTO3-8305007F-DN

Remark: With internal Non-Dimmable LED driver



POSITANO 300





POSITANO 600

5 W	7 W	220-240 VAC	80	3000K	50°	200lm	PTO6-830-50°	PTO6-8305007F-DN
-----	-----	-------------	----	-------	-----	-------	--------------	------------------

Remark: With internal Non-Dimmable LED driver

Light Distribution

3000K



NEKO / PORTOFINO
Projector Light



4W 11W 13W	CRI80	3000K	20° 35°	IP65	IK07	CREE 50,000h@L80B10	CE	Body: Aluminum Color: Dark-Grey			
------------------	-------	-------	------------	------	------	------------------------	----	------------------------------------	--	--	--



Cable in 1.5 meters



Cable in 1.5 meters



Cable in 1.5 meters

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
3 W	4 W	220-240 VAC	80	3000K	35°	250lm	PORTOFINO S-830-35°	PORS-8303504F-DN

Remark: With internal Non-Dimmable LED driver

9 W	11 W	220-240 VAC	80	3000K	20°	900lm	PORTOFINO M-830-20°	PORM-8302011F-DN
-----	------	-------------	----	-------	-----	-------	---------------------	------------------


Remark: With internal Non-Dimmable LED driver

11 W	13 W	220-240 VAC	80	3000K	20°	1050lm	PORTOFINO L-830-20°	PORL-8302013F-DN
------	------	-------------	----	-------	-----	--------	---------------------	------------------


Remark: With internal Non-Dimmable LED driver

Light Distribution


3000K

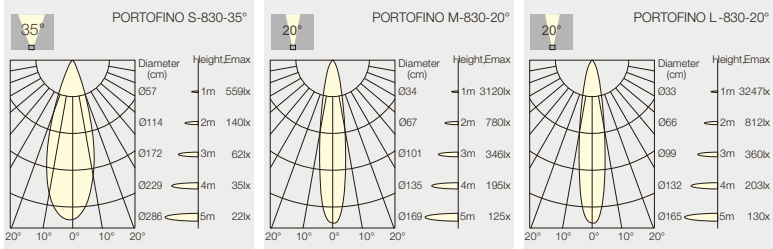

Stake for PORTOFINO series projectors

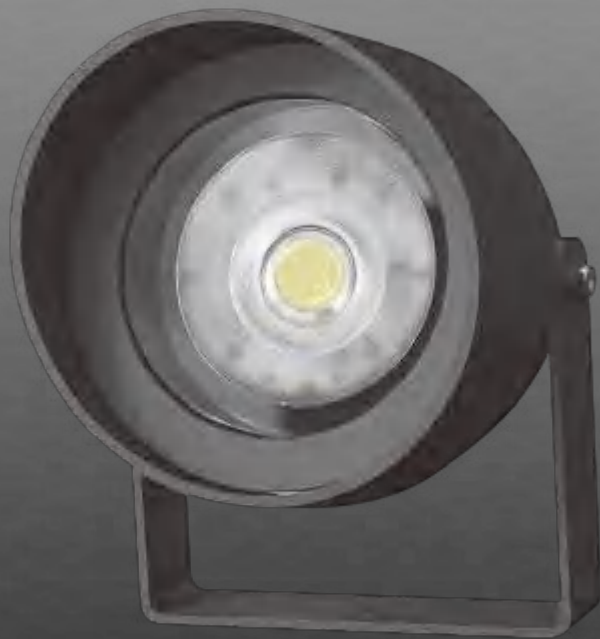

NEKO / PORTOFINO Adjustable
Beam Angle Zooming Projector Light



11W	CRI80	3000K	15°-60° Zooming	IP65	IK07	 50,000h @ L80B10			Body: Aluminum Color: Dark-Grey
-----	-------	-------	-----------------	------	------	--	---	---	------------------------------------




Cable in 1.5 meters

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
9 W	11 W	220-240 VAC	80	3000K	15°-60°	Max.450lm	PORTOFINO A-830-Z	PORA-830ZM11F-DN

Remark: With internal Non-Dimmable LED driver


Light Distribution

3000K

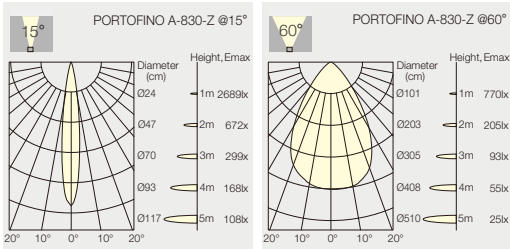



+60°

15°-

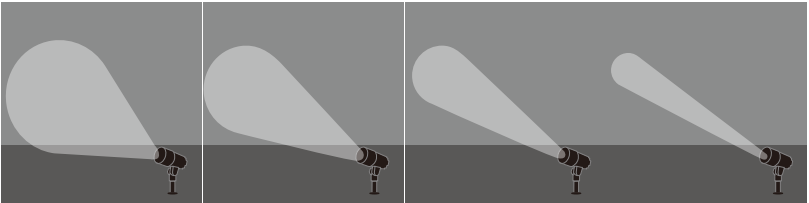

NEKO / AFTER7 Mini
Projector Light



5.5W	CRI80	3000K	30° 45°	IP67	IK10	 50,000h@L80B10			Body: Aluminum Color: Dark-Grey		
------	-------	-------	------------	------	------	---	---	---	------------------------------------	--	---



Cable in 3 meters



Cable in 3 meters

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5 W	5.5 W	24 V	80	3000K	30°	500lm	AFTER7 Mini-830-30°	AFMI-8303006F-DN
				3000K	45°	500lm	AFTER7 Mini-830-45°	AFMI-8304506F-DN

Remark: Remote 24VDC LED driver is required (Non-Dimmable)


5 W	5.5 W	24 V	80	3000K	30°	500lm	AFTER7 Mini-830-30°-H	AFMI-8303006F-DN-H
				3000K	45°	500lm	AFTER7 Mini-830-45°-H	AFMI-8304506F-DN-H

Remark: Remote 24VDC LED driver is required (Non-Dimmable)

Accessory: Stake for AFTER7 series projectors





Light Distribution

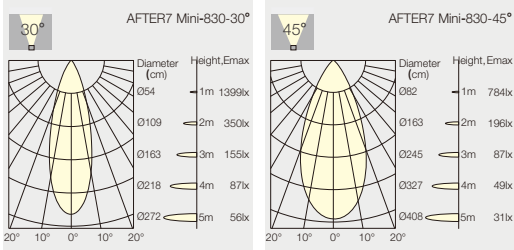

NEKO / AFTER7 Maxi
Projector Light



10W	CRI80	3000K	20° 30° 50°	IP67	IK10	 50,000h@L80B10			Body: Aluminum Color: Dark-Grey		
-----	-------	-------	-------------------	------	------	---	---	---	------------------------------------	---	---



Cable in 3 meters



3 meters

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
9 W	10 W	24 V	80	3000K	20°	850lm	AFTER7 Maxi-830-20°	AFMA-8302010F-DN
				3000K	30°	850lm	AFTER7 Maxi-830-30°	AFMA-8303010F-DN
				3000K	50°	850lm	AFTER7 Maxi-830-50°	AFMA-8305010F-DN

Remark: Remote 24VDC LED driver is required (Non-Dimmable)


9 W	10 W	24 V	80	3000K	20°	850lm	AFTER7 Maxi-830-20°-H	AFMA-8302010F-DN-H
				3000K	30°	850lm	AFTER7 Maxi-830-30°-H	AFMA-8303010F-DN-H
				3000K	50°	850lm	AFTER7 Maxi-830-50°-H	AFMA-8305010F-DN-H

Remark: Remote 24VDC LED driver is required (Non-Dimmable)

Accessory: Stake for AFTER7 series projectors



Light Distribution

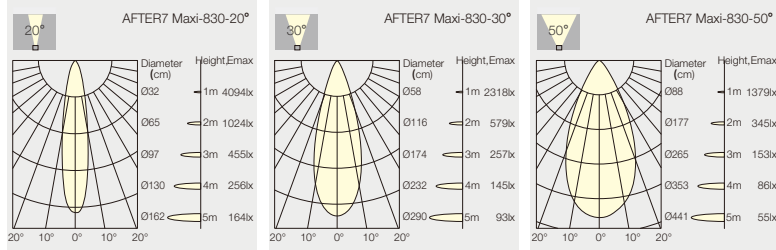

NEKO / TERARACE Micro
Recessed Ground Light



1.5W

CRI80

3000K

18°
40°
65°

IP67

IK10

OSRAM
50,000h L80B10

CE


Top Cover: Stainless Steel
Body: Aluminum
Color: Dark-Grey

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
1 W	1.5 W	24 V	80	3000K	18°	100lm	TERARACE Micro-830-18°	TEMI-8301802F-DN
				3000K	40°	100lm	TERARACE Micro-830-40°	TEMI-8304002F-DN
				3000K	65°	100lm	TERARACE Micro-830-65°	TEMI-8306502F-DN


Remark: Remote 24VDC LED driver is required (Non-Dimmable)

Cable in 3 meters

Accessory: Pre-embedded Tube



Light Distribution

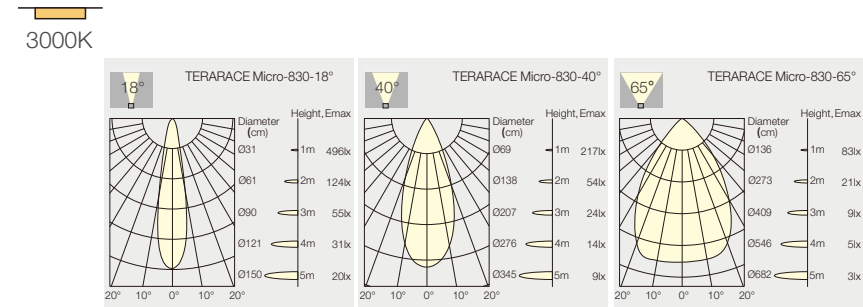

NEKO / TERARACE Nano
Recessed Ground Light



2W

CRI80

3000K

18°
35°
60°

IP67

IK10

OSRAM
50,000h L80B10

CE


Top Cover: Stainless Steel
Body: Aluminum
Color: Dark-Grey

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
1.6 W	2 W	24 V	80	3000K	18°	120lm	TERARACE Nano-830-18°	TENA-8301802F-DN
				3000K	35°	120lm	TERARACE Nano-830-35°	TENA-8303502F-DN
				3000K	60°	120lm	TERARACE Nano-830-60°	TENA-8306002F-DN


Remark: Remote 24VDC LED driver is required (Non-Dimmable)

Cable in 3 meters


Accessory: Pre-embedded Tube



Light Distribution

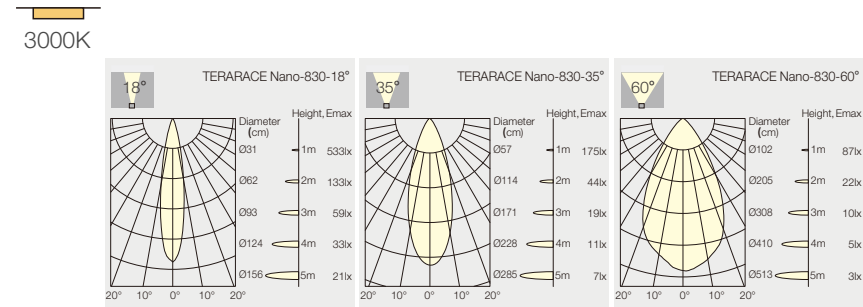

NEKO / TERARACE Mini
Recessed Ground Light



5.5W	CRI80	3000K	30° 45°	IP67	IK10				Top Cover: Stainless Steel Body: Aluminum Color: Dark-Grey
------	-------	-------	------------	------	------	---	---	---	--


LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5 W	5.5 W	24 V	80	3000K	30°	500lm	TERARACE Mini-830-30°	TEMI-8303006F-DN
				3000K	45°	500lm	TERARACE Mini-830-45°	TEMI-8304506F-DN

Remark: Remote 24VDC LED driver is required (Non-Dimmable)




Cable in 3 meters


Accessory: Pre-embedded Tube



Light Distribution

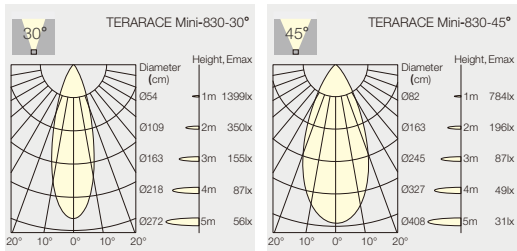

NEKO / TERARACE Maxi
Recessed Ground Light



10W	CRI80	3000K	20° 30° 50°	IP67	IK10				Top Cover: Stainless Steel Body: Aluminum Color: Dark-Grey
-----	-------	-------	-------------------	------	------	---	---	---	--


LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
9 W	10 W	24 V	80	3000K	20°	850lm	TERARACE Maxi-830-20°	TEMA-8302010F-DN
				3000K	30°	850lm	TERARACE Maxi-830-30°	TEMA-8303010F-DN
				3000K	50°	850lm	TERARACE Maxi-830-50°	TEMA-8305010F-DN

Remark: Remote 24VDC LED driver is required (Non-Dimmable)




Cable in 3 meters

Accessory: Pre-embedded Tube



Light Distribution

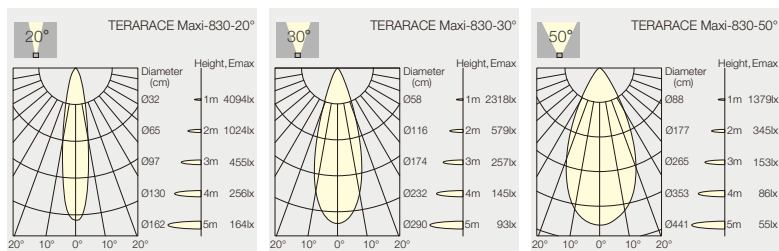

- Headquarters
- Factory
- German Office / Warehouse
- N. America
- UK Office
- France Office
- Beijing Office
- Shanghai Office
- Distributor

NEKO LIGHTING AG
Switzerland Headquarters
Kreuzstrasse 2, CH-8008 Zürich, Switzerland
Tel: +41 44 451 80 15
sales@nekolighting.com
www.nekolighting.com

NEKO LIGHTING LTD.
China Factory
Huizhou, P.R.China | P.C.: 516057
Tel: +86 755 3669 7712
sales@nekolighting.com
www.nekolighting.com

NEKO LIGHTING GmbH
German Office / Warehouse
Lange Reihe 170, 59071 Hamm, Germany
Tel: +49 2381 8770960
sales@nekolighting.de
www.nekolighting.de

NEKO LIGHTING INC.
Canada Office
3025 Bates Road, Montreal, QC H3S 2W8, Canada

USA Office
132 32nd Street, Suite 313, Brooklyn, NY 11232, USA
Tel: +1 855 LED NEKO (533 6356)
sales@nekolighting.com

NEKO Lighting Ltd.
UK Office
6C Calderdale Business Park, Club Lane,
Ovenden, Halifax, Hx2 8DB
andy@nekolightinguk.com
www.nekolighting.com

NEKO Lighting
France Office
8 rue du Sentier, 75002, Paris, France
+33 1 44 50 20 30
sales@nekolighting.fr
www.nekolighting.com

NEKO Beijing Office
Room 218, Huaxi Loft, 5th Da Yang Fang Road,
Chaoyang District, Beijing, P.R.China
Tel: +86 173 2681 1100
sales@nekolighting.com

NEKO Shanghai Office
Haliyang Building Room 2811, No. 550, Yan'an East Road,
Huangfu District, Shanghai, P.R.China
Tel: +86 189 2602 8927
jonson@nekolighting.com

