



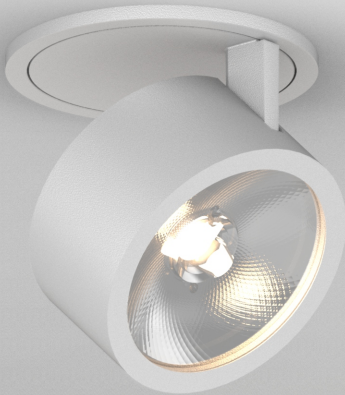

Tilting 90°

Rotation 360°

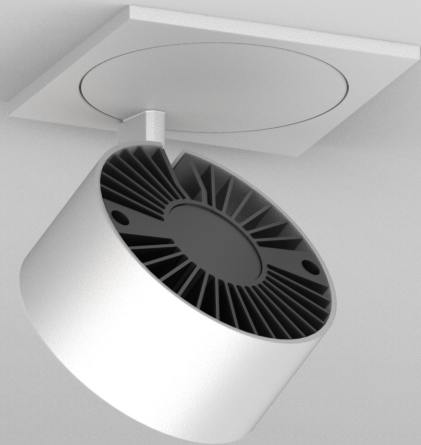

Different Mounting Bases

Surface Mounted




1RC Base



1SC Base



2RC Base




2SC Base


Recessed Mounted



1RR Base



1SR Base




2RR Base



2SR Base

Accessory




Honeycomb

Module Color



Black



Chrome Gold




Chrome



White



NEKO / VIBES / V1RC  
Ceiling Mounted Spotlight  
Incl. Phase Dim Driver



|     |       |                |     |      |                                               |                     |    |
|-----|-------|----------------|-----|------|-----------------------------------------------|---------------------|----|
| 14W | CRI90 | 2700K<br>3000K | 36° | IP20 | CITIZEN<br>Micro-Components<br>50,000h@L80B10 | 5 YEAR<br>GUARANTEE | CE |
|-----|-------|----------------|-----|------|-----------------------------------------------|---------------------|----|



| LED Power | System Power | LED Voltage | LED Current | CRI | CCT   | Beam | LED Output | System Output | Code             |
|-----------|--------------|-------------|-------------|-----|-------|------|------------|---------------|------------------|
| 12.5 W    | 14 W         | 36 V        | 350 mA      | 90  | 2700K | 36°  | 1400lm     | 1100lm        | V1RC-9273614P-WN |
|           |              |             |             |     | 3000K | 36°  | 1500lm     | 1200lm        | V1RC-9303614P-WN |


Code Remark: P=(Phase Dim)




|        |      |      |        |    |       |     |        |        |                  |
|--------|------|------|--------|----|-------|-----|--------|--------|------------------|
| 12.5 W | 14 W | 36 V | 350 mA | 90 | 2700K | 36° | 1400lm | 1100lm | V1RC-9273614P-BN |
|        |      |      |        |    | 3000K | 36° | 1500lm | 1200lm | V1RC-9303614P-BN |

Code Remark: P=(Phase Dim)

Light Distribution

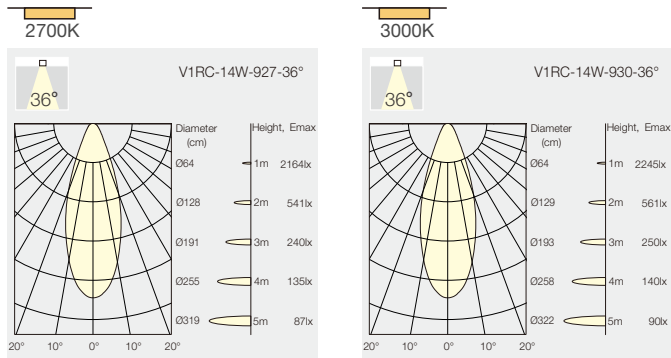

NEKO / VIBES / V2RC  
Ceiling Mounted Spotlight  
Incl. Phase Dim Driver



|     |       |                |     |      |                                               |                     |    |
|-----|-------|----------------|-----|------|-----------------------------------------------|---------------------|----|
| 28W | CRI90 | 2700K<br>3000K | 36° | IP20 | CITIZEN<br>Micro-Components<br>50,000h@L80B10 | 5 YEAR<br>GUARANTEE | CE |
|-----|-------|----------------|-----|------|-----------------------------------------------|---------------------|----|



| LED Power | System Power | LED Voltage | LED Current | CRI | CCT   | Beam | LED Output | System Output | Code             |
|-----------|--------------|-------------|-------------|-----|-------|------|------------|---------------|------------------|
| 2x12.5 W  | 2x14 W       | 36 V        | 2x350 mA    | 90  | 2700K | 36°  | 2900lm     | 2300lm        | V2RC-9273628P-WN |
|           |              |             |             |     | 3000K | 36°  | 3000lm     | 2400lm        | V2RC-9303628P-WN |


Code Remark: P=(Phase Dim)




|          |        |      |          |    |       |     |        |        |                  |
|----------|--------|------|----------|----|-------|-----|--------|--------|------------------|
| 2x12.5 W | 2x14 W | 36 V | 2x350 mA | 90 | 2700K | 36° | 2900lm | 2300lm | V2RC-9273628P-BN |
|          |        |      |          |    | 3000K | 36° | 3000lm | 2400lm | V2RC-9303628P-BN |

Code Remark: P=(Phase Dim)

Light Distribution

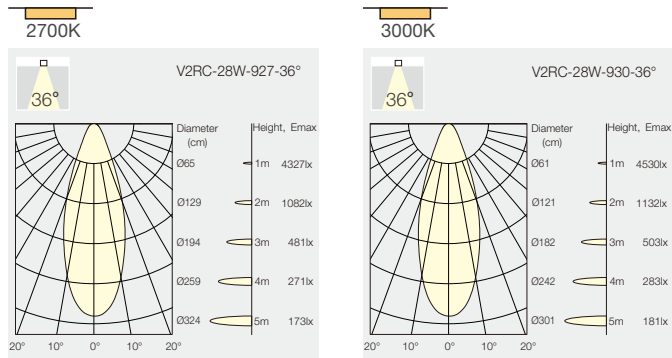

NEKO / VIBES / V1SC  
Ceiling Mounted Spotlight  
Incl. Phase Dim Driver



|     |       |                |     |      |                                               |                     |    |
|-----|-------|----------------|-----|------|-----------------------------------------------|---------------------|----|
| 14W | CRI90 | 2700K<br>3000K | 36° | IP20 | CITIZEN<br>Micro-Components<br>50,000h@L80B10 | 5 YEAR<br>GUARANTEE | CE |
|-----|-------|----------------|-----|------|-----------------------------------------------|---------------------|----|



| LED Power | System Power | LED Voltage | LED Current | CRI | CCT   | Beam | LED Output | System Output | Code             |
|-----------|--------------|-------------|-------------|-----|-------|------|------------|---------------|------------------|
| 12.5 W    | 14 W         | 36 V        | 350 mA      | 90  | 2700K | 36°  | 1400lm     | 1100lm        | V1SC-9273614P-WN |
|           |              |             |             |     | 3000K | 36°  | 1500lm     | 1200lm        | V1SC-9303614P-WN |


Code Remark: P=(Phase Dim)




|        |      |      |        |    |       |     |        |        |                  |
|--------|------|------|--------|----|-------|-----|--------|--------|------------------|
| 12.5 W | 14 W | 36 V | 350 mA | 90 | 2700K | 36° | 1400lm | 1100lm | V1SC-9273614P-BN |
|        |      |      |        |    | 3000K | 36° | 1500lm | 1200lm | V1SC-9303614P-BN |

Code Remark: P=(Phase Dim)

Light Distribution

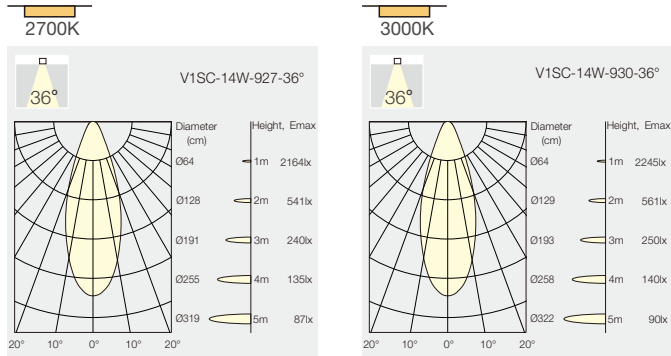

NEKO / VIBES / V2SC  
Ceiling Mounted Spotlight  
Incl. Phase Dim Driver



|     |       |                |     |      |                                               |                     |    |
|-----|-------|----------------|-----|------|-----------------------------------------------|---------------------|----|
| 28W | CRI90 | 2700K<br>3000K | 36° | IP20 | CITIZEN<br>Micro-Components<br>50,000h@L80B10 | 5 YEAR<br>GUARANTEE | CE |
|-----|-------|----------------|-----|------|-----------------------------------------------|---------------------|----|



| LED Power | System Power | LED Voltage | LED Current | CRI | CCT   | Beam | LED Output | System Output | Code             |
|-----------|--------------|-------------|-------------|-----|-------|------|------------|---------------|------------------|
| 2x12.5 W  | 2x14 W       | 36 V        | 2x350 mA    | 90  | 2700K | 36°  | 2900lm     | 2300lm        | V2SC-9273628P-WN |
|           |              |             |             |     | 3000K | 36°  | 3000lm     | 2400lm        | V2SC-9303628P-WN |


Code Remark: P=(Phase Dim)



|          |        |      |          |    |       |     |        |        |                  |
|----------|--------|------|----------|----|-------|-----|--------|--------|------------------|
| 2x12.5 W | 2x14 W | 36 V | 2x350 mA | 90 | 2700K | 36° | 2900lm | 2300lm | V2SC-9273628P-BN |
|          |        |      |          |    | 3000K | 36° | 3000lm | 2400lm | V2SC-9303628P-BN |

Code Remark: P=(Phase Dim)

Light Distribution

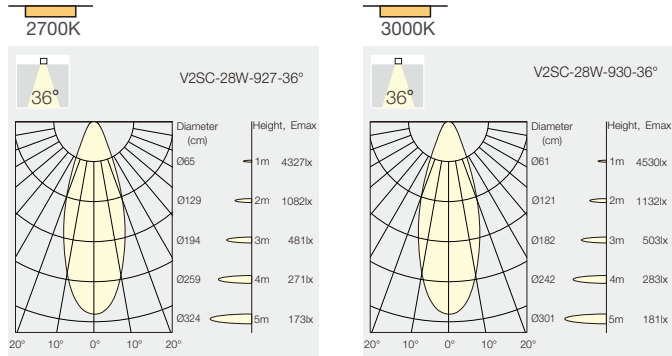

NEKO / VIBES / V1RR  
Recessed Spotlight  
Incl. Phase Dim Driver



NEKO / VIBES / V2RR  
Recessed Spotlight  
Incl. Phase Dim Driver



|     |       |                |     |      |                                                |  |    |  |  |
|-----|-------|----------------|-----|------|------------------------------------------------|--|----|--|--|
| 14W | CRI90 | 2700K<br>3000K | 36° | IP20 | CITIZEN<br>Micro-convertible<br>50,000h@L80B10 |  | CE |  |  |
|-----|-------|----------------|-----|------|------------------------------------------------|--|----|--|--|



| LED Power | System Power | LED Voltage | LED Current | CRI | CCT   | Beam | LED Output | System Output | Code             |
|-----------|--------------|-------------|-------------|-----|-------|------|------------|---------------|------------------|
| 12.5 W    | 14 W         | 36 V        | 350 mA      | 90  | 2700K | 36°  | 1400lm     | 1100lm        | V1RR-9273614P-WN |
|           |              |             |             |     | 3000K | 36°  | 1500lm     | 1200lm        | V1RR-9303614P-WN |

Code Remark: P=(Phase Dim)



|        |      |      |        |    |       |     |        |        |                  |
|--------|------|------|--------|----|-------|-----|--------|--------|------------------|
| 12.5 W | 14 W | 36 V | 350 mA | 90 | 2700K | 36° | 1400lm | 1100lm | V1RR-9273614P-BN |
|        |      |      |        |    | 3000K | 36° | 1500lm | 1200lm | V1RR-9303614P-BN |

Code Remark: P=(Phase Dim)

|     |       |                |     |      |                                                |  |    |  |  |
|-----|-------|----------------|-----|------|------------------------------------------------|--|----|--|--|
| 28W | CRI90 | 2700K<br>3000K | 36° | IP20 | CITIZEN<br>Micro-convertible<br>50,000h@L80B10 |  | CE |  |  |
|-----|-------|----------------|-----|------|------------------------------------------------|--|----|--|--|



| LED Power | System Power | LED Voltage | LED Current | CRI | CCT   | Beam | LED Output | System Output | Code             |
|-----------|--------------|-------------|-------------|-----|-------|------|------------|---------------|------------------|
| 2x12.5 W  | 2x14 W       | 36 V        | 2x350 mA    | 90  | 2700K | 36°  | 2900lm     | 2300lm        | V2RR-9273628P-WN |
|           |              |             |             |     | 3000K | 36°  | 3000lm     | 2400lm        | V2RR-9303628P-WN |


Code Remark: P=(Phase Dim)




|          |        |      |          |    |       |     |        |        |                  |
|----------|--------|------|----------|----|-------|-----|--------|--------|------------------|
| 2x12.5 W | 2x14 W | 36 V | 2x350 mA | 90 | 2700K | 36° | 2900lm | 2300lm | V2RR-9273628P-BN |
|          |        |      |          |    | 3000K | 36° | 3000lm | 2400lm | V2RR-9303628P-BN |

Code Remark: P=(Phase Dim)

Light Distribution

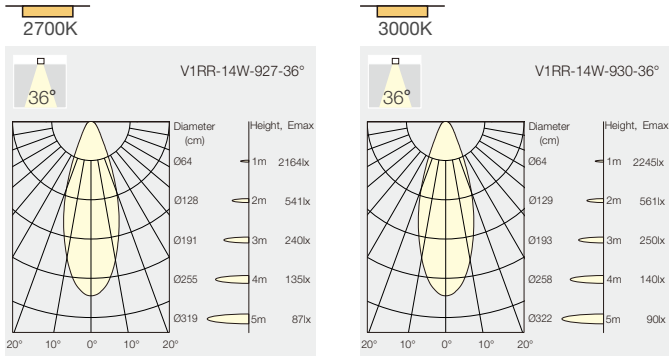

Light Distribution

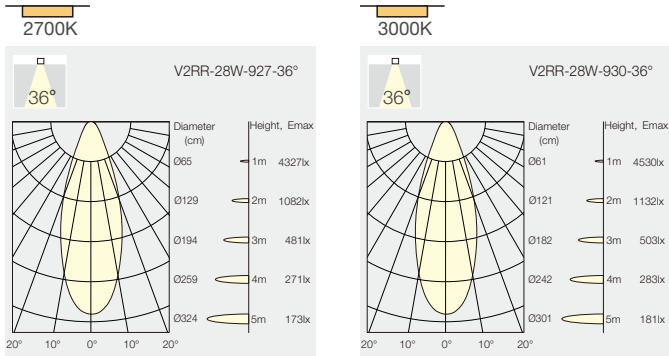



NEKO / VIBES / V1SR  
Recessed Spotlight  
Incl. Phase Dim Driver



|     |       |                |     |      |                                                |  |    |  |  |
|-----|-------|----------------|-----|------|------------------------------------------------|--|----|--|--|
| 14W | CRI90 | 2700K<br>3000K | 36° | IP20 | CITIZEN<br>Micro-convertible<br>50,000h@L80B10 |  | CE |  |  |
|-----|-------|----------------|-----|------|------------------------------------------------|--|----|--|--|



| LED Power | System Power | LED Voltage | LED Current | CRI | CCT   | Beam | LED Output | System Output | Code             |
|-----------|--------------|-------------|-------------|-----|-------|------|------------|---------------|------------------|
| 12.5 W    | 14 W         | 36 V        | 350 mA      | 90  | 2700K | 36°  | 1400lm     | 1100lm        | V1SR-9273614P-WN |
|           |              |             |             |     | 3000K | 36°  | 1500lm     | 1200lm        | V1SR-9303614P-WN |


Code Remark: P=(Phase Dim)




|        |      |      |        |    |       |     |        |        |                  |
|--------|------|------|--------|----|-------|-----|--------|--------|------------------|
| 12.5 W | 14 W | 36 V | 350 mA | 90 | 2700K | 36° | 1400lm | 1100lm | V1SR-9273614P-BN |
|        |      |      |        |    | 3000K | 36° | 1500lm | 1200lm | V1SR-9303614P-BN |

Code Remark: P=(Phase Dim)

Light Distribution

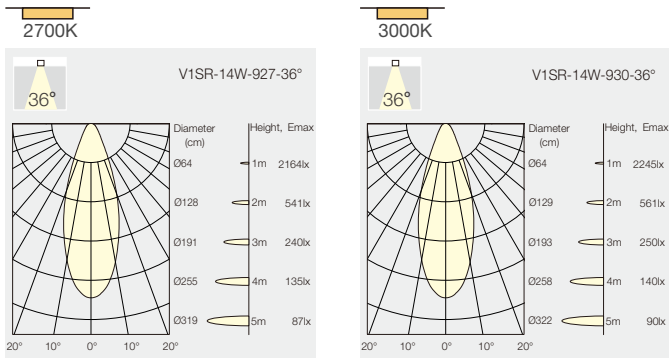

NEKO / VIBES / V2SR  
Recessed Spotlight  
Incl. Phase Dim Driver

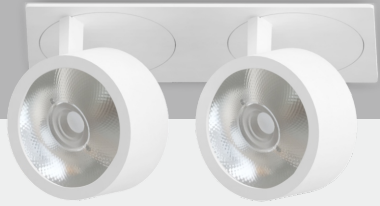

|     |       |                |     |      |                                                |  |    |  |  |
|-----|-------|----------------|-----|------|------------------------------------------------|--|----|--|--|
| 28W | CRI90 | 2700K<br>3000K | 36° | IP20 | CITIZEN<br>Micro-convertible<br>50,000h@L80B10 |  | CE |  |  |
|-----|-------|----------------|-----|------|------------------------------------------------|--|----|--|--|



| LED Power | System Power | LED Voltage | LED Current | CRI | CCT   | Beam | LED Output | System Output | Code             |
|-----------|--------------|-------------|-------------|-----|-------|------|------------|---------------|------------------|
| 2x12.5 W  | 2x14 W       | 36 V        | 2x350 mA    | 90  | 2700K | 36°  | 2900lm     | 2300lm        | V2SR-9273628P-WN |
|           |              |             |             |     | 3000K | 36°  | 3000lm     | 2400lm        | V2SR-9303628P-WN |

Code Remark: P=(Phase Dim)



|          |        |      |          |    |       |     |        |        |                  |
|----------|--------|------|----------|----|-------|-----|--------|--------|------------------|
| 2x12.5 W | 2x14 W | 36 V | 2x350 mA | 90 | 2700K | 36° | 2900lm | 2300lm | V2SR-9273628P-BN |
|          |        |      |          |    | 3000K | 36° | 3000lm | 2400lm | V2SR-9303628P-BN |

Code Remark: P=(Phase Dim)

Light Distribution

