

SPACE 16 Ring – Decorative Pendant Light



110°

36°

3000K

CRI >90

IP20

CE


LUMILEDS

50,000h@L80B10


5 YEARS

GUARANTEE

- Quick Info**
- General Lighting, Pendant Direct & Indirect
 - Lumileds LED: 28W, 43W, CRI>90
 - CCT: 3000K Available as Standard
 - Beam Angle: 36° ↓ , 110° ↑
 - Lumen Output: Up to 2700lm System Luminous Flux
 - LED Driver: On-Off, Phase Dim, DALI Dim

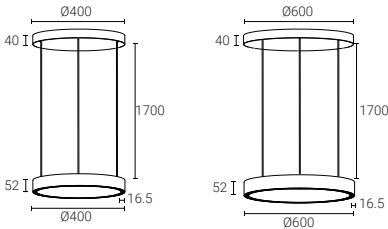

Light Distribution



Finish



Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
28W	30W	36V	800mA	90	3000K	36° ↓ 110° ↑	1900lm	S16A-9303630F-BR-U S16A-9303630F-BN-U S16A-9303630F-CB-U S16A-9303630P-BR-U S16A-9303630P-BN-U S16A-9303630P-CB-U S16A-9303630D-BR-U S16A-9303630D-BN-U S16A-9303630D-CB-U
43W	46W	36V	1200mA	90	3000K	36° ↓ 110° ↑	2700lm	S16C-9303646F-BR-U S16C-9303646F-BN-U S16C-9303646F-CB-U S16C-9303646P-BR-U S16C-9303646P-BN-U S16C-9303646P-CB-U S16C-9303646D-BR-U S16C-9303646D-BN-U S16C-9303646D-CB-U

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Coding

S16A	-	***	**	**	*	-	**	-	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish		Accessory
S16A SPACE 16 Ring-400-30W		930 CRI90/ 3000K	36 36° ↓	30 30W	F On-Off		BR Brushed Bronze		U Uplight
S16C SPACE 16 Ring-600-46W			36 36° ↓ 110° ↑	46 46W	P Phase Dim D DALI Dim		BN Brushed Nickel CB Chrome Black		



Project: Application reference