



NEKO / DASH Smart


LED Module

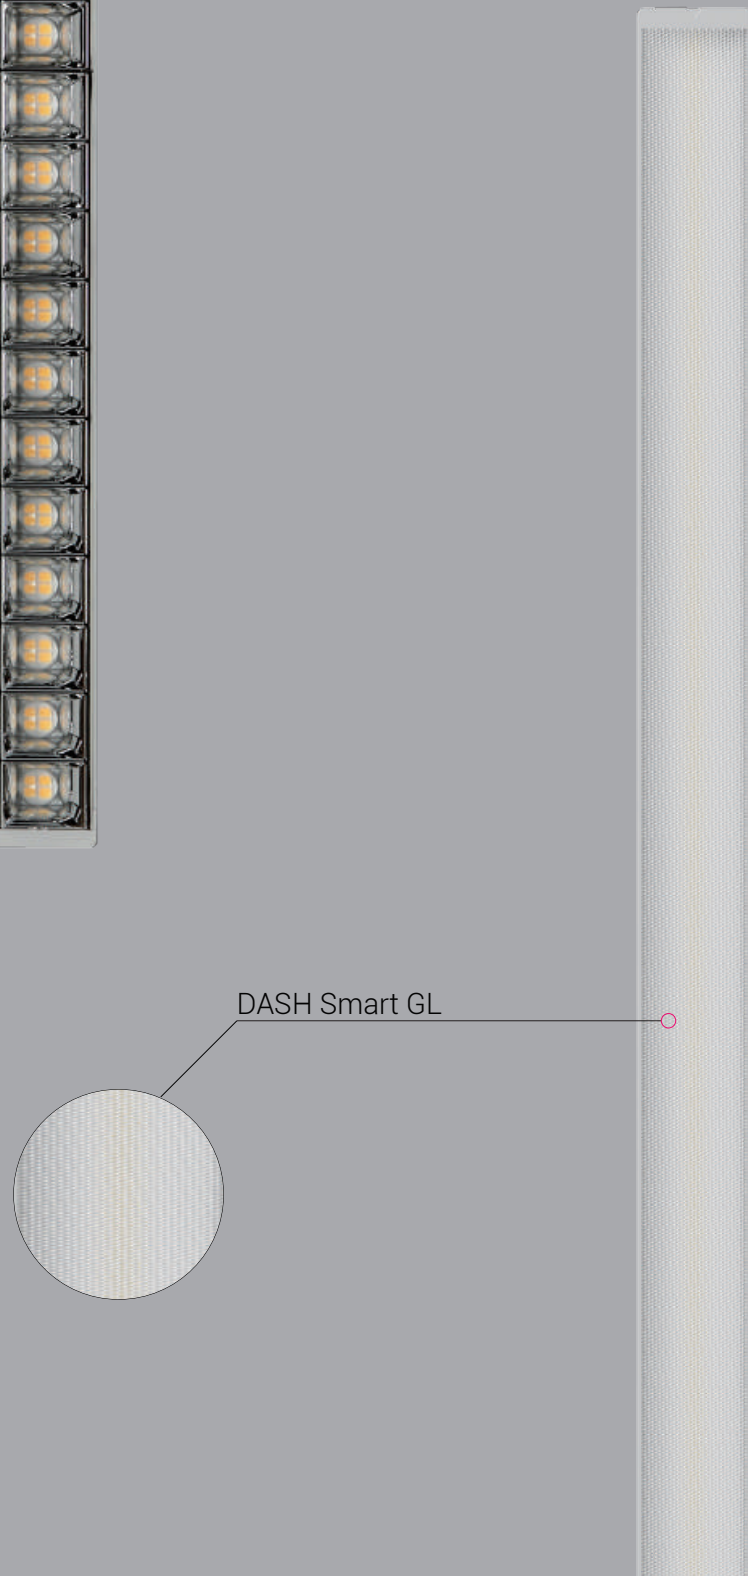

DASH Smart AL
Efficiency > 120lm/W




DASH Smart GL



NEKO / DASH Smart

In-Track Driver

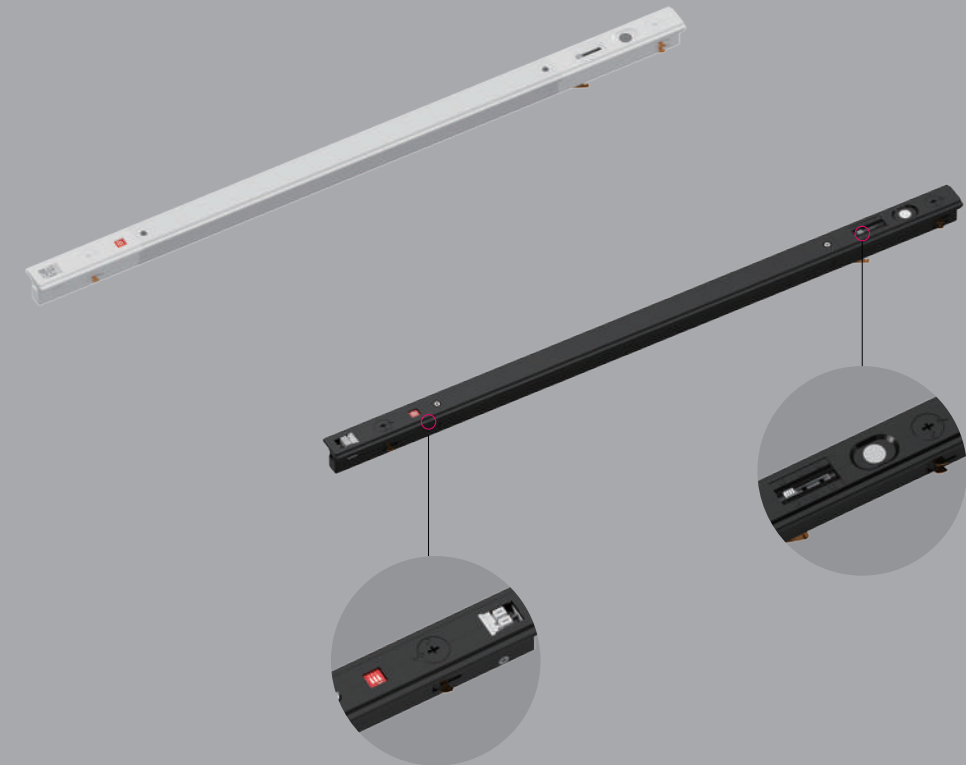

- Compatible 3-phase tracks
- Output current adjustable between 350 - 1050 mA via dip-switch
- On-off and DALI
- Hot-plug capable
- Overtemperature protection
- Overload protection
- Short-circuit protection
- Open-circuit protection

Accessory





NEKO / DASH Smart AL

LED Module

NEKO / DASH Smart GL

LED Module

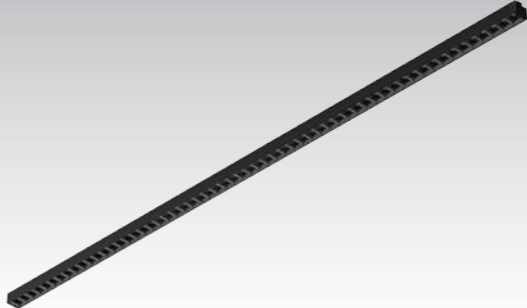

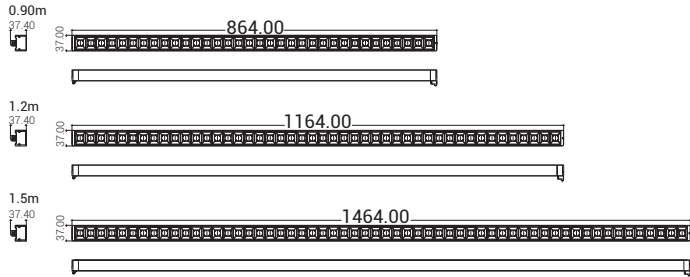

29W
39W
50W

CRI80

3000K
4000K

70°

SMD2835


UGR
< 19


IP20





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code		
900	max. 29W	max. 30W	48V	max. 600mA	80	3000K	70°	4300lm	3700lm	DSD26-L090-83070-WS	
							70°	4300lm	3700lm	DSD26-L090-83070-BS	
							70°	4300lm	3700lm	DSD26-L090-83070-BC	
	4000K	70°	4400lm	3900lm	DSD26-L090-84070-WS						
		70°	4400lm	3900lm	DSD26-L090-84070-BS						
		70°	4400lm	3900lm	DSD26-L090-84070-BC						
		70°	4400lm	3900lm	DSD26-L090-84070-BC						
	Matched with On-off or DALI GR6d in-Track Driver										
	1200	max. 39W	max. 40W	48V	max. 800mA	80	3000K	70°	5700lm	4800lm	DSD26-L120-83070-WS
								70°	5700lm	4800lm	DSD26-L120-83070-BS
70°								5700lm	4800lm	DSD26-L120-83070-BC	
4000K		70°	6000lm	5000lm	DSD26-L120-84070-WS						
		70°	6000lm	5000lm	DSD26-L120-84070-BS						
		70°	6000lm	5000lm	DSD26-L120-84070-BC						
		70°	6000lm	5000lm	DSD26-L120-84070-BC						
Matched with On-off or DALI GR6d in-Track Driver											
1500		max. 50W	max. 54W	48V	max. 1050mA	80	3000K	70°	8100lm	7200lm	DSD26-L150-83070-WS
								70°	8100lm	7200lm	DSD26-L150-83070-BS
	70°							8100lm	7200lm	DSD26-L150-83070-BC	
	4000K	70°	8600lm	7500lm	DSD26-L150-84270-WS						
		70°	8600lm	7500lm	DSD26-L150-84270-BS						
		70°	8600lm	7500lm	DSD26-L150-84270-BC						
		70°	8600lm	7500lm	DSD26-L150-84270-BC						
	Matched with On-off or DALI GR6d in-Track Driver										

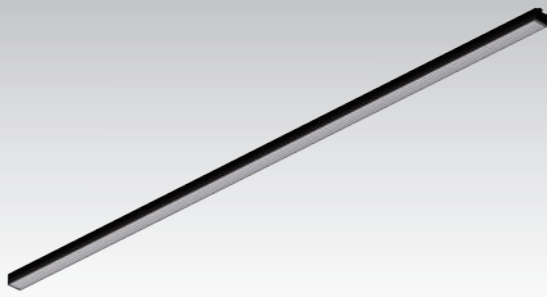

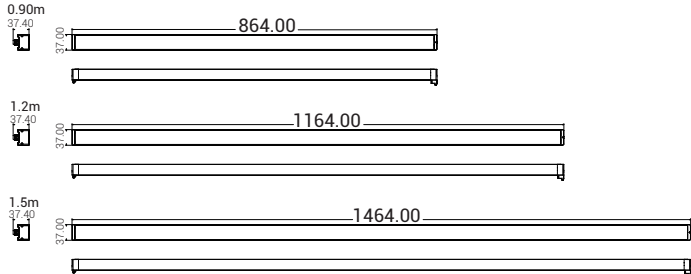

29W
39W
50W

CRI80

3000K
4000K

90°

SMD2835

IP20





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code							
900	max. 29W	max. 30W	48V	max. 600mA	80	3000K	90°	4200lm	3000lm	DSO26-L090-83090-WN						
							90°	4200lm	3000lm	DSO26-L090-83090-BN						
							4000K	90°	4400lm	3200lm	DSO26-L090-84090-WN					
								90°	4400lm	3200lm	DSO26-L090-84090-BN					
												Matched with On-off or DALI GR6d in-Track Driver				
1200	max. 39W	max. 40W	48V	max. 800mA	80	3000K	90°	5500lm	4000lm	DSO26-L120-83090-WN						
							90°	5500lm	4000lm	DSO26-L120-83090-BN						
							4000K	90°	5700lm	4200lm	DSO26-L120-84090-WN					
								90°	5700lm	4200lm	DSO26-L120-84090-BN					
												Matched with On-off or DALI GR6d in-Track Driver				
1500	max. 50W	max. 54W	48V	max.1050mA	80	3000K	90°	6900lm	5000lm	DSO26-L150-83090-WN						
							90°	6900lm	5000lm	DSO26-L150-83090-BN						
							4000K	90°	7400lm	5200lm	DSO26-L150-84090-WN					
								90°	7400lm	5200lm	DSO26-L150-84090-BN					
												Matched with On-off or DALI GR6d in-Track Driver				