

AFTER7 MINI – Projector Light



30°

45°

2700K
3000K

CRI
>80

IP67


IK08

CE


CITIZEN
50,000h@L80B10

5 YEARS
GUARANTEE

- Quick Info**
- CITIZEN LED: 5W, CRI>80, 2700K, 3000K
 - Beam Angle: 30°, 45°
 - Lumen Output: Up to 500lm System Luminous Flux
 - IP Class: IP67
 - Body: Aluminum; Color: Dark-Grey
 - LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)

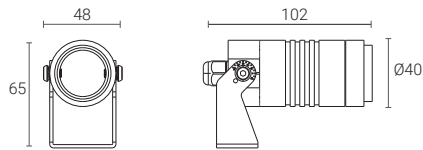

Light Distribution

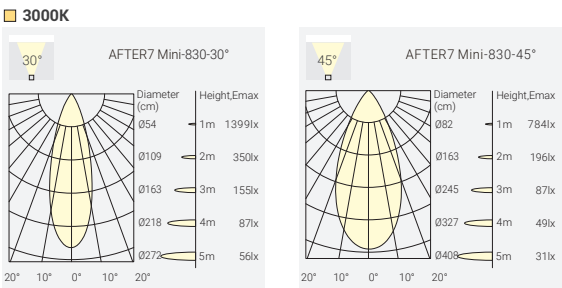

Versions



Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5W	5.5W	24V	80	2700K	30°	480lm	AFTER7 Mini-827-30°	AFMI-8273006F-DN
					45°	480lm	AFTER7 Mini-827-45°	AFMI-8274506F-DN
					30°	450lm	AFTER7 Mini-82730°-H	AFMI-8273006F-DN-H
					45°	450lm	AFTER7 Mini-827-45°-H	AFMI-8274506F-DN-H
				3000K	30°	500lm	AFTER7 Mini-830-30°	AFMI-8303006F-DN
					45°	500lm	AFTER7 Mini-830-45°	AFMI-8304506F-DN
					30°	470lm	AFTER7 Mini-830-30°-H	AFMI-8303006F-DN-H
					45°	470lm	AFTER7 Mini-830-45°-H	AFMI-8304506F-DN-H

Remark: Remote 24VDC LED driver is required (Non-Dimmable)

Accessory : Stake for AFTER7 series projectors



AFTER7 MAXI – Projector Light



20°

30°

50°

2700K
3000K

CRI
>80

IP67

IK08


CE

UK
CA


bridgelux
50,000h@L80B10

5 YEARS
GUARANTEE

- Quick Info**
- Bridgelux LED: 9W, CRI>80, 2700K, 3000K
 - Beam Angle: 20°, 30°, 50°
 - Lumen Output: Up to 850lm System Luminous Flux
 - IP Class: IP67
 - Body: Aluminum; Color: Dark-Grey
 - LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)

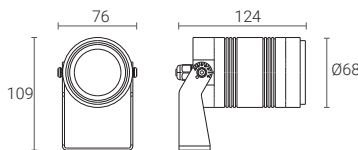

Light Distribution

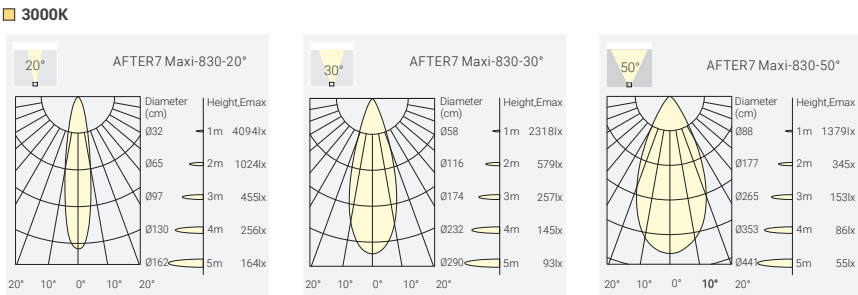

Versions



Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model
9W	10W	24V	80	2700K	20°	800lm	AFTER7 Maxi-827-20°
					30°	800lm	AFTER7 Maxi-827-30°
					50°	800lm	AFTER7 Maxi-827-50°
					20°	750lm	AFTER7 Maxi-827-20°-H
					30°	750lm	AFTER7 Maxi-827-30°-H
					50°	750lm	AFTER7 Maxi-827-50°-H
				3000K	20°	850lm	AFTER7 Maxi-830-20°
					30°	850lm	AFTER7 Maxi-830-30°
					50°	850lm	AFTER7 Maxi-830-50°
					20°	800lm	AFTER7 Maxi-830-20°-H
					30°	800lm	AFTER7 Maxi-830-30°-H
					50°	800lm	AFTER7 Maxi-830-50°-H

Remark: Remote 24VDC LED driver is required (Non-Dimmable)

Accessory : Stake for AFTER7 series projectors

