

! NEW



Features

- Modular designed pathway light with IP66 waterproof rating, perfect for outdoor use
- Twist & Lock covers are interchangeable, styles can be custom made
- Press button for CCT changeable, warm 2700K(2200K Optional) or cozy 3000K
- Extension poles are available with shrubbery growing
- Multiple installation accessories; Pole, Spike or base mounting
- Triple layer coating, ensuring over 1000hours of salt mist test, suitable for seaside installations
- Wider light distribution 130° achieved by advanced lens design
- Invisible screws for esthetic appeal



- Press Button for 2CCT Changeable
- 2700K-3000K Changeable



POSEIDON Series – IP66 Garden Light


Cover



Light Engine




Mounting Type

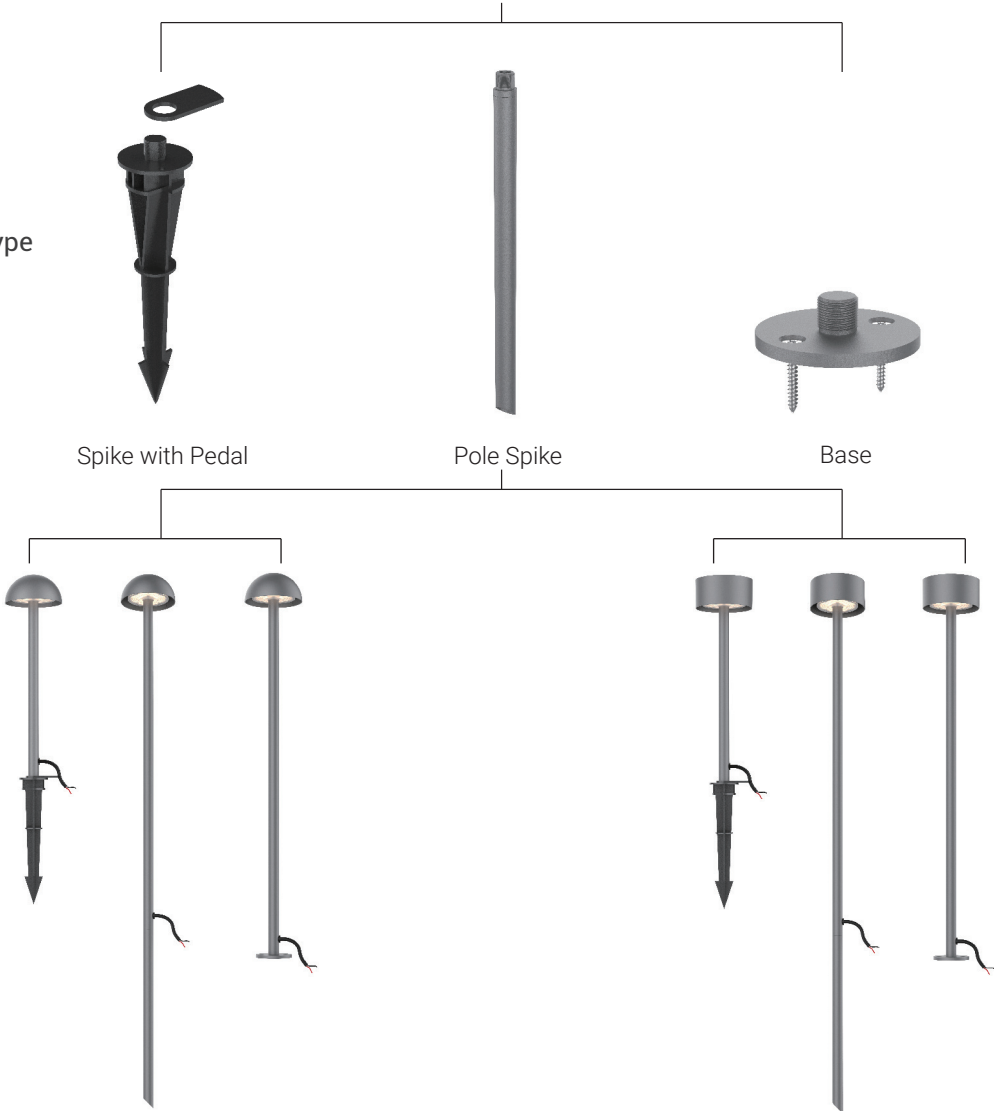

POSEIDON Series – IP66 Garden Light

NEW

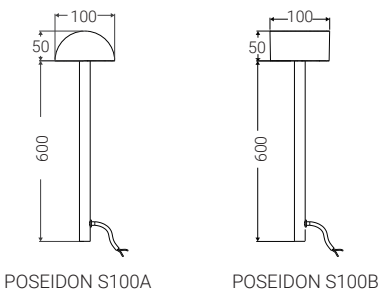


Accessory



Quick Info

- OSRAM LED: 4W, 5W, CRI>80, 2700K(2200K Optional)-3000K Changeable
- Beam Angle: Light Emission 360°
- Lumen Output: Up to 370m/ 485lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: 24VDC Remote On-Off LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input

Light Distribution

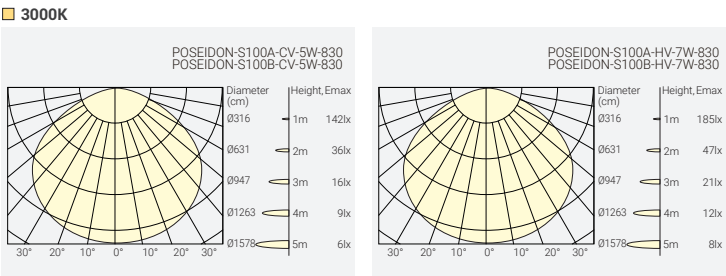

Order Info

24VDC Version						
LED Power	System Power	Voltage	CRI	CCT	System Output	Model
4W	5W	24VDC	80	@2700K @3000K	350lm 370lm	POSEIDON-S100A-CV PAV1-8A3C605F-DN-K1
				@2700K @3000K	350lm 370lm	POSEIDON-S100B-CV PBV1-8A3C605F-DN-K1
Code Remark: K1=(Spike with Pedal) K2=(Pole Spike) K3=(Base) Remark: External 24VDC LED Driver is Required						
LED Driver Integrated Version						
LED Power	System Power	Input	CRI	CCT	System Output	Model Code
5W	7W	220-240VAC	80	@2700K @3000K	460lm 485lm	POSEIDON-S100A-HV PAH1-8A3C607F-DN-K1
				@2700K @3000K	460lm 485lm	POSEIDON-S100B-HV PBH1-8A3C607F-DN-K1
Code Remark: K1=(Spike with Pedal) K2=(Pole Spike) K3=(Base) Remark: On-Off LED Driver Integrated						

