


TERARACE MICRO – Recessed Ground Light



30°

40°

65°

2700K
3000K

CRI
>80

IP67

IK08

CE


OSRAM
50,000h@L80B10

5 YEARS
GUARANTEE

Quick Info

- OSRAM LED: 1W, CRI>80, 2700K, 3000K
- Beam Angle: 30°, 40°, 65°
- Lumen Output: Up to 100lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)

Light Distribution

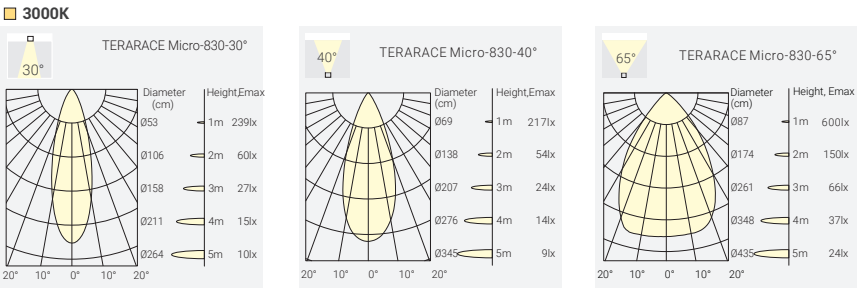

Accessory: Pre-embedded Tube




Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
1W	1.5W	24V	80	2700K	30°	90lm	TERARACE Micro-827-30°	TEMI-8273002F-DN
					40°	90lm	TERARACE Micro-827-40°	TEMI-8274002F-DN
					65°	90lm	TERARACE Micro-827-65°	TEMI-8276502F-DN
				3000K	30°	100lm	TERARACE Micro-830-30°	TEMI-8303002F-DN
					40°	100lm	TERARACE Micro-830-40°	TEMI-8304002F-DN
					65°	100lm	TERARACE Micro-830-65°	TEMI-8306502F-DN

Remark: Remote 24VDC LED driver is required (Non-Dimmable)

TERARACE NANO – Recessed Ground Light



18°

35°

60°

2700K
3000K

CRI
>80

IP67

IK08

CE


OSRAM
50,000h@L80B10

5 YEARS
GUARANTEE

Quick Info

- OSRAM LED: 1.6W, CRI>80, 2700K, 3000K
- Beam Angle: 18°, 35°, 60°
- Lumen Output: Up to 120lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)

Light Distribution

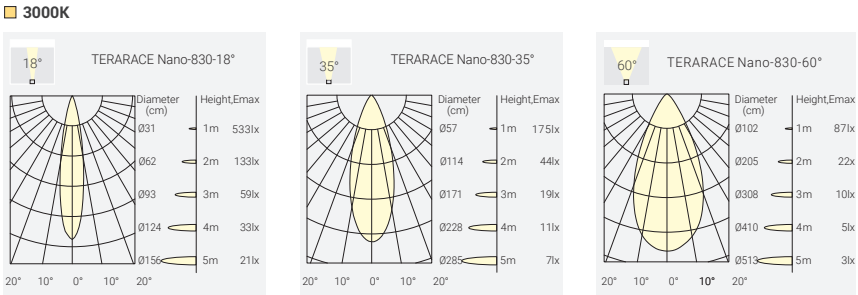

Accessory: Pre-embedded Tube



Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
1.6W	2W	24V	80	2700K	18°	110lm	TERARACE Nano-827-18°	TENA-8271802F-DN
					35°	110lm	TERARACE Nano-827-35°	TENA-8273502F-DN
					60°	110lm	TERARACE Nano-827-60°	TENA-8276002F-DN
				3000K	18°	120lm	TERARACE Nano-830-18°	TENA-8301802F-DN
					35°	120lm	TERARACE Nano-830-35°	TENA-8303502F-DN
					60°	120lm	TERARACE Nano-830-60°	TENA-8306002F-DN


Remark: Remote 24VDC LED driver is required (Non-Dimmable)

TERARACE MINI – Recessed Ground Light




Quick Info

- CITIZEN LED: 5W, CRI>80, 2700K, 3000K
- Beam Angle: 30°, 45°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)



Light Distribution

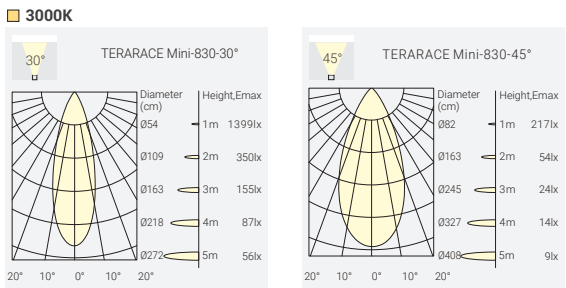


Accessory: Pre-embedded Tube



Order Info


LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5W	5.5W	24V	80	2700K	30°	480lm	TERARACE Mini-827-30°	TEMI-8273006F-DN
					45°	480lm	TERARACE Mini-827-45°	TEMI-8274506F-DN
				3000K	30°	500lm	TERARACE Mini-830-30°	TEMI-8303006F-DN
					45°	500lm	TERARACE Mini-830-45°	TEMI-8304506F-DN
Remark: Remote 24VDC LED driver is required (Non-Dimmable)								

TERARACE MAXI – Recessed Ground Light

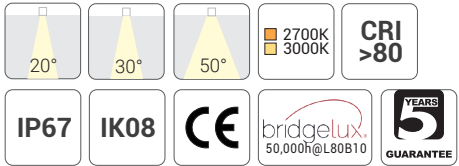


Quick Info

- Bridgelux LED: 9W, CRI>80, 2700K, 3000K
- Beam Angle: 20°, 30°, 45°
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)



Light Distribution

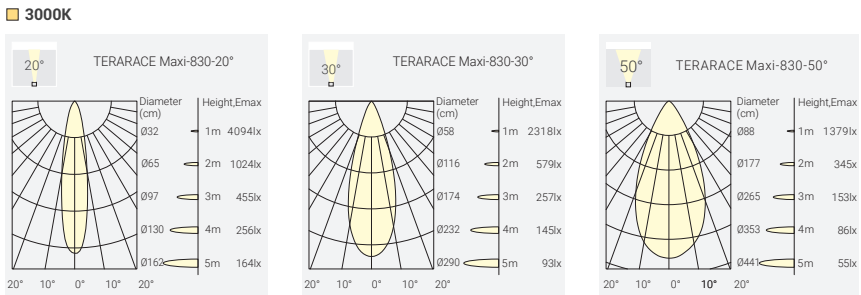

Accessory: Pre-embedded Tube



Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
9W	10W	24V	80	2700K	20°	810lm	TERARACE Maxi-827-20°	TEMA-8272010F-DN
					30°	810lm	TERARACE Maxi-827-30°	TEMA-8273010F-DN
					50°	810lm	TERARACE Maxi-827-50°	TEMA-8275010F-DN
				3000K	20°	850lm	TERARACE Maxi-830-20°	TEMA-8302010F-DN
					30°	850lm	TERARACE Maxi-830-30°	TEMA-8303010F-DN
					50°	850lm	TERARACE Maxi-830-50°	TEMA-8305010F-DN
Remark: Remote 24VDC LED driver is required (Non-Dimmable)								