neko

THINK DESIGN

www.nekolighting.com

2026

PUBLIC PRICE LIST INDOOR /OUTDOOR COLLECTION

NEKO COLORS

Standard white & standard black of NEKO products

RAL 9016	TRAFFIC WHITE
RAL 9005	JET BLACK

Besides standard colors as mentioned in the catalogue, any individual RAL classic color can be custom made.

Details for your individual colors

Have the freedom of design a wide range of NEKO products, can now be ordered in any RAL classic color for indoor lighting

The individual color can be produced for you with a reasonable surcharge.

For this customized color the delivery times will be a bit longer.

Please ask our NEKO sales team to support you.



INDEX

MINUX Series



MINUX 38
■003



MINUX 44
■004



MINUX 57
■005

SENSE 45 Series



S45R1
■009



S45S1
■010

SENSE 55 Series



S55R1-G2
■011

SENSE 68 Series



S68R1-G2
■013-014



S68S1-G2
■015-016

SENSE 75 Series



S75R1-G2
■017

SENSE 100 Series



S100R1-G2
■019-020



S100S1-G2
■021-022



S100HR1-G2
■023



S100HS1-G2
■024




S100R7-G2
■025



S100HR7-G2
■026



S100R2-G2
■027



S100HR2-G2
■028




S100S2-G2
■029



S100HS2-G2
■030

SENSE 125 Series



S125R1-G2
■031



S125S1-G2
■032




S125R2-G2
■033



S125S2-G2
■034


SENSE 150 Series



S150R1-G2
■035



S150S1-G2
■036



S150R2-G2
■037



S150S2-G2
■038

SENSE New Wall Washer Series

! NEW



SENSE W75
■043



SENSE W100
■044

TAKEO Round Series



T75
■047



T100 Pro
■048-050



T150 Pro
■051-052



T200 Pro
■053-054



T150C Pro
■055


TAKEO Square Series



TS68
■057



TS100 Pro
■058



TS150 Pro
■059




TS200 Pro
■060

VISION Series



VISION V68
■063



VISION V68W
■064

PASSION Series

! NEW



PASSION 100
■067



PASSION 150
■068



PASSION 200
■069

NEKO Code Introduction

[Code_Prefix]-[Electrical-optical Info.]-[Color Info]-[Accessories]

******	-	*	**	**	**	*	-	*	*	-	*
SSR1G2	-	9	30	45	18	D	-	W	S	-	H
Acronym of Model		CRI	CCT	Beam Angle	Power	Lighting Control		Fixture Color	Reflector / Decoration Ring Color		Accessories

SSR1G2-9304518D-WS-H
- SENSE100-G2, Round Trim, Adjustable Version,
- CRI90, CCT3000K, Beam 45°, 18W, DALI Control,
- White Trim, Specular 2nd Reflector,
- with Honeycomb.


CLUB LED Module



M1
■073



M2
■074



M3
■075-076



M4
■077-078



M4 Pro
■079-082

CLUB Trim Series



TA5



TA6



TA7



TA8



TF5



TRF1-IP44



TA5-IP65



TSF1



TSA1



TSA2



TSA3



TSA1D
■083-090



TSA2D



TSA3D

SKYJACK Series



SKYJACK A68
■093-094



SKYJACK D
■095-096



SKYJACK F
■097



SKYJACK A145
■098

KENZO Series



K1X30
■101

K1X55
■102

K1X70
■103

FUSION Fixed



FUSION FF1
■107



FUSION FF2
■108



FUSION FF3
■109



FUSION FF4
■110



FUSION FF5
■111



FUSION FF10
■112

FUSION Fixed IP65

NEW



FUSION FF2-IP65
■113



FUSION FF3-IP65
■114



FUSION FF5-IP65
■115



FUSION FF10-IP65
■116

FUSION Adjustable



FUSION FA5
■117



FUSION FA10
■119

FUSION Fixed Trimless



FUSION FFT5
■111



FUSION FFT10
■112

FUSION Wall Washer



FUSION FW5
■120



FUSION FW10
■121

FUSION General Light



FUSION FG5
■123



FUSION FG10
■124

FUSION Adjustable Spotlight



FUSION FS1
■125



FUSION FS2
■126



FUSION FS3
■127



FUSION FS6
■128



FUSION FF3-FS1
■129



FUSION FF6-FS2
■130

FUSION G2 Fixed

NEW



FUSION G2 FF1
■131



FUSION G2 FF2
■132



FUSION G2 FF3
■133



FUSION G2 FF5
■134




FUSION G2 FF10
■135

FUSION G2 Trimless Fixed

NEW



FUSION G2 FFT5
■134




FUSION G2 FFT10
■135

FUSION G2 Adjustable

NEW




FUSION G2 FA5
■136




FUSION G2 FA10
■137

FUSION Linear System

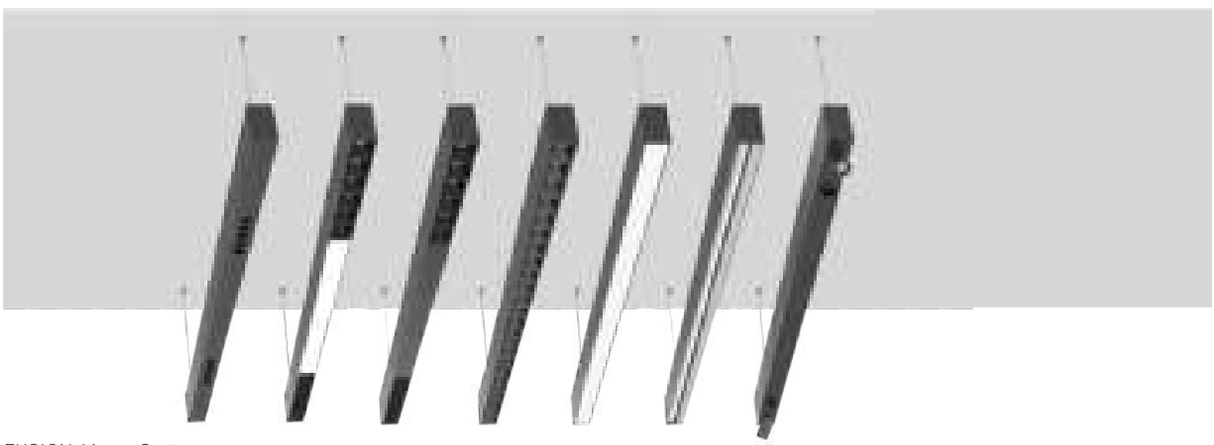

FUSION Linear System
■141-154

SPACE 60 Linear System

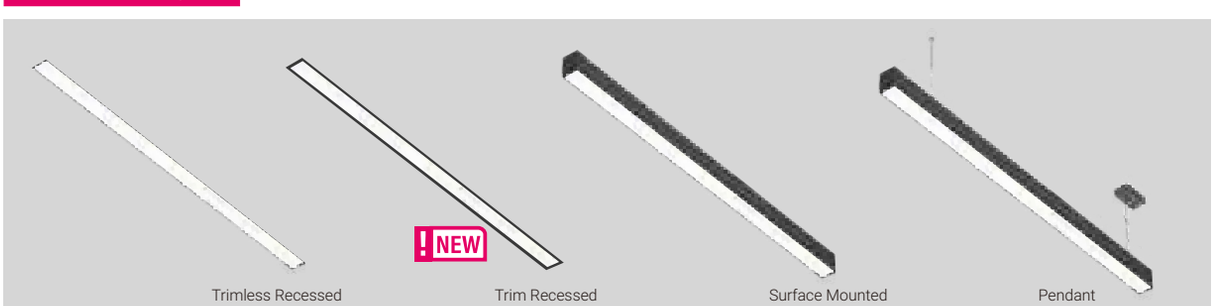

SPACE 60 Linear System
■157-162

DASH Smart Series

NEW




DSD26
■169




DSO26
■170



InTrack Driver
■171



DSC12
■173



DSP12
■174




DS1R12
■175



DSR625
■176

MODULINE 05 24V Linear System NEW

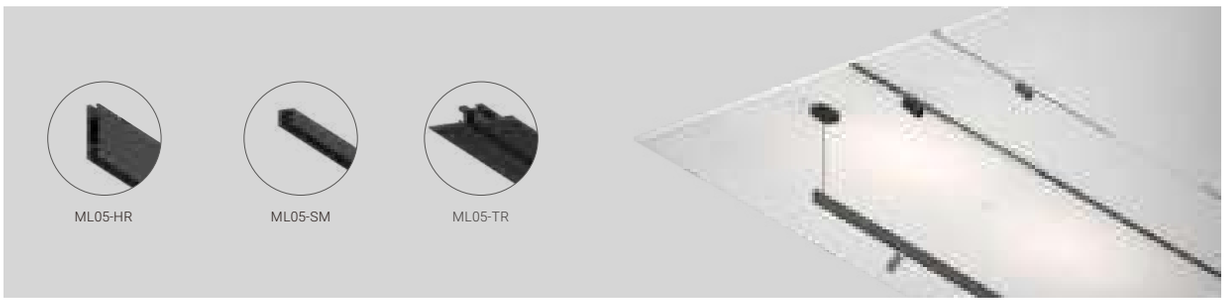

MODULINE 05 Linear System
■181-186

MODULINE 26 48V Linear System



MODULINE 26 Linear System
■191-254

GAME Ceiling Light Series



GAME
■257-262

SUGAR Ceiling Light Series



SUGAR
■263-266

GLAMOR Ceiling Light Series



GLAMOR
■269-272

MINT Ceiling Light Series



MINT 280
■275-277

MINT 420
■279-281

SKY Family Ceiling Light



SKYDRIVER SDRC ■285
SKYDRIVER SDSC ■286
SKYJOY Single SJSC ■287-288
SKYJOY Double SJDC ■289-290
SKYLINE SL5C ■291

MIU Series



MIU-C M ■297
MIU-C L ■298
MIU-P S ■299
MIU-P M ■300
MIU-P L ■301

MIU Art Series

NEW




MIU Art-S ■305
MIU Art-M ■306

BREEZE Series



BREEZE Single ■309
BREEZE Double ■310
BREEZE Triple ■311

VIBES Series

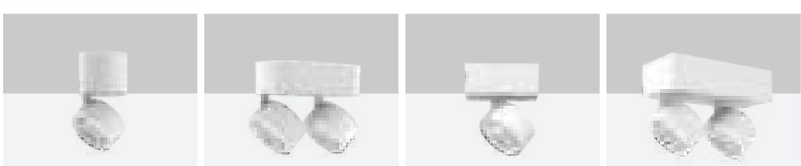

V1RC ■315
V2RC ■316
V1SC ■317
V2SC ■318



V1RR ■319
V2RR ■320
V1SR ■321
V2SR ■322

Ceiling Mounted PURE Series



PURE Art-C
■325



PURE S-C
■326

PURE Series Tracklight



PURE ART
■329

PURE S
■330-331

PURE M
■332-333

ROXY Series Tracklight



ROXY ART
■337-338

ROXY S
■339-340

ROXY K
■341-342

Zooming
ROXY Art-Z
■343

Zooming
ROXY S-Z
■344

INLINE Series Tracklight



INLINE ST
■347

INLINE SP
■348

INDEX

SEAPOINT Series



SEAPOINT
■355

LAKEPOINT Series



LAKEPOINT Fixed
■356



LAKEPOINT Adjustable
■357

CARMEL Series



SKYSURFER SSRC
■358



CARMEL Round
■359

CLIFTON Series



CLIFTON
■360

RIVA Series



RIVA Round
■361



RIVA Square
■362

CAMPSBAY Series



CAMPSBAY Single
■363



CAMPSBAY Double

LAGOON Series



LAGOON
■364

CRUZ D Series



CRUZ D
■365

CAPRI Series



CAPRI
■366

BAY Series




BAY
■367

NICE Series



NICE 250S & NICE 250D
■368



NICE 500S & NICE 500D
■369

St.Tropez Series



St.Tropez
■370

Capetown-Recessed Series




Capetown Round-Recessed
■371



Capetown Square-Recessed

Capetown-Surface Series




Capetown Round-Surface
■372




Capetown Square-Surface

CALIFORNIA Series

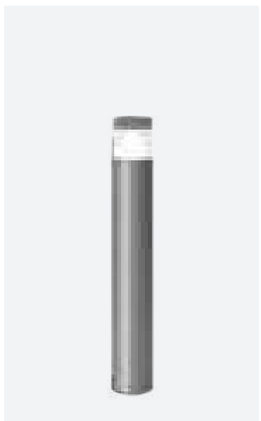

CALIFORNIA 12
■373

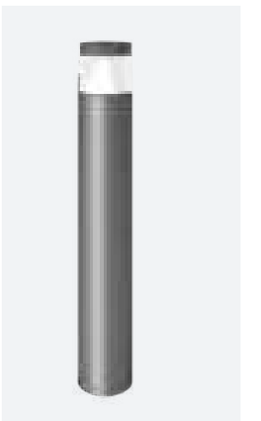


CALIFORNIA 16

DURBAN Series



DURBAN
■374

POSITANO Series

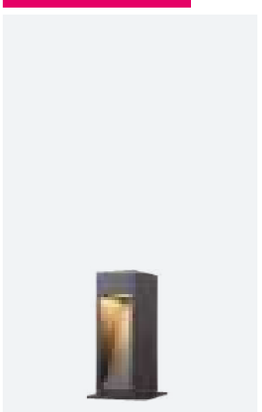


POSITANO 300
■375



POSITANO 600

PORTOFINO Series



PORTOFINO S
■376



PORTOFINO L



PORTOFINO Adjustable
■377

AFTER7 Series



AFTER7 Mini
■378




AFTER7 Maxi
■379

NEPTUNE Series



NEPTUNE XSU CV
■380




NEPTUNE SU CV
■381



NEPTUNE MU CV
■382



NEPTUNE LU CV
■383



NEPTUNE SR CV
NEPTUNE SR HV
■385



NEPTUNE MR CV
NEPTUNE MR HV
■386



NEPTUNE LR CV
NEPTUNE LR HV
■387

TERARACE Series



TERARACE Micro
■388



TERARACE Nano
■389



TERARACE Mini
■390




TERARACE Maxi
■391


MINUX


The Slim Powerful Fixed Downlight



MINUX 38 – The Slim & Powerful Fixed Downlight Series

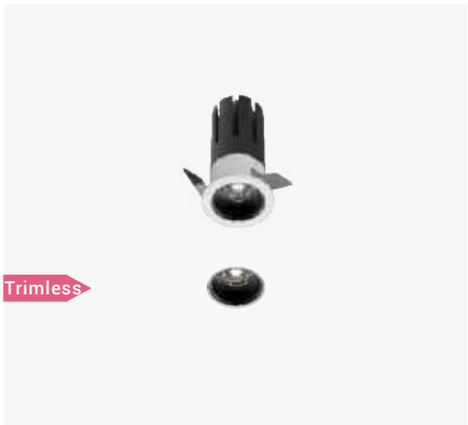

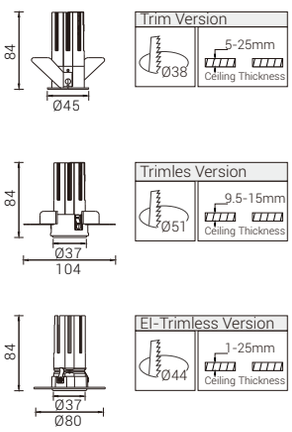

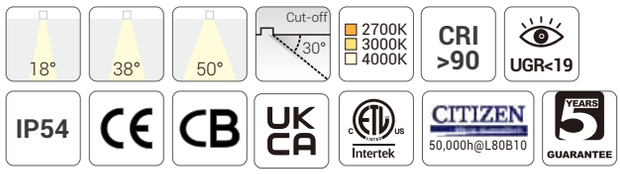


Quick Info

- Ceiling Cut-out: Ø38mm for Trim Version
- Trimless Version also available
- CITIZEN LED: 6W, CRI>90
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: 18°(UGR<19), 38°(UGR<19), 50°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K

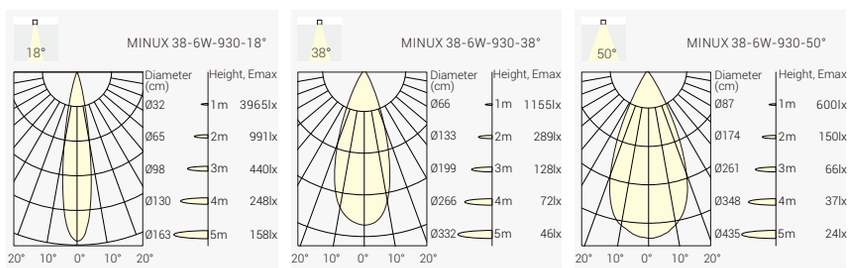

Order Info (MINUX 38 Trim Version in white Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	12 V	500 mA	90	2700K	18°	500lm	420lm	MIF3-9271806N-WC
						38°	500lm	420lm	MIF3-9273806N-WC
						50°	500lm	420lm	MIF3-9275006N-WC
					3000K	18°	550lm	450lm	MIF3-9301806N-WC
						38°	550lm	450lm	MIF3-9303806N-WC
						50°	550lm	450lm	MIF3-9305006N-WC
					4000K	18°	600lm	500lm	MIF3-9401806N-WC
						38°	600lm	500lm	MIF3-9403806N-WC
						50°	600lm	500lm	MIF3-9405006N-WC

No Driver	69,00 €
ON-OFF	79,00 €
Phase Dim	89,00 €
DALI Dim	99,00 €

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Trimless Version:
Trimless: +10,00€

Reflector Options



Dark Light Black Matt White Gold

Optional accessary



Honeycomb

Code for MIF3-9305006N-WM with Honeycomb
MIF3-9305006N-WM-H

Honeycomb: +9,00€



Soft Ceiling Protection Ring
* for Trim Version ONLY


Coding


MIF3 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
MIF3 MINUX 38 Trim Verssion	**927** CRI90/ 2700K	**18** 18°	**06** 6W	**N** No Driver	**W** White	**C** Dark Light	**H** Honeycomb
MIT3 MINUX 38 Trimless Version	**930** CRI90/ 3000K	**38** 38°		**F** On-Off	**B** Black	**B** Black	
MIE3 MINUX 38 EI-Trimless Version	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**M** Matt	
				A 1-10V Dim		**W** White	
				D DALI Dim		**G** Gold	

BACK

MINUX 44 – The Slim & Powerful Fixed Downlight Series

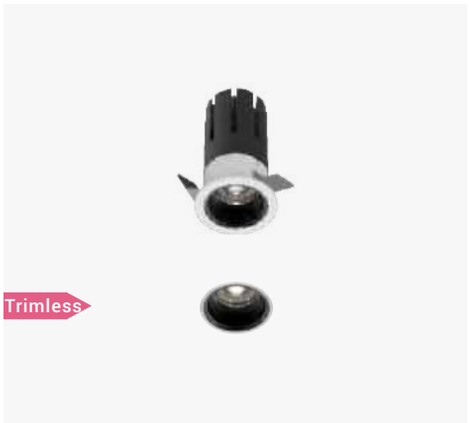

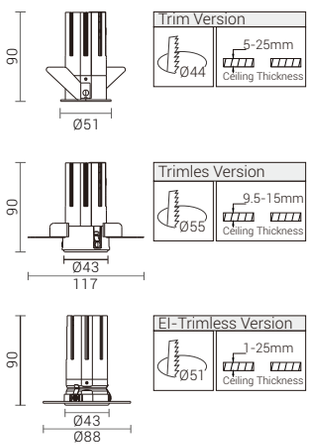

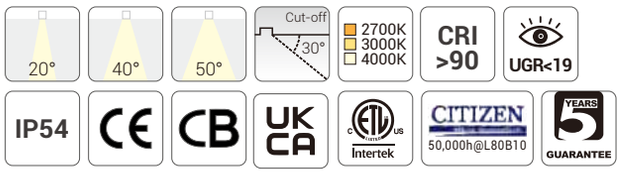


Quick Info

- Ceiling Cut-out: Ø44mm for Trim Version
- Trimless Version also available
- CITIZEN LED: 9W, CRI>90
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: 20°(UGR<19), 40°(UGR<19), 50°
- Lumen Output: Up to 900lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K

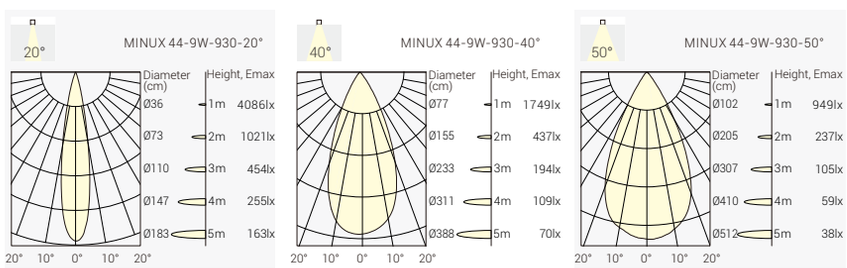

Order Info (MINUX 44 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	90	2700K	20°	950lm	800lm	MIF4-9272009N-WC
						40°	950lm	800lm	MIF4-9274009N-WC
						50°	950lm	800lm	MIF4-9275009N-WC
					3000K	20°	1000lm	850lm	MIF4-9302009N-WC
						40°	1000lm	850lm	MIF4-9304009N-WC
						50°	1000lm	850lm	MIF4-9305009N-WC
					4000K	20°	1050lm	900lm	MIF4-9402009N-WC
						40°	1050lm	900lm	MIF4-9404009N-WC
						50°	1050lm	900lm	MIF4-9405009N-WC

No Driver	69,00 €
ON-OFF	79,00 €
Phase Dim	109,00 €
DALI Dim	129,00 €

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finish

Trimless Version:
Trimless: +10,00€



White Black

Reflector Options



Matt Dark Light Black White Gold

Optional accessary



Honeycomb

Code for MIF4-9305009N-WM with Honeycomb
MIF4-9305009N-WM-H

Honeycomb: +9,00€




Soft Ceiling Protection Ring
* for Trim Version ONLY


Coding


MIF4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
MIF4 MINUX 44 Trim Verssion	**927** CRI90/ 2700K	**20** 20°	**09** 9W	**N** No Driver	**W** White	**C** Dark Light	**H** Honeycomb
MIT4 MINUX 44 Trimless Version	**930** CRI90/ 3000K	**40** 40°		**F** On-Off	**B** Black	**B** Black	
MIE4 MINUX 44 El-Trimless Version	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**M** Matt	
				A 1-10V Dim		**W** White	
				D DALI Dim		**G** Gold	

MINUX 57– The Slim & Powerful Fixed Downlight Series

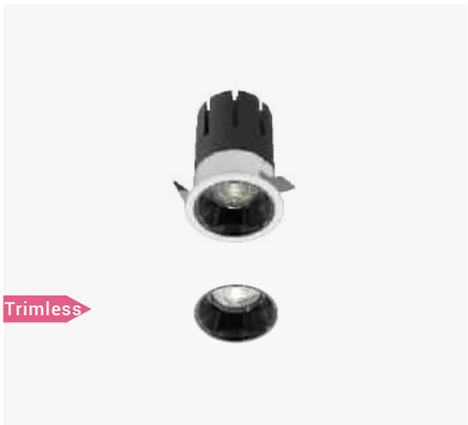

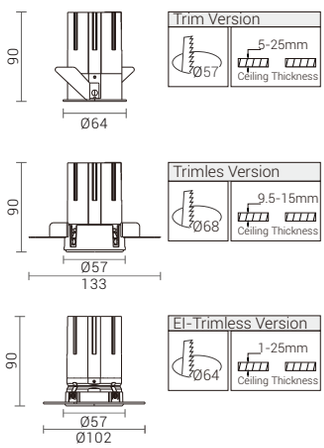

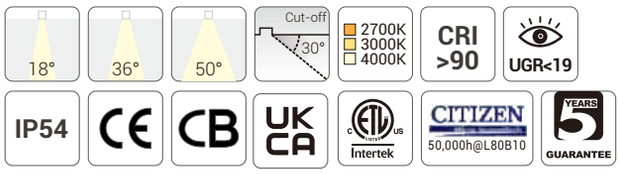


Quick Info

- Ceiling Cut-out: Ø57mm for Trim Version
- Trimless Version also available
- CITIZEN LED: 13W, CRI>90
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: 18°(UGR<19), 36°(UGR<19), 50°
- Lumen Output: Up to 1050lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

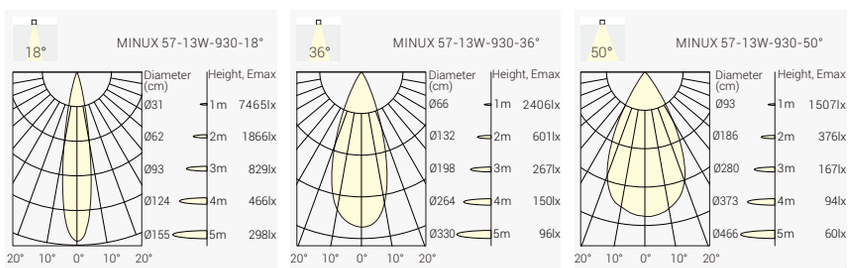

Order Info (MINUX 57 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1200lm	950lm	MIF5-9271813N-WC
						36°	1200lm	950lm	MIF5-9273613N-WC
						50°	1200lm	950lm	MIF5-9275013N-WC
					3000K	18°	1300lm	1000lm	MIF5-9301813N-WC
						36°	1300lm	1000lm	MIF5-9303613N-WC
						50°	1300lm	1000lm	MIF5-9305013N-WC
					4000K	18°	1400lm	1050lm	MIF5-9401813N-WC
						36°	1400lm	1050lm	MIF5-9403613N-WC
						50°	1400lm	1050lm	MIF5-9405013N-WC

No Driver	89,00 €
ON-OFF	99,00 €
Phase Dim	119,00 €
DALI Dim	129,00 €

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Trimless Version:
Trimless: +10,00€

Reflector Options



Matt Dark Light Black White Gold

Optional accessary



Honeycomb

Code for MIF5-9305013N-WM with Honeycomb
MIF5-9305013N-WM-H

Honeycomb: +9,00€



Soft Ceiling Protection Ring
* for Trim Version ONLY

Coding

MIF5 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
MIF5 MINUX 57 Trim Verssion	**927** CRI90/ 2700K	**18** 18°	**13** 13W	**N** No Driver	**W** White	**C** Dark Light	**H** Honeycomb
MIT5 MINUX 57 Trimless Version	**930** CRI90/ 3000K	**36** 36°		**F** On-Off	**B** Black	**B** Black	
MIE5 MINUX 57 EI-Trimless Version	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**M** Matt	
				A 1-10V Dim		**W** White	
				D DALI Dim		**G** Gold	

BACK


SENSE G2


The Upgraded SENSE Downlight Series
Modular Design Architectural Downlight System
Adjustable & Fixed
LED Engine Power from 4W to 38W
Round & Square, Trim & Trimless
Cutouts in 45mm, 55mm, 68mm, 75mm,
100mm, 125mm, 150mm



SENSE S45R1 – Modular Design Architectural Downlight





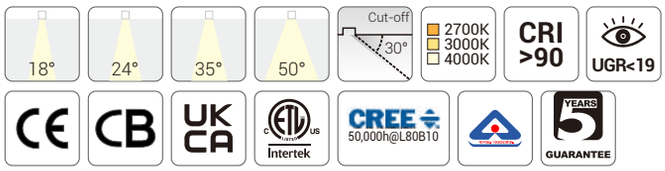


Quick Info

- Ceiling Cut-out: Ø45mm for Trim Version
- CREE LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: 18° , 24°, 35°, 50°
- Lumen Output: Up to 380lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K

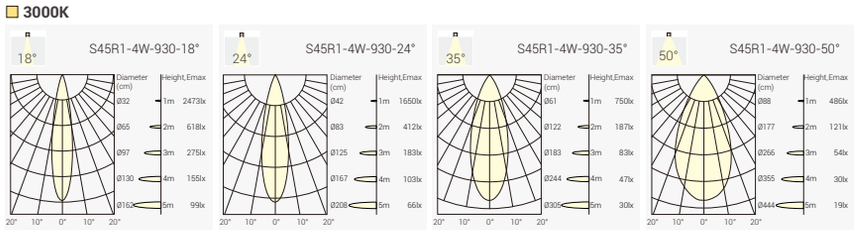

Order Info (SENSE S45 Trim Version in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	12V	350mA	90	2700K	18°	480lm	330lm	SUR1-9271804N-WM
						24°	480lm	330lm	SUR1-9272404N-WM
						35°	480lm	330lm	SUR1-9272504N-WM
						50°	480lm	330lm	SUR1-9275004N-WM
					3000K	18°	500lm	350lm	SUR1-9303804N-WM
						24°	500lm	350lm	SUR1-9302404N-WM
						35°	500lm	350lm	SUR1-9303504N-WM
						50°	500lm	350lm	SUR1-9305004N-WM
					4000K	18°	550lm	380lm	SUR1-9401804N-WM
						24°	550lm	380lm	SUR1-9402404N-WM
						35°	550lm	380lm	SUR1-9403504N-WM
						50°	550lm	380lm	SUR1-9405004N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	79,00 €
ON-OFF	89,00 €
Phase Dim	99,00 €
DALI Dim	119,00 €

Trim Finsh



White Black

Reflector Options



Black White Matt

Optional accessary



Honeycomb

Code for SUR1-9305004N-WM with Honeycomb
SUR1-9305004N-WM-H

Honeycomb: +9,00€

Coding


SUR1 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SUR1 S45R1	927 CRI90/ 2700K	18 18°	04 4W	N No Driver	W White	B Black	H Honeycomb
	930 CRI90/ 3000K	24 24°		F On-Off	B Black	M Matt	
	940 CRI90/ 4000K	35 35°		P Phase Dim		W White	
		50 50°		A 1-10V Dim			
				D DALI Dim			

BACK

SENSE S45S1 – Modular Design Architectural Downlight





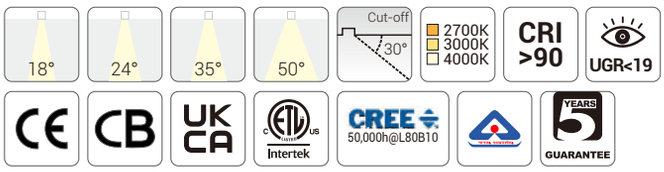


Quick Info

- Ceiling Cut-out: 45x45mm for Trim Version
- CREE LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: 18°, 24°, 35°, 50°
- Lumen Output: Up to 380lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K

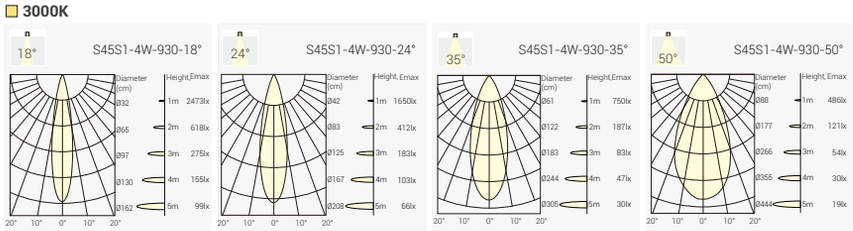

Order Info (SENSE S45 Trim Version in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	12V	350mA	90	2700K	18°	480lm	330lm	SUS1-9271804N-WM
						24°	480lm	330lm	SUS1-9272404N-WM
						35°	480lm	330lm	SUS1-9272504N-WM
						50°	480lm	330lm	SUS1-9275004N-WM
					3000K	18°	500lm	350lm	SUS1-9303804N-WM
						24°	500lm	350lm	SUS1-9302404N-WM
						35°	500lm	350lm	SUS1-9303504N-WM
						50°	500lm	350lm	SUS1-9305004N-WM
					4000K	18°	550lm	380lm	SUS1-9401804N-WM
						24°	550lm	380lm	SUS1-9402404N-WM
						35°	550lm	380lm	SUS1-9403504N-WM
						50°	550lm	380lm	SUS1-9405004N-WM

No Driver	79,00 €
ON-OFF	89,00 €
Phase Dim	99,00 €
DALI Dim	119,00 €

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Black White Matt

Optional accessary



Honeycomb

Code for SUS1-9305004N-WM with Honeycomb
SUS1-9305004N-WM-H

Honeycomb: +9,00€


Coding


SUS1 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SUS1 S45S1	927 CRI90/ 2700K	18 18°	04 4W	N No Driver	W White	B Black	H Honeycomb
	930 CRI90/ 3000K	24 24°		F On-Off	B Black	M Matt	
	940 CRI90/ 4000K	35 35°		P Phase Dim		W White	
		50 50°		A 1-10V Dim			
				D DALI Dim			


SENSE S55R1-G2 – The Precise Cut-Off Lighting Performance Adjustable Downlight









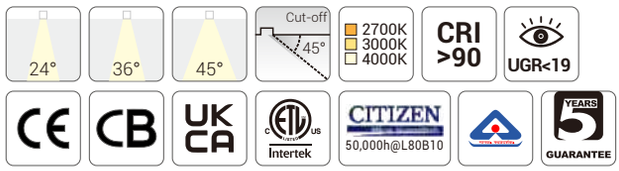


Quick Info

- The exceptionally precise cut-off lighting performance enhances the architectural lines on the wall, lending it a touch of elegance.
- Ceiling Cut-out: Ø55mm for Trim Version
- CITIZEN LED: 7W, CRI>90
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: 24°, 36°, 45°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

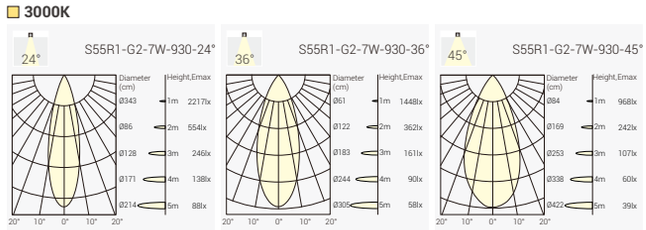

Order Info (SENSE S55R1-G2 Trim Version in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	8.5W	36V	200mA	90	2700K	24°	720lm	460lm	SXR1G2-9272407N-WB
						36°	720lm	520lm	SXR1G2-9273607N-WB
						45°	720lm	520lm	SXR1G2-9274507N-WB
					3000K	24°	750lm	480lm	SXR1G2-9302407N-WB
						36°	750lm	550lm	SXR1G2-9303607N-WB
						45°	750lm	550lm	SXR1G2-9304507N-WB
					4000K	24°	800lm	530lm	SXR1G2-9402407N-WB
						36°	800lm	600lm	SXR1G2-9403607N-WB
						45°	800lm	600lm	SXR1G2-9404507N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Trimless Version:

Trimless: +10,00€

No Driver	89,00 €
ON-OFF	99,00 €
Phase Dim	109,00 €
DALI DIM	129,00 €

Reflector Options



Black Matt White

Coding

SXR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SXRG2 SENSE S55R1 -G2 Trim Verion	**927** CRI90/ 2700K	**24** 24°	**07** 7W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
EXR1G2 SENSE S55R1 EI-G2 EI-Trimless Verion	**930** CRI90/ 3000K	**36** 36°		**F** On-Off	**B** Black	**M** Matt	
	940 CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 1-10V Dim			
				D DALI Dim			

Optional accessary



Honeycomb


Code for SXR1G2-9303607N-WB with Honeycomb SXR1G2-9303607N-WB-H


Honeycomb: +9,00€

BACK

SENSE S68R1-G2 – Modular Design Architectural Downlight



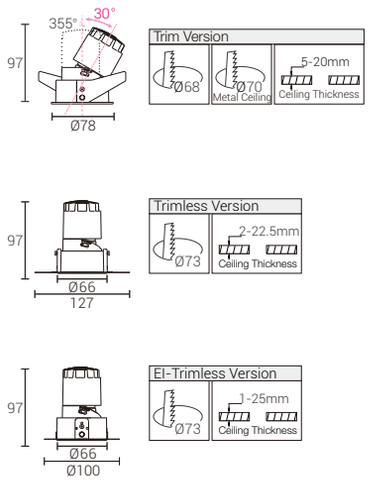

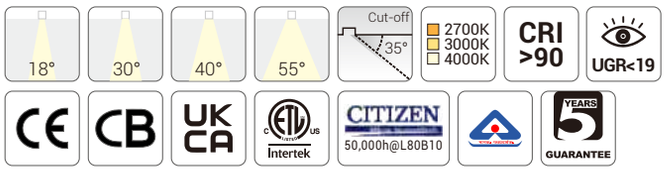


Quick Info

- Ceiling Cut-out: Ø68mm (Metal Ceiling: Ø70mm) for Trim Version
- Trimless Version also available
- CITIZEN LED: 7.5W, 11W, CRI>90
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: 18°, 30°, 40°, 55°
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

■ 3000K

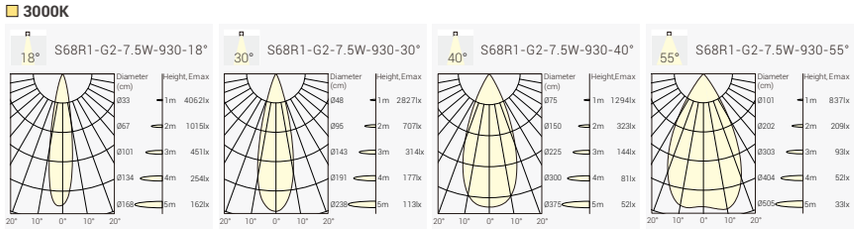

Order Info (SENSE 68-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5W	9W	31V	250mA	90	2700K	18°	850lm	620lm	STR1G2-9271808N-WC
						30°	850lm	620lm	STR1G2-9273008N-WC
						40°	850lm	620lm	STR1G2-9274008N-WC
						55°	850lm	620lm	STR1G2-9275508N-WC
					3000K	18°	900lm	650lm	STR1G2-9301808N-WC
						30°	900lm	650lm	STR1G2-9303008N-WC
						40°	900lm	650lm	STR1G2-9301408N-WC
						55°	900lm	650lm	STR1G2-9301558N-WC
					4000K	18°	1000lm	700lm	STR1G2-9401808N-WC
						30°	1000lm	700lm	STR1G2-9403008N-WC
						40°	1000lm	700lm	STR1G2-9404008N-WC
						55°	1000lm	700lm	STR1G2-9405508N-WC
11W	13W	31V	350mA	90	2700K	18°	1100lm	770lm	STR1G2-9271811N-WC
						30°	1100lm	770lm	STR1G2-9273011N-WC
						40°	1100lm	770lm	STR1G2-9274011N-WC
						55°	1100lm	770lm	STR1G2-9275511N-WC
					3000K	18°	1200lm	800lm	STR1G2-9301811N-WC
						30°	1200lm	800lm	STR1G2-9303011N-WC
						40°	1200lm	800lm	STR1G2-9301411N-WC
						55°	1200lm	800lm	STR1G2-9305511N-WC
					4000K	18°	1300lm	850lm	STR1G2-9401811N-WC
						30°	1300lm	850lm	STR1G2-9403011N-WC
						40°	1300lm	850lm	STR1G2-9404011N-WC
						55°	1300lm	850lm	STR1G2-9405511N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Trimless Version:
Trimless: +10,00€

No Driver	99,00 €
ON-OFF	109,00 €
Phase Dim	119,00 €
DALI DIM	139,00 €

Dim-to-warm	
No Driver	129,00 €
Phase Dim	149,00 €
DALI DIM	169,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Honeycomb

Code for STR1G2-9305511N-WM with Honeycomb
STR1G2-9305511N-WM-H

Honeycomb: +9,00€

Coding

STR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
STR1G2 S68R1-G2 Trim Version	**927** CRI90/ 2700K	**18** 18°	**08** 7.5W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
STR3G2 S68RT1-G2 Trimless Version	**930** CRI90/ 3000K	**30** 30°	**11** 11W	**F** On-Off	**B** Black	**M** Matt	
ETR1G2 S68RT1-EI-G2 EI-Trimless Version	**940** CRI90/ 4000K	**40** 40°		**P** Phase Dim		**W** White	
		55 55°		**A** 1-10V Dim		**C** Chrome Black	
				D DALI Dim		**G** Gold	
						S Specular	




Quick Info

- Ceiling Cut-out: Ø68mm (Metal Ceiling: Ø70mm) for Trim Version
- Trimless Version also Available
- CITIZEN LED: 7.5W, 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: **12°**
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K



No Driver	109,00 €
ON-OFF	119,00 €
Phase Dim	129,00 €
DALI DIM	149,00 €

Order Info (SENSE 68 -G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6W	8W	12V	500mA	90	2700K	12°	670lm	350m	STR1G2-9271206N-WC
					3000K	12°	700lm	400lm	STR1G2-9301206N-WC
					4000K	12°	750lm	450lm	STR1G2-9401206N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Coding


STR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
STR1G2 S68R1-G2 Trim Version	**927** CRI90/ 2700K	**12** 12°	**06** 6W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
STR3G2 S68RT1-G2 Trimless Version	**930** CRI90/ 3000K			**F** On-Off	**B** Black	**M** Matt	
ETR1G2 S68RT1-EI-G2 EI-Trimless Version	**940** CRI90/ 4000K			**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Chrome Black	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE S68S1-G2 – Modular Design Architectural Downlight



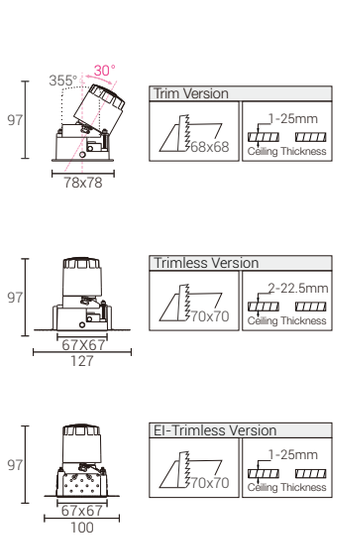

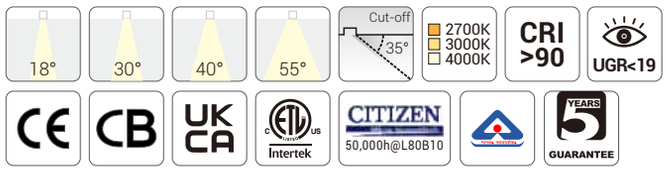


Quick Info

- Ceiling Cut-out: 68x68mm for Trim Version
- Trimless Version also available
- CITIZEN LED: 7.5W/ 11W, CRI>90
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: 18°, 30°, 40°, 55°
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

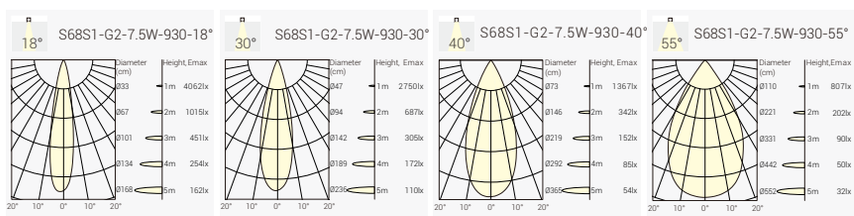

Order Info (SENSE 68-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5W	9W	31V	250mA	90	2700K	18°	850lm	620lm	STS1G2-9271808N-WC
						30°	850lm	620lm	STS1G2-9273008N-WC
						40°	850lm	620lm	STS1G2-9274008N-WC
						55°	850lm	620lm	STS1G2-9275508N-WC
					3000K	18°	900lm	650lm	STS1G2-9301808N-WC
						30°	900lm	650lm	STS1G2-9303008N-WC
						40°	900lm	650lm	STS1G2-9301408N-WC
						55°	900lm	650lm	STS1G2-9301558N-WC
					4000K	18°	1000lm	700lm	STS1G2-9401808N-WC
						30°	1000lm	700lm	STS1G2-9403008N-WC
						40°	1000lm	700lm	STS1G2-9404008N-WC
						55°	1000lm	700lm	STS1G2-9405508N-WC
11W	13W	31V	350mA	90	2700K	18°	1100lm	770lm	STS1G2-9271811N-WC
						30°	1100lm	770lm	STS1G2-9273011N-WC
						40°	1100lm	770lm	STS1G2-9274011N-WC
						55°	1100lm	770lm	STS1G2-9275511N-WC
					3000K	18°	1200lm	800lm	STS1G2-9301811N-WC
						30°	1200lm	800lm	STS1G2-9303011N-WC
						40°	1200lm	800lm	STS1G2-9301411N-WC
						55°	1200lm	800lm	STS1G2-9305511N-WC
					4000K	18°	1300lm	850lm	STS1G2-9401811N-WC
						30°	1300lm	850lm	STS1G2-9403011N-WC
						40°	1300lm	850lm	STS1G2-9404011N-WC
						55°	1300lm	850lm	STS1G2-9405511N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Trimless Version:
Trimless: +10,00€

No Driver	99,00 €
ON-OFF	109,00 €
Phase Dim	119,00 €
DALI DIM	139,00 €

Dim-to-warm	
No Driver	129,00 €
Phase Dim	149,00 €
DALI DIM	169,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Honeycomb

Code for STS1G2-9304004N-WM with Honeycomb
STS1G2-9304004N-WM-H

Honeycomb: +9,00€

Coding

STS1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
STS1G2 S68S1-G2 Trim Version	**927** CRI90/ 2700K	**18** 18°	**08** 7.5W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
STS3G2 S68ST1-G2 Trimless Version	**930** CRI90/ 3000K	**30** 30°	**11** 11W	**F** On-Off	**B** Black	**M** Matt	
ETS1G2 S68ST1-EI-G2 EI-Trimless Version	**940** CRI90/ 4000K	**40** 40°		**P** Phase Dim		**W** White	
		55 55°		**A** 1-10V Dim		**C** Chrome Black	
				D DALI Dim		**G** Gold	
						S Specular	

BACK






Quick Info

- Ceiling Cut-out: 68x68mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 7.5W/ 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: **12°**
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K



No Driver	109,00 €
ON-OFF	119,00 €
Phase Dim	129,00 €
DALI DIM	149,00 €

Order Info (SENSE 68-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6W	8W	12V	500mA	90	2700K	12°	670lm	350m	STS1G2-9271206N-WC
					3000K	12°	700lm	400lm	STS1G2-9301206N-WC
					4000K	12°	750lm	450lm	STS1G2-9401206N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Coding


STS1G2 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
STS1G2 S68S1-G2 Trim Version	**927** CRI90/ 2700K	**12** 12°	**06** 6W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
STS3G2 S68ST1-G2 Trimless Version	**930** CRI90/ 3000K			**F** On-Off	**B** Black	**M** Matt	
ETS1G2 S68ST1-EI-G2 EI-Trimless Version	**940** CRI90/ 4000K			**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Chrome Black	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S75R1-G2 – The Precise Cut-Off Lighting Performance Adjustable Downlight









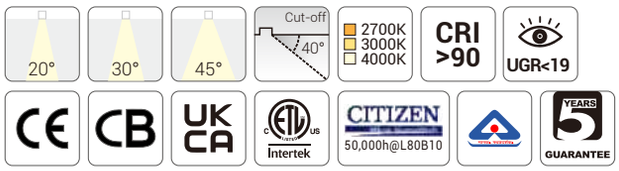


Quick Info

- The exceptionally precise cut-off lighting performance enhances the architectural lines on the wall, lending it a touch of elegance.
- Ceiling Cut-out: Ø75mm for Trim Version
- CITIZEN LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: 20°, 30°, 45°
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

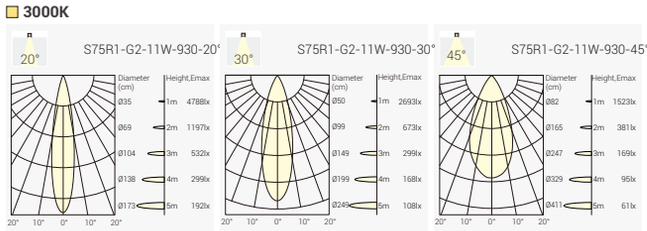

Order Info (SENSE S75R1-G2 Trim Version in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	31V	350mA	90	2700K	20°	900lm	770lm	SGR1G2-9272011N-WB
						30°	900lm	770lm	SGR1G2-9273011N-WB
						45°	900lm	770lm	SGR1G2-9274511N-WB
					3000K	20°	950lm	800lm	SGR1G2-9302011N-WB
						30°	950lm	800lm	SGR1G2-9303011N-WB
						45°	950lm	800lm	SGR1G2-9304511N-WB
					4000K	20°	1000lm	850lm	SGR1G2-9402011N-WB
						30°	1000lm	850lm	SGR1G2-9403011N-WB
						45°	1000lm	850lm	SGR1G2-9404511N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Trimless Version:

Trimless: +10,00€

No Driver	109,00 €
ON-OFF	119,00 €
Phase Dim	129,00 €
DALI DIM	149,00 €

Reflector Options



Black Matt White

Coding

SGR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SGR1G2 SENSE S75R1-G2 Trim Verion	**927** CRI90/ 2700K	**20** 20°	**11** 11W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
EGR1G2 SENSE S75R1 EI-G2 EI-Trimless Verion	**930** CRI90/ 3000K	**30** 30°		**F** On-Off	**B** Black	**M** Matt	
	940 CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 1-10V Dim			
				D DALI Dim			

Optional accessary



Honeycomb


Code for SGR1G2-9304511N-WB with Honeycomb SGR1G2-9304511N-WB-H


Honeycomb: +9,00€

BACK

SENSE S100R1-G2 –Modular Design Architectural Downlight



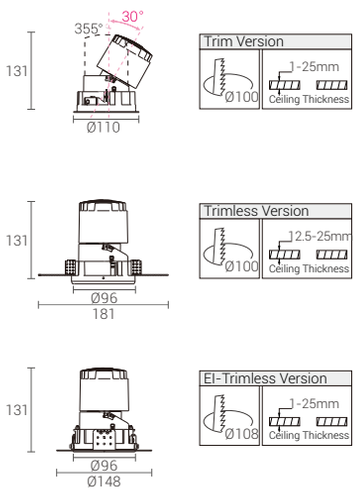

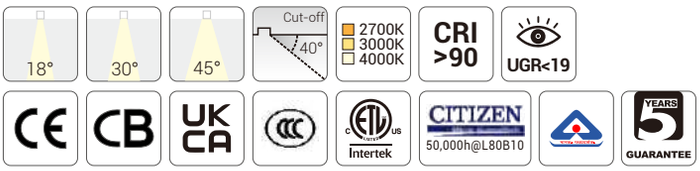


Quick Info

- Ceiling Cut-out: Ø100mm for Trim Version
- Trimless Version also available
- CITIZEN LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 1800lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

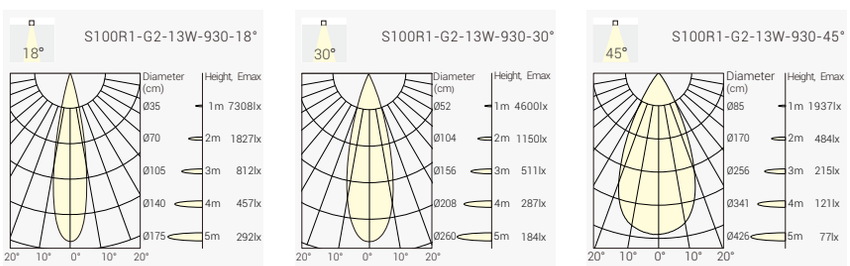

Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	18°	1500lm	1050lm	SSR1G2-9271813N-WC
						30°	1500lm	1100lm	SSR1G2-9273013N-WC
						45°	1500lm	1050lm	SSR1G2-9274513N-WC
					3000K	18°	1600lm	1150lm	SSR1G2-9301813N-WC
						30°	1600lm	1200lm	SSR1G2-9303013N-WC
						45°	1600lm	1150lm	SSR1G2-9304513N-WC
					4000K	18°	1700lm	1200lm	SSR1G2-9401813N-WC
						30°	1700lm	1300lm	SSR1G2-9403013N-WC
						45°	1700lm	1200lm	SSR1G2-9404513N-WC
18W	21W	36V	500mA	90	2700K	18°	1900lm	1400lm	SSR1G2-9271818N-WC
						30°	1900lm	1600lm	SSR1G2-9273018N-WC
						45°	1900lm	1400lm	SSR1G2-9274518N-WC
					3000K	18°	2000lm	1500lm	SSR1G2-9301818N-WC
						30°	2000lm	1700lm	SSR1G2-9303018N-WC
						45°	2000lm	1500lm	SSR1G2-9304518N-WC
					4000K	18°	2200lm	1700lm	SSR1G2-9401818N-WC
						30°	2200lm	1800lm	SSR1G2-9403018N-WC
						45°	2200lm	1700lm	SSR1G2-9404518N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



Trimless Version:
Trimless: +10,00€

White	Black
No Driver	149,00 €
ON-OFF	159,00 €
Phase Dim	179,00 €
DALI Dim	189,00 €

Tunable White	
DALI Dim	259,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Honeycomb

Code for SSR1G2-9304018N-WM with Honeycomb
SSR1G2-9304018N-WM-H


Honeycomb: +9,00€

Coding

SSR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SSR1G2 SENSE 100-G2 Trim Verion	**927** CRI90/ 2700K	**18** 18°	**13** 13W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SSR4G2 SENSE 100-G2 Trimless Verion	**930** CRI90/ 3000K	**30** 36°	**18** 18W	**F** On-Off	**B** Black	**M** Matt	
ESR1G2 SENSE 100-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	



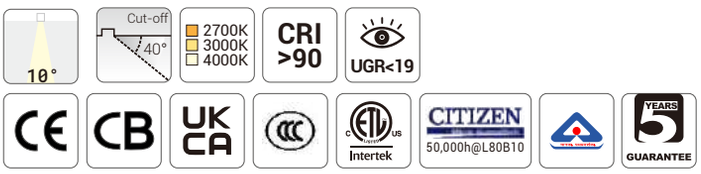


Quick Info

- Ceiling Cut-out: Ø100mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: **10°**
- Lumen Output: Up to 1800lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K



No Driver	149,00 €
ON-OFF	159,00 €
Phase Dim	179,00 €
DALI Dim	189,00 €

Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	36V	200mA	90	2700K	10°	600lm	480lm	SSR1G2-9271007N-WC
					3000K	10°	650lm	500lm	SSR1G2-9301007N-WC
					4000K	10°	700lm	550lm	SSR1G2-9401007N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Coding


SSR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SSR1G2 SENSE 100-G2 Trim Verion	**927** CRI90/ 2700K	**10** 10°	**07** 7W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SSR4G2 SENSE 100-G2 Trimless Verion	**930** CRI90/ 3000K			**F** On-Off	**B** Black	**M** Matt	
EXR1G2 SENSE 100-G2 EI-Trimless Verion	**940** CRI90/ 4000K			**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE S100S1-G2 –Modular Design Architectural Downlight



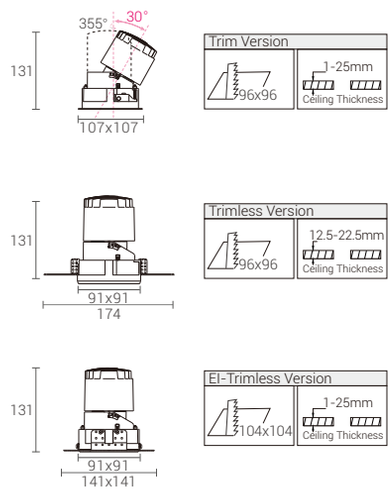

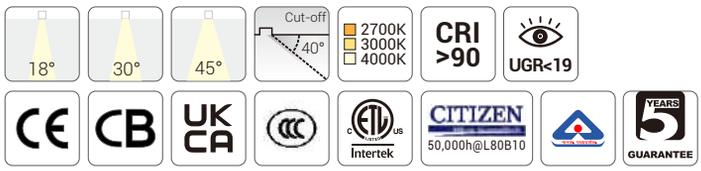


Quick Info

- Ceiling Cut-out: 96x96mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 1800lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

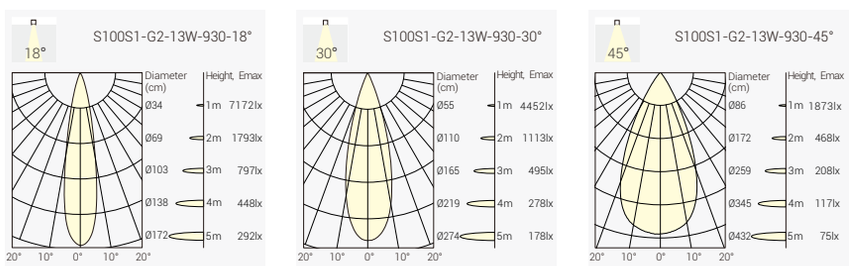

Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	18°	1500lm	1050lm	SSS1G2-9271813N-WC
						30°	1500lm	1150lm	SSS1G2-9273013N-WC
						45°	1500lm	1050lm	SSS1G2-9274513N-WC
					3000K	18°	1600lm	1150lm	SSS1G2-9301813N-WC
						30°	1600lm	1250lm	SSS1G2-9303013N-WC
						45°	1600lm	1150lm	SSS1G2-9304513N-WC
					4000K	18°	1700lm	1200lm	SSS1G2-9401813N-WC
						30°	1700lm	1300lm	SSS1G2-9403013N-WC
						45°	1700lm	1200lm	SSS1G2-9404513N-WC
18W	21W	36V	500mA	90	2700K	18°	1900lm	1450lm	SSS1G2-9271818N-WC
						30°	1900lm	1550lm	SSS1G2-9273018N-WC
						45°	1900lm	1450lm	SSS1G2-9274518N-WC
					3000K	18°	2000lm	1550lm	SSS1G2-9301818N-WC
						30°	2000lm	1650lm	SSS1G2-9303018N-WC
						45°	2000lm	1550lm	SSS1G2-9304518N-WC
					4000K	18°	2200lm	1600lm	SSS1G2-9401818N-WC
						30°	2200lm	1800lm	SSS1G2-9403018N-WC
						45°	2200lm	1600lm	SSS1G2-9404518N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



Trimless Version:
Trimless: +10,00€

White	Black
No Driver	149,00 €
ON-OFF	159,00 €
Phase Dim	169,00 €
Dali Dim	189,00 €

Tunable White	
DALI Dim	259,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Coding

SSS1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SSS1G2 SENSE 100-G2 Trim Verion	**927** CRI90/ 2700K	**18** 18°	**13** 13W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SSS4G2 SENSE 100-G2 Trimless Verion	**930** CRI90/ 3000K	**30** 30°	**18** 18W	**F** On-Off	**B** Black	**M** Matt	
ESS1G2 SENSE 100-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

Optional accessary




Honeycomb

Code for SSS1G2-9301813N-WM with Honeycomb
SSS1G2-9301813N-WM-H

Honeycomb: +9,00€

BACK



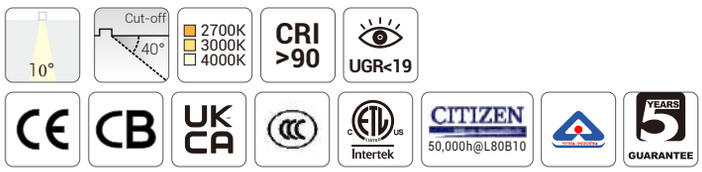


Quick Info

- Ceiling Cut-out: 96x96mm for Trim Version
- Trimless Version also available
- CITIZEN LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: **10°**
- Lumen Output: Up to 1800lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K



No Driver	149,00 €
ON-OFF	159,00 €
Phase Dim	169,00 €
DALI DIM	189,00 €

Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	36V	200mA	90	2700K	10°	600lm	480lm	SSS1G2-9271007N-WC
					3000K	10°	650lm	500lm	SSS1G2-9301007N-WC
					4000K	10°	700lm	550lm	SSS1G2-9401007N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Coding


SSS1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SSS1G2 SENSE 100-G2 Trim Verion	**927** CRI90/ 2700K	**10** 10°	**07** 7W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SSS4G2 SENSE 100-G2 Trimless Verion	**930** CRI90/ 3000K			**F** On-Off	**B** Black	**M** Matt	
ESS1G2 SENSE 100-G2 EI-Trimless Verion	**940** CRI90/ 4000K			**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE S100HR1-G2 –Modular Design Architectural Downlight



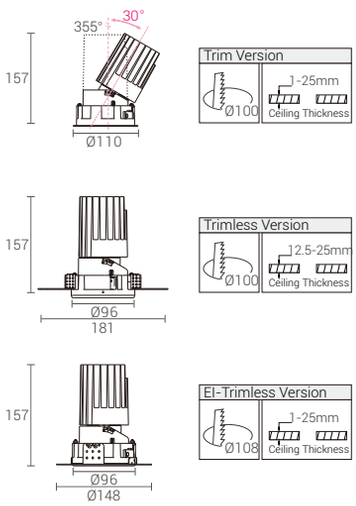

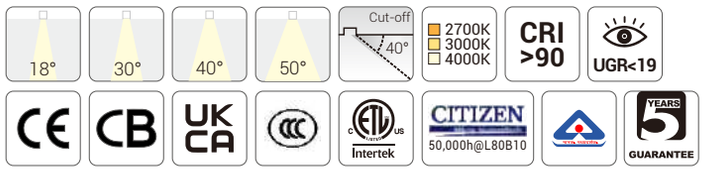


Quick Info

- Ceiling Cut-out: Ø100mm for Trim Version
- Trimless Version also available
- CITIZEN LED: 25W, CRI>90
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: 18°, 30°, 40°, 50°
- Lumen Output: Up to 2200lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

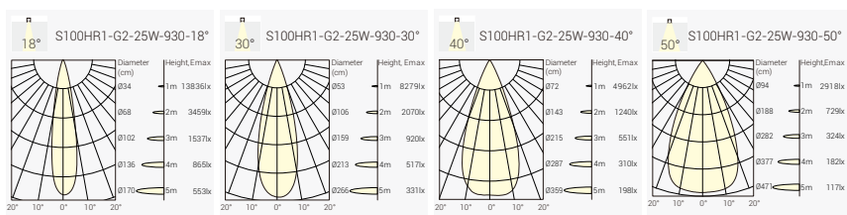

Order Info (SENSE 100H-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	18°	2400lm	1900lm	SHR1G2-9271825N-WC
						30°	2400lm	2000lm	SHR1G2-9273025N-WC
						40°	2400lm	2000lm	SHR1G2-9274025N-WC
						50°	2400lm	1800lm	SHR1G2-9275025N-WC
					3000K	18°	2600lm	2000lm	SHR1G2-9301825N-WC
						30°	2600lm	2100lm	SHR1G2-9303025N-WC
						40°	2600lm	2100lm	SHR1G2-9304025N-WC
						50°	2600lm	1900lm	SHR1G2-9305025N-WC
					4000K	18°	2800lm	2100lm	SHR1G2-9401825N-WC
						30°	2800lm	2200lm	SHR1G2-9403025N-WC
						40°	2800lm	2200lm	SHR1G2-9404025N-WC
						50°	2800lm	2000lm	SHR1G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Trimless Version:

Trimless: +10,00€

No Driver	189,00 €
ON-OFF	199,00 €
Phase Dim	219,00 €
DALI DIM	239,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Coding

SHR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SHR1G2 SENSE 100H-G2 Trim Verion	**927** CRI90/ 2700K	**18** 18°	**25** 25W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SHR4G2 SENSE 100H-G2 Trimless Verion	**930** CRI90/ 3000K	**30** 30°		**F** On-Off	**B** Black	**M** Matt	
EHR1G2 SENSE 100H-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**40** 40°		**P** Phase Dim		**W** White	
		50 50°		**A** 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

Optional accessary



Honeycomb


Code for SHR1G2-9304025N-WM with Honeycomb
SHR1G2-9304025N-WM-H

Honeycomb: +9,00€

BACK

SENSE S100HS1-G2 –Modular Design Architectural Downlight



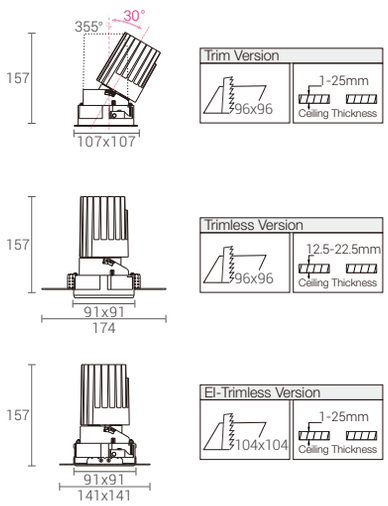

Trim Finsh



White Black

Trimless Version:

Trimless: +10,00€

No Driver	189,00 €
ON-OFF	199,00 €
Phase Dim	219,00 €
DALI DIM	239,00 €

Reflector Options



Specular Matt Black Dark Light White Gold


Optional accessary



Honeycomb

Code for SHS1G2-9301825N-WM with Honeycomb
SHS1G2-9301825N-WM-H

Honeycomb: +9,00€

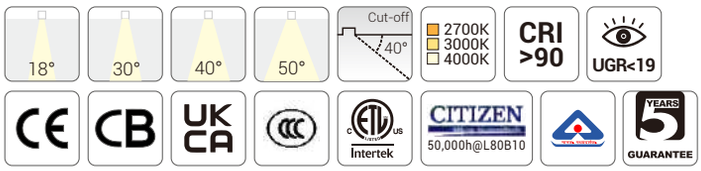


Quick Info

- Ceiling Cut-out: 96x96mm for Trim Version
- Trimless Version also available
- CITIZEN LED: 25W, CRI>90, CITIZEN
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: 18°, 30°, 40°, 50°
- Lumen Output: Up to 2000lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

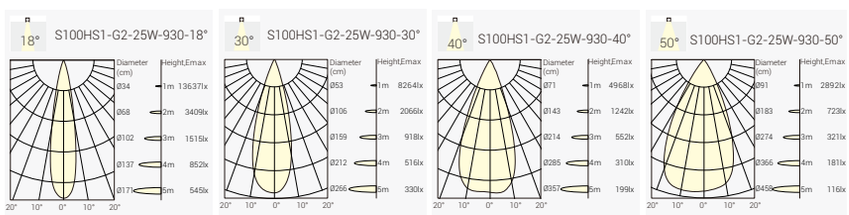

Order Info (SENSE 100H-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	18°	2400lm	1700lm	SHS1G2-9271825N-WC
						30°	2400lm	1800lm	SHS1G2-9273025N-WC
						40°	2400lm	1800lm	SHS1G2-9274025N-WC
						50°	2400lm	1700lm	SHS1G2-9275025N-WC
					3000K	18°	2600lm	1800lm	SHS1G2-9301825N-WC
						30°	2600lm	1900lm	SHS1G2-9303025N-WC
						40°	2600lm	1900lm	SHS1G2-9304025N-WC
						50°	2600lm	1800lm	SHS1G2-9305025N-WC
					4000K	18°	2800lm	1900lm	SHS1G2-9401825N-WC
						30°	2800lm	2000lm	SHS1G2-9403025N-WC
						40°	2800lm	2000lm	SHS1G2-9404025N-WC
						50°	2800lm	1900lm	SHS1G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Coding

SHS1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SHS1G2 SENSE 100H-G2 Trim Verion	**927** CRI90/ 2700K	**18** 18°	**25** 25W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SHS4G2 SENSE 100H-G2 Trimless Verion	**930** CRI90/ 3000K	**30** 30°		**F** On-Off	**B** Black	**M** Matt	
EHS1G2 SENSE 100H-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**40** 40°		**P** Phase Dim		**W** White	
		50 50°		**A** 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S100R7-G2 –Modular Design Architectural Downlight



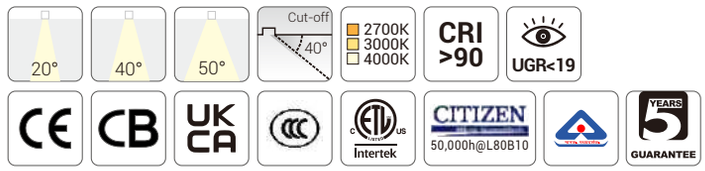


Quick Info

- Ceiling Cut-out: Ø100mm for Trim Version
- Trimless Version also available
- CITIZEN LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: 20°, 40°, 50°
- Lumen Output: Up to 1900lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

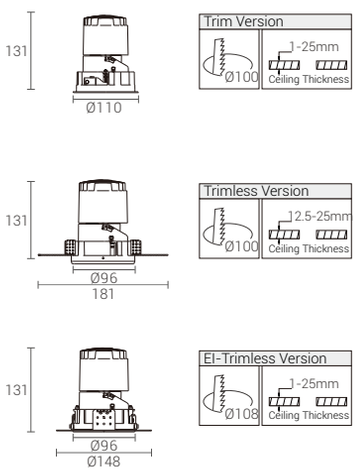

Light Distribution

3000K

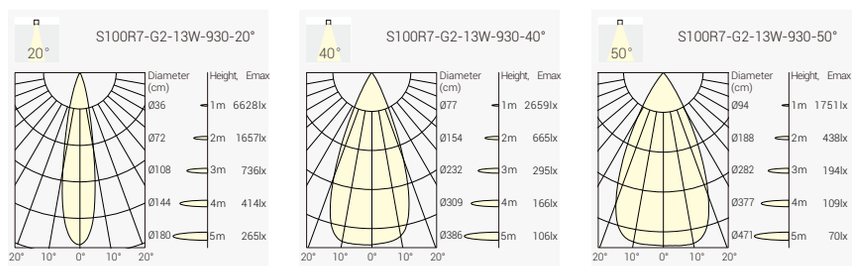

Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	20°	1500lm	1100lm	SSR7G2-9272013N-WC
						40°	1500lm	1200lm	SSR7G2-9274013N-WC
						50°	1500lm	850lm	SSR7G2-9275013N-WC
					3000K	20°	1600lm	1150lm	SSR7G2-9302013N-WC
						40°	1600lm	1300lm	SSR7G2-9304013N-WC
						50°	1600lm	900lm	SSR7G2-9305013N-WC
					4000K	20°	1700lm	1200lm	SSR7G2-9402013N-WC
						30°	1700lm	1350lm	SSR7G2-9404013N-WC
						50°	1700lm	1000lm	SSR7G2-9405013N-WC
18W	21W	36V	500mA	90	2700K	20°	1900lm	1500lm	SSR7G2-9272018N-WC
						40°	1900lm	1700lm	SSR7G2-9274018N-WC
						50°	1900lm	1250lm	SSR7G2-9275018N-WC
					3000K	20°	2000lm	1600lm	SSR7G2-9302018N-WC
						40°	2000lm	1800lm	SSR7G2-9304018N-WC
						50°	2000lm	1350lm	SSR7G2-9305018N-WC
					4000K	20°	2200lm	1700lm	SSR7G2-9402018N-WC
						40°	2200lm	1900lm	SSR7G2-9404018N-WC
						50°	2200lm	1450lm	SSR7G2-9405018N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Trimless Version:
Trimless: +10,00€

No Driver	149,00 €
ON-OFF	159,00 €
Phase Dim	179,00 €
Dali Dim	189,00 €

Tunable White	
DALI Dim	259,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Coding

SSR7G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SSR7G2 SENSE 100-G2 Trim Verion	**927** CRI90/ 2700K	**20** 20°	**13** 13W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SSR84G2 SENSE 100-G2 Trimless Verion	**930** CRI90/ 3000K	**40** 40°	**18** 18W	**F** On-Off	**B** Black	**M** Matt	
ESR7G2 SENSE 100-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

Optional accessary



Honeycomb


Code for SSR7G2-9304013N-WM with Honeycomb
SSR7G2-9304013N-WM-H


Honeycomb: +9,00€

BACK

SENSE S100HR7-G2 –Modular Design Architectural Downlight



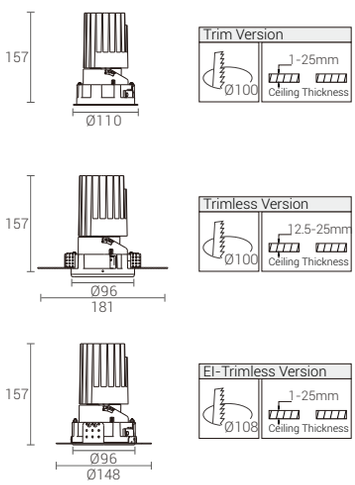

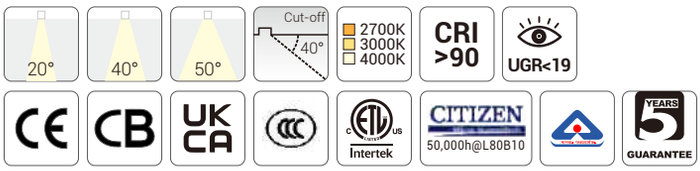


Quick Info

- Ceiling Cut-out: Ø100mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 25W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 30°, 40°, 50°
- Lumen Output: Up to 2200lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

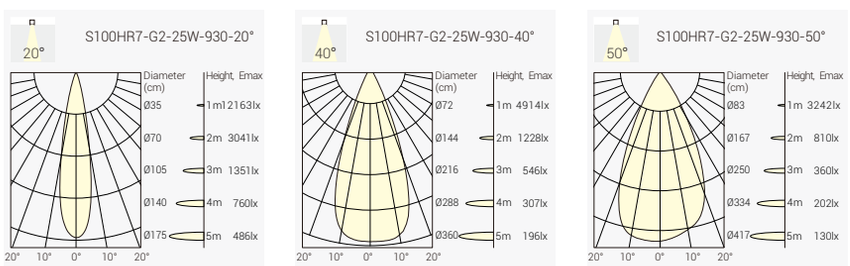

Order Info (SENSE 100H-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	20°	2400lm	1800lm	SHR7G2-9272025N-WC
						40°	2400lm	2000lm	SHR7G2-9274025N-WC
						50°	2400lm	1800lm	SHR7G2-9275025N-WC
					3000K	20°	2600lm	1900lm	SHR7G2-9302025N-WC
						40°	2600lm	2100lm	SHR7G2-9304025N-WC
						50°	2600lm	1900lm	SHR7G2-9305025N-WC
					4000K	20°	2800lm	2000lm	SHR7G2-9402025N-WC
						20°	2800lm	2200lm	SHR7G2-9402025N-WC
						30°	2800lm	2000lm	SHR7G2-9404025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



Trimless Version:
Trimless: +10,00€

	White	Black
No Driver	189,00 €	
ON-OFF	199,00 €	
Phase Dim	219,00 €	
DALI DIM	239,00 €	

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Honeycomb

Code for SHR1G2-9304025N-WM with Honeycomb
SHR1G2-9304025N-WM-H


Honeycomb: +9,00€


Coding

SHR7G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SHR7G2 SENSE 100H-G2 Trim Verion	**927** CRI90/ 2700K	**20** 20°	**25** 25W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SHR8G2 SENSE 100H-G2 Trimless Verion	**930** CRI90/ 3000K	**40** 40°		**F** On-Off	**B** Black	**M** Matt	
EHR7G2 SENSE 100H-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE S100R2-G2 –Modular Design Architectural Downlight

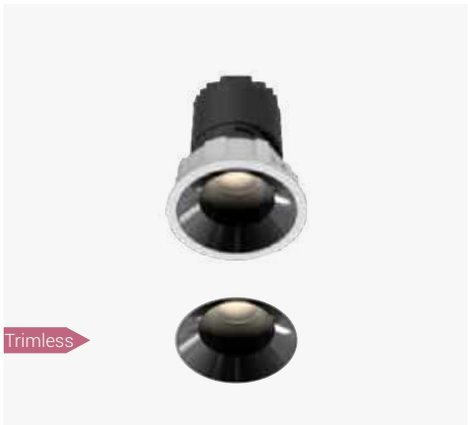

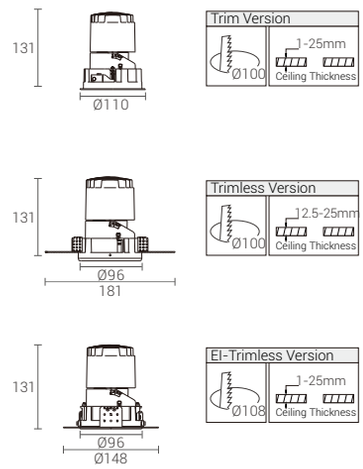

Trim Finsh



White Black

Trimless Version:

Trimless: +10,00€

No Driver	149,00 €
ON-OFF	159,00 €
Phase Dim	179,00 €
DALI DIM	189,00 €

Tunable White	
DALI DIM	259,00 €

Reflector Options



Specular Matt Black Dark Light White Gold


Optional accessary



Honeycomb

Code for SSR2G2-9303618N-WM with Honeycomb
SSR2G2-9303618N-WM-H

Honeycomb: +9,00€

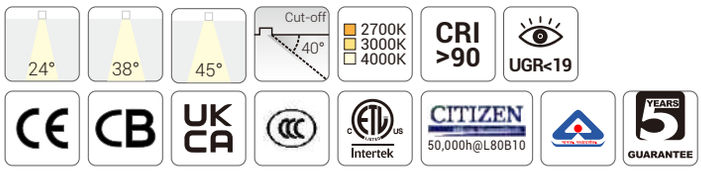



Quick Info


- Ceiling Cut-out: Ø100mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 38°, 45°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K







Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	24°	1500lm	950lm	SSR2G2-9272413N-WC
						38°	1500lm	1000lm	SSR2G2-9273813N-WC
						45°	1500lm	950lm	SSR2G2-9274513N-WC
					3000K	24°	1600lm	1000lm	SSR2G2-9302413N-WC
						38°	1600lm	1100lm	SSR2G2-9303813N-WC
						45°	1600lm	1000lm	SSR2G2-9304513N-WC
					4000K	24°	1700lm	1100lm	SSR2G2-9402413N-WC
						38°	1700lm	1200lm	SSR2G2-9403813N-WC
						45°	1700lm	1100lm	SSR2G2-9404513N-WC
18W	21W	36V	500mA	90	2700K	24°	1900lm	1350lm	SSR2G2-9272418N-WC
						38°	1900lm	1450lm	SSR2G2-9273818N-WC
						50°	1900lm	1350lm	SSR2G2-9274518N-WC
					3000K	24°	2000lm	1450lm	SSR2G2-9302418N-WC
						38°	2000lm	1550lm	SSR2G2-9303818N-WC
						45°	2000lm	1450lm	SSR2G2-9304518N-WC
					4000K	24°	2200lm	1550lm	SSR2G2-9402418N-WC
						38°	2200lm	1700lm	SSR2G2-9403818N-WC
						45°	2200lm	1550lm	SSR2G2-9404518N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Coding

SSR2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SSR2G2 SENSE 100-G2 Trim Verion	**927** CRI90/ 2700K	**24** 24°	**13** 13W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SSR54G2 SENSE 100-G2 Trimless Verion	**930** CRI90/ 3000K	**38** 38°	**18** 18W	**F** On-Off	**B** Black	**M** Matt	
ESR2G2 SENSE 100-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE S100HR2-G2 –Modular Design Architectural Downlight



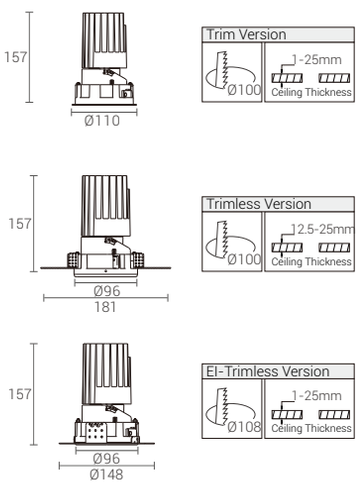

Trim Finsh



White Black

Trimless Version:

Trimless: +10,00€

No Driver	189,00 €
ON-OFF	199,00 €
Phase Dim	219,00 €
DALI DIM	239,00 €

Reflector Options



Specular Matt Black Dark Light White Gold


Optional accessary



Honeycomb

Code for SHR2G2-9305025N-WM with Honeycomb
SHR2G2-9305025N-WM-H

Honeycomb: +9,00€

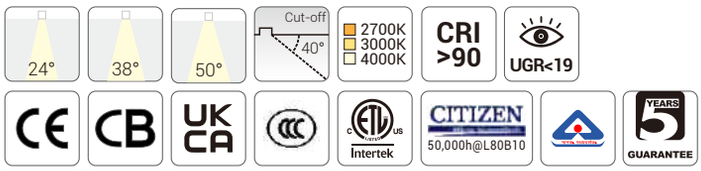


Quick Info

- Ceiling Cut-out: Ø100mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 25W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 38°, 50°
- Lumen Output: Up to 2000lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

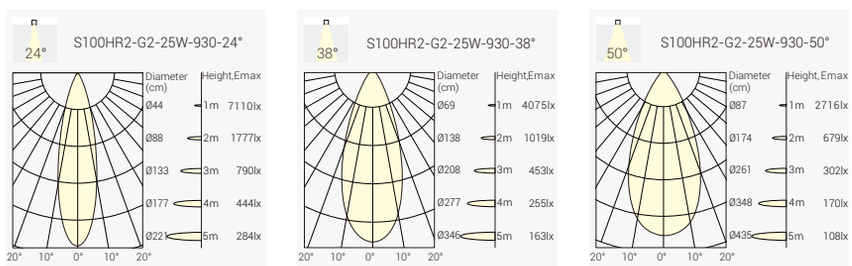

Order Info (SENSE 100H-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	24°	2400lm	1700lm	SHR2G2-9272425N-WC
						38°	2400lm	1800lm	SHR2G2-9273825N-WC
						50°	2400lm	1700lm	SHR2G2-9275025N-WC
					3000K	24°	2600lm	1800lm	SHR2G2-9302425N-WC
						38°	2600lm	1900lm	SHR2G2-9303825N-WC
						50°	2600lm	1800lm	SHR2G2-9305025N-WC
					4000K	24°	2800lm	1900lm	SHR2G2-9402425N-WC
						38°	2800lm	2000lm	SHR2G2-9403825N-WC
						50°	2800lm	1900lm	SHR2G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SHR2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SHR5G2 SENSE 100H-G2 Trim Verion	**927** CRI90/ 2700K	**24** 24°	**25** 25W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SHR5G2 SENSE 100H-G2 Trimless Verion	**930** CRI90/ 3000K	**38** 38°		**F** On-Off	**B** Black	**M** Matt	
EHR5G2 SENSE 100H-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S100S2-G2 –Modular Design Architectural Downlight






Quick Info

- Ceiling Cut-out: 96x96mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 38°, 45°
- Lumen Output: Up to 1600lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

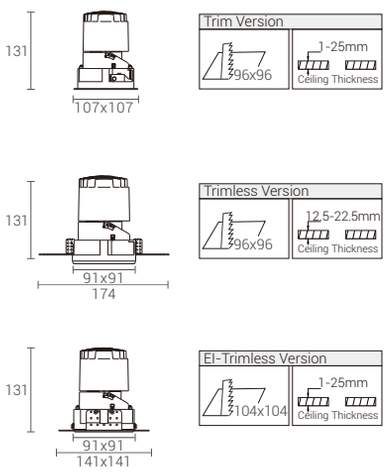

Light Distribution

3000K

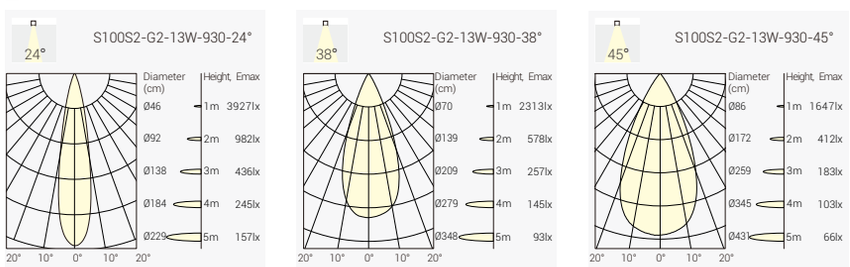

Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	24°	1500lm	900lm	SSS2G2-9272413N-WC
						38°	1500lm	950lm	SSS2G2-9273813N-WC
						45°	1500lm	900lm	SSS2G2-9274513N-WC
					3000K	24°	1600lm	950lm	SSS2G2-9302413N-WC
						38°	1600lm	1000lm	SSS2G2-9303813N-WC
						45°	1600lm	950lm	SSS2G2-9304513N-WC
					4000K	24°	1700lm	1100lm	SSS2G2-9402413N-WC
						38°	1700lm	1150lm	SSS2G2-9403813N-WC
						45°	1700lm	1100lm	SSS2G2-9404513N-WC
18W	21W	36V	500mA	90	2700K	24°	1900lm	1200lm	SSS2G2-9272418N-WC
						38°	1900lm	1350lm	SSS2G2-9273818N-WC
						50°	1900lm	1200lm	SSS2G2-9274518N-WC
					3000K	24°	2000lm	1300lm	SSS2G2-9302418N-WC
						38°	2000lm	1450lm	SSS2G2-9303818N-WC
						45°	2000lm	1300lm	SSS2G2-9304518N-WC
					4000K	24°	2200lm	1450lm	SSS2G2-9402418N-WC
						38°	2200lm	1600lm	SSS2G2-9403818N-WC
						45°	2200lm	1450lm	SSS2G2-9404518N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Trimless Version:
Trimless: +10,00€

No Driver	149,00 €
ON-OFF	159,00 €
Phase Dim	179,00 €
DALI DIM	189,00 €

Tunable White	
DALI DIM	259,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Coding

SSS2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SSS2G2 SENSE 100-G2 Trim Verion	**927** CRI90/ 2700K	**24** 24°	**13** 13W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SSS54G2 SENSE 100-G2 Trimless Verion	**930** CRI90/ 3000K	**38** 38°	**18** 18W	**F** On-Off	**B** Black	**M** Matt	
ESS2G2 SENSE 100-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

Optional accessary



Honeycomb


Code for SSS2G2-9302413N-WM with Honeycomb
SSS2G2-9302413N-WM-H


Honeycomb: +9,00€

BACK

SENSE S100HS2-G2 –Modular Design Architectural Downlight



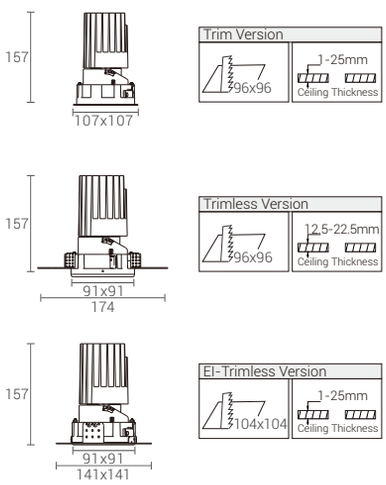

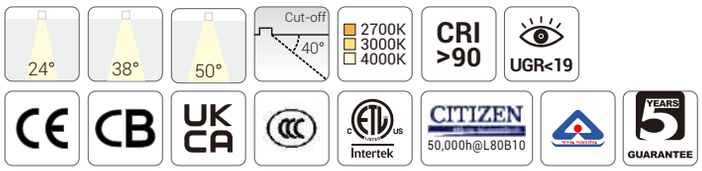


Quick Info

- Ceiling Cut-out: 96x96mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 25W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 38°, 50°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

■ 3000K

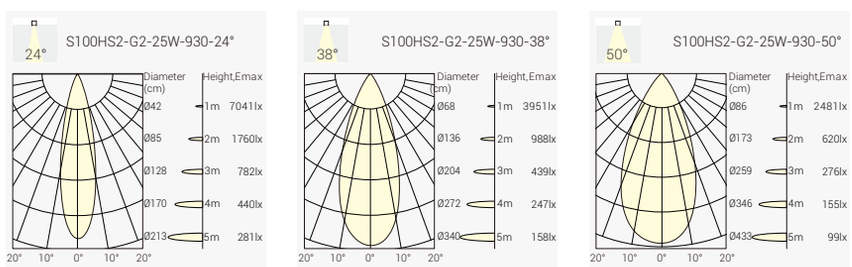

Order Info (SENSE 100H-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	24°	2400lm	1400lm	SHS2G2-9272425N-WC
						38°	2400lm	1500lm	SHS2G2-9273825N-WC
						50°	2400lm	1400lm	SHS2G2-9275025N-WC
					3000K	24°	2600lm	1500lm	SHS2G2-9302425N-WC
						38°	2600lm	1600lm	SHS2G2-9303825N-WC
						50°	2600lm	1500lm	SHS2G2-9305025N-WC
					4000K	24°	2800lm	1600lm	SHS2G2-9402425N-WC
						38°	2800lm	1700lm	SHS2G2-9403825N-WC
						50°	2800lm	1600lm	SHS2G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Trimless Version:
Trimless: +10,00€

No Driver	189,00 €
ON-OFF	199,00 €
Phase Dim	219,00 €
DALI DIM	239,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Coding

SHS2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SHS5G2 SENSE 100-G2H Trim Verion	**927** CRI90/ 2700K	**24** 24°	**25** 25W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SHS5G2 SENSE 100H -G2 Trimless Verion	**930** CRI90/ 3000K	**38** 38°		**F** On-Off	**B** Black	**M** Matt	
EHS5G2 SENSE 100H-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

Optional accessary




Honeycomb


Code for SHS2G2-9302425N-WM with Honeycomb
SHS2G2-9302425N-WM-H

Honeycomb: +9,00€

SENSE S125R1-G2 –Modular Design Architectural Downlight System



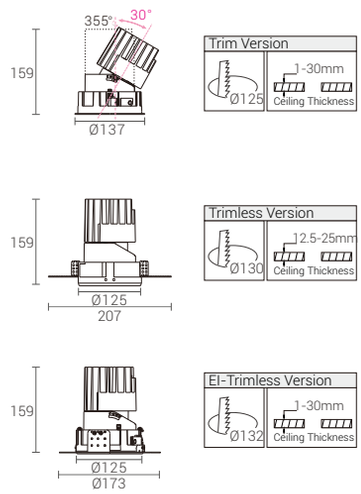

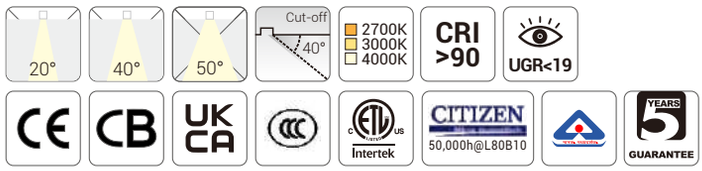



Quick Info


- Ceiling Cut-out: Ø125mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 18W, 25W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 40°, 50°
- Lumen Output: Up to 2600lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K







Order Info (SENSE 125-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	21W	36V	500mA	90	2700K	20°	2100lm	1600lm	SMR1G2-9272018N-WC
						40°	2100lm	1700lm	SMR1G2-9274018N-WC
						50°	2100lm	1500lm	SMR1G2-9275018N-WC
					3000K	20°	2300lm	1700lm	SMR1G2-9302018N-WC
						40°	2300lm	1800lm	SMR1G2-9304018N-WC
						50°	2300lm	1600lm	SMR1G2-9305018N-WC
					4000K	20°	2500lm	1800lm	SMR1G2-9402018N-WC
						40°	2500lm	1900lm	SMR1G2-9404018N-WC
						50°	2500lm	1700lm	SMR1G2-9405018N-WC
25W	28W	36V	700mA	90	2700K	20°	2900lm	2200lm	SMR1G2-9272025N-WC
						40°	2900lm	2400lm	SMR1G2-9274025N-WC
						50°	2900lm	2000lm	SMR1G2-9275025N-WC
					3000K	20°	3100lm	2300lm	SMR1G2-9302025N-WC
						40°	3100lm	2500lm	SMR1G2-9304025N-WC
						50°	3100lm	2100lm	SMR1G2-9305025N-WC
					4000K	20°	3300lm	2400lm	SMR1G2-9402025N-WC
						40°	3300lm	2600lm	SMR1G2-9404025N-WC
						50°	3300lm	2200lm	SMR1G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Trimless Version:
Trimless: +10,00€

No Driver	199,00 €
ON-OFF	209,00 €
Phase Dim	229,00 €
DALI DIM	239,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Honeycomb

Code for SMR1G2-9405025N-WM with Honeycomb
SMR1G2-9405025N-WM-H

Honeycomb: +9,00€

Product Code

SMR1G2 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SMR1G2 SENSE 125 Trim Verion	**927** CRI90/ 2700K	**20** 20°	**18** 18W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SMR4G2 SENSE 125 Trimless Verion	**930** CRI90/ 3000K	**40** 40°	**25** 25W	**F** On-Off	**B** Black	**M** Matt	
EMR1G2 SENSE 125 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE S125S1-G2 –Modular Design Architectural Downlight System




Quick Info

- Ceiling Cut-out: 122x122mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 18W, 25W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 40°, 50°
- Lumen Output: Up to 2600lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

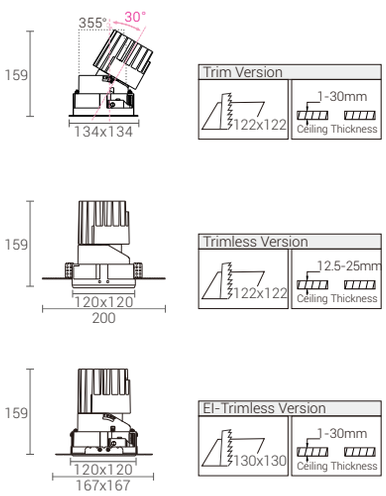

Light Distribution

3000K

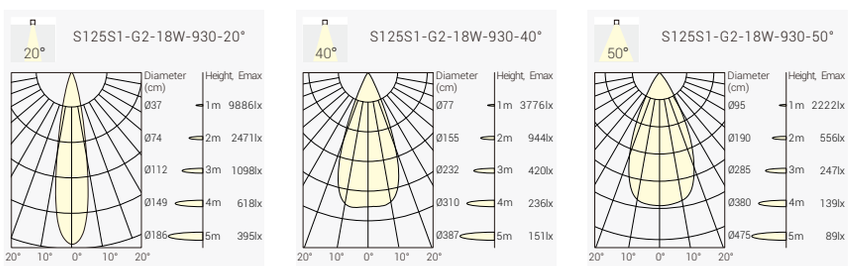

Order Info (SENSE 125-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	21W	36V	500mA	90	2700K	20°	2100lm	1500lm	SMS1G2-9272018N-WC
						40°	2100lm	1700lm	SMS1G2-9274018N-WC
						50°	2100lm	1500lm	SMS1G2-9275018N-WC
					3000K	20°	2300lm	1600lm	SMS1G2-9302018N-WC
						40°	2300lm	1800lm	SMS1G2-9304018N-WC
						20°	2300lm	1600lm	SMS1G2-9305018N-WC
					4000K	20°	2500lm	1700lm	SMS1G2-9402018N-WC
						04°	2500lm	1900lm	SMS1G2-9404018N-WC
						50°	2500lm	1700lm	SMS1G2-9405018N-WC
25W	28W	36V	700mA	90	2700K	20°	2900lm	2100lm	SMS1G2-9272025N-WC
						40°	2900lm	2300lm	SMS1G2-9274025N-WC
						50°	2900lm	2000lm	SMS1G2-9275025N-WC
					3000K	20°	3100lm	2200lm	SMS1G2-9302025N-WC
						40°	3100lm	2400lm	SMS1G2-9304025N-WC
						50°	3100lm	2100lm	SMS1G2-9305025N-WC
					4000K	20°	3300lm	2300lm	SMS1G2-9402025N-WC
						40°	3300lm	2600lm	SMS1G2-9404025N-WC
						50°	3300lm	2200lm	SMS1G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Trimless Version:
Trimless: +10,00€

No Driver	199,00 €
ON-OFF	209,00 €
Phase Dim	229,00 €
DALI DIM	239,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Honeycomb

Code for SMS1G2-9405025N-WM with Honeycomb
SMS1G2-9405025N-WM-H


Honeycomb: +9,00€


Product Code

SMS1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SMS1G2 SENSE 125 Trim Verion	**927** CRI90/ 2700K	**20** 20°	**18** 18W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SMS4G2 SENSE 125 Trimless Verion	**930** CRI90/ 3000K	**40** 40°	**25** 25W	**F** On-Off	**B** Black	**M** Matt	
EMS1G2 SENSE 125 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S125R2-G2 – Modular Design Architectural Downlight System

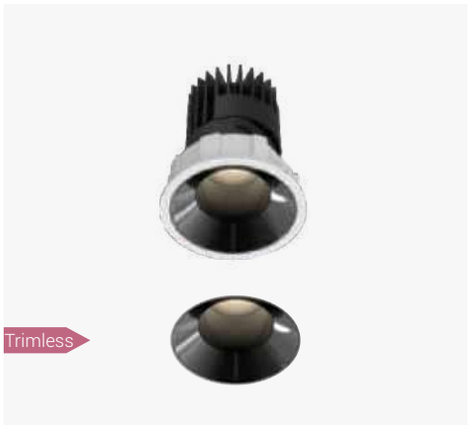

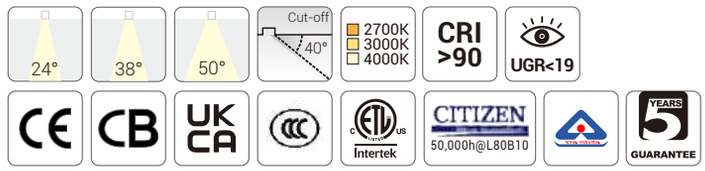


Quick Info

- Ceiling Cut-out: Ø125mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 18W, 25W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 38°, 50°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

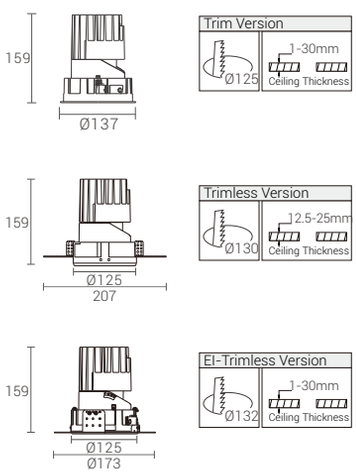

Light Distribution

3000K

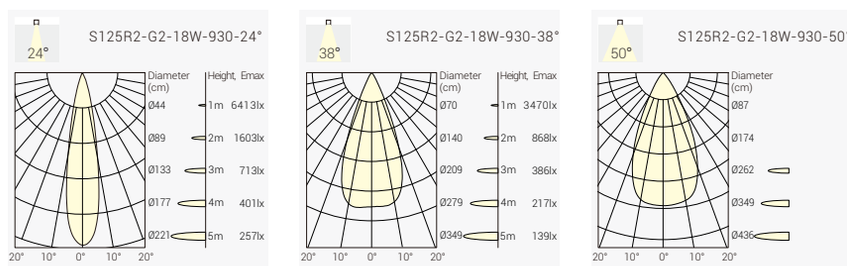

Order Info (SENSE 125-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	21W	36V	500mA	90	2700K	24°	2100lm	1500lm	SMR2G2-9272418 -WC
						38°	2100lm	1600lm	SMR2G2-9273818 -WC
						50°	2100lm	1400lm	SMR2G2-9275018 -WC
					3000K	24°	2300lm	1600lm	SMR2G2-9302418 -WC
						38°	2300lm	1700lm	SMR2G2-9303818 -WC
						20°	2300lm	1500lm	SMR2G2-9305018 -WC
					4000K	24°	2500lm	1700lm	SMR2G2-9404218 -WC
						38°	2500lm	1800lm	SMR2G2-9403818 -WC
						50°	2500lm	1600lm	SMR2G2-9405018 -WC
25W	28W	36V	700mA	90	2700K	24°	2900lm	2100lm	SMR2G2-9272425 -WC
						38°	2900lm	2200lm	SMR2G2-9273825 -WC
						50°	2900lm	1900lm	SMR2G2-9275025 -WC
					3000K	24°	3100lm	2200lm	SMR2G2-9302425 -WC
						38°	3100lm	2300lm	SMR2G2-9303825 -WC
						50°	3100lm	2000lm	SMR2G2-9305025 -WC
					4000K	24°	3300lm	2300lm	SMR2G2-9402425 -WC
						38°	3300lm	2400lm	SMR2G2-9403825 -WC
						50°	3300lm	2100lm	SMR2G2-9405025 -WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D

Trim Finsh



White Black

Trimless Version:
Trimless: +10,00€

No Driver	199,00 €
ON-OFF	209,00 €
Phase Dim	229,00 €
DALI DIM	239,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Honeycomb

Code for SMR2G2-9405025N-WM with Honeycomb
SMR2G2-9405025N-WM-H

Honeycomb: +9,00€


Product Code

SMR2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SMR2G2 SENSE 125 Trim Verion	**927** CRI90/ 2700K	**24** 24°	**18** 18W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SMR5G2 SENSE 125 Trimless Verion	**930** CRI90/ 3000K	**38** 38°	**25** 25W	**F** On-Off	**B** Black	**M** Matt	
EMR2G2 SENSE 125 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S125S2-G2 –Modular Design Architectural Downlight System



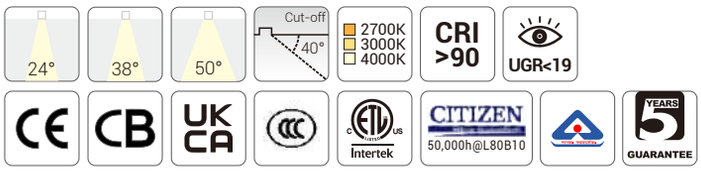


Quick Info

- Ceiling Cut-out: 122x122mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 18W, 25W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 38°, 50°
- Lumen Output: Up to 2300lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

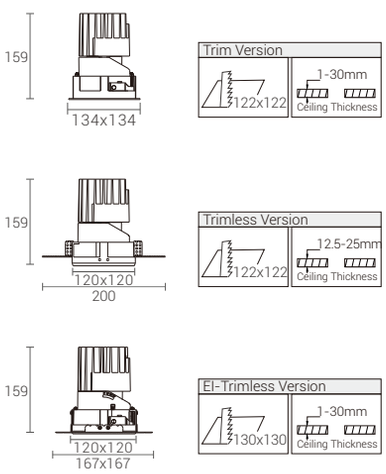

Light Distribution

3000K

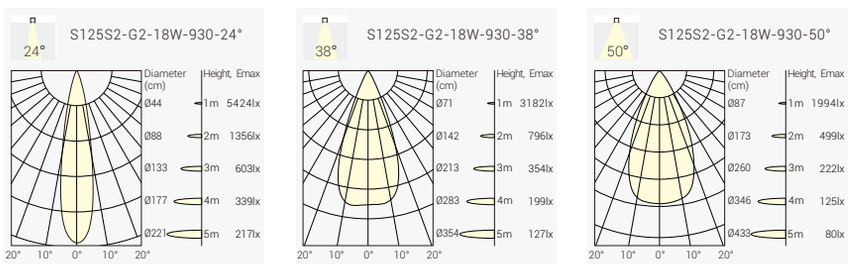

Order Info (SENSE 125-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	21W	36V	500mA	90	2700K	24°	2100lm	1300lm	SMS2G2-9272418N-WC
						38°	2100lm	1500lm	SMS2G2-9273818N-WC
						50°	2100lm	1200lm	SMS2G2-9275018N-WC
					3000K	24°	2300lm	1500lm	SMS2G2-9302418N-WC
						38°	2300lm	1600lm	SMS2G2-9303818N-WC
						20°	2300lm	1300lm	SMS2G2-9305018N-WC
					4000K	24°	2500lm	1500lm	SMS2G2-9404218N-WC
						38°	2500lm	1700lm	SMS2G2-9403818N-WC
						50°	2500lm	1400lm	SMS2G2-9405018N-WC
25W	28W	36V	700mA	90	2700K	24°	2900lm	1800lm	SMS2G2-9272425N-WC
						38°	2900lm	2000lm	SMS2G2-9273825N-WC
						50°	2900lm	1700lm	SMS2G2-9275025N-WC
					3000K	24°	3100lm	1900lm	SMS2G2-9302425N-WC
						38°	3100lm	2100lm	SMS2G2-9303825N-WC
						50°	3100lm	1800lm	SMS2G2-9305025N-WC
					4000K	24°	3300lm	2100lm	SMS2G2-9402425N-WC
						38°	3300lm	2300lm	SMS2G2-9403825N-WC
						50°	3300lm	2000lm	SMS2G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh




White Black

Trimless Version:
Trimless: +10,00€

No Driver	199,00 €
ON-OFF	209,00 €
Phase Dim	229,00 €
DALI DIM	239,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Honeycomb

Code for SMS2G2-9405025N-WM with Honeycomb
SMS2G2-9405025N-WM-H

Honeycomb: +9,00€


Product Code

SMS2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SMS2G2 SENSE 125 Trim Verion	**927** CRI90/ 2700K	**20** 20°	**18** 18W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SMS5G2 SENSE 125 Trimless Verion	**930** CRI90/ 3000K	**38** 38°	**25** 25W	**F** On-Off	**B** Black	**M** Matt	
EMS2G2 SENSE 125 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE S150R1-G2 – Modular Design Architectural Downlight System



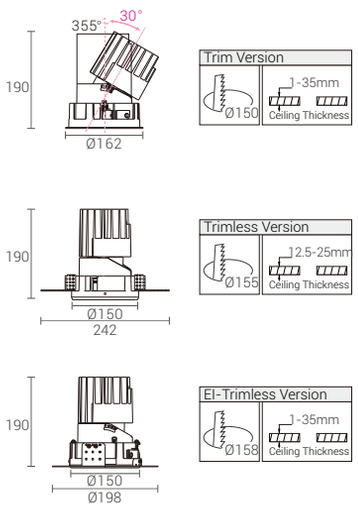

Trim Finsh



White Black

Trimless Version:
Trimless: +10,00€

No Driver	269,00 €
ON-OFF	279,00 €
Phase Dim	299,00 €
DALI DIM	319,00 €

Reflector Options



Specular Matt Black Dark Light White Gold


Optional accessary



Honeycomb

Code for SLR1G2-9404525N-WM with Honeycomb
SLR1G2-9404525N-WM-H

Honeycomb: +9,00€

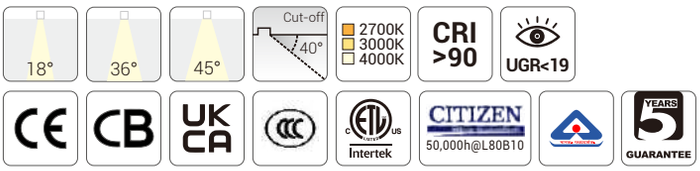


Quick Info

- Ceiling Cut-out: Ø150mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 25W, 38W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 36°, 45°
- Lumen Output: Up to 3900lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: No Driver, On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

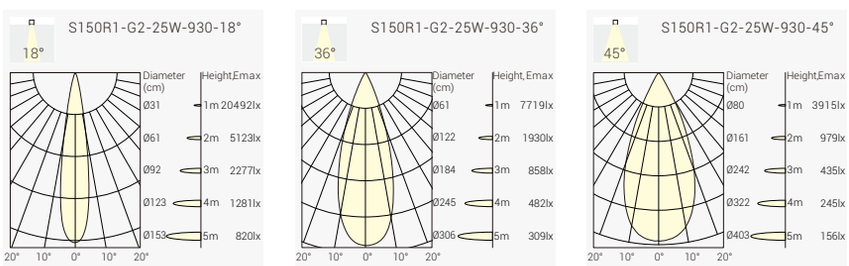

Order Info (SENSE 150-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	18°	3000lm	2300lm	SLR1G2-9271825N-WC
						36°	3000lm	2500lm	SLR1G2-9273625N-WC
						45°	3000lm	2000lm	SLR1G2-9274525N-WC
					3000K	18°	3200lm	2400lm	SLR1G2-9301825N-WC
						36°	3200lm	2600lm	SLR1G2-9303625N-WC
						45°	3200lm	2100lm	SLR1G2-9304525N-WC
					4000K	18°	3400lm	2500lm	SLR1G2-9401825N-WC
						36°	3400lm	2700lm	SLR1G2-9403625N-WC
						45°	3400lm	2200lm	SLR1G2-9404525N-WC
38W	42W	36V	1050mA	90	2700K	18°	4400lm	3300lm	SLR1G2-9271838N-WC
						36°	4400lm	3500lm	SLR1G2-9273638N-WC
						45°	4400lm	2800lm	SLR1G2-9274538N-WC
					3000K	18°	4600lm	3500lm	SLR1G2-9301838N-WC
						36°	4600lm	3700lm	SLR1G2-9303638N-WC
						45°	4600lm	3000lm	SLR1G2-9304538N-WC
					4000K	18°	4800lm	3700lm	SLR1G2-9401838N-WC
						36°	4800lm	3900lm	SLR1G2-9403638N-WC
						45°	4800lm	3200lm	SLR1G2-9404538N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Product Code


SLR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SLR1G2 SENSE 150 Trim Verion	**927** CRI90/ 2700K	**18** 18°	**18** 18W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SLR5G2 SENSE 150 Trimless Verion	**930** CRI90/ 3000K	**36** 36°	**25** 25W	**F** On-Off	**B** Black	**M** Matt	
ELR1G2 SENSE 150 EI-Trimless Verion	**940** CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

BACK

SENSE S150S1-G2 –Modular Design Architectural Downlight System



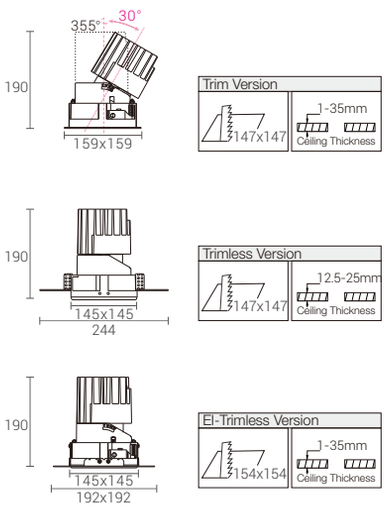

Trim Finsh



White Black

Trimless Version:

Trimless: +10,00€

No Driver	269,00 €
ON-OFF	279,00 €
Phase Dim	299,00 €
DALI DIM	319,00 €

Reflector Options



Specular Matt Black Dark Light White Gold


Optional accessary



Honeycomb

Code for SLS1G2-9404525N-WM with Honeycomb
SLS1G2-940525N-WM-H

Honeycomb: +9,00€

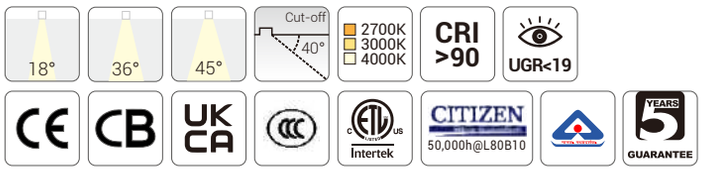


Quick Info

- Ceiling Cut-out: 147x147mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 25W, 38W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 36°, 45°
- Lumen Output: Up to 3600lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

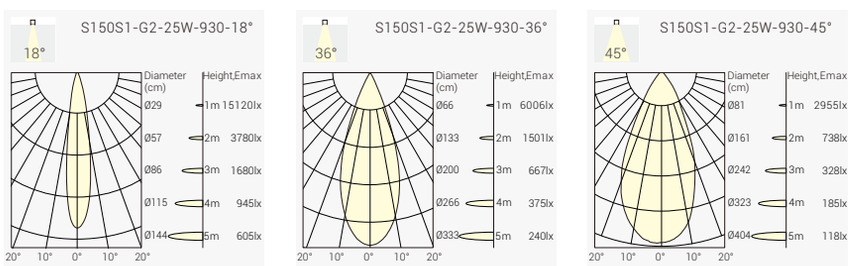

Order Info (SENSE 150-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	18°	3000lm	2000lm	SLS1G2-9271825N-WC
						36°	3000lm	2100lm	SLS1G2-9273625N-WC
						45°	3000lm	2000lm	SLS1G2-9274525N-WC
					3000K	18°	3200lm	2100lm	SLS1G2-9301825N-WC
						36°	3200lm	2200lm	SLS1G2-9303625N-WC
						45°	3200lm	2100lm	SLS1G2-9304525N-WC
					4000K	18°	3400lm	2200lm	SLS1G2-9401825N-WC
						36°	3400lm	2300lm	SLS1G2-9403625N-WC
						45°	3400lm	2200lm	SLS1G2-9404525N-WC
38W	42W	36V	1050mA	90	2700K	18°	4400lm	2900lm	SLS1G2-9271838N-WC
						36°	4400lm	3200lm	SLS1G2-9273638N-WC
						45°	4400lm	2900lm	SLS1G2-9274538N-WC
					3000K	18°	4600lm	3100lm	SLS1G2-9301838N-WC
						36°	4600lm	3400lm	SLS1G2-9303638N-WC
						45°	4600lm	3100lm	SLS1G2-9304538N-WC
					4000K	18°	4800lm	3300lm	SLS1G2-9401838N-WC
						36°	4800lm	3600lm	SLS1G2-9403638N-WC
						45°	4800lm	3300lm	SLS1G2-9404538N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Product Code

SLS1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SLS1G2 SENSE 150 Trim Verion	**927** CRI90/ 2700K	**18** 18°	**18** 18W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SLS4G2 SENSE 150 Trimless Verion	**930** CRI90/ 3000K	**36** 38°	**25** 25W	**F** On-Off	**B** Black	**M** Matt	
ELS1G2 SENSE 150 EI-Trimless Verion	**940** CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S150R2-G2 –Modular Design Architectural Downlight System



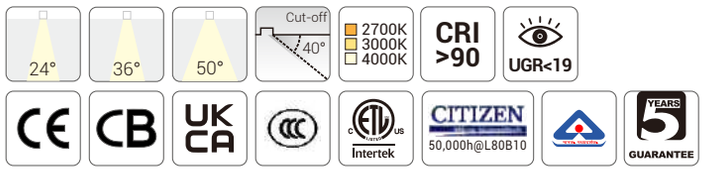


Quick Info

- Ceiling Cut-out: Ø150mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 25W, 38W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 36°, 50°
- Lumen Output: Up to 3400lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

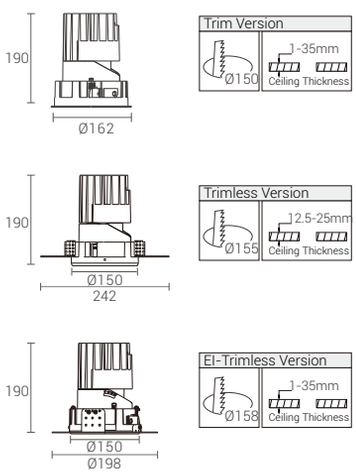

Light Distribution

3000K

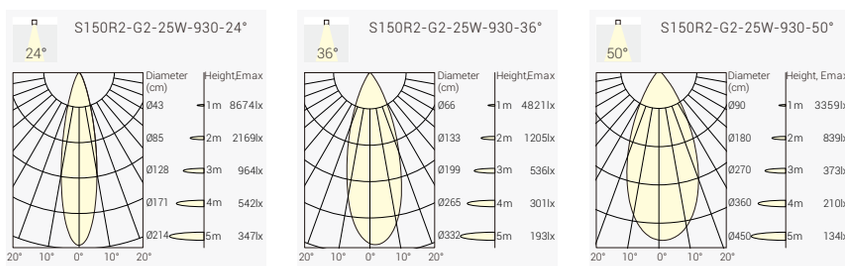

Order Info (SENSE 150-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	24°	3000lm	2100lm	SLR2G2-9272425N-WC
						36°	3000lm	2100lm	SLR2G2-9273625N-WC
						50°	3000lm	2100lm	SLR2G2-9275025N-WC
					3000K	24°	3200lm	2200lm	SLR2G2-9302425N-WC
						36°	3200lm	2200lm	SLR2G2-9303625N-WC
						50°	3200lm	2200lm	SLR2G2-9305025N-WC
					4000K	24°	3400lm	2300lm	SLR2G2-9402425N-WC
						36°	3400lm	2300lm	SLR2G2-9403625N-WC
						50°	3400lm	2300lm	SLR2G2-9405025N-WC
38W	42W	36V	1050mA	90	2700K	24°	4400lm	2900lm	SLR2G2-9272438N-WC
						36°	4400lm	3000lm	SLR2G2-9273638N-WC
						50°	4400lm	2900lm	SLR2G2-9275038N-WC
					3000K	24°	4600lm	3100lm	SLR2G2-9302438N-WC
						36°	4600lm	3200lm	SLR2G2-9303638N-WC
						50°	4600lm	3100lm	SLR2G2-9305038N-WC
					4000K	24°	4800lm	3300lm	SLR2G2-9402438N-WC
						36°	4800lm	3400lm	SLR2G2-9403638N-WC
						50°	4800lm	3300lm	SLR2G2-9405038N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Trimless Version:
Trimless: +10,00€

No Driver	269,00 €
ON-OFF	279,00 €
Phase Dim	299,00 €
DALI DIM	319,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Honeycomb

Code for SLR2G2-9405025N-WM with Honeycomb
SLR2G2-9405025N-WM-H

Honeycomb: +9,00€


Product Code

SLR2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SLR2G2 SENSE 150 Trim Verion	**927** CRI90/ 2700K	**24** 24°	**25** 25W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SLR6G2 SENSE 150 Trimless Verion	**930** CRI90/ 3000K	**36** 36°	**38** 38W	**F** On-Off	**B** Black	**M** Matt	
ELR2G2 SENSE 150 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S150S2-G2 –Modular Design Architectural Downlight System



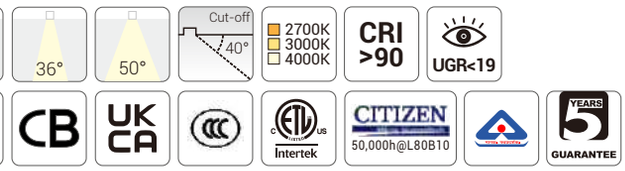


Quick Info

- Ceiling Cut-out: 147x147mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 25W, 38W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 36°, 50°
- Lumen Output: Up to 3100lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

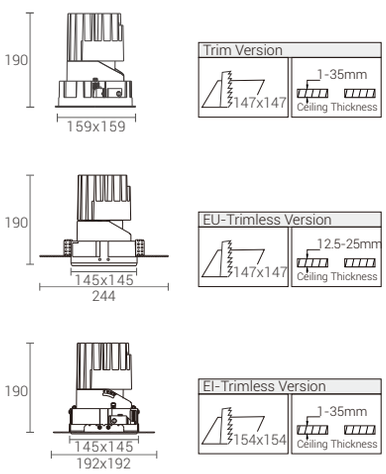

Light Distribution

3000K

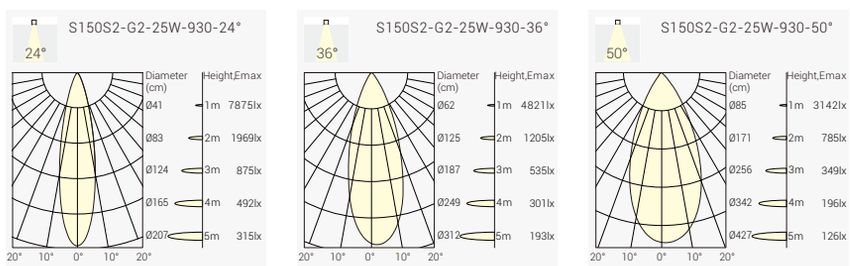

Order Info (SENSE 150-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	24°	3000lm	1800lm	SLS2G2-9272425N-WC
						36°	3000lm	2000lm	SLS2G2-9273625N-WC
						50°	3000lm	1900lm	SLS2G2-9275025N-WC
					3000K	24°	3200lm	1900lm	SLS2G2-9302425N-WC
						36°	3200lm	2100lm	SLS2G2-9303625N-WC
						50°	3200lm	2000lm	SLS2G2-9305025N-WC
					4000K	24°	3400lm	2000lm	SLS2G2-9402425N-WC
						36°	3400lm	2200lm	SLS2G2-9403625N-WC
						50°	3400lm	2100lm	SLS2G2-9405025N-WC
38W	42W	36V	1050mA	90	2700K	24°	4400lm	2500lm	SLS2G2-9272438N-WC
						36°	4400lm	2800lm	SLS2G2-9273638N-WC
						50°	4400lm	2700lm	SLS2G2-9275038N-WC
					3000K	24°	4600lm	2600lm	SLS2G2-9302438N-WC
						36°	4600lm	2900lm	SLS2G2-9303638N-WC
						50°	4600lm	2850lm	SLS2G2-9305038N-WC
					4000K	24°	4800lm	2700lm	SLS2G2-9402438N-WC
						36°	4800lm	3100lm	SLS2G2-9403638N-WC
						50°	4800lm	3000lm	SLS2G2-9405038N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh




White Black

Trimless Version:

Trimless: +10,00€

No Driver	269,00 €
ON-OFF	279,00 €
Phase Dim	299,00 €
DALI DIM	319,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Honeycomb

Code for SLS2G2-9404525N-WM with Honeycomb
SLS2G2-940525N-WM-H

Honeycomb: +9,00€


Product Code

SLS2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SLS2G2 SENSE 150 Trim Verion	**927** CRI90/ 2700K	**24** 24°	**24** 24W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SLS6G2 SENSE 150 Trimless Verion	**930** CRI90/ 3000K	**36** 38°	**38** 38W	**F** On-Off	**B** Black	**M** Matt	
ELS2G2 SENSE 150 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE
New Wall Washer


Excellent Glare Control
Uniform Illumination Across the Wall
Reflector Available with Specular

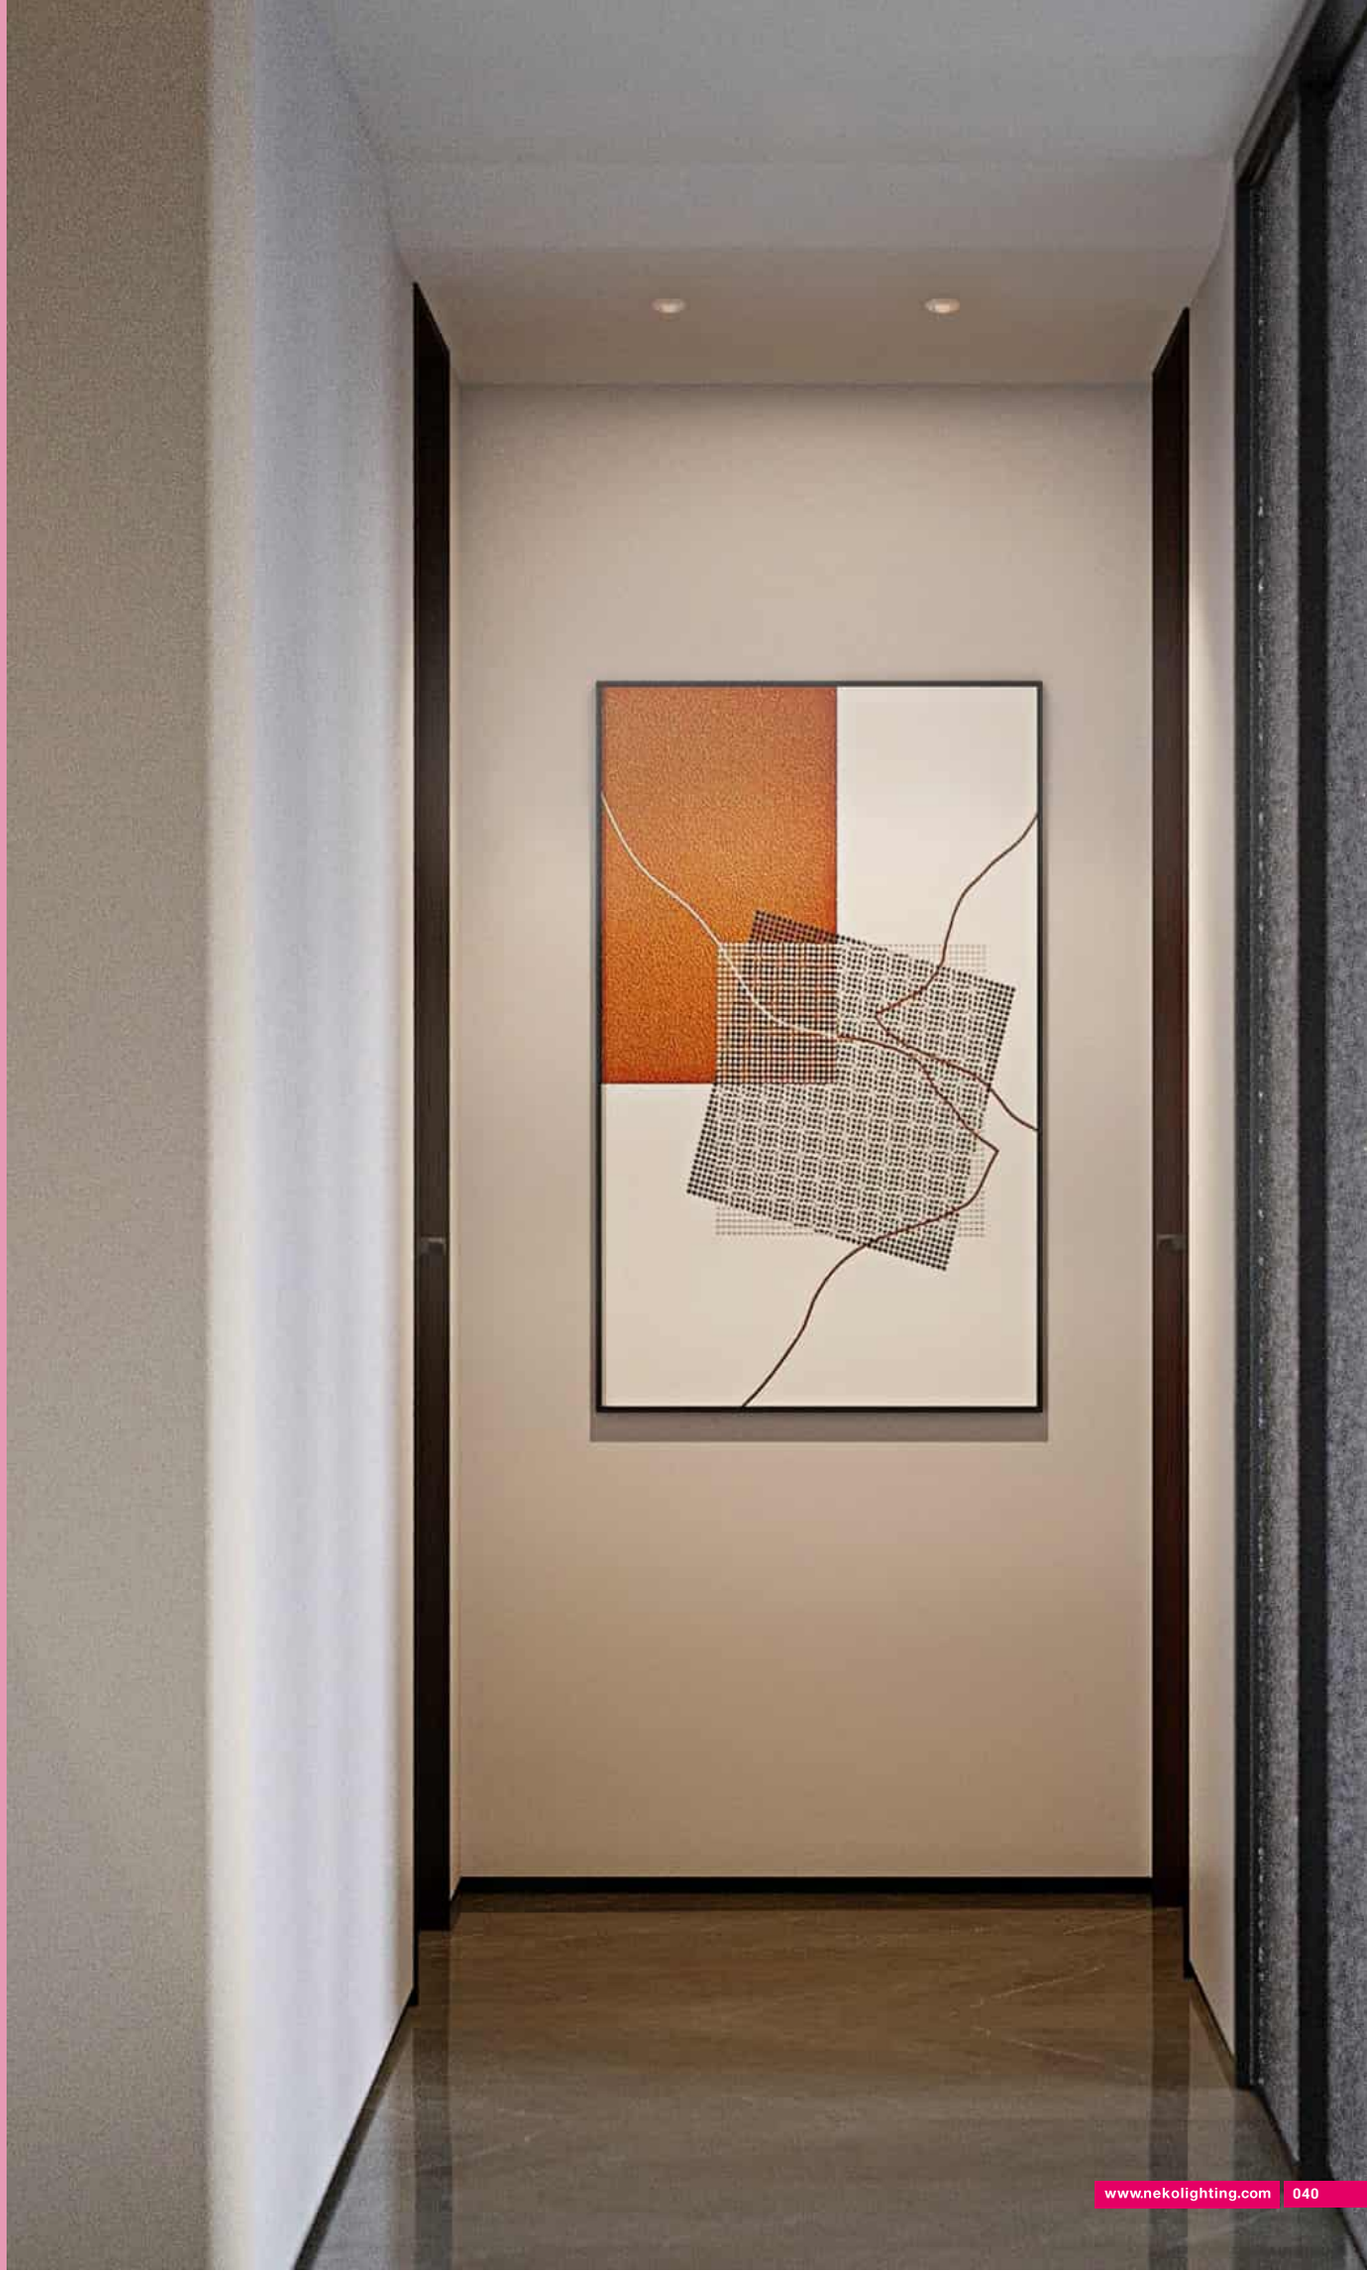

NEW

SENSE W75 & W100

The new technology of wall washer downlight is now part of the SENSE 2.0
Ceiling cutouts in both Ø75mm and Ø100mm sizes, offering different power and output options to meet diverse wall washing requirements across varying wall heights.
Excellent glare control and uniform illumination across the wall.
Reflector available in specular.

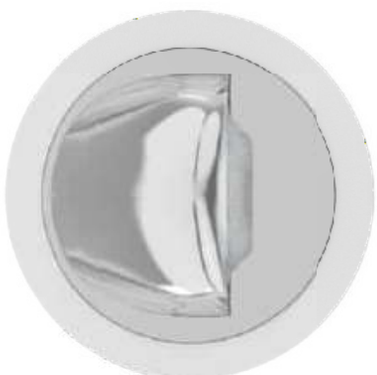



SENSE W75




SENSE W100

Wall Washer

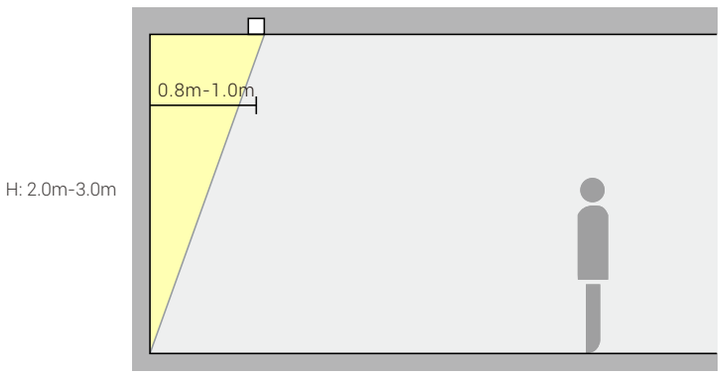

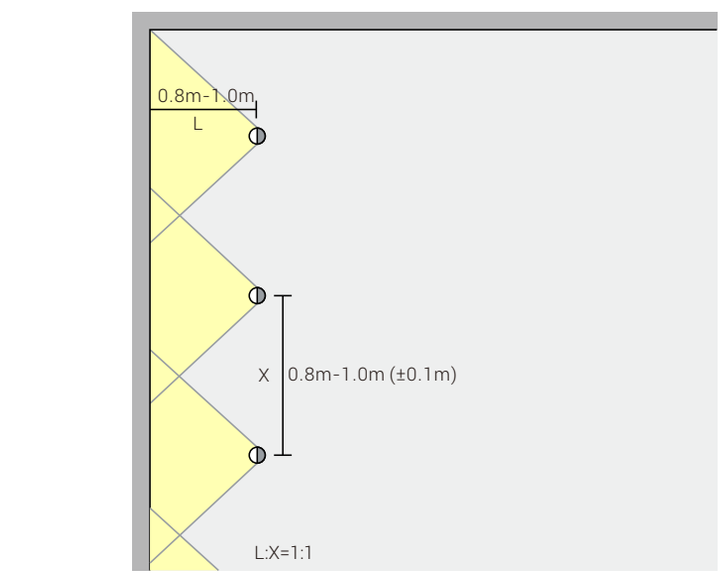


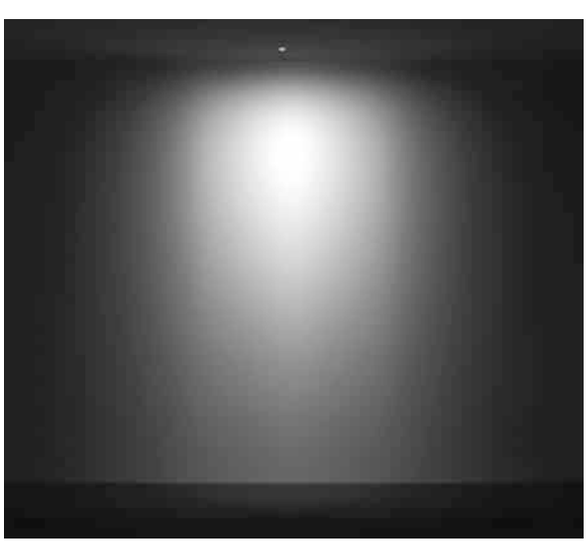


SENSE W75 – The New Technology of Wall Washer Downlight

NEW







No Direct Light into Eyes

Wall Washer | 2700K 3000K 4000K | CRI >90


CE CB UKCA ETL Intertek CITIZEN 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: Ø75mm
- CITIZEN LED: 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: Wall Washer
- Lumen Output: Up to 900lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K



Order Info (SENSE W75 in White Trim & Specular Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	Wall Washer	1200lm	800lm	S3RW-927WW13N-WS
					3000K	Wall Washer	1300lm	850lm	S3RW-930WW13N-WS
					4000K	Wall Washer	1400lm	900lm	S3RW-940WW13N-WS

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh


White


Black

Trimless Version:
Trimless: +10,00€

No Driver	119,00 €
ON-OFF	129,00 €
Phase Dim	139,00 €
DALI°DIM	159,00 €

Reflector Options


Specular



Coding

S3RW – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
S3RW SENSE W75	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	WW Wall Washer	13 13W	N No Driver F On-Off P Phase Dim A 1-10V Dim D DALI Dim	W White B Black	S Specular	

BACK

SENSE W100 – The New Technology of Wall Washer Downlight

NEW





Wall Washer | 2700K 3000K 4000K | CRI >90


CE CB UKCA ETL Intertek CITIZEN 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: Ø100mm
- CITIZEN LED: 17W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: Wall Washer
- Lumen Output: Up to 1450lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim








No Direct Light into Eyes

Light Distribution

3000K



Order Info (SENSE W100 in White Trim & Specular Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17W	20W	36V	500mA	90	2700K	Wall Washer	2300lm	1250lm	S4RW-927WW17N-WS
					3000K	Wall Washer	2400lm	1350lm	S4RW-930WW17N-WS
					4000K	Wall Washer	2600lm	1450lm	S4RW-940WW17N-WS

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Trimless Version:
Trimless: +10,00€

No Driver	169,00 €
ON-OFF	179,00 €
Phase Dim	199,00 €
DALI°DIM	209,00 €

Reflector Options



Specular



Coding


S4RW – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
S4RW SENSE W100	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	WW Wall Washer	17 17W	N No Driver F On-Off P Phase Dim A 1-10V Dim D DALI Dim	W White B Black	S Specular	


BACK

TAKEO

The Interchangeable Design
Fixed Downlight Series
Round & Square
High Efficiency
UGR<19
IP54

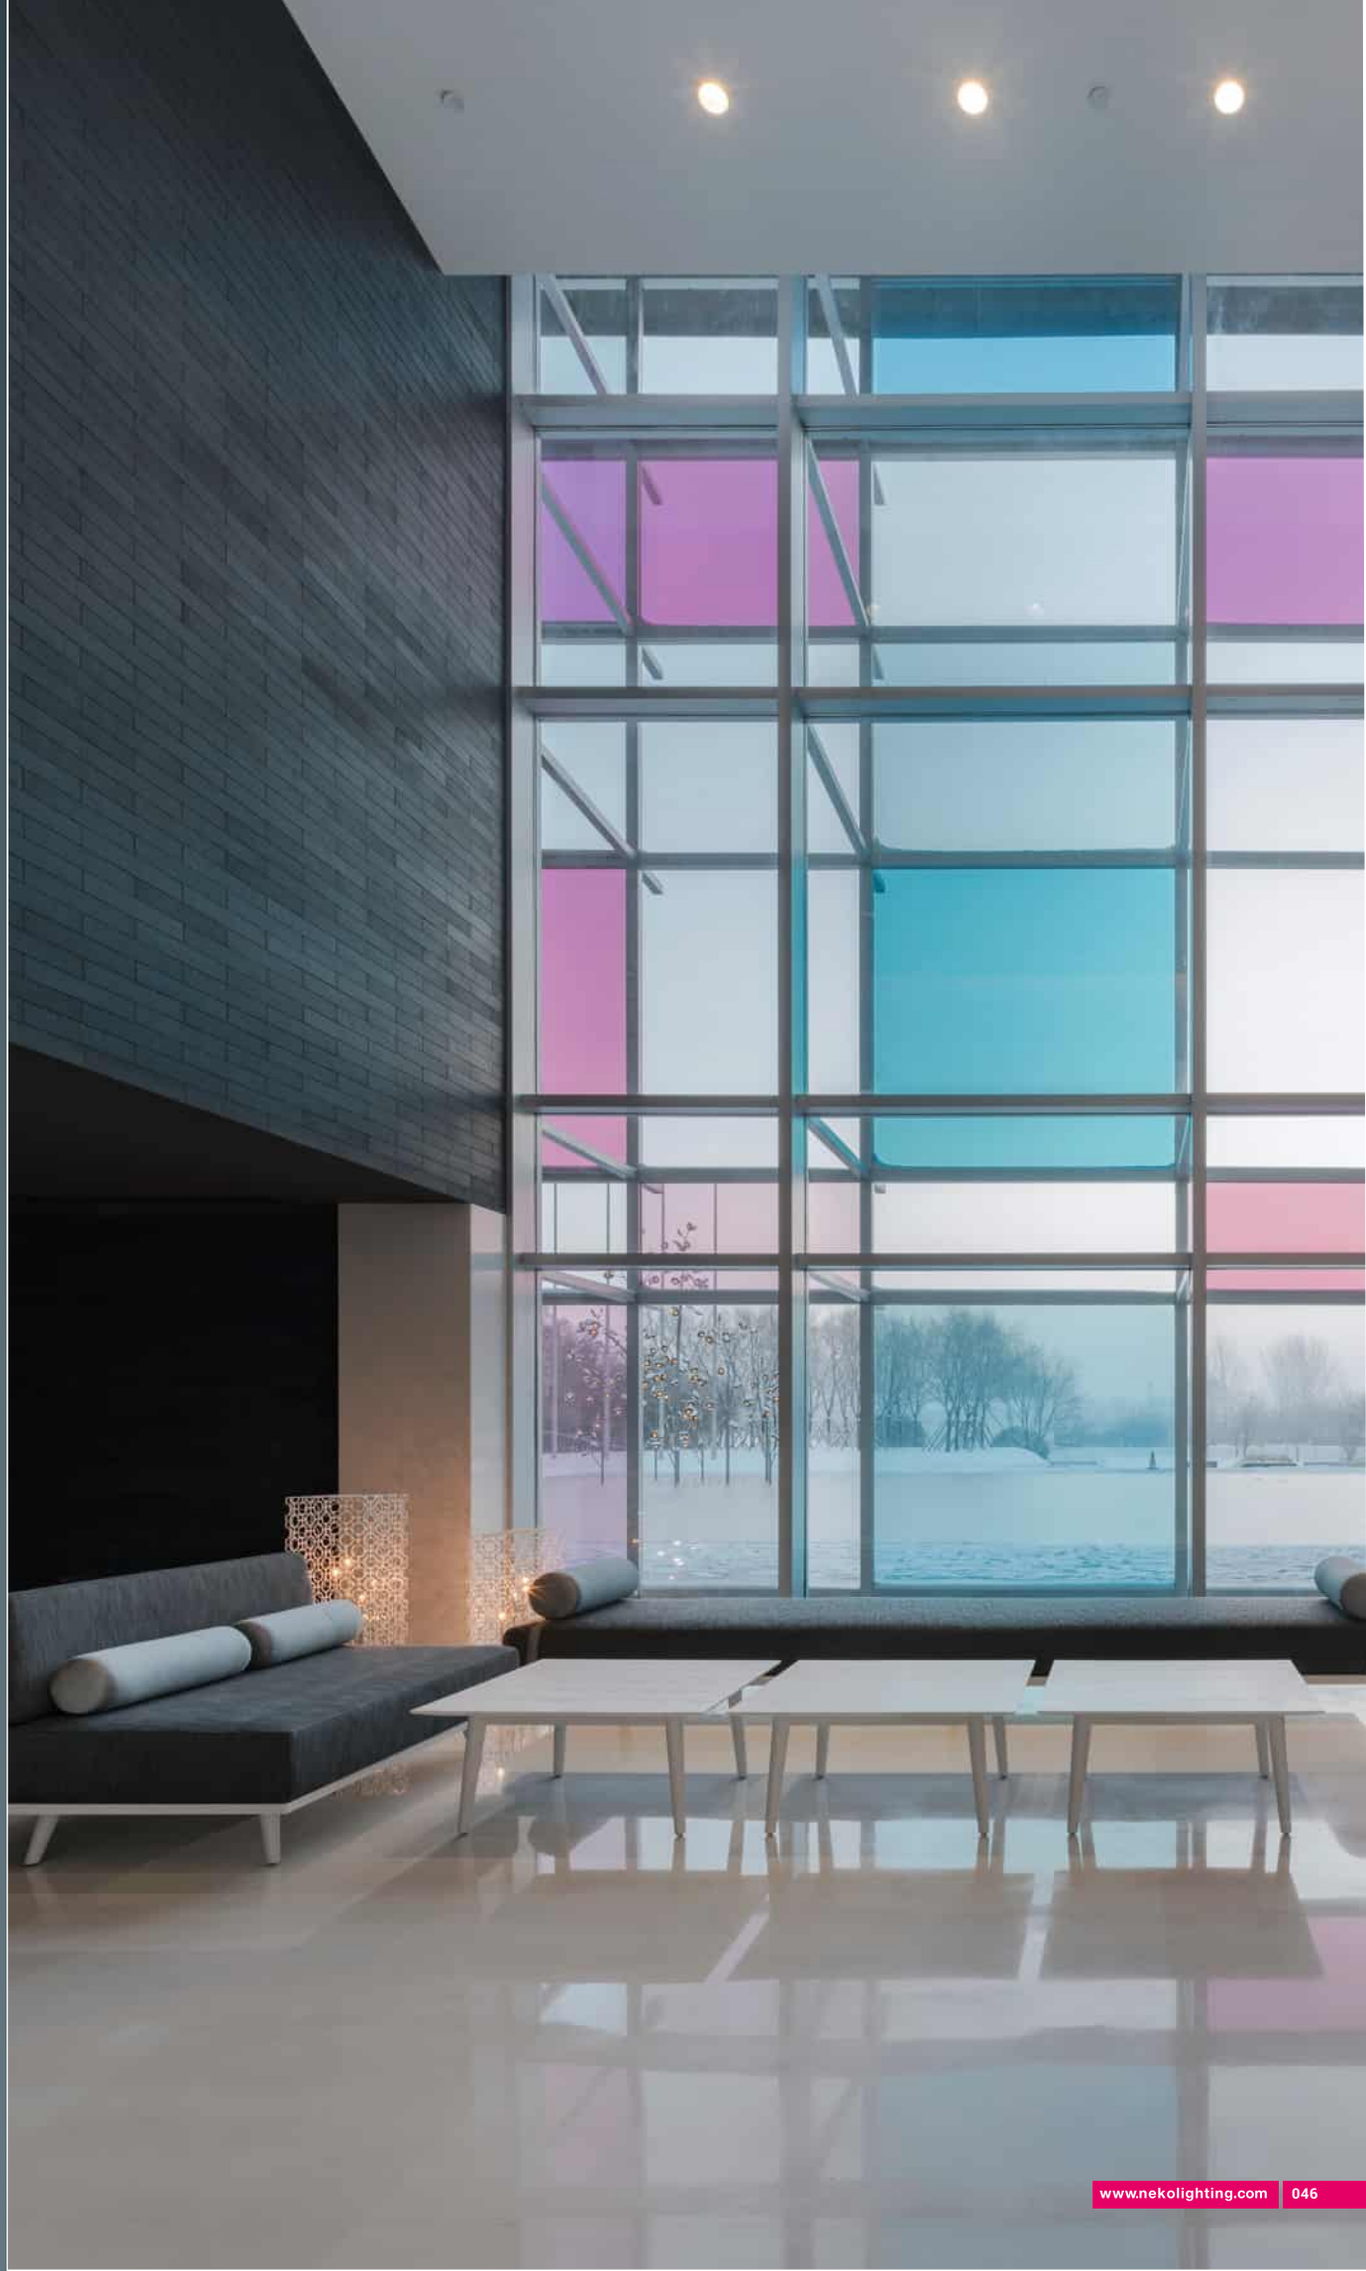

TAKEO T75 – High Efficiency Fixed Downlight

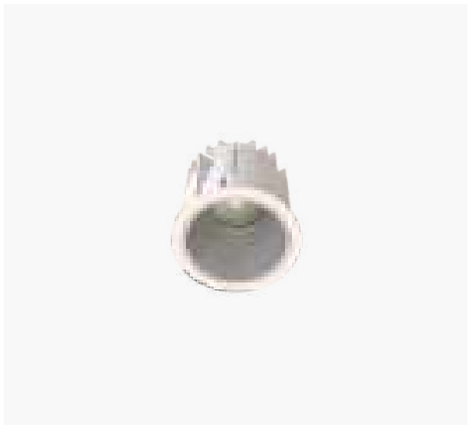


25° 50° Cut-off 40° 2700K 3000K 4000K CRI >80 CRI >90 UGR<19

IP54 CE CB UKCA ETL Intertek CITIZEN 50,000h@L80B10 5 YEARS GUARANTEE PEP eco PASS PORT

Quick Info


- Ceiling Cut-out: Ø75mm
- CITIZEN LED: 7.5W, 11W, CRI>90, CRI>80
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 25°, 50°
- Lumen Output: Up to 1050lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

3000K





Trim Finsh



White Black


No Driver	49,00 €
ON-OFF	59,00 €
Phase Dim	69,00 €
DALI DIM	89,00 €

Order Info (TAKEO T75 in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5W	9W	31V	250mA	80	2700K	25°	1000lm	720lm	TT1-8272509N-WM
						50°	1000lm	720lm	TT1-8275009N-WM
					3000K	25°	1100lm	750lm	TT1-8302509N-WM
						50°	1100lm	750lm	TT1-8305009N-WM
					4000K	25°	1200lm	800lm	TT1-8402509N-WM
						50°	1200lm	800lm	TT1-8405009N-WM
11W	13W	31V	350mA	80	2700K	25°	1300lm	900lm	TT2-8272511N-WM
						50°	1300lm	900lm	TT2-8275011N-WM
					3000K	25°	1400lm	950lm	TT2-8302511N-WM
						50°	1400lm	950lm	TT2-8305011N-WM
					4000K	25°	1500lm	1050lm	TT2-8402511N-WM
						50°	1500lm	1050lm	TT2-8405011N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black

Coding


TT1 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TT1 T75-7.5W	827 CRI>80/ 2700K	25 25°	08 7.5W	N No Driver	W White	B Black	
TT2 T75-11W	830 CRI>80/ 3000K	50 50°	11 11W	F On-Off	B Black	M Matt	
	840 CRI>80/ 4000K			P Phase Dim		W White	
	927 CRI>90/ 2700K			A 1-10V Dim			
	930 CRI>90/ 3000K			D DALI Dim			
	940 CRI>90/ 4000K						

BACK

TAKEO T100 Pro – High Efficiency Fixed Downlight









Quick Info

- Ceiling Cut-out: Ø100mm
- CITIZEN LED: 8.5W, 12W, 17W, CRI>90, CRI>80
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 30°, 50°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K





Order Info (TAKEO T100 Pro in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8.5W	10W	34V	250mA	80	2700K	30°	1300lm	1150lm	TS4-8272009N-WM
						50°	1300lm	1050lm	TS4-8274009N-WM
					3000K	30°	1400lm	1200lm	TS4-8302009N-WM
						50°	1400lm	1100lm	TS4-8305009N-WM
					4000K	30°	1500lm	1300lm	TS4-8402009N-WM
						50°	1500lm	1200lm	TS4-8404009N-WM
12W	14W	34V	350mA	80	2700K	30°	1800lm	1500lm	TS4-8272012N-WM
						50°	1800lm	1400lm	TS4-8274012N-WM
					3000K	30°	1900lm	1600lm	TS4-8302012N-WM
						50°	1900lm	1500lm	TS4-8304012N-WM
					4000K	30°	2050lm	1700lm	TS4-8402012N-WM
						50°	2050lm	1600lm	TS4-8404012N-WM
17W	20W	36V	500mA	80	2700K	30°	2500lm	2150lm	TS4-8272017N-WM
						50°	2500lm	1900lm	TS4-8274017N-WM
					3000K	30°	2600lm	2250lm	TS4-8302017N-WM
						50°	2600lm	2000lm	TS4-8304017N-WM
					4000K	30°	2800lm	2400lm	TS4-8402017N-WM
						50°	2800lm	2200lm	TS4-8404017N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

No Driver	79,00 €
ON-OFF	89,00 €
Phase Dim	109,00 €
DALI DIM	119,00 €

Reflector Options



White Matt Black

Coding

TS4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TS4 TAKEO T100 Pro	**827** CRI>80/ 2700K	**30** 30°	**08** 7.5W	**N** No Driver	**W** White	**B** Black	
	830 CRI>80/ 3000K	**50** 50°	**12** 12W	**F** On-Off	**B** Black	**M** Matt	
	840 CRI>80/ 4000K		**17** 17W	**P** Phase Dim		**W** White	
	927 CRI>90/ 2700K			**A** 1-10V Dim			
	930 CRI>90/ 3000K			**D** DALI Dim			
	940 CRI>90/ 4000K						


TAKEO T100-DW – High Efficiency Fixed Downlight






Quick Info


- Ceiling Cut-out: Ø100mm
- Bridgelux LED: 12W, CRI>95
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 50°
- Lumen Output: Up to Max.1000lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: Phase Dim, 1-10V Dim, DALI Dim , Casambi Wireless Dim





Light Distribution

3000K



Trim Finsh



White Black

Dim-to-warm	
No Driver	109,00 €
Phase Dim	129,00 €
DALI DIM	149,00 €

Order Info (TAKEO T100-DW in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
12W	14W	34V	350mA	95	1800K-3000K	50°	Max.1000lm	TS2-9D35012N-WM

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim



Reflector Options



White Matt Black

Coding


TS2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TS2 TAKEO T100-DW	9D3 CRI>95 1800K-3000K	50 50°	12 12W	N No Driver P Phase Dim A 1-10V Dim D DALI Dim	W White B Black	B Black M Matt W White	

BACK

TAKEO T100-TW – High Efficiency Fixed Downlight







Quick Info

- Ceiling Cut-out: Ø100mm
- Bridgelux LED: 13W, CRI>90
- CCT: Tunable White 2700K-6500K
- Beam Angle: 50°
- Lumen Output: Up to 900lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: DALI DT8 Dim

Light Distribution

3000K





Trim Finsh



White Black

No Driver	169,00 €
DALI DIM	229,00 €

Order Info (TAKEO T100-TW in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
13W	15W	36V	350mA	90	2700K-6500k	50°	Max.900lm	TS2-9TW5013N-WM
					@2700K	50°	750lm	
					@3000K	50°	780lm	
					@4000K	50°	850lm	
					@5000K	50°	900lm	
					@6500K	50°	900lm	

Code Remark: N=N(No Driver) D=D(DALI DT8 Dim)

Reflector Options



White Matt Black

Coding

TS2	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	LED Power	Control		Trim Finish	Reflector Color		Accessory
TS2 TAKEO T100-TW		9TW CRI>90 2700K-6500K	50 50°	13 13W	N No Driver D DALI DT8 Dim		W White B Black	B Black M Matt W White		

TAKEO T150 Pro – High Efficiency Fixed Downlight





30° 65° Cut-off 30° 2700K 3000K 4000K CRI >80 CRI >90 UGR<19

IP54 CE CB UKCA ETL Intertek CITIZEN 50,000h@L80B10 5 YEARS GUARANTEE PEP eco PASS PORT®

Quick Info


- Ceiling Cut-out: Ø150mm
- CITIZEN LED: 17W, 24W, CRI>90, CRI>80
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 30°, 65°
- Lumen Output: Up to 3800lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

■ 3000K





Trim Finsh



White Black

No Driver	129,00 €
ON-OFF	139,00 €
Phase Dim	159,00 €
DALI DIM	169,00 €

Order Info (TAKEO T150 Pro in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17W	19W	36V	500mA	80	2700K	30°	3000lm	2450lm	TM4-8273017N-WM
						65°	3000lm	2000lm	TM4-8276517N-WM
					3000K	30°	3200lm	2600lm	TM4-8303017N-WM
						65°	3200lm	2100lm	TM4-8306517N-WM
					4000K	30°	3500lm	2800lm	TM4-8403017N-WM
						65°	3500lm	2300lm	TM4-8406517N-WM
24W	26W	36V	700mA	80	2700K	30°	4000lm	3300lm	TM4-8273024N-WM
						65°	4000lm	2700lm	TM4-8276524N-WM
					3000K	30°	4200lm	3500lm	TM4-8303024N-WM
						65°	4200lm	2850lm	TM4-8306524N-WM
					4000K	30°	4500lm	3800lm	TM4-8403024N-WM
						65°	4500lm	3000lm	TM4-8406524N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black

Coding

TM4 – *** ** ** * – * * – *

MODEL	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TM4 TAKEO T150 Pro	827 CRI>80/ 2700K	30 30°	17 17W	N No Driver	W White	B Black	
	830 CRI>80/ 3000K	65 65°	24 24W	F On-Off	B Black	M Matt	
	840 CRI>80/ 4000K			P Phase Dim		W White	
	927 CRI>90/ 2700K			A 1-10V Dim			
	930 CRI>90/ 3000K			D DALI Dim			
	940 CRI>90/ 4000K						

BACK

TAKEO T150-TW – High Efficiency Fixed Downlight





60° | Cut-off 30° | 2700K 6500K Tunable White | CRI >90 | UGR<19

IP54 | CE | CB | UK CA | ETL Intertek | bridgelux 50,000h@L80B10 | 5 YEARS GUARANTEE | PEP eco PASS PORT®

Quick Info


- Ceiling Cut-out: Ø150mm
- Bridgelux LED: 18W, 25W, CRI>90
- CCT: Tunable White 2700K-6500K
- Beam Angle: 60°
- Lumen Output: Up to Max.1900lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: DALI DT8 Dim






Light Distribution

3000K





Trim Finsh



White Black

No Driver	219,00 €
DALI DIM	279,00 €

Order Info (TAKEO T150-TW in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
18W	21W	36V	500mA	90	2700K-6500k	60°	Max.1400lm	TM1-9TW6018N-WM
					@2700K	60°	1200lm	
					@3000K	60°	1250lm	
					@4000K	60°	1350lm	
					@5000K	60°	1400lm	
					@6500K	60°	1400lm	
25W	28W	36V	700mA	90	2700K-6500k	60°	Max.1900lm	TM2-9TW6025N-WM
					@2700K	60°	1700lm	
					@3000K	60°	1750lm	
					@4000K	60°	1850lm	
					@5000K	60°	1900lm	
					@6500K	60°	1900lm	

Code Remark: N=N(No Driver) D=D(DALI DT8 Dim)

Reflector Options



White Matt Black

Coding

TM1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TM1 TAKEO T150-18W	9TW CRI>90 2700K-6500K	60 60°	18 18W	N No Driver	W White	B Black	
TM2 TAKEO T150-25W			25 25W	D DALI DT8 Dim	B Black	M Matt	
						W White	

TAKEO T200 Pro – High Efficiency Fixed Downlight





18° 30° 65° Cut-off 35° 2700K 3000K 4000K CRI >80 CRI >90 UGR<19

IP54 CE CB UKCA ETL Intertek CITIZEN 50,000h@L80B10 5 YEARS GUARANTEE PEP eco PASS PORT

Quick Info


- Ceiling Cut-out: Ø200mm
- CITIZEN LED: 24W, 36W, CRI>90, CRI>80
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 65°
- Lumen Output: Up to 5300lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim







Light Distribution

3000K







Trim Finsh



White Black

No Driver	179,00 €
ON-OFF	199,00 €
Phase Dim	209,00 €
DALI DIM	229,00 €

Order Info (TAKEO T200 Pro in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24W	26W	34V	700mA	80	2700K	18°	4200lm	3200lm	TL4-8271824N-WM
						30°	4200lm	3300lm	TL4-8273024N-WM
						65°	4200lm	2700lm	TL4-8276524N-WM
					3000K	18°	4400lm	3400lm	TL4-8301824N-WM
						30°	4400lm	3500lm	TL4-8303024N-WM
						65°	4400lm	2900lm	TL4-8306524N-WM
					4000K	18°	4700lm	3750lm	TL4-8401824N-WM
						30°	4700lm	3800lm	TL4-8403024N-WM
						65°	4700lm	3100lm	TL4-8406524N-WM
36W	40W	34V	1050mA	80	2700K	18°	5600lm	4600lm	TL4-8271836N-WM
						30°	5600lm	4800lm	TL4-8273036N-WM
						65°	5600lm	4000lm	TL4-8276536N-WM
					3000K	18°	6000lm	4800lm	TL4-8301836N-WM
						30°	6000lm	5000lm	TL4-8303036N-WM
						65°	6000lm	4200lm	TL4-8306536N-WM
					4000K	18°	6500lm	5100lm	TL4-8401836N-WM
						30°	6500lm	5300lm	TL4-8403036N-WM
						65°	6500lm	4500lm	TL4-8406536N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black


Coding


TL4 – *** ** ** * – * * – *

MODEL	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TL4 TAKEO T200 Pro	827 CRI>80/ 2700K	18 18°	24 24W	N No Driver	W White	B Black	
	830 CRI>80/ 3000K	30 30°	36 36W	F On-Off	B Black	M Matt	
	840 CRI>80/ 4000K	65 65°		P Phase Dim		W White	
	927 CRI>90/ 2700K			A 1-10V Dim			
	930 CRI>90/ 3000K			D DALI Dim			

TAKEO T200-TW – High Efficiency Fixed Downlight









Quick Info

- Ceiling Cut-out: Ø200mm
- Bridgelux LED: 25W, CRI>90
- CCT: Tunable White 2700K-6500K
- Beam Angle: 60°
- Lumen Output: Up to Max.1900lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: DALI DT8 Dim

Light Distribution

3000K





Trim Finsh



White Black

No Driver	289,00 €
DALI DIM	329,00 €

Reflector Options



White Matt Black

Order Info (TAKEO T200-TW in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
25W	28W	36V	700mA	90	2700K-6500k	60°	Max.1900lm	TL1-9TW6025N-WM
					@2700K	60°	1700lm	
					@3000K	60°	1750lm	
					@4000K	60°	1850lm	
					@5000K	60°	1900lm	
					@6500K	60°	1900lm	

Code Remark: N=N(No Driver) D=D(DALI DT8 Dim)


Coding

TL1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TL1 TAKEO T200 TW	9TW CRI>90 2700K-6500K	60 60°	25 25W	N No Driver D DALI DT8 Dim	W White B Black	B Black M Matt W White	


TAKEO T150C Pro – High Efficiency Fixed Downlight



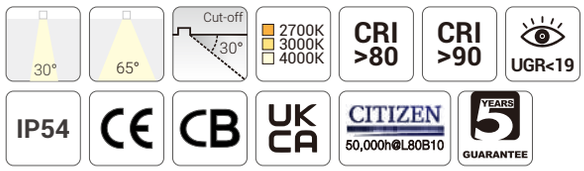


Quick Info


- CITIZEN LED: 17W, 24W, CRI>90, CRI>80
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 30° , 65°
- Lumen Output: Up to 3800lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K





Housing Finsh



White Black

No Driver	249,00 €
ON-OFF	269,00 €
Phase Dim	279,00 €
DALI DIM	299,00 €

Order Info (TAKEO T150C Pro in White Housing & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17W	19W	36V	500mA	80	2700K	30°	3000lm	2450lm	TMC4-8273017N-WM
						65°	3000lm	2000lm	TMC4-8276517N-WM
					3000K	30°	3200lm	2600lm	TMC4-8303017N-WM
						65°	3200lm	2100lm	TMC4-8306517N-WM
					4000K	30°	3500lm	2800lm	TMC4-8403017N-WM
						65°	3500lm	2300lm	TMC4-8406517N-WM
24W	26W	36V	700mA	80	2700K	30°	4000lm	3300lm	TMC4-8273024N-WM
						65°	4000lm	2700lm	TMC4-8276524N-WM
					3000K	30°	4200lm	3500lm	TMC4-8303024N-WM
						65°	4200lm	2850lm	TMC4-8306524N-WM
					4000K	30°	4500lm	3800lm	TMC4-8403024N-WM
						65°	4500lm	3000lm	TMC4-8406524N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black

Coding

TMC4 – *** ** ** * – * * – *

MODEL	CRI/ CCT	Beam Angle	LED Power	Control	Housing Finish	Reflector Color	Accessory
TMC4 TAKEO T150C Pro	827 CRI>80/ 2700K	30 30°	17 17W	N No Driver	W White	B Black	
	830 CRI>80/ 3000K	65 65°	24 24W	F On-Off	B Black	M Matt	
	840 CRI>80/ 4000K			P Phase Dim		W White	
	927 CRI>90/ 2700K			A 1-10V Dim			
	930 CRI>90/ 3000K			D DALI Dim			
	940 CRI>90/ 4000K						

BACK

TAKEO TS68 – High Efficiency Fixed Downlight





25° 60° Cut-off 40° 2700K 3000K 4000K CRI >80 CRI >90 UGR<19

IP54 CE CB UKCA ETL Intertek CITIZEN 50,000h@L80B10 5 YEARS GUARANTEE PEP eco PASS PORT

Quick Info


- Ceiling Cut-out: 68x68mm
- CITIZEN LED: 7.5W, 11W, CRI>90, CRI>80
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 25°,, 60°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

3000K





Trim Finsh



White Black

No Driver	69,00 €
ON-OFF	79,00 €
Phase Dim	89,00 €
DALI DIM	109,00 €

Order Info (TAKEO TS68 in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5W	9W	31V	250mA	80	2700K	25°	1000lm	680lm	TTS1-8272508N-WM
						60°	1000lm	680lm	TTS1-8275008N-WM
					3000K	25°	1100lm	700lm	TTS1-8302508N-WM
						60°	1100lm	700lm	TTS1-8305008N-WM
					4000K	25°	1200lm	750lm	TTS1-8402508N-WM
						60°	1200lm	750lm	TTS1-8405008N-WM
11W	13W	31V	350mA	80	2700K	25°	1300lm	870lm	TTS2-8272511N-WM
						60°	1300lm	870lm	TTS2-8275011N-WM
					3000K	25°	1400lm	900lm	TTS2-8302511N-WM
						60°	1400lm	900lm	TTS2-8305011N-WM
					4000K	25°	1500lm	950lm	TTS2-8402511N-WM
						60°	1500lm	950lm	TTS2-8405011N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black

Coding

TTS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TTS1 TAKEO TS68-7.5W	827 CRI>80/ 2700K	25 25°	08 7.5W	N No Driver	W White	B Black	
TTS2 TAKEO TS68-11W	830 CRI>80/ 3000K	60 60°	11 11W	F On-Off	B Black	M Matt	
	840 CRI>80/ 4000K			P Phase Dim		W White	
	927 CRI>90/ 2700K			A 1-10V Dim			
	930 CRI>90/ 3000K			D DALI Dim			
	940 CRI>90/ 4000K						

BACK

TAKEO TS100 Pro – High Efficiency Fixed Downlight





60° | Cut-off 35° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19

IP54 | CE | CB | UK CA | Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE | PEP eco PASS PORT®

Quick Info


- Ceiling Cut-out: 100x100mm
- CITIZEN LED: 8.5W, 12W, CRI>90, CRI>80
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 60°
- Lumen Output: Up to 1500lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

3000K



Trim Finsh



White Black

Order Info (TAKEO TS100 Pro in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8.5W	10W	34V	250mA	80	2700K	60°	1300lm	950lm	TSS4-8276009N-WM
					3000K	60°	1400lm	1000lm	TSS4-8306009N-WM
					4000K	60°	1500lm	1100lm	TSS4-8406009N-WM
12W	14W	34V	350mA	80	2700K	60°	1800lm	1250lm	TSS4-9276012N-WM
					3000K	60°	1900lm	1350lm	TSS4-9306012N-WM
					4000K	60°	2050lm	1500lm	TSS4-9406012N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black

No Driver	99,00 €
ON-OFF	109,00 €
Phase Dim	119,00 €
DALI DIM	139,00 €

Coding

TSS4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TSS4 TAKEO TS100 Pro	827 CRI>80/ 2700K	60 60°	09 8.5W	N No Driver	W White	B Black	
	830 CRI>80/ 3000K		12 12W	F On-Off	B Black	M Matt	
	840 CRI>80/ 4000K			P Phase Dim		W White	
	927 CRI>90/ 2700K			A 1-10V Dim			
	930 CRI>90/ 3000K			D DALI Dim			
	940 CRI>90/ 4000K						

TAKEO TS150 Pro – High Efficiency Fixed Downlight





70° | Cut-off 30° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19

IP54 | CE | CB | UKCA | ETL Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE | PEP eco PASS PORT

Quick Info


- Ceiling Cut-out: 150x150mm
- CITIZEN LED: 17W, 24W, CRI>90, CRI>80
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 70°
- Lumen Output: Up to 3000lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim





Light Distribution

3000K



Trim Finsh



White Black

Order Info (TAKEO TS150 Pro in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17W	19W	36V	500mA	80	2700K	70°	3000lm	1900lm	TSM4-8277017N-WM
					3000K	70°	3200lm	2050lm	TSM4-8307017N-WM
					4000K	70°	3500lm	2200lm	TSM4-8407017N-WM
24W	26W	36V	700mA	80	2700K	70°	4000lm	2700lm	TSM4-8277024N-WM
					3000K	70°	4200lm	2800lm	TSM4-8307024N-WM
					4000K	70°	4500lm	3000lm	TSM4-8407024N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black

No Driver	169,00 €
ON-OFF	179,00 €
Phase Dim	199,00 €
DALI DIM	209,00 €

Coding

TSM4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TSSM4 TAKEO TS150 Pro	827 CRI>80/ 2700K	70 70°	17 17W	N No Driver	W White	B Black	
	830 CRI>80/ 3000K		24 24W	F On-Off	B Black	M Matt	
	840 CRI>80/ 4000K			P Phase Dim		W White	
	927 CRI>90/ 2700K			A 1-10V Dim			
	930 CRI>90/ 3000K			D DALI Dim			
	940 CRI>90/ 4000K						

BACK

TAKEO TS200 Pro – High Efficiency Fixed Downlight





70° | Cut-off 35° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19

IP54 | CE | CB | UKCA | Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE | PEP eco PASS PORT®

Quick Info


- Ceiling Cut-out: 200x200mm
- CITIZEN LED: 24W, 36W, CRI>90, CRI>80
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 70°
- Lumen Output: Up to 4200lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim





Light Distribution

3000K



Trim Finsh




White Black

Order Info (TAKEO TS200 Pro in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24W	26W	34V	700mA	80	2700K	70°	4200lm	2700lm	TSL4-8277024N-WM
					3000K	70°	4400lm	2800lm	TSL4-8307024N-WM
					4000K	70°	4700lm	3000lm	TSL4-8407024N-WM
36W	40W	34V	1050mA	80	2700K	70°	5600lm	3700lm	TSL4-8277036N-WM
					3000K	70°	6000lm	3900lm	TSL4-8307036N-WM
					4000K	70°	6500lm	4200lm	TSL4-8407036N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black

No Driver	229,00 €
ON-OFF	239,00 €
Phase Dim	259,00 €
DALI DIM	269,00 €


Coding


TSL4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TSL4 TAKEO TS200 Pro	827 CRI>80/ 2700K	70 70°	24 24W	N No Driver	W White	B Black	
	830 CRI>80/ 3000K		36 36W	F On-Off	B Black	M Matt	
	840 CRI>80/ 4000K			P Phase Dim		W White	
	927 CRI>90/ 2700K			A 1-10V Dim			
	930 CRI>90/ 3000K			D DALI Dim			
	940 CRI>90/ 4000K						

VISION


The Cut-Out 68
Powerful
Fixed Downlight
Wall Washer Downlight

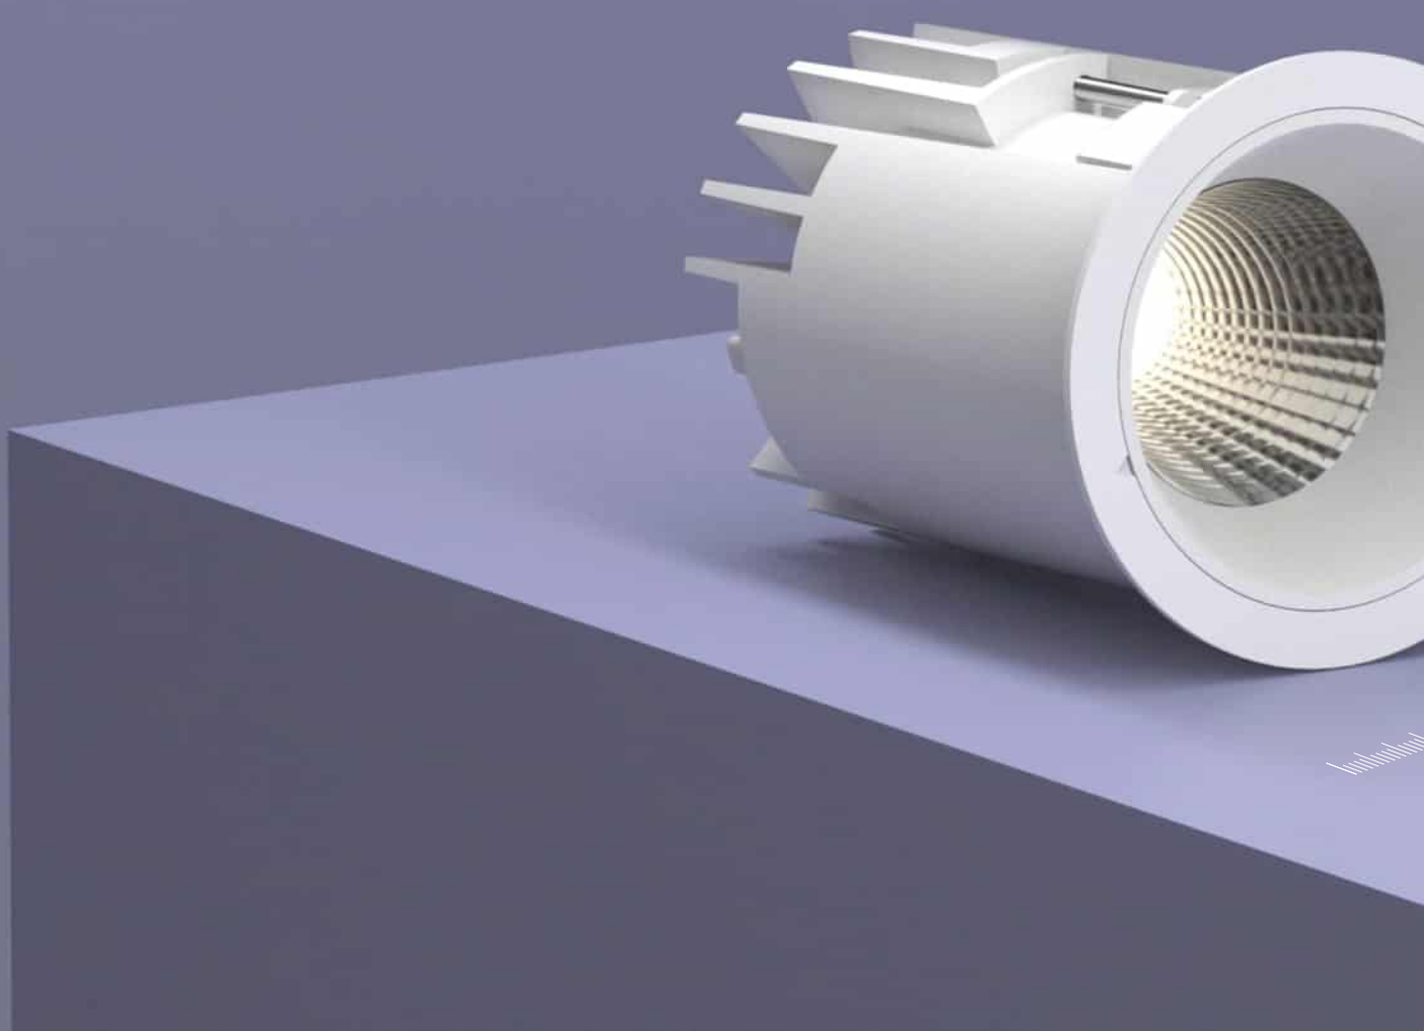


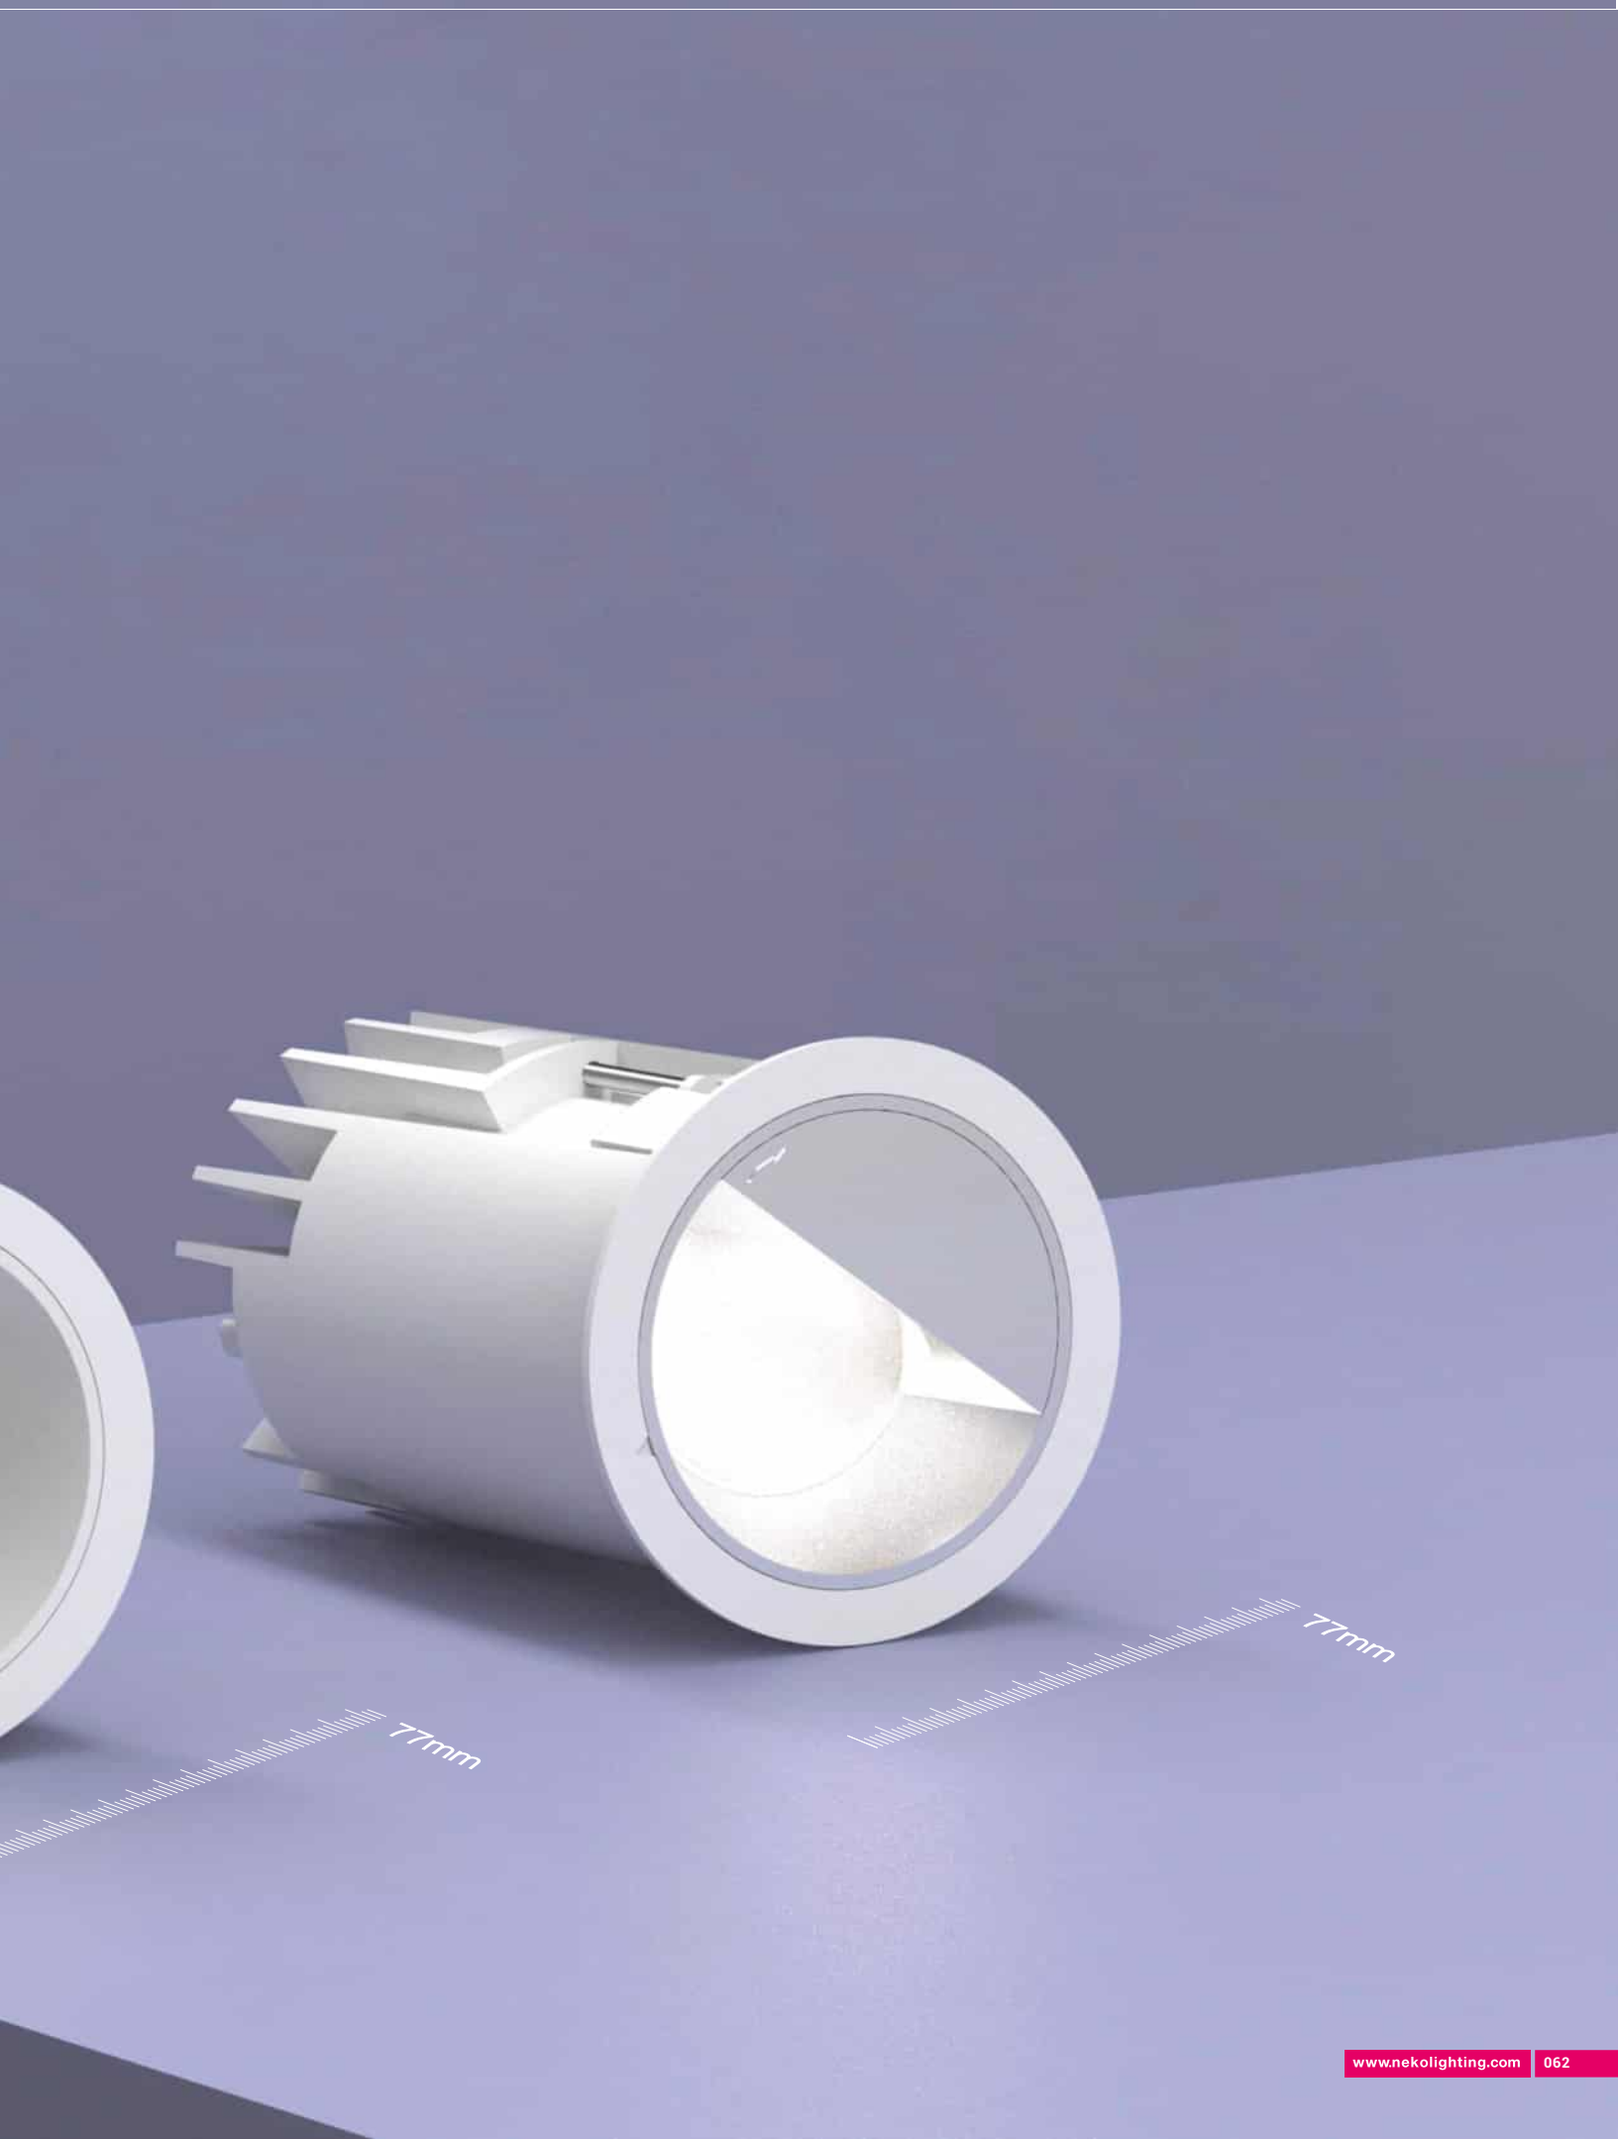
77mm
77mm

VISION V68 – The Cut-Out 68 Powerful Fixed Downlight







18° 40° Cut-off 30° 2700K 3000K 4000K CRI >90 UGR<19


IP20 CE CB UKCA Intertek CITIZEN 50,000h@L80B10 5 YEARS GUARANTEE PEP eco PASS PORT


Quick Info

- Ceiling Cut-out: Ø68mm
- CITIZEN LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 40°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: IP20 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K





Order Info (VISION V68 in White Trim & Specual Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	18°	1400lm	1100lm	VF68-9271813N-WS
						40°	1400lm	1100lm	VF68-9274013N-WS
					3000K	18°	1500lm	1200lm	VF68-9301813N-WS
						40°	1500lm	1200lm	VF68-9304013N-WS
					4000K	18°	1600lm	1300lm	VF68-9401813N-WS
						40°	1600lm	1300lm	VF68-9404013N-WS
18W	21W	36V	500mA	90	2700K	18°	1900lm	1500lm	VF68-9271818N-WS
						40°	1900lm	1500lm	VF68-9274018N-WS
					3000K	18°	2000lm	1600lm	VF68-9301818N-WS
						40°	2000lm	1600lm	VF68-9304018N-WS
					4000K	18°	2200lm	1700lm	VF68-9401818N-WS
						40°	2200lm	1700lm	VF68-9404018N-WS

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

No Driver	89,00 €
ON-OFF	99,00 €
Phase Dim	119,00 €
DALI DIM	129,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Coding

VF68 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
VF68 VISION V68	927 CRI>90/ 2700K	18 18°	13 13W	N No Driver	W White	B Black	
	930 CRI>90/ 3000K	40 40°	18 18W	F On-Off	B Black	M Matt	
	940 CRI>90/ 4000K			P Phase Dim		W White	
				A 1-10V Dim		D Dark Light	
				D DALI Dim		S Specuculr	
						G Gold	

BACK

VISION V68W – The Cut-Out 68 Powerful Wall Washer Downlight







Wall Washer | 2700K 3000K 4000K | CRI >90


IP20 | CE | CB | UKCA | Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE | PEP eco PASS PORT


Quick Info

- Ceiling Cut-out: Ø68mm
- CITIZEN LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: Wall Washer
- Lumen Output: Up to 1170lm System Luminous Flux
- IP Class: IP20 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K





Trim Finsh


White


Black

No Driver	109,00 €
ON-OFF	129,00 €
Phase Dim	149,00 €
DALI DIM	159,00 €

Order Info (VISION V68W in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	Wall Washer	1400lm	780lm	VW68-927WW13N-WM
					3000K	Wall Washer	1500lm	820lm	VW68-930WW13N-WM
					4000K	Wall Washer	1600lm	870lm	VW68-940WW13N-WM
18W	21W	36V	500mA	90	2700K	Wall Washer	1900lm	1050lm	VW68-927WW18N-WM
					3000K	Wall Washer	2000lm	1100lm	VW68-930WW18N-WM
					4000K	Wall Washer	2200lm	1170lm	VW68-940WW18N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Reflector Options


Matt



Coding

VW68 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
VW68 VISION V68W	**927** CRI>90/ 2700K **930** CRI>90/ 3000K **940** CRI>90/ 4000K	**WW** Wall Washer	**13** 13W **18** 18W	**N** No Driver **F** On-Off **P** Phase Dim **A** 1-10V Dim **D** DALI Dim	**W** White **B** Black	**M** Matt	

PASSION


Excellent Balance Between Eye Comfort & High Efficiency

Light Source Deep Integrated for Glare Control (UGR<19) with a 30° Shielding Angle

Beam Angle in 60° with Opal Cover

Single CCT Version Available in 3000K or 4000K, for High Efficiency (up to 140lm/W) Switchable CCT
Swichtable CCT Version on Request:
In 3000K-3500K-4000K Switchable, Easier for Keeping Stock


IP54 Rating, Suitable for Indoor Environments with Moderate Moisture and Dust Levels. Product Finish in White-Specular(WS), White-Matt(WM), White-White(WW), Black-Black(BB)

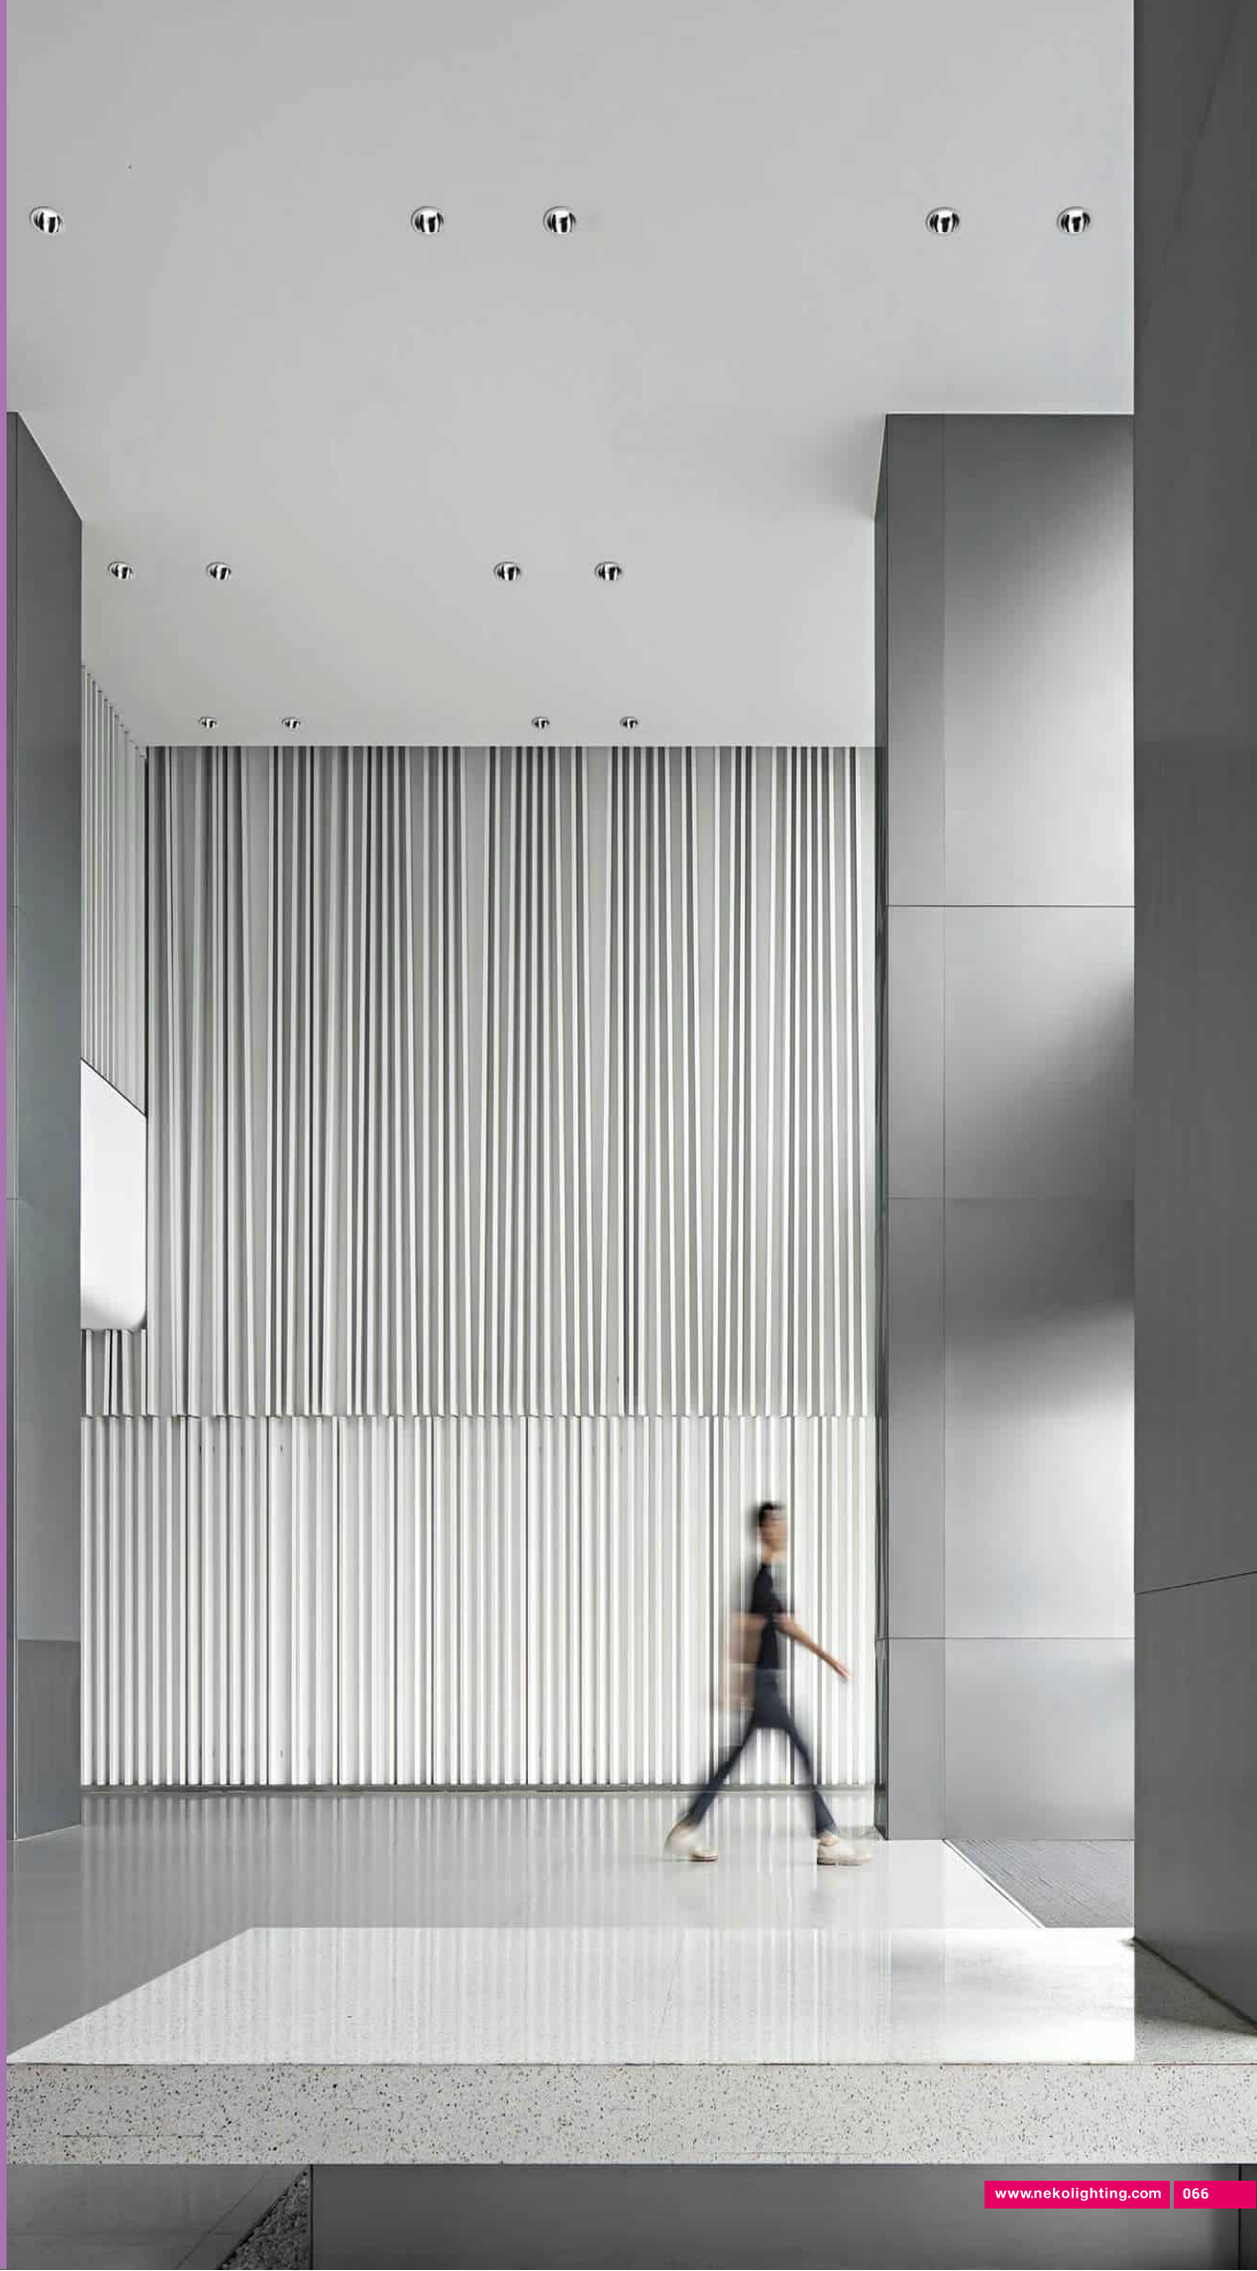



PASSION 100 – The High Efficiency Fixed Downlight

NEW







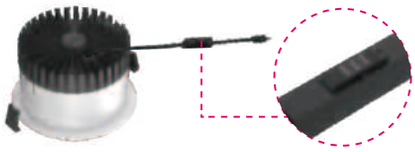

On Request: 3000K-3500K-4000K CCT Switchable Version

60° | Cut-off 30° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19


IP54 | CE | CB | UKCA | ETL Intertek | 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: Ø100mm
- LED: 8W, 12W, CRI>80, CRI>90
- CCT: Single 3000K, 4000K or 3000K-3500K-4000K CCT Switchable
- Beam Angle: 60° within Opal Cover
- Lumen Output: Up to 1750lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K



Finish



White-Specular | White-Matt | White-White | Black-Black

No Driver	69,00 €
ON-OFF	79,00 €
Phase Dim	89,00 €
DALI DIM	109,00 €

Order Info (PASSION 100 in White-Specular Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8W	10W	33V	250mA	80	3000K	60°	1500lm	1100lm	PAN4-8306008N-WS
					4000K	60°	1600lm	1200lm	PAN4-8406008N-WS
12W	14W	33V	350mA	80	3000K	60°	2100lm	1650lm	PAN4-8306012N-WS
					4000K	60°	2300lm	1750lm	PAN4-8406012N-WS

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Coding

PAN4 – *** ** ** * – ** – *


Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish-Reflector Color	Accessory
PAN4 PASSION 100	830 CRI>80/ 3000K	60 60°	08 8W	N No Driver	WS White-Specular	
	840 CRI>80/ 4000K		12 12W	F On-Off	WM White-Matt	
	8S3 CRI>80/ 3000K-3500K-4000K			P Phase Dim	WW White-White	
	930 CRI>90/ 3000K			A 1-10V Dim	BB Black-Black	
	940 CRI>90/ 4000K			D DALI Dim		
	9S3 CRI>90/ 3000K-3500K-4000K					


BACK

PASSION 150 – The High Efficiency Fixed Downlight

NEW





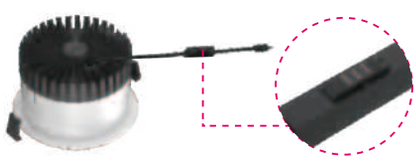

On Request: 3000K-3500K-4000K CCT Switchable Version

60° | Cut-off 30° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19


IP54 | CE | CB | UK CA | Intertek | 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: Ø150mm
- LED: 16W, 23W, CRI>80, CRI>90
- CCT: Single 3000K, 4000K or 3000K-3500K-4000K CCT Switchable
- Beam Angle: 60° within Opal Cover
- Lumen Output: Up to 3500lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K



Finish



White-Specular | White-Matt | White-White | Black-Black

No Driver	99,00 €
ON-OFF	119,00 €
Phase Dim	139,00 €
DALI DIM	159,00 €

Order Info (PASSION 150 in White-Specular Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16W	18W	33V	500mA	80	3000K	60°	3100lm	2450lm	PAN6-8306016N-WS
					4000K	60°	3400lm	2600lm	PAN6-8406016N-WS
23W	25W	33V	700mA	80	3000K	60°	3900lm	3350lm	PAN6-8306023N-WS
					4000K	60°	4200lm	3500lm	PAN6-8406023N-WS

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Coding

PAN6 – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish-Reflector Color	Accessory
PAN6 PASSION 150	830 CRI>80/ 3000K	60 60°	16 16W	N No Driver	WS White-Specular	
	840 CRI>80/ 4000K		23 23W	F On-Off	WM White-Matt	
	8S3 CRI>80/ 3000K-3500K-4000K			P Phase Dim	WW White-White	
	930 CRI>90/ 3000K			A 1-10V Dim	BB Black-Black	
	940 CRI>90/ 4000K			D DALI Dim		
	9S3 CRI>90/ 3000K-3500K-4000K					

BACK


PASSION 200 – The High Efficiency Fixed Downlight






Quick Info

- Ceiling Cut-out: Ø175mm-200mm
- LED: 23W, 30W, CRI>80, CRI>90
- CCT: Single 3000K, 4000K or 3000K-3500K-4000K CCT Switchable
- Beam Angle: 60° within Opal Cover
- Lumen Output: Up to 4600lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim




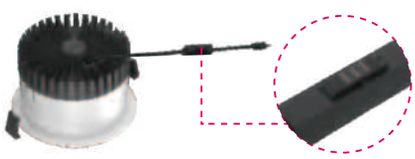

On Request: 3000K-3500K-4000K CCT Switchable Version

Light Distribution

3000K



Finish



White-Specular | White-Matt | White-White | Black-Black

No Driver	119,00 €
ON-OFF	139,00 €
Phase Dim	149,00 €
DALI DIM	169,00 €

Order Info (PASSION 200 in White-Specular Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
23W	25W	33V	700mA	80	3000K	60°	3900lm	3500lm	PAN8-8306023N-WS
					4000K	60°	4200lm	3650lm	PAN8-8406023N-WS
30W	33W	33V	900mA	80	3000K	60°	5000lm	4350lm	PAN8-8306030N-WS
					4000K	60°	5300lm	4600lm	PAN8-8406030N-WS

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Coding

PAN8 – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish-Reflector Color	Accessory
PAN8 PASSION 200	830 CRI>80/ 3000K	60 60°	23 23W	N No Driver	WS White-Specular	
	840 CRI>80/ 4000K		30 30W	F On-Off	WM White-Matt	
	8S3 CRI>80/ 3000K-3500K-4000K			P Phase Dim	WW White-White	
	930 CRI>90/ 3000K			A 1-10V Dim	BB Black-Black	
	940 CRI>90/ 4000K			D DALI Dim		
	9S3 CRI>90/ 3000K-3500K-4000K					

BACK

CLUB

Modular Downlight System
Power from 6W to 18W
Round & Square, Trim & Trimless
Various Trims for Different Applications

Project: Hotel Bellune, Paris, France



CLUB – M1 LED Module

NEW



15° 24° 36° 50°

2700K
3000K
4000K

CRI >90


CE CB UKCA

bridgelux 50,000h@L80B10

5 YEARS GUARANTEE


Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 6W, 9W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 36°, 50°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: Module IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K

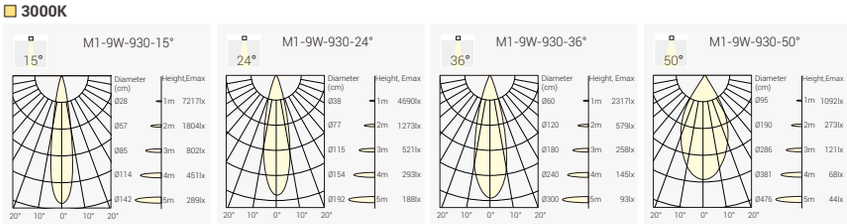

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	36V	250mA	90	2700K	15°	950lm	720lm	M1 -9271509N-NN
						24°	950lm	800lm	M1 -9272409N-NN
						36°	950lm	800lm	M1 -9273609N-NN
						50°	950lm	800lm	M1 -9275009N-NN
					3000K	15°	1050lm	750lm	M1 -9301509N-NN
						24°	1050lm	850lm	M1 -9302409N-NN
						36°	1050lm	850lm	M1 -9303609N-NN
						50°	1050lm	850lm	M1 -9305009N-NN
					4000K	15°	1150lm	800lm	M1 -9401509N-NN
						24°	1150lm	950lm	M1 -9402409N-NN
						36°	1150lm	950lm	M1 -9403609N-NN
						50°	1150lm	950lm	M1 -9405009N-NN
6W	8W	36V	180mA	90	2700K	15°	720lm	520lm	M1 -9271506N-NN
						24°	720lm	550lm	M1 -9272406N-NN
						36°	720lm	550lm	M1 -9273606N-NN
						50°	720lm	550lm	M1 -9275006N-NN
					3000K	15°	750lm	570lm	M1 -9301506N-NN
						24°	750lm	600lm	M1 -9302406N-NN
						36°	750lm	600lm	M1 -9303606N-NN
						50°	750lm	600lm	M1 -9305006N-NN
					4000K	15°	800lm	620lm	M1 -9401506N-NN
						24°	800lm	650lm	M1 -9402406N-NN
						36°	800lm	650lm	M1 -9403606N-NN
						50°	800lm	650lm	M1 -9405006N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


No Driver	29,00 €
ON-OFF	39,00 €
Phase Dim	49,00 €
DALI DIM	59,00 €

BACK

CLUB – M2 LED Module

NEW





15° 24° 36° 50° 2700K 3000K 4000K CRI >90


CE CB UK CA bridgelux 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 9W, 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 36°, 50°
- Lumen Output: Up to 1250lm System Luminous Flux
- IP Class: Module IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

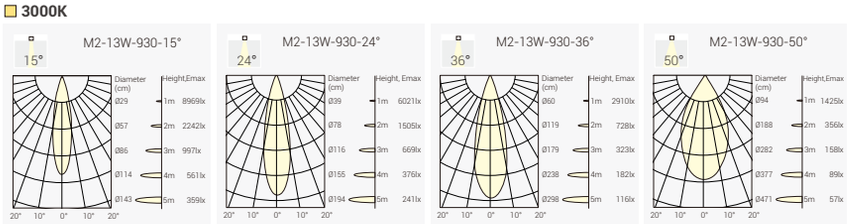

No Driver	39,00 €
ON-OFF	49,00 €
Phase Dim	59,00 €
DALI DIM	69,00 €


Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	15°	1300lm	900lm	M2 -9271513N-NN
						24°	1300lm	980lm	M2 -9272413N-NN
						36°	1300lm	980lm	M2 -9273613N-NN
						50°	1300lm	950lm	M2 -9275013N-NN
					3000K	15°	1450lm	950lm	M2 -9301513N-NN
						24°	1450lm	1150lm	M2 -9302413N-NN
						36°	1450lm	1150lm	M2 -9303613N-NN
						50°	1450lm	1100lm	M2 -9305013N-NN
					4000K	15°	1600lm	1100lm	M2 -9401513N-NN
						24°	1600lm	1250lm	M2 -9402413N-NN
						36°	1600lm	1250lm	M2 -9403613N-NN
						50°	1600lm	1200lm	M2 -9405013N-NN
9W	11W	36V	250mA	90	2700K	15°	950lm	720lm	M2 -9271509N-NN
						24°	950lm	800lm	M2 -9272409N-NN
						36°	950lm	800lm	M2 -9273609N-NN
						50°	950lm	780lm	M2 -9275009N-NN
					3000K	15°	1050lm	780lm	M2 -9301509N-NN
						24°	1050lm	850lm	M2 -9302409N-NN
						36°	1050lm	850lm	M2 -9303609N-NN
						50°	1050lm	800lm	M2 -9305009N-NN
					4000K	15°	1150lm	850lm	M2 -9401509N-NN
						24°	1150lm	950lm	M2 -9402409N-NN
						36°	1150lm	950lm	M2 -9403609N-NN
						50°	1150lm	900lm	M2 -9405009N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

CLUB – M3 LED Module





15° 25° 35° 60° | 2700K 3000K 4000K | CRI >90


IP54 | CE | CB | UK CA | CCC | ETL Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- Fit with CLUB Series Trims
- CITIZEN LED: 7.5W, 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 25°, 35°, 60°
- Lumen Output: Up to 1000lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

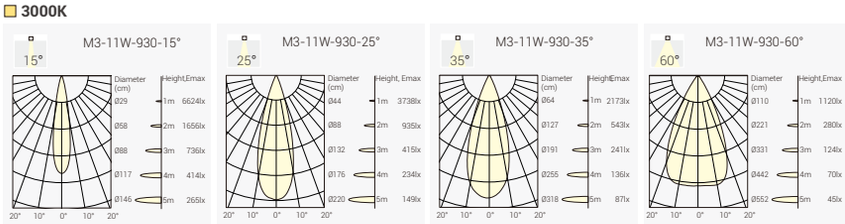

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	31V	350mA	90	2700K	15°	1000lm	900lm	M3 -9271511N-NN
						25°	1000lm	900lm	M3 -9272511N-NN
						35°	1000lm	900lm	M3 -9273511N-NN
						60°	1000lm	900lm	M3 -9276011N-NN
					3000K	15°	1100lm	950lm	M3 -9301511N-NN
						25°	1100lm	950lm	M3 -9302511N-NN
						35°	1100lm	950lm	M3 -9303511N-NN
						60°	1100lm	950lm	M3 -9306011N-NN
					4000K	15	1200lm	1000lm	M3 -9401511N-NN
						25°	1200lm	1000lm	M3 -9402511N-NN
						35°	1200lm	1000lm	M3 -9403511N-NN
						60°	1200lm	1000lm	M3 -9406011N-NN
7.5W	9W	31V	250mA	90	2700K	15°	850lm	650lm	M3 -9271508N-NN
						25°	850lm	650lm	M3 -9272508N-NN
						35°	850lm	650lm	M3 -9273508N-NN
						60°	850lm	650lm	M3 -9276008N-NN
					3000K	15°	900lm	700lm	M3 -9301508N-NN
						25°	900lm	700lm	M3 -9302508N-NN
						35°	900lm	700lm	M3 -9303508N-NN
						60°	900lm	700lm	M3 -9306008N-NN
					4000K	15°	950lm	750lm	M3 -9401508N-NN
						25°	950lm	750lm	M3 -9402508N-NN
						35°	950lm	750lm	M3 -9403508N-NN
						60°	950lm	750lm	M3 -9406008N-NN


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	39,00 €
ON-OFF	49,00 €
Phase Dim	59,00 €
DALI DIM	89,00 €

BACK

CLUB – M3 LED Module









Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 12W, CRI>95
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 35°, 60°
- Lumen Output: Up to Max.850lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K





No Driver	69,00 €
Phase Dim	89,00 €
DALI DIM	109,00 €

Order Info


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	14W	34V	350mA	95	1800K–3000K	35°	1100lm	Max.850lm	M3- 9D33512N-NN
						60°	1100lm	Max.850lm	M3- 9D36012N-NN

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



CLUB – M4 LED Module





20° 35° 60°

2700K
3000K
4000K

CRI >90


IP54 CE CB UKCA CCC ETL Intertek CITIZEN 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info


- Fit with CLUB Series Trims
- CITIZEN LED: 9W, 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 60°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K







LED power 9W / 13W

No Driver	59,00 €
ON-OFF	79,00 €
Phase Dim	89,00 €
DALI DIM	99,00 €

LED power 18W

No Driver	69,00 €
ON-OFF	89,00 €
Phase Dim	109,00 €
DALI DIM	119,00 €

Order Info


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	20°	1300lm	1100lm	M4 -9272013N-NN
						35°	1300lm	1100lm	M4 -9273513N-NN
						60°	1300lm	1100lm	M4 -9276013N-NN
					3000K	20°	1400lm	1200lm	M4 -9302013N-NN
						35°	1400lm	1200lm	M4 -9303513N-NN
						60°	1400lm	1200lm	M4 -9306013N-NN
					4000K	20	1500lm	1300lm	M4 -9402013N-NN
						35°	1500lm	1300lm	M4 -9403513N-NN
						60°	1500lm	1300lm	M4 -9406013N-NN
9W	11W	36V	250mA	90	2700K	20°	900lm	1100lm	M4 -9272009N-NN
						35°	900lm	1100lm	M4 -9273509N-NN
						60°	900lm	1100lm	M4 -9276009N-NN
					3000K	20°	1000lm	1200lm	M4 -9302009N-NN
						35°	1000lm	1200lm	M4 -9303509N-NN
						60°	1000lm	1200lm	M4 -9306009N-NN
					4000K	20°	1100lm	1300lm	M4 -9402009N-NN
						35°	1100lm	1300lm	M4 -9403509N-NN
						60°	1100lm	1300lm	M4 -9406009N-NN
18W	21W	36V	500mA	90	2700K	20°	1800lm	1500lm	M4 -9272018N-NN
						35°	1800lm	1500lm	M4 -9273518N-NN
						60°	1800lm	1500lm	M4 -9276018N-NN
					3000K	20°	1900lm	1600lm	M4 -9302018N-NN
						35°	1900lm	1600lm	M4 -9303518N-NN
						60°	1900lm	1600lm	M4 -9306018N-NN
					4000K	20°	2000lm	1700lm	M4 -9402018N-NN
						35°	2000lm	1700lm	M4 -9403518N-NN
						60°	2000lm	1700lm	M4 -9406018N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

BACK

CLUB – M4 LED Module







Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 12W, CRI>95
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 35°, 60°
- Lumen Output: Up to Max.850lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K





No Driver	89,00 €
Phase Dim	119,00 €
DALI DIM	129,00 €

Order Info


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	14W	34V	350mA	95	1800K–3000K	35°	1100lm	Max.850lm	M4- 9D33512N-NN
						60°	1100lm	Max.850lm	M4- 9D36012N-NN

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



CLUB – M4 Pro Architectural LED Module





18° 30° 36° 50° | 2700K 3000K 3500K 4000K | CRI >97


IP54 | CE | CB | UK CA | CCC | ETL Intertek | bridgelux 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 13W, 18W, CRI>97
- CCT: 2700K, 3000K, 3500K, 4000K Available as Standard
- Beam Angle: 15°/18°, 25°/30° , 35°/36°, 50°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

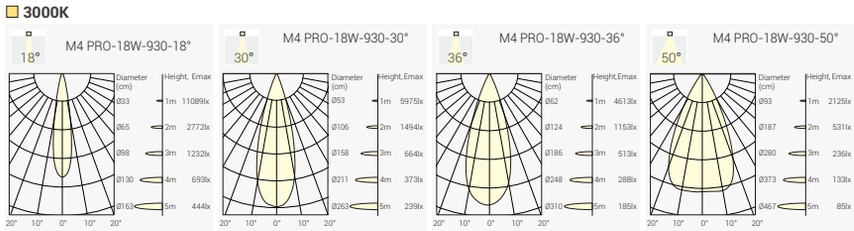

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	97	2700K	15°	1300lm	1050lm	M4P3 -0271513N-NN
						25°	1300lm	1050lm	M4P3 -0272513N-NN
						35°	1300lm	1050lm	M4P3 -0273513N-NN
						50°	1300lm	1000lm	M4P3 -0276013N-NN
					3000K	15°	1400lm	1100lm	M4P3 -0301513N-NN
						25°	1400lm	1100lm	M4P3 -0302513N-NN
						35°	1400lm	1100lm	M4P3 -0303513N-NN
						50°	1400lm	1050lm	M4P3 -0306013N-NN
					3500K	15°	1450lm	1150lm	M4P3 -0351513N-NN
						25°	1450lm	1150lm	M4P3 -0352513N-NN
						35°	1450lm	1150lm	M4P3 -0353513N-NN
						50°	1450lm	1100lm	M4P3 -0356013N-NN
					4000K	15	1500lm	1200lm	M4P3 -0401513N-NN
						25°	1500lm	1200lm	M4P3 -0402513N-NN
						35°	1500lm	1200lm	M4P3 -0403513N-NN
						50°	1500lm	1150lm	M4P3- 0406013N-NN
18W	21W	36V	500mA	97	2700K	18°	1900lm	1500lm	M4P4- 0271818N-NN
						30°	1900lm	1500lm	M4P4- 0273018N-NN
						36°	1900lm	1500lm	M4P4- 0273618N-NN
						50°	1900lm	1400lm	M4P4- 0275018N-NN
					3000K	18°	2000lm	1600lm	M4P4- 0301818N-NN
						30°	2000lm	1600lm	M4P4- 0303018N-NN
						36°	2000lm	1600lm	M4P4- 0303618N-NN
						50°	2000lm	1500lm	M4P4- 0305018N-NN
					3500K	18°	2150lm	1650lm	M4P4- 0351818N-NN
						30°	2150lm	1650lm	M4P4- 0353018N-NN
						36°	2150lm	1650lm	M4P4- 0353618N-NN
						50°	2150lm	1500lm	M4P4- 0355018N-NN
					4000K	18°	2200lm	1700lm	M4P4- 0401818N-NN
						30°	2200lm	1700lm	M4P4- 0403018N-NN
						36°	2200lm	1700lm	M4P4- 0403618N-NN
						50°	2200lm	1650lm	M4P4- 0405018N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


No Driver	79,00 €
ON-OFF	89,00 €
Phase Dim	99,00 €
DALI DIM	129,00 €

No Driver	79,00 €
ON-OFF	99,00 €
Phase Dim	119,00 €
DALI DIM	129,00 €

BACK

CLUB – M4 Pro Architectural LED Module





No Driver	79,00 €
ON-OFF	89,00 €
Phase Dim	99,00 €
DALI DIM	129,00 €




Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 7W, CRI>97
- CCT: 2700K, 3000K, 3500K, 4000K Available as Standard
- Beam Angle: 10°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K




Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	36V	200mA	97	2700K	10°	650lm	500lm	M4P1 -0271007N-NN
					3000K	10°	700lm	550lm	M4P1 -0301007N-NN
					3500K	10°	725lm	570lm	M4P1 -0351007N-NN
					4000K	10°	750lm	600lm	M4P1 -0401007N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)







Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 12W, CRI>90
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 38°, 50°
- Lumen Output: Up to 900lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K





No Driver	89,00 €
Phase Dim	109,00 €
DALI DIM	129,00 €

Order Info


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	14W	34V	350mA	90	1800K-3000K	38°	1100lm	Max. 900lm	M4P5-0D33812N-NN
						50°	1100lm	Max. 850lm	M4P5-0D35012N-NN

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



BACK






No Driver	99,00 €
DALI DIM	169,00 €


Quick Info


- Fit with CLUB Series Trims
- Bridgelux LED: 9W, 13W, CRI>90,
- CCT: Tunable White 2700K-6500K
- Beam Angle: 20°, 35°, 50°
- Lumen Output: Up to 1100lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: DALI DT8 Dim

Light Distribution

3000K








Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
9W	11W	36V	250mA	90	2700K-6500K	20°	700lm-850lm	M4P6-9TW2009N-NN
						38°	700lm-850lm	M4P6-9TW3809N-NN
						50°	700lm-850lm	M4P6-9TW5009N-NN
					@2700K	38°	700lm	
					@3000K	38°	730lm	
					@4000K	38°	800lm	
					@5000K	38°	850lm	
					@6500K	38°	850lm	
13 W	15 W	36 V	350 mA	90	2700K-6500K	20°	900lm-1100lm	M4P6-9TW2013N-NN
						38°	900lm-1100lm	M4P6-9TW3813N-NN
						50°	850lm-1050lm	M4P6-9TW5013N-NN
					@2700K	38°	900lm	
					@3000K	38°	950lm	
					@4000K	38°	1000lm	
					@5000K	38°	1100lm	
					@6500K	38°	1100lm	

Code Remark: N=N(No Driver) D=D(DALI DT8 Dim)

Tunable White 2700K 3000K 3500K 4000K 5000K 6500K

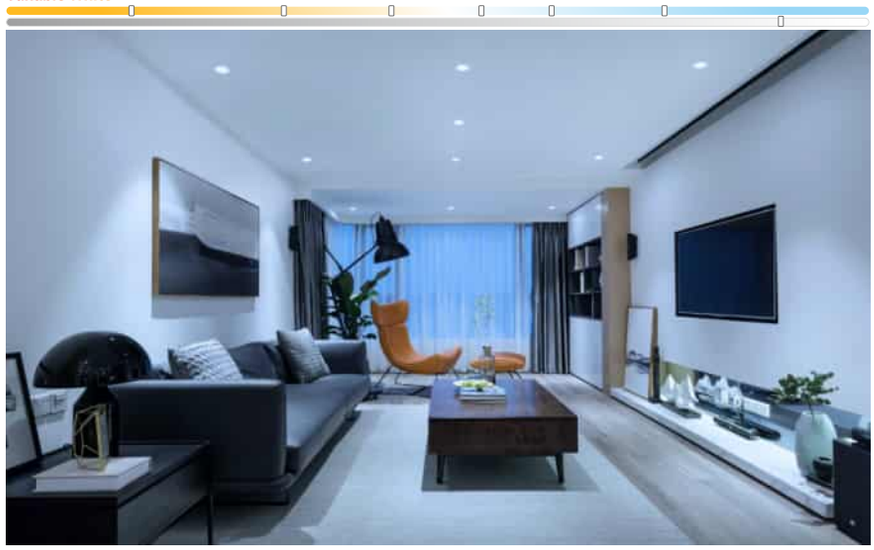

TA5 29,00 €





M3-TA5


97
M4-TA5


108
M4 PRO-TA5


Ø85


Ø85


Ø85

TA6 29,00 €




M3-TA6


97
M4-TA6


108
M4 PRO-TA6


76
Ø85


Ø85


Ø85

KA5-EI 49,00 €




76
M3-KA5-EI


97
M4-KA5-EI


108
M4 PRO-KA5-EI


Ø71
Ø120


Ø71
Ø120


Ø71
Ø120

KA6-EI 49,00 €




M3-KA6-EI


M4-KA6-EI


M4 PRO-KA6-EI


76
Ø71
Ø120


Ø71
Ø120


Ø71
Ø120

KA5 39,00 €




M3-KA5


M4-KA5


M4 PRO-KA5


Ø71
136


Ø71
136


Ø71
136

KA6 39,00 €




M3-KA6


M4-KA6


M4 PRO-KA6


Ø71
136


Ø71
136


Ø71
136

TA7 29,00 €





M3-TA7




M4-TA7




M4 PRO-TA7



TA8 29,00 €





M3-TA8




M4-TA8





M4 PRO-TA8



KA7-EI 49,00 €





M3-KA7-EI




M4-KA7-EI




M4 PRO-KA7-EI



KA8-EI 49,00 €





M3-KA8-EI




M4-KA8-EI




M4 PRO-KA8-EI



KA7 39,00 €




M3-KA7




M4-KA7




M4 PRO-KA7



KA8 49,00 €




M3-KA8




M4-KA8





M4 PRO-KA8



NEW


TF5 29,00 €



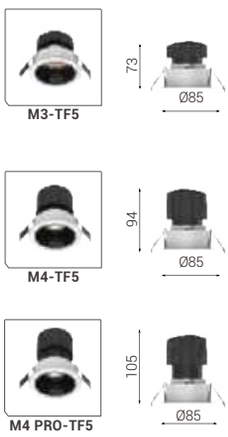

TRF1/ TRF1-IP44 39,00 €




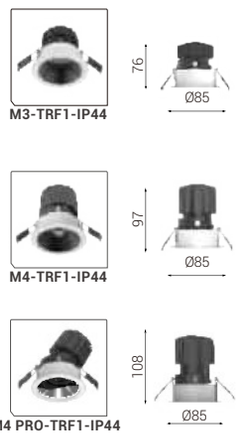

NEW


KF5-EI 39,00 €



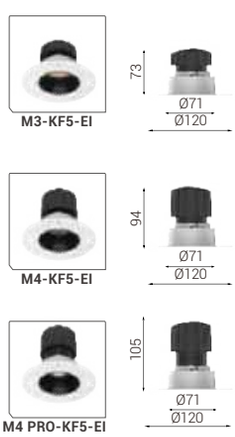

KRF1-EI/ KRF1-EI-IP44 39,00 €




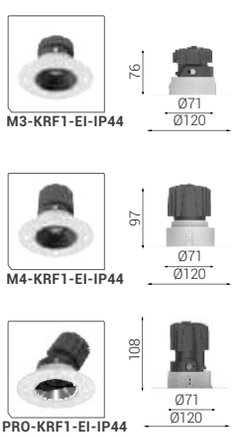

NEW


KF5 39,00 €



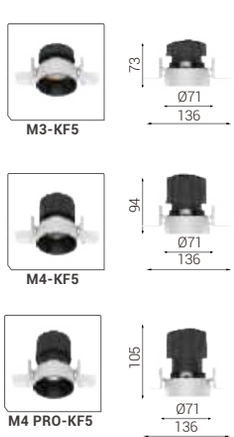

KRF1/ KRF1-IP44 39,00 €



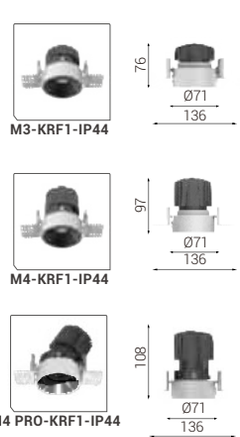


BACK

TA5-IP65 39,00 €





M3-TA5-IP65





M4-TA5-IP65





M4 PRO-TA5-IP65



NEW

TSF1 39,00 €

75X75 | 355° | UK CA | CE




M3-TSF1




M4-TSF1




M4 PRO-TSF1



TSA1 39,00 €

75X75 | 355° | 30° | UK CA | CE




M3-TSA1




M4-TSA1




M4 PRO-TSA1



NEW

KSF1-EI 39,00 €

80X80 | 355° | UK CA | CE




M3-KSF1-EI




M4-KSF1-EI




M4 PRO-KSF1-EI



KSA1-EI 49,00 €

80X80 | 355° | 30° | UK CA | CE




M3-KSA1-EI




M4-KSA1-EI




M4 PRO-KSA1-EI



NEW

KSF1 39,00 €

75X75 | 355° | UK CA | CE




M3-KRF1




M4-KRF1




M4 PRO-KRF1



KSA1 49,00 €


75X75 | 355° | 30° | UK CA | CE




M3-KSA1




M4-KSA1




M4 PRO-KSA1



BACK

TSA2 39,00 €


75X75 | 355° | 30° | UK CA | CE




M3-TSA2




M4-TSA2




M4 PRO-TSA2




TSA3 29,00 €


75X75 | 355° | 30° | UK CA | CE




M3-TSA3




M4-TSA3




M4 PRO-TSA3



KSA2-EI 59,00 €

80x80 | 355° | 30° | UK CA | CE




M3-KSA2-EI




M4-KSA2-EI




M4 PRO-KSA2-EI




KSA3-EI 49,00 €


80x80 | 355° | 30° | UK CA | CE




M3-KSA3-EI




M4-KSA3-EI




M4 PRO-KSA3-EI




KSA2 49,00 €

75X75 | 355° | 30° | UK CA | CE




M3-KSA2




M4-KSA2




M4 PRO-KSA2




KSA3 49,00 €


75X75 | 355° | 30° | UK CA | CE




M3-KSA3




M4-KSA3





M4 PRO-KSA3



TSA1D 69,00 €

145X75 | 355° | 30° | UK CA | CE





M3/M4-TSA1D




M4 PRO-TSA1D


TSA2D 89,00 €

145X75 | UK CA | CE





M3/M4-TSA2D




M4 PRO-TSA2D

KSA1D-EI 89,00 €

145X80 | 355° | 30° | UK CA | CE





M3/M4-KSA1D-EI



M4 PRO-KSA1D-EI

KSA2D-EI 99,00 €

145X80 | UK CA | CE





M3/M4-KSA2D-EI




M4 PRO-KSA2D-EI

KSA1D 89,00 €

145X75 | 355° | 30° | UK CA | CE





M3/M4-KSA1D




M4 PRO-KSA1D


KSA2D 99,00 €

145X75 | UK CA | CE





M3/M4-KSA2D




M4 PRO-KSA2D

BACK

TSA3D 59,00 €

145X75 | 355° | 30° | UK CA | CE





M3/M4-TSA3D




M4 PRO-TSA3D

KSA2D-EI 99,00 €

145X80 | UK CA | CE





M3/M4-KSA2D-EI




M4 PRO-KSA3D-EI

KSA3D 69,00 €

145X75 | UK CA | CE





M3/M4-KSA3D



M4 PRO-KSA3D


SKYJACK

Incl. Phase Dim Driver & Fast Connection Box



SKYJACK A68 – Classic Tiltable Downlight






Quick Info


- Ceiling Cut-out: Ø68mm
- Bridgelux LED: 9W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 38°
- Lumen Output: Up to 750lm System Luminous Flux
- IP Class: IP44 from Front
- LED Driver: Phase Dim

Light Distribution

2700K



3000K



Trim Finsh



Black(BB) White(WW)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K	38°	900lm	720lm	SJA1-9273809P-WW
							900lm	720lm	SJA1-9273809P-BB
					3000K	38°	950lm	750lm	SJA1-9303809P-WW
							950lm	750lm	SJA1-9303809P-BB


Code Remark: P=P(Phase Dim)

Phase Dim 69,00 €

BACK


SKYJACK A68 – Classic Tiltable Downlight



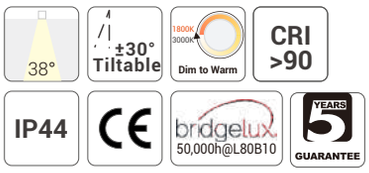


Quick Info

- Ceiling Cut-out: Ø68mm
- Bridgelux LED: 6W, CRI>90
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 38°
- Lumen Output: Up to Max.450lm System Luminous Flux
- IP Class: IP44 from Front
- LED Driver: Phase Dim



Light Distribution

3000K



Trim Finsh




Black(BB) White(WW)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	18 V	350 mA	90	1800K–3000k	38°	650lm	Max.450lm	SJA1-9D33806P-WW
							650lm	Max.450lm	SJA1-9D33806P-BB


Code Remark: P=P(Phase Dim)

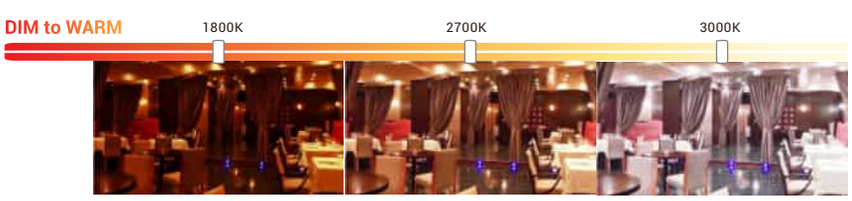

Phase Dim	89,00 €

SKYJACK D – Recessed Architectural Tiltable Downlight






38° | Cut-off 30° | ±30° Tiltable | 2700K 3000K | CRI >90 | UGR<19 | IP44 | CE | bridgelux 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: Ø70mm
- Bridgelux LED: 9W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 38°
- Lumen Output: Up to 750lm System Luminous Flux
- IP Class: IP44 from Front
- LED Driver: Phase Dim

Light Distribution

2700K



3000K



Trim Finsh



Black(BB)



White(WW)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K	38°	900lm	700lm	SJD-9273809P-WW
							900lm	650lm	SJD-9273809P-BB
					3000K	38°	950lm	750lm	SJD-9303809P-WW
							950lm	700lm	SJD-9303809P-BB


Code Remark: P=P(Phase Dim)

Phase Dim 69,00 €

BACK

SKYJACK D-DW – Recessed Architectural Tiltable Downlight






38° | Cut-off 30° | ±30° Tiltable | 1800K 3000K Dim to Warm | CRI >90 | UGR<19 | IP44 | CE | bridgelux 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: Ø70mm
- Bridgelux LED: 6W, CRI>90, Bridgelux
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 38°
- Lumen Output: Up to Max.450lm System Luminous Flux
- IP Class: IP44 from Front
- LED Driver: Phase Dim

Light Distribution

3000K



Trim Finsh



Black(BB)




White(WW)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	18 V	350 mA	90	1800K–3000k	38°	650lm	Max.450lm	SJD-9D33806P-WW
							650lm	Max.400lm	SJD-9D33806P-BB

Code Remark: P=P(Phase Dim)


DIM to WARM 1800K 2700K 3000K

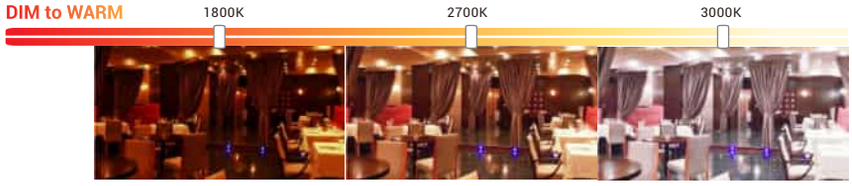

Phase Dim 89,00 €

SKYJACK F – IP65 Fixed Downlight






38° | 2700K 3000K | CRI >90 | IP65 | CE | bridgelux 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: Ø68mm
- Bridgelux LED: 9W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 38°
- Lumen Output: Up to 750lm System Luminous Flux
- IP Class: IP65 from Front
- LED Driver: Phase Dim

Light Distribution

2700K



3000K



Trim Finsh


Black(BB)


White(WW)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K	38°	900lm	720lm	SJF-9273809P-WW
							900lm	720lm	SJF-9273809P-BB
					3000K	38°	950lm	750lm	SJF-9303809P-WW
							950lm	750lm	SJF-9303809P-BB

Code Remark: P=P(Phase Dim)

Phase Dim 79,00 €

BACK


SKYJACK 145 – Shop & Corridors Tiltable Downlight






Quick Info

- Ceiling Cut-out: Ø145mm
- Bridgelux LED: 25W, CRI>90, Bridgelux
- CCT: 3000K Available as Standard
- Beam Angle: 30°
- Lumen Output: Up to 2200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K



Trim Finsh



Black(BB)



White(WW)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	3000K	30°	2500lm	2200lm	SJA2-9303025N-WW SJA2-9303025N-BB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	109,00 €
ON-OFF	129,00 €
Phase Dim	139,00 €
DALI Dim	169,00 €

KENZO


Recessed Adjustable Spotlight
Powerful Light & Energy Efficient
Suitable for any Architectural Ambience



Project: NETO, Israel

KENZO K1X30 – Recessed Adjustable Spotlight







Quick Info


- Ceiling Cut-out: Ø46mm for Trim Version
- CREE LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 55°
- Lumen Output: Up to 350lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

2700K







Housing Finish


White


Black

No Driver	69,00 €
ON-OFF	79,00 €
Phase Dim	89,00 €
DALI Dim	109,00 €

Reflector Options


Black


Gold


White

Optional accessary


Honeycomb

Code for K1S-9405504N-WG with Honeycomb
K1S-9405504N-WG-H

Honeycomb: +9,00€

Order Info (KENZO K1X30 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	12V	350mA	90	2700K	15°	350lm	300lm	K1S-9271504N-WB
						30°	350lm	300lm	K1S-9273004N-WB
						55°	350lm	300lm	K1S-9275504N-WB
					3000K	15°	400lm	320lm	K1S-9301504N-WB
						30°	400lm	320lm	K1S-9303004N-WB
						55°	400lm	320lm	K1S-9305504N-WB
					4000K	15°	450lm	350lm	K1S-9401504N-WB
						30°	450lm	350lm	K1S-9403004N-WB
						55°	450lm	350lm	K1S-9405504N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim D=D(DALI Dim)

Coding

K1S – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
K1S KENZO K1X30	927 CRI>90/ 2700K	15 15°	04 4W	N No Driver	W White	B Black	H Honeycomb
	930 CRI>90/ 3000K	30 30°		F On-Off	B Black	W White	
	940 CRI>90/ 4000K	55 55°		P Phase Dim		G Gold	
				A 1-10V Dim			
				D DALI Dim			

BACK

KENZO K1X55– Recessed Adjustable Spotlight




18° 24° 36° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | CITIZEN 50,000h@L80B10 | 0-90° 350° | 5 YEARS GUARANTEE


Quick Info


- Ceiling Cut-out: Ø80mm for Trim Version
- CITIZEN LED: 9W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°
- Lumen Output: Up to 800lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

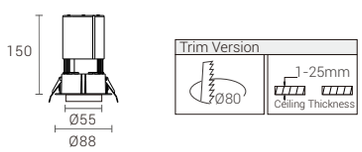


Light Distribution

3000K







Housing Finish



White



Black

No Driver	139,00 €
ON-OFF	149,00 €
Phase Dim	159,00 €
DALI Dim	179,00 €

Reflector Options



Black



Gold



White

Optional accessary



Honeycomb

Code for K1M-9402409N-WG with Honeycomb
K1M-9402409-WG-H

Honeycomb: +9,00€

Order Info (KENZO K1X55 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	36V	250mA	90	2700K	18°	850lm	700lm	K1M-9271809N-WB
						24°	850lm	700lm	K1M-9272409N-WB
						36°	850lm	700lm	K1M-9273609N-WB
					3000K	18°	950lm	720lm	K1M-9301809N-WB
						24°	950lm	720lm	K1M-9302409N-WB
						36°	950lm	720lm	K1M-9303609N-WB
					4000K	18°	1050lm	800lm	K1M-9401809N-WB
						24°	1050lm	800lm	K1M-9402409N-WB
						36°	1050lm	800lm	K1M-9403609N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim D=D(DALI Dim)


Coding

K1M – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
K1M KENZO K1X55	927 CRI>90/ 2700K	18 18°	09 9W	N No Driver	W White	B Black	H Honeycomb
	930 CRI>90/ 3000K	24 24°		F On-Off	B Black	W White	
	940 CRI>90/ 4000K	36 36°		P Phase Dim		G Gold	
				A 1-10V Dim			
				D DALI Dim			

KENZO K1X70 – Recessed Adjustable Spotlight



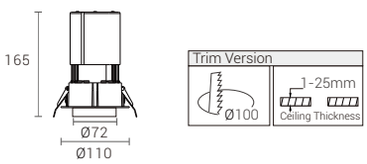

15° 25° 30° 2700K 3000K 4000K CRI >90 UGR<19


IP20 CE CB UKCA CITIZEN 50,000h@L80B10 0-90° 350° 5 YEARS GUARANTEE


Quick Info


- Ceiling Cut-out: Ø100mm for Trim Version
- CITIZEN LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 25°, 30°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

2700K







Housing Finish


White


Black

No Driver	179,00 €
ON-OFF	189,00 €
Phase Dim	199,00 €
DALI Dim	209,00 €

Reflector Options


Black


Gold


White

Optional accessary


Honeycomb

Code for K1L2-9403018N-WG with Honeycomb
K1L2-9403018N-WG-H

Honeycomb: +9,00€

Order Info (KENZO K1X70 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	15°	1400lm	1100lm	K1L1-9271513N-WB
						25°	1400lm	1100lm	K1L1-9272513N-WB
						30°	1400lm	1100lm	K1L1-9273013N-WB
					3000K	15°	1500lm	1200lm	K1L1-9301513N-WB
						25°	1500lm	1200lm	K1L1-9302513N-WB
						30°	1500lm	1200lm	K1L1-9303013N-WB
					4000K	15°	1600lm	1300lm	K1L1-9401513N-WB
						25°	1600lm	1300lm	K1L1-9402513N-WB
						30°	1600lm	1300lm	K1L1-9403013N-WB
18W	21W	36V	500mA	90	2700K	15°	1800lm	1500lm	K1L2-9271518N-WB
						25°	1800lm	1500lm	K1L2-9272518N-WB
						30°	1800lm	1500lm	K1L2-9273018N-WB
					3000K	15°	2000lm	1600lm	K1L2-9301518N-WB
						25°	2000lm	1600lm	K1L2-9302518N-WB
						30°	2000lm	1600lm	K1L2-9303018N-WB
					4000K	15°	2200lm	1700lm	K1L2-9401518N-WB
						25°	2200lm	1700lm	K1L2-9402518N-WB
						30°	2200lm	1700lm	K1L2-9403018N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim D=D(DALI Dim)

Coding

K1L1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
K1L1 K1X70-13W	927 CRI>90/ 2700K	15 15°	13 13W	N No Driver	W White	B Black	H Honeycomb
K1L2 K1X70-18W	930 CRI>90/ 3000K	25 25°	18 18W	F On-Off	B Black	W White	
	940 CRI>90/ 4000K	30 30°		P Phase Dim		G Gold	
				A 1-10V Dim			
				D DALI Dim			

BACK

FUSION


The Narrow Linear Downlight Series
Featuring Fixed Downlights,
Adjustable Downlights,
Spotlights,
Wall Washer Downlights,
General Light Downlights.



Project: Eggen Restaurant, Norway

FUSION FF1 – Fixed LED Downlight






Shielding Angle:50°


Quick Info

- Ceiling Cut-out: 37x37mm
- OSRAM LED: 2W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 160lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K





Finish



White Black

Order Info (FUSION FF1 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2W	3 W	3 V	700mA	90	2700K	24°	200lm	130lm	FF1-9272402N-WB
						40°	200lm	130lm	FF1-9274002N-WB
					3000K	24°	210lm	140lm	FF1-9302402N-WB
						40°	210lm	140lm	FF1-9304002N-WB
					4000K	24°	230lm	155lm	FF1-9402402N-WB
						40°	230lm	155lm	FF1-9404002N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	39,00 €
ON-OFF	49,00 €
DALI Dim	69,00 €

Coding

FF1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF1 FUSION FF1	**927** CRI>90/ 2700K	**24** 24°	**02** 2W	**N** No Driver	**W** White	**B** Black	
	930 CRI>90/ 3000K	**40** 40°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

BACK


FUSION FF2 – Fixed LED Spotlight






Quick Info


- Ceiling Cut-out: 68x37mm
- OSRAM LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 330lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim






Light Distribution

3000K





Finish



White Black

Order Info (FUSION FF2 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	6 V	700mA	90	2700K	24°	400lm	290lm	FF2-9272404N-WB
						40°	400lm	290lm	FF2-9274004N-WB
					3000K	24°	450lm	300lm	FF2-9302404N-WB
						40°	450lm	300lm	FF2-9304004N-WB
					4000K	24°	500lm	330lm	FF2-9402404N-WB
						40°	500lm	330lm	FF2-9404004N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	49,00 €
ON-OFF	59,00 €
Phase Dim	79,00 €
DALI Dim	89,00 €

Coding

FF2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF2 FUSION FF2	927 CRI>90/ 2700K	24 24°	04 4W	N No Driver	W White	B Black	
	930 CRI>90/ 3000K	40 40°		F On-Off	B Black		
	940 CRI>90/ 4000K			P Phase Dim			
				A 1-10V Dim			
				D DALI Dim			


FUSION FF3 – Fixed LED Spotlight







Quick Info

- Ceiling Cut-out: 90x37mm
- OSRAM LED: 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim









Shielding Angle:50°

Light Distribution

3000K





Finish



White Black

Reflector Options



Black Specular

Order Info (FUSION FF3 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9 W	9V	700mA	90	2700K	24°	600lm	420lm	FF3-9272407N-WB
						40°	600lm	420lm	FF3-9274007N-WB
					3000K	24°	650lm	450lm	FF3-9302407N-WB
						40°	650lm	450lm	FF3-9304007N-WB
					4000K	24°	700lm	500lm	FF3-9402407N-WB
						40°	700lm	500lm	FF3-9404007N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	69,00 €
ON-OFF	79,00 €
Phase Dim	89,00 €
DALI Dim	109,00 €

Coding


FF3 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF3 FUSION FF3	**927** CRI>90/ 2700K	**24** 24°	**07** 7W	**N** No Driver	**W** White	**B** Black	
	930 CRI>90/ 3000K	**40** 40°		**F** On-Off	**B** Black	**S** Specualr	
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

BACK


FUSION FF4 – Fixed LED Spotlight






Quick Info


- Ceiling Cut-out: 65x65mm
- OSRAM LED: 9W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 650lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K





Finish



White Black

Reflector Options



Black Specular

Order Info (FUSION FX4 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	12V	700mA	90	2700K	24°	750lm	550lm	FX4-9272409N-WB
						40°	750lm	550lm	FX4-9274009N-WB
					3000K	24°	800lm	600lm	FX4-9302409N-WB
						40°	800lm	600lm	FX4-9304009N-WB
					4000K	24°	900lm	650lm	FX4-9402409N-WB
						40°	900lm	650lm	FX4-9404009N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	79,00 €
ON-OFF	89,00 €
Phase Dim	99,00 €
DALI Dim	109,00 €

Coding

FF4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FX4 FUSION FX4	927 CRI>90/ 2700K	24 24°	09 9W	N No Driver	W White	B Black	
	930 CRI>90/ 3000K	40 40°		F On-Off	B Black	S Specualr	
	940 CRI>90/ 4000K			P Phase Dim			
				A 1-10V Dim			
				D DALI Dim			


FUSION FF5 – Fixed LED Spotlight







Quick Info

- Ceiling Cut-out: 144x37mm for Trim Version
- OSRAM LED: 11W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 750lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim





Light Distribution

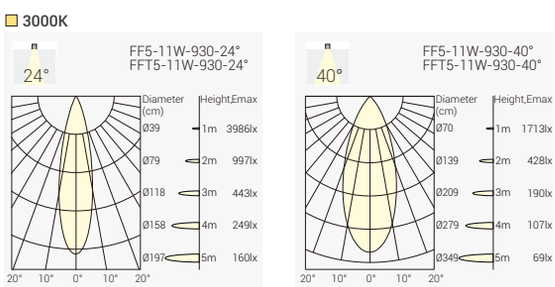

Finish



White Black

Order Info (FUSION FF5 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	15V	700mA	90	2700K	24°	950lm	650lm	FF5-9272411N-WB
						40°	950lm	650lm	FF5-9274011N-WB
					3000K	24°	1050lm	700lm	FF5-9302411N-WB
						40°	1050lm	700lm	FF5-9304011N-WB
					4000K	24°	1150lm	750lm	FF5-9402411N-WB
						40°	1150lm	750lm	FF5-9404011N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Reflector Options



Black Specular

Trimless version

No Driver	89,00 €	No Driver	179,00 €
ON-OFF	99,00 €	ON-OFF	189,00 €
Phase Dim	109,00 €	Phase Dim	199,00 €
DALI Dim	129,00 €	DALI Dim	209,00 €

Coding


FF5 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF5 FUSION FF5	**927** CRI>90/ 2700K	**24** 24°	**11** 11W	**N** No Driver	**W** White	**B** Black	
FFT5 FUSION FFT5	**930** CRI>90/ 3000K	**40** 40°		**F** On-Off	**B** Black	**S** Specualr	
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

Trimless Version




FFT5




BACK

FUSION FF10 – Fixed LED Spotlight







Finish



White



Black

Reflector Options




Specualr




Black

Trimless Version



FFT10







Quick Info

- Ceiling Cut-out: 282x37mm for Trim Version
- OSRAM LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 1650lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K





Order Info (FUSION FF10 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	90	2700K	24°	1900lm	1400lm	FF10-9272422N-WB
						40°	1900lm	1400lm	FF10-9274022N-WB
					3000K	24°	2050lm	1500lm	FF10-9302422N-WB
						40°	2050lm	1500lm	FF10-9304022N-WB
					4000K	24°	2200lm	1650lm	FF10-9402422N-WB
						40°	2200lm	1650lm	FF10-9404022N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	139,00 €
ON-OFF	159,00 €
Phase Dim	179,00 €
DALI Dim	189,00 €

Trimless version

No Driver	339,00 €
ON-OFF	359,00 €
Phase Dim	379,00 €
DALI Dim	389,00 €

Coding

FF10 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF10 FUSION FF10	**927** CRI>90/ 2700K	**24** 24°	**22** 22W	**N** No Driver	**W** White	**B** Black	
FFTA FUSION FFT10	**930** CRI>90/ 3000K	**40** 40°		**F** On-Off	**B** Black	**S** Specualr	
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

FUSION FF2-IP65 – Surface IP65 FUSION Downlight

NEW





35° 45° 2700K 3000K 4000K CRI >90 UGR<19

IP65 CE CB UKCA ETL Intertek OSRAM 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 66x37mm
- OSRAM LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 35°, 45°
- Lumen Output: Up to 270lm System Luminous Flux
- IP Class: IP65 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim






Light Distribution

3000K





Finish



White Black

Order Info (FUSION FF2-IP65 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	6V	700mA	90	2700K	35°	400lm	240lm	FF2-9273504N-WB-IP
						45°	400lm	205lm	FF2-9274504N-WB-IP
					3000K	35°	450lm	250lm	FF2-9303504N-WB-IP
						45°	450lm	215lm	FF2-9304504N-WB-IP
					4000K	35°	500lm	270lm	FF2-9403504N-WB-IP
						45°	500lm	230lm	FF2-9404504N-WB-IP

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	109,00 €
ON-OFF	129,00 €
Phase Dim	149,00 €
DALI°Dim	159,00 €

Coding

FF2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF2 FF2-IP65	**927** CRI>90/ 2700K	**35** 35°	**04** 4W	**N** No Driver	**W** White	**B** Black	IP IP65
	930 CRI>90/ 3000K	**45** 45°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

BACK

FUSION FF3-IP65 – Surface IP65 FUSION Downlight

NEW





35° 45° 2700K 3000K 4000K CRI >90 UGR<19

IP65 CE CB UKCA Intertek OSRAM 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 90x37mm
- OSRAM LED: 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 35°, 45°
- Lumen Output: Up to 410lm System Luminous Flux
- IP Class: IP65 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim






Light Distribution

3000K





Finish



White



Black

Order Info (FUSION FF3-IP65 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	9V	700mA	90	2700K	35°	600lm	360lm	FF3-9273507N-WB-IP
						45°	600lm	315lm	FF3-9274507N-WB-IP
					3000K	35°	650lm	385lm	FF3-9303507N-WB-IP
						45°	650lm	335lm	FF3-9304507N-WB-IP
					4000K	35°	700lm	410lm	FF3-9403507N-WB-IP
						45°	700lm	350lm	FF3-9404507N-WB-IP

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	149,00 €
ON-OFF	159,00 €
Phase Dim	169,00 €
DALI˚Dim	189,00 €

Coding

FF3 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF3 FF3-IP65	**927** CRI>90/ 2700K	**35°** 35°	**07** 7W	**N** No Driver	**W** White	**B** Black	**IP** IP65
	930 CRI>90/ 3000K	**45** 45°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

FUSION FF5-IP65 – Surface IP65 FUSION Downlight

NEW





35° 45° 2700K 3000K 4000K CRI >90 UGR<19

IP65 CE CB UKCA ETL Intertek OSRAM 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 148x37mm
- OSRAM LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 35°, 45°
- Lumen Output: Up to 840lm System Luminous Flux
- IP Class: IP65 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

3000K





Finish



White



Black

Order Info (FUSION FF5-IP65 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13 W	15V	700mA	90	2700K	35°	950lm	745lm	FF5-9273511N-WB-IP
						45°	950lm	620lm	FF5-9274511N-WB-IP
					3000K	35°	1050lm	785lm	FF5-9303511N-WB-IP
						45°	1050lm	650lm	FF5-9304511N-WB-IP
					4000K	35°	1150lm	840lm	FF5-9403511N-WB-IP
						45°	1150lm	700lm	FF5-9404511N-WB-IP

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim

No Driver	179,00 €
ON-OFF	189,00 €
Phase Dim	209,00 €
DALI°Dim	219,00 €

Coding


FF5 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF5 FF5-IP65	**927** CRI>90/ 2700K	**35** 35°	**11** 11W	**N** No Driver	**W** White	**B** Black	**IP** IP65
	930 CRI>90/ 3000K	**45** 45°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

BACK

FUSION FF10-IP65– Surface IP65 FUSION Downlight

NEW

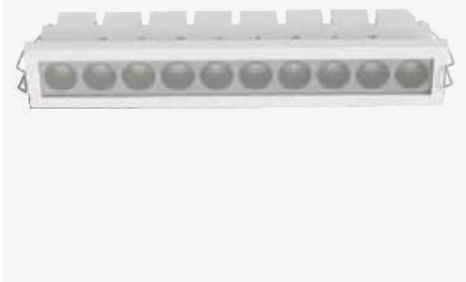



35° 45° 2700K 3000K 4000K CRI >90 UGR<19

IP65 CE CB UKCA Intertek OSRAM 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 286x37mm
- OSRAM LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 35°, 40°
- Lumen Output: Up to 1400lm System Luminous Flux
- IP Class: IP65 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

3000K





Finish



White



Black

Order Info (FUSION FF10-IP65 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	24W	30V	700mA	90	2700K	35°	1900lm	1250lm	FF10-9272422N-WB-IP
						45°	1900lm	1200lm	FF10-9274022N-WB-IP
					3000K	35°	2050lm	1300lm	FF10-9302422N-WB-IP
						45°	2050lm	1250lm	FF10-9304022N-WB-IP
					4000K	35°	2200lm	1400lm	FF10-9402422N-WB-IP
						45°	2200lm	1300lm	FF10-9404022N-WB-IP

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	289,00 €
ON-OFF	309,00 €
Phase Dim	329,00 €
DALI Dim	339,00 €

Coding


FF10 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF10 FF10-IP65	**927** CRI>90/ 2700K	**35** 35°	**22** 22W	**N** No Driver	**W** White	**B** Black	**IP** IP65
	930 CRI>90/ 3000K	**45** 45°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			


BACK

FUSION FA5 – Adjustable LED Downlight





Shielding Angle:50°

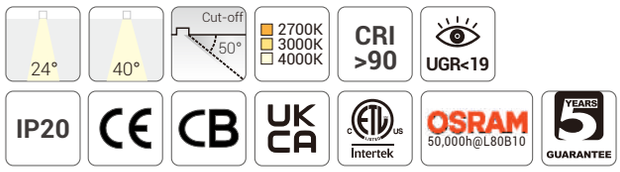



Quick Info

- Ceiling Cut-out: 160x53mm for Trim Version
- OSRAM LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 750lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K





Finish



White Black

Order Info (FUSION FA5 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13 W	15V	700mA	90	2700K	24°	950lm	650lm	FA5-9272411N-WB
						40°	950lm	650lm	FA5-9274011N-WB
					3000K	24°	1050lm	700lm	FA5-9302411N-WB
						40°	1050lm	700lm	FA5-9304011N-WB
					4000K	24°	1150lm	750lm	FA5-9402411N-WB
						40°	1150lm	750lm	FA5-9404011N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	149,00 €
ON-OFF	159,00 €
Phase Dim	169,00 €
DALI Dim	189,00 €

Reflector Options




Black Specular

Coding

FA5 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FA5 FUSION FA5	927 CRI>90/ 2700K	24 24°	11 11W	N No Driver	W White	B Black	
	930 CRI>90/ 3000K	40 40°		F On-Off	B Black	S Specular	
	940 CRI>90/ 4000K			P Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

BACK

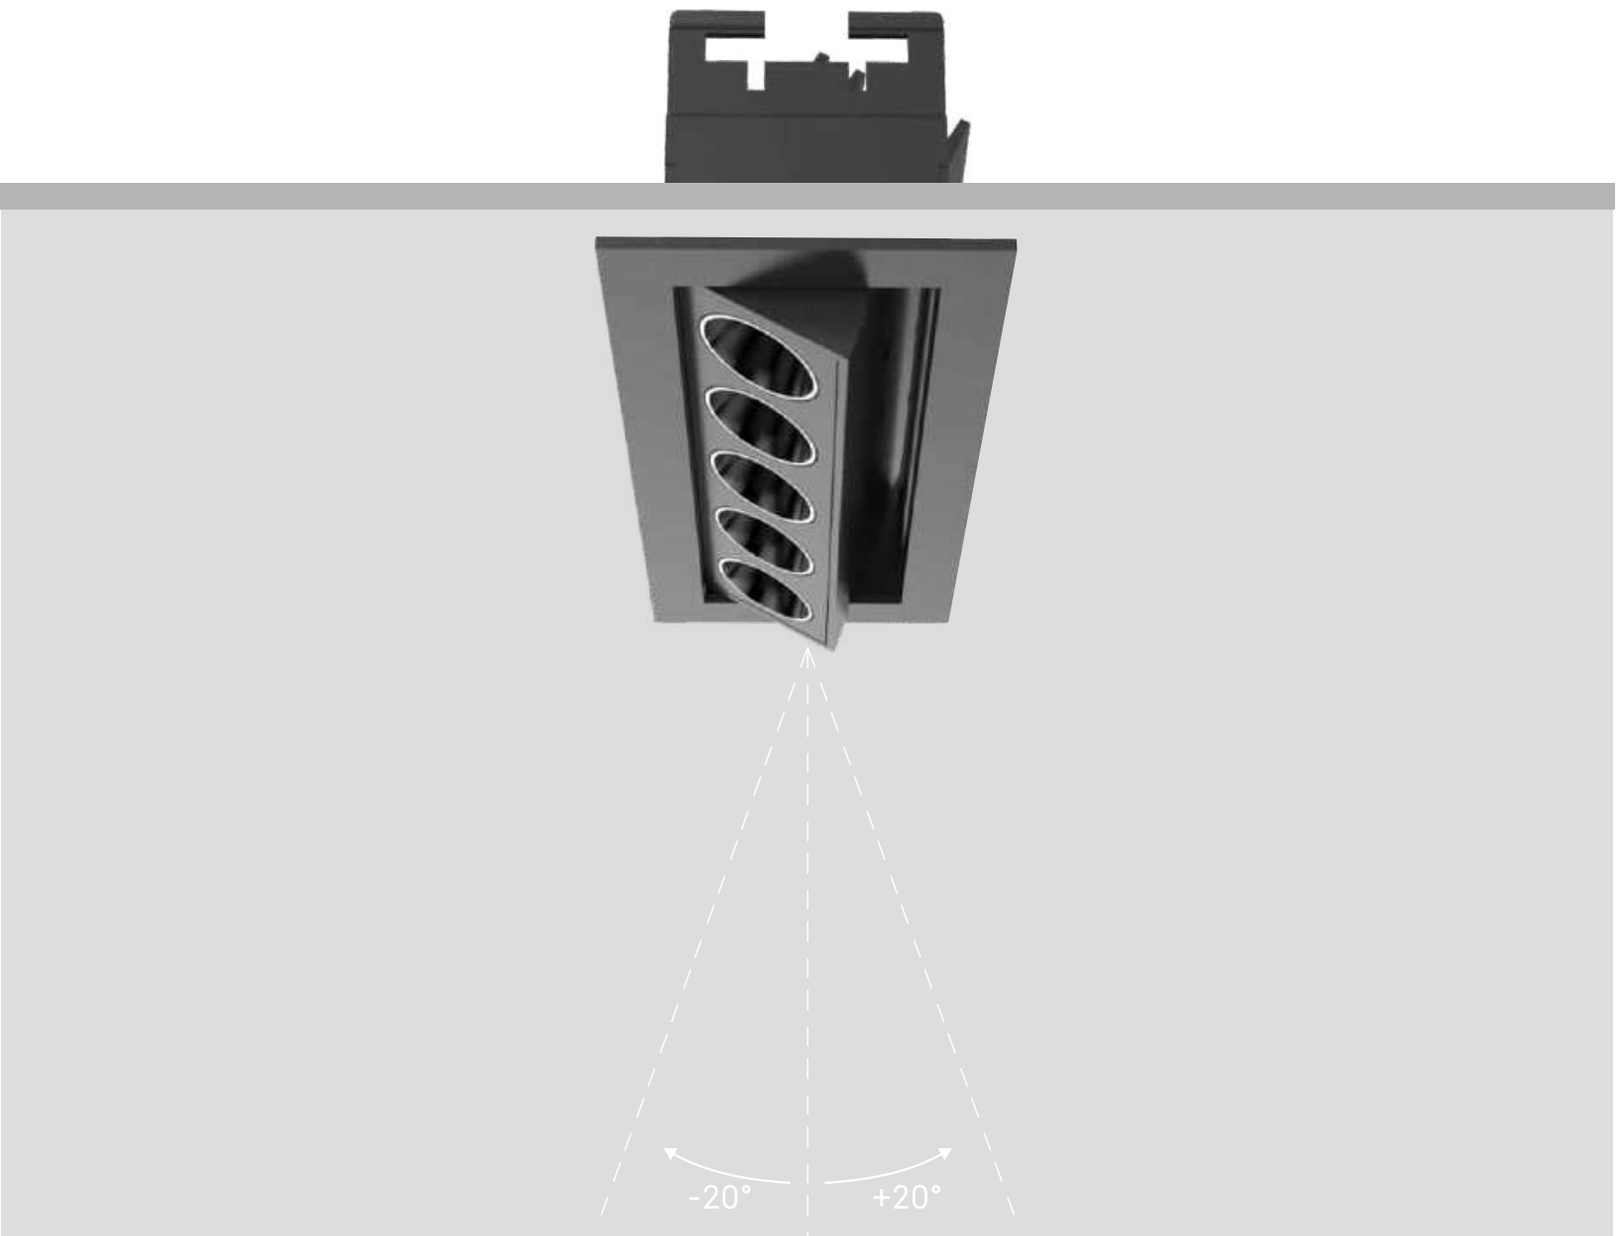
-20°
+20°

FUSION FA10 – Adjustable LED Downlight





24° 40° Cut-off 50° 2700K 3000K 4000K CRI >90 UGR<19


IP20 CE CB UKCA ETL Intertek OSRAM 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: 198x53mm for Trim Version
- OSRAM LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 1650lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim









Shielding Angle:50°

Light Distribution

3000K





Finish



White



Black

Order Info (FUSION FFA10 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	24W	30V	700mA	90	2700K	24°	1900lm	1400lm	FA10-9272422N-WB
						40°	1900lm	1400lm	FA10-9274022N-WB
					3000K	24°	2050lm	1500lm	FA10-9302422N-WB
						40°	2050lm	1500lm	FA10-9304022N-WB
					4000K	24°	2200lm	1650lm	FA10-9402422N-WB
						40°	2200lm	1650lm	FA10-9404022N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	249,00 €
ON-OFF	259,00 €
Phase Dim	289,00 €
DALI Dim	299,00 €

Reflector Options



Black



Specular

Coding

FA10 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FA10 FUSION FA10	927 CRI>90/ 2700K	24 24°	22 22W	N No Driver	W White	B Black	
	930 CRI>90/ 3000K	40 40°		F On-Off	B Black	S Specular	
	940 CRI>90/ 4000K			P Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

BACK

FUSION FW5 – Wall Washer LED Downlight





Wall Washer | 2700K 3000K 4000K | CRI >90

IP20 | CE | CB | UKCA | Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 144x37mm for Trim Version
- OSRAM LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: Wall Washer
- Lumen Output: Up to 550lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim





Light Distribution

3000K



Finish



White Black

Order Info (FUSION FW5 in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	15V	700mA	90	2700K	WW	900lm	450lm	FW5-927WW11N-WM
					3000K	WW	950lm	500lm	FW5-930WW11N-WM
					4000K	WW	1050lm	550lm	FW5-940WW11N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	129,00 €
ON-OFF	139,00 €
Phase Dim	159,00 €
DALI Dim	169,00 €


Trimless version


No Driver	209,00 €
ON-OFF	219,00 €
Phase Dim	229,00 €
DALI Dim	249,00 €

Trimless Version



FWT5





Coding

FW5 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FW5 FUSION FW5	**927** CRI>90/ 2700K	**WW** Wall Washer	**11** 11W	**N** No Driver	**W** White	**M** Matt	
FWT5 FUSION FWT5	**930** CRI>90/ 3000K			**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

FUSION FW10 – Wall Washer LED Downlight





Wall Washer | 2700K 3000K 4000K | CRI >90

IP20 | CE | CB | UKCA | ETL Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 282x37mm for Trim Version
- OSRAM LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: Wall Washer
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim





Light Distribution

3000K



Finish



White



Black

Order Info (FUSION FW10 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	24W	30V	700mA	90	2700K	WW	2000lm	1000lm	FW10-927WW22N-WM
					3000K	WW	2200lm	1100lm	FW10-930WW22N-WM
					4000K	WW	2400lm	1200lm	FW10-940WW22N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	219,00 €
ON-OFF	229,00 €
Phase Dim	249,00 €
DALI Dim	259,00 €


Trimless version


No Driver	369,00 €
ON-OFF	389,00 €
Phase Dim	409,00 €
DALI Dim	419,00 €

Trimless Version



FWT10







Coding

FW10 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FW10 FUSION FW10	**927** CRI>90/ 2700K	**WW** Wall Washer	**22** 22W	**N** No Driver	**W** White	**M** Matt	
FWTA FUSION FWT10	**930** CRI>90/ 3000K			**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

BACK

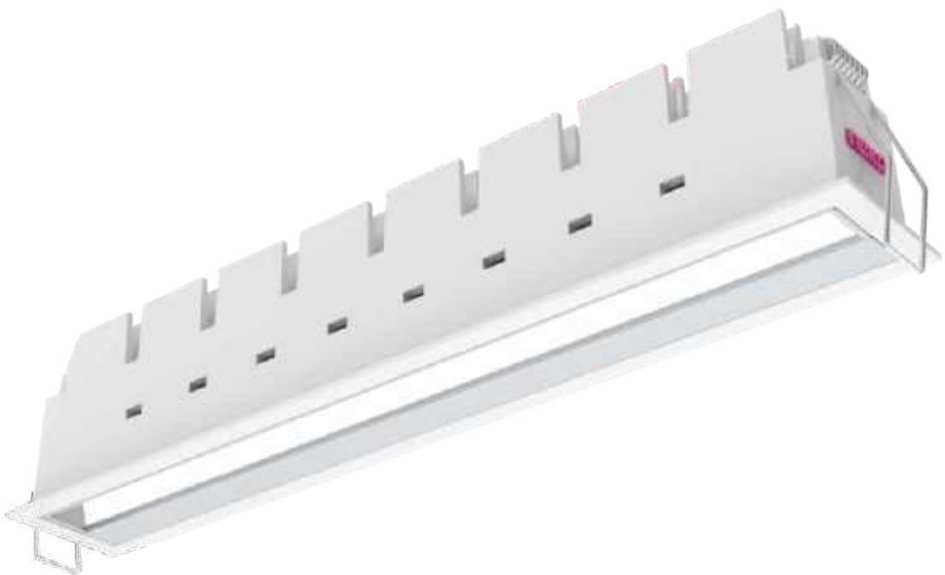

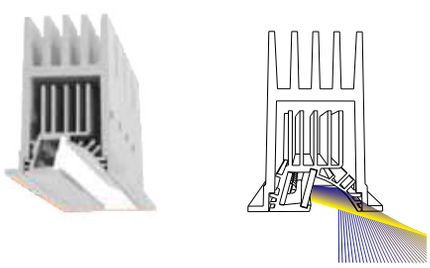

High quality wall washer illumination

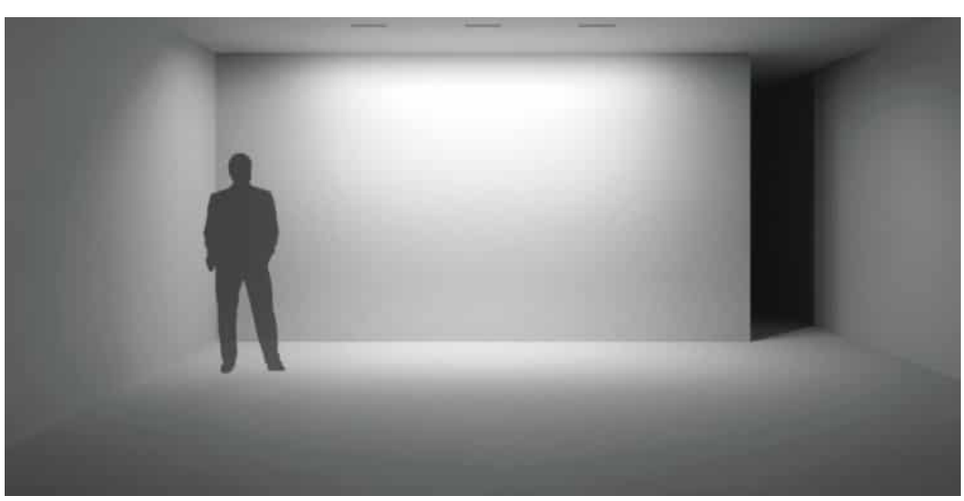


FUSION FG5 – General LED Downlight




75° | 2700K 3000K 4000K | CRI >90 | IP20 | CE | CB | UKCA | ETL Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 144x37mm for Trim Version
- OSRAM LED: 11W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 75°
- Lumen Output: Up to 400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim





Light Distribution

3000K



Finish



White



Black

Order Info (FUSION FG5 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	15V	700mA	90	2700K	75°	900lm	330lm	FG5-9277511N-WB
					3000K	75°	950lm	350lm	FG5-9277511N-WB
					4000K	75°	1050lm	400lm	FG5-9307511N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	109,00 €
ON-OFF	119,00 €
Phase Dim	129,00 €
DALI Dim	149,00 €


Trimless version


No Driver	169,00 €
ON-OFF	179,00 €
Phase Dim	189,00 €
DALI Dim	199,00 €

Trimless Version



FGT5





Coding

FG5 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FG5 FUSION FG5	**927** CRI>90/ 2700K	**75** 75°	**11** 11W	**N** No Driver	**W** White	**B** Black	
FGT5 FUSION FGT5	**930** CRI>90/ 3000K			**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

BACK


FUSION FG10 – General LED Downlight




75° | 2700K 3000K 4000K | CRI >90 | IP20 | CE | CB | UKCA | Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: Ø55mm for Trim Version
- OSRAM LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 75°
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim





Light Distribution

3000K



Finish



White



Black

Order Info (FUSION FG10 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	24W	30V	700mA	90	2700K	75°	2000lm	750lm	FG10-9277522N-WB
					3000K	75°	2200lm	800lm	FG10-9307522N-WB
					4000K	75°	2400lm	850lm	FG10-9407522N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	189,00 €
ON-OFF	199,00 €
Phase Dim	219,00 €
DALI Dim	229,00 €


Trimless version


No Driver	289,00 €
ON-OFF	309,00 €
Phase Dim	329,00 €
DALI Dim	339,00 €

Trimless Version



FGT10





Coding

FG10 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FG10 FUSION FG10	927 CRI>90/ 2700K	75 75°	22 22W	N No Driver	W White	B Black	
FGTA FUSION FGT10	930 CRI>90/ 3000K			F On-Off	B Black		
	940 CRI>90/ 4000K			P Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

BACK

FUSION FS1 – Adjustable Spotlight





15° 30° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA Intertek OSRAM 50,000h@L80B10 bridgelux. 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 62x37mm
- OSRAM LED: 2W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°
- Lumen Output: Up to 160lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, No-Off, 1-10V Dim, DALI Dim






Light Distribution

3000K





Finish



White Black

Order Info (FUSION FS1 in White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2W	3W	3V	700mA	90	2700K	15°	200lm	130lm	FS1-9271502N-WN
						30°	200lm	130lm	FS1-9273002N-WN
					3000K	15°	210lm	140lm	FS1-9301502N-WN
						30°	210lm	140lm	FS1-9303002N-WN
					4000K	15°	230lm	160lm	FS1-9401502N-WN
						30°	230lm	160lm	FS1-9403002N-WN

Code Remark: N=N(No Driver) F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	79,00 €
ON-OFF	89,00 €
DALI Dim	119,00 €

Coding

FS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FS1 FUSION FS1	927 CRI>90/ 2700K	15 15°	02 2W	N No Driver	W White	N None	
	930 CRI>90/ 3000K	30 30°		F On-Off	B Black		
	940 CRI>90/ 4000K			A 1-10V Dim			
*In same BRIDGELUX LED chip as FUSION G2 series is optional.				D DALI Dim			

BACK

FUSION FS2– Adjustable Spotlight





15° 30° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA Intertek OSRAM 50,000h@L80B10 bridgelux 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 90x37mm
- OSRAM LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°
- Lumen Output: Up to 330lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim






Light Distribution

3000K





Finish



White Black

Order Info (FUSION FS2 in White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	6V	700mA	90	2700K	15°	400lm	280lm	FS2-9271504N-WN
						30°	400lm	280lm	FS2-9273004N-WN
					3000K	15°	450lm	300lm	FS2-9301504N-WN
						30°	450lm	300lm	FS2-9303004N-WN
					4000K	15°	500lm	330lm	FS2-9401504N-WN
						30°	500lm	330lm	FS2-9403004N-WN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	129,00 €
ON-OFF	149,00 €
Phase Dim	159,00 €
DALI Dim	169,00 €

Coding

FS2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FS2 FUSION FS2	**927** CRI>90/ 2700K	**15** 15°	**04** 4W	**N** No Driver	**W** White	**N** None	
	930 CRI>90/ 3000K	**30** 30°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

*In same BRIDGELUX LED chip as FUSION G2 series is optional.

FUSION FS3 – Adjustable Spotlight





15° 30° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA Intertek OSRAM 50,000h@L80B10 bridgelux. 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 144x37mm for Trim Version
- OSRAM LED: 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim






Light Distribution

3000K





Finish



White Black

Order Info (FUSION FS3 in White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	9 V	700mA	90	2700K	15°	600lm	420lm	FS3-9271507N-WN
						30°	600lm	420lm	FS3-9273007N-WN
					3000K	15°	650lm	450lm	FS3-9301507N-WN
						30°	650lm	450lm	FS3-9303007N-WN
					4000K	15°	700lm	500lm	FS3-9401507N-WN
						30°	700lm	500lm	FS3-9403007N-WN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	189,00 €
ON-OFF	199,00 €
Phase Dim	209,00 €
DALI Dim	229,00 €


Trimless version


No Driver	279,00 €
ON-OFF	289,00 €
Phase Dim	299,00 €
DALI Dim	309,00 €

Trimless Version



FST3





Coding

FS3 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FS3 FUSION FS3	927 CRI>90/ 2700K	15 15°	07 7W	N No Driver	W White	N None	
FST3 FUSION FST3	930 CRI>90/ 3000K	30 30°		F On-Off	B Black		
	940 CRI>90/ 4000K			P Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

*In same BRIDGELUX LED chip as FUSION G2 series is optional.

BACK

FUSION FS6 – Adjustable Spotlight





15° 30° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA Intertek OSRAM 50,000h@L80B10 bridgelux 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 282x37mm for Trim Version
- OSRAM LED: 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°
- Lumen Output: Up to 900lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

3000K






Finish



Black



White

Order Info (FUSION FS6 in White Finish as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	18V	700mA	90	2700K	15°	1200lm	800lm	FS6-9271513N-WN
						30°	1200lm	800lm	FS6-9273013N-WN
					3000K	15°	1300lm	850lm	FS6-9301513N-WN
						30°	1300lm	850lm	FS6-9303013N-WN
					4000K	15°	1400lm	900lm	FS6-9401513N-WN
						30°	1400lm	900lm	FS6-9403013N-WN


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version



FST6





	Trimless version	
No Driver	349,00 €	489,00 €
ON-OFF	359,00 €	499,00 €
Phase Dim	379,00 €	509,00 €
DALI Dim	389,00 €	519,00 €

Coding

FS6 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FS6 FUSION FS6	**927** CRI>90/ 2700K	**15** 15°	**22** 22W	**N** No Driver	**W** White	**N** None	
FST6 FUSION FST6	**930** CRI>90/ 3000K	**30** 30°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

*In same BRIDGELUX LED chip as FUSION G2 series is optional.

FUSION FF3-FS3 – Adjustable Spotlight





24° 40° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA Intertek OSRAM 50,000h@L80B10 bridgelux. 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 144x37mm for Trim Version
- OSRAM LED: 9W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim







Light Distribution

3000K





Finish



White Black

Order Info (FUSION FFS1 in White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	12 V	700mA	90	2700K	24°	750lm	500lm	FFS1-9272409N-WB
						40°	750lm	500lm	FFS1-9274009N-WB
					3000K	24°	800lm	550lm	FFS1-9302409N-WB
						40°	800lm	550lm	FFS1-9304009N-WB
					4000K	24°	900lm	600lm	FFS1-9402409N-WB
						40°	900lm	600lm	FFS1-9404009N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	139,00 €
ON-OFF	149,00 €
Phase Dim	159,00 €
DALI Dim	179,00 €


Trimless version


No Driver	219,00 €
ON-OFF	229,00 €
Phase Dim	239,00 €
DALI Dim	259,00 €

Trimless Version



FFT3-FST1





Coding

FFS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FFS1 FUSION FFS1	**927** CRI>90/ 2700K	**24** 24°	**09** 9W	**N** No Driver	**W** White	**N** None	
FFS3 FUSION FFT3-FST1	**930** CRI>90/ 3000K	**40** 40°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

*In same BRIDGELUX LED chip as FUSION G2 series is optional.

BACK

FUSION FF6-FS2 – Adjustable Spotlight





24° 40° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA Intertek OSRAM 50,000h@L80B10 bridgelux 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 282x37mm for Trim Version
- OSRAM LED: 17W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

3000K





Finish



White





Black

Trimless Version



FFT6-FST2





Order Info (FUSION FFS2 in White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17W	19W	24	700mA	90	2700K	24°	1500lm	1050lm	FFS2-9272417N-WB
						40°	1500lm	1050lm	FFS2-9274017N-WB
					3000K	24°	1600lm	1100lm	FFS2-9302417N-WB
						40°	1600lm	1100lm	FFS2-9304017N-WB
					4000K	24°	1800lm	1200lm	FFS2-9402417N-WB
						40°	1800lm	1200lm	FFS2-9404017N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	229,00 €
ON-OFF	239,00 €
Phase Dim	249,00 €
DALI Dim	269,00 €

Trimless version

No Driver	369,00 €
ON-OFF	379,00 €
Phase Dim	399,00 €
DALI Dim	409,00 €

Coding

FFS2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FFS2 FUSION FFS2	**927** CRI>90/ 2700K	**24** 24°	**17** 17W	**N** No Driver	**W** White	**N** None	
FFS4 FUSION FFT6-FST2	**930** CRI>90/ 3000K	**40** 40°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

*In same BRIDGELUX LED chip as FUSION G2 series is optional.

FUSION G2 FF1 – Fixed LED Downlight

NEW





15° 24° 48° 60° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19


IP20 CE CB UKCA ETL Intertek bridgelux 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: 37x37mm
- Bridgelux LED: 2W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 220lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim








Light Distribution

3000K

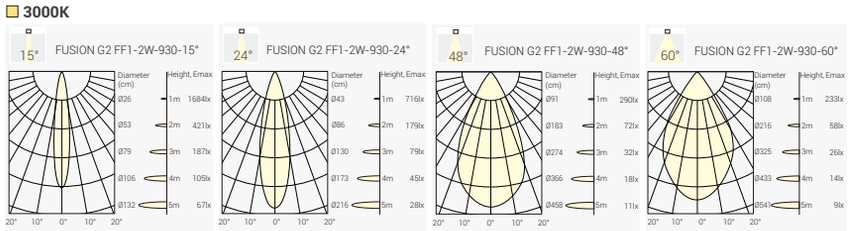

Finish



White



Black

Order Info (FUSION G2 FF1 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2W	3W	3V	700mA	90	2700K	15°	230lm	190lm	FF1G2-9271502N-WB
						24°	230lm	180lm	FF1G2-9272402N-WB
						48°	230lm	180lm	FF1G2-9274802N-WB
						60°	230lm	180lm	FF1G2-9276002N-WB
					3000K	15°	240lm	200lm	FF1G2-9301502N-WB
						24°	240lm	190lm	FF1G2-9302402N-WB
						48°	240lm	190lm	FF1G2-9304802N-WB
						60°	240lm	190lm	FF1G2-9306002N-WB
					4000K	15°	260lm	220lm	FF1G2-9401502N-WB
						24°	260lm	200lm	FF1G2-9402402N-WB
						48°	260lm	200lm	FF1G2-9404802N-WB
						60°	260lm	200lm	FF1G2-9406002N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	39,00 €
ON-OFF	49,00 €
Phase Dim	69,00 €
DALI Dim	79,00 €

Coding

FF1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF1G2 FUSION G2 FF1	927 CRI>90/ 2700K	15 15°	02 2W	N No Driver	W White	B Black	
	930 CRI>90/ 3000K	24 24°		F On-Off	B Black		
	940 CRI>90/ 4000K	48 48°		P Phase Dim			
		60 60°		A 1-10V Dim			
				D DALI Dim			

BACK

FUSION G2 FF2 – Fixed LED Downlight

NEW





15° 24° 48° 60° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19


IP20 CE CB UKCA Intertek bridgelux 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: 68x37mm
- Bridgelux LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 420lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim








Light Distribution

3000K

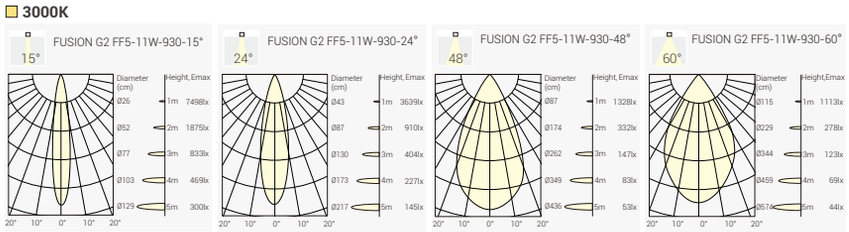

Finish



White Black

Order Info (FUSION G2 FF2 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	6V	700mA	90	2700K	15°	460lm	380lm	FF2G2-8271510N-WB
						24°	460lm	350lm	FF2G2-8272410N-WB
						48°	460lm	350lm	FF2G2-8274810N-WB
						60°	460lm	350lm	FF2G2-8276010N-WB
					3000K	15°	480lm	400lm	FF2G2-8301510N-WB
						24°	480lm	360lm	FF2G2-8302410N-WB
						48°	480lm	360lm	FF2G2-8304810N-WB
						60°	480lm	360lm	FF2G2-8306010N-WB
					4000K	15°	510lm	420lm	FF2G2-8401510N-WB
						24°	510lm	380lm	FF2G2-8402410N-WB
						48°	510lm	380lm	FF2G2-8404810N-WB
						60°	510lm	380lm	FF2G2-8406010N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	49,00 €
ON-OFF	59,00 €
Phase Dim	79,00 €
DALI Dim	89,00 €

Coding

FF2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF2G2 FUSION G2 FF2	927 CRI>90/ 2700K	15 15°	04 4W	N No Driver	W White	B Black	
	930 CRI>90/ 3000K	24 24°		F On-Off	B Black		
	940 CRI>90/ 4000K	48 48°		P Phase Dim			
		60 60°		A 1-10V Dim			
				D DALI Dim			

BACK

FUSION G2 FF3 – Fixed LED Downlight

NEW





15° 24° 48° 60° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19


IP20 CE CB UKCA ETL Intertek bridgelux 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: 90x37mm
- Bridgelux LED: 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim








Light Distribution

3000K

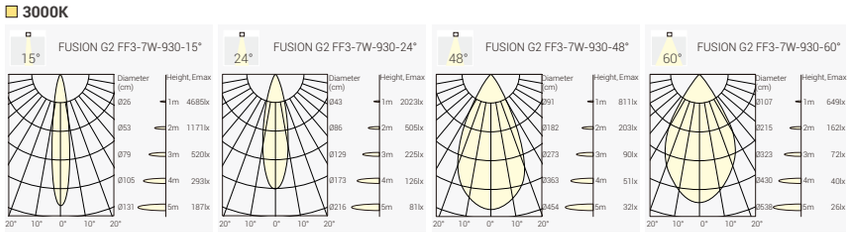

Finish



White Black

Order Info (FUSION G2 FF3 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	9V	700mA	80	2700K	15°	700lm	560lm	FF3G2-9271507N-WB
						24°	700lm	500lm	FF3G2-9272407N-WB
						48°	700lm	500lm	FF3G2-9274807N-WB
						60°	700lm	500lm	FF3G2-9276007N-WB
					3000K	15°	720lm	580lm	FF3G2-9301507N-WB
						24°	720lm	520lm	FF3G2-9302407N-WB
						48°	720lm	520lm	FF3G2-9304807N-WB
						60°	720lm	520lm	FF3G2-9306007N-WB
					4000K	15°	780lm	600lm	FF3G2-9401507N-WB
						24°	780lm	550lm	FF3G2-9402407N-WB
						48°	780lm	550lm	FF3G2-9404807N-WB
						60°	780lm	550lm	FF3G2-9406007N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	79,00 €
ON-OFF	89,00 €
Phase Dim	99,00 €
DALI Dim	109,00 €

Coding

FF3G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF3G2 FUSION G2 FF3	927 CRI>90/ 2700K	15 15°	07 7W	N No Driver	W White	B Black	
	930 CRI>90/ 3000K	24 24°		F On-Off	B Black		
	940 CRI>90/ 4000K	48 48°		P Phase Dim			
		60 60°		A 1-10V Dim			
				D DALI Dim			

BACK

FUSION G2 FF5 – Fixed LED Downlight

NEW





15° 24° 48° 60° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA Intertek bridgelux 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 144x37mm for Trim Version
- Bridgelux LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim





Light Distribution

3000K

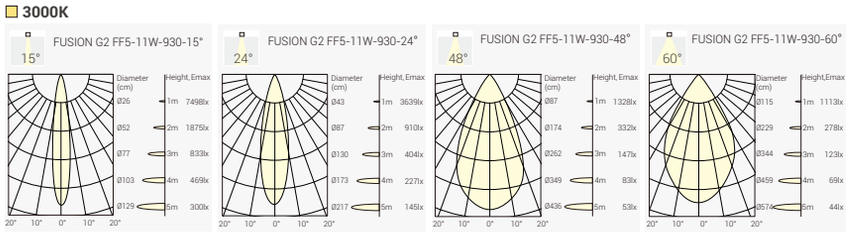

Finish



White Black

Order Info (FUSION G2 FF5 in White Trim & Black Reflector as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	15V	700mA	90	2700K	15°	1150lm	870lm	FF5G2-9271511N-WB
						24°	1150lm	830lm	FF5G2-9272411N-WB
						48°	1150lm	830lm	FF5G2-9274811N-WB
						60°	1150lm	830lm	FF5G2-9276011N-WB
					3000K	15°	1200lm	900lm	FF5G2-9301511N-WB
						24°	1200lm	850lm	FF5G2-9302411N-WB
						48°	1200lm	850lm	FF5G2-9304811N-WB
						60°	1200lm	850lm	FF5G2-9306011N-WB
					4000K	15°	1300lm	950lm	FF5G2-9401511N-WB
						24°	1300lm	900lm	FF5G2-9402411N-WB
						48°	1300lm	900lm	FF5G2-9404811N-WB
						60°	1300lm	900lm	FF5G2-9406011N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version



FUSION G2 FFT5



Trimless version

No Driver	89,00 €
ON-OFF	99,00 €
Phase Dim	109,00 €
DALI Dim	129,00 €

No Driver	169,00 €
ON-OFF	179,00 €
Phase Dim	189,00 €
DALI Dim	209,00 €

Coding

FF5G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF5G2 FUSION G2 FF5	**927** CRI>90/ 2700K	**15** 15°	**11** 11W	**N** No Driver	**W** White	**B** Black	
FFT5G2 FUSION G2 FFT5	**930** CRI>90/ 3000K	**24** 24°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K	**48** 48°		**P** Phase Dim			
		60 60°		**A** 1-10V Dim			
				D DALI Dim			

BACK

FUSION G2 FF10 – Fixed LED Downlight

NEW





15° 24° 48° 60° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19


IP20 CE CB UKCA Intertek bridgelux 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: 282x37mm for Trim Version
- Bridgelux LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 2000lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim








Shielding Angle:35°

Light Distribution

3000K

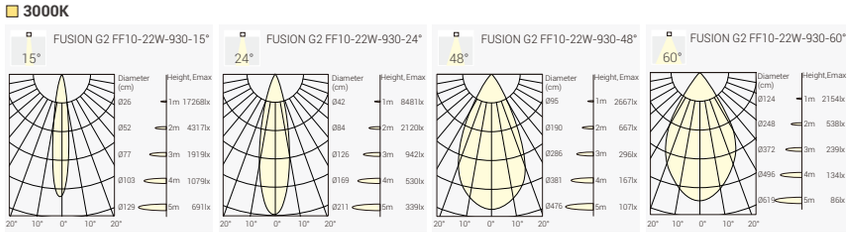

Finish



White



Black

Order Info (FUSION G2 FF10 in White Trim & Black Reflector as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	24W	30V	700mA	90	2700K	15°	2300lm	1850lm	FF10G2-9271522N-WB
						24°	2300lm	1800lm	FF10G2-9272422N-WB
						48°	2300lm	1800lm	FF10G2-9274822N-WB
						60°	2300lm	1850lm	FF10G2-9276022N-WB
					3000K	15°	2450lm	1900lm	FF10G2-9301522N-WB
						24°	2450lm	1850lm	FF10G2-9302422N-WB
						48°	2450lm	1850lm	FF10G2-9304822N-WB
						60°	2450lm	1900lm	FF10G2-9306022N-WB
					4000K	15°	2600lm	2000lm	FF10G2-9401522N-WB
						24°	2600lm	1950lm	FF10G2-9402422N-WB
						48°	2600lm	1950lm	FF10G2-9404822N-WB
						60°	2600lm	2000lm	FF10G2-9406022N-WB


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version



FUSION G2 FFT10





Trimless version

No Driver	139,00 €	No Driver	329,00 €
ON-OFF	159,00 €	ON-OFF	339,00 €
Phase Dim	179,00 €	Phase Dim	359,00 €
DALI Dim	189,00 €	DALI Dim	369,00 €

Coding

FF10G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF10G2 FUSION G2 FF10	927 CRI>90/ 2700K	15 15°	22 22W	N No Driver	W White	B Black	
FFT10G2 FUSION G2 FFT10	930 CRI>90/ 3000K	24 24°		F On-Off	B Black		
	940 CRI>90/ 4000K	48 48°		P Phase Dim			
		60 60°		A 1-10V Dim			
				D DALI Dim			

BACK

FUSION G2 FA5 – Adjustable LED Downliht

NEW





15° 24° 48° 60° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19


IP20 CE CB UKCA ETL Intertek bridgelux 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: 160x53mm for Trim Version
- Bridgelux LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim








Light Distribution

3000K

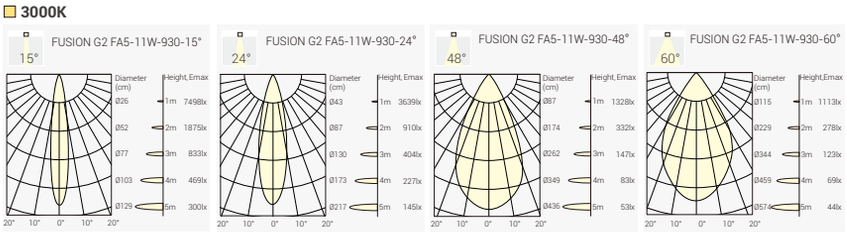

Finish



White Black

Order Info (FUSION G2 FA5 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	15V	700mA	90	2700K	15°	1150lm	870lm	FA5G2-9271511N-WB
						24°	1150lm	830lm	FA5G2-9272411N-WB
						48°	1150lm	830lm	FA5G2-9274811N-WB
						60°	1150lm	830lm	FA5G2-9276011N-WB
					3000K	15°	1200lm	900lm	FA5G2-9301511N-WB
						24°	1200lm	850lm	FA5G2-9302411N-WB
						48°	1200lm	850lm	FA5G2-9304811N-WB
						60°	1200lm	850lm	FA5G2-9306011N-WB
					4000K	15°	1300lm	950lm	FA5G2-9401511N-WB
						24°	1300lm	900lm	FA5G2-9402411N-WB
						48°	1300lm	900lm	FA5G2-9404811N-WB
						60°	1300lm	900lm	FA5G2-9406011N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	149,00 €
ON-OFF	159,00 €
Phase Dim	169,00 €
DALI Dim	189,00 €

Coding


FA5G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FA5G2 FUSION G2 FA5	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	15 15° 24 24° 48 48° 60 60°	11 11W	N No Driver F On-Off P Phase Dim A 1-10V Dim D DALI Dim	W White B Black	B Black	

BACK

FUSION G2 FA10 – Adjustable LED Downliht

NEW

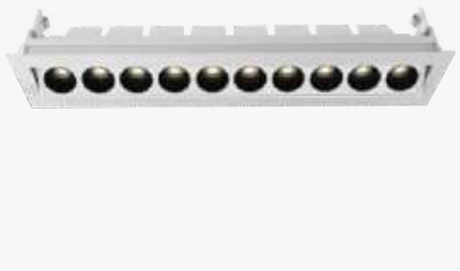



15° 24° 48° 60° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19


IP20 CE CB UKCA ETL Intertek bridgelux 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: 198x53mm for Trim Version
- Bridgelux LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 2000lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim








Light Distribution

3000K

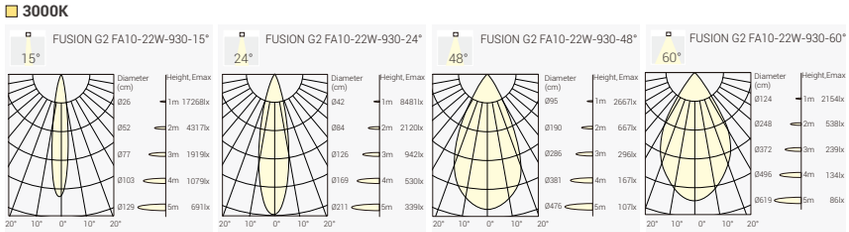

Order Info (FUSION G2 FA10 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	24W	30V	700mA	90	2700K	15°	2300lm	1850lm	FA10G2-9271522N-WB
						24°	2300lm	1800lm	FA10G2-9272422N-WB
						48°	2300lm	1800lm	FA10G2-9274822N-WB
						60°	2300lm	1850lm	FA10G2-9276022N-WB
					3000K	15°	2450lm	1900lm	FA10G2-9301522N-WB
						24°	2450lm	1850lm	FA10G2-9302422N-WB
						48°	2450lm	1850lm	FA10G2-9304822N-WB
						60°	2450lm	1900lm	FA10G2-9306022N-WB
					4000K	15°	2600lm	2000lm	FA10G2-9401522N-WB
						24°	2600lm	1950lm	FA10G2-9402422N-WB
						48°	2600lm	1950lm	FA10G2-9404822N-WB
						60°	2600lm	2000lm	FA10G2-9406022N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	249,00 €
ON-OFF	259,00 €
Phase Dim	279,00 €
DALI Dim	289,00 €

Finish



White



Black

Coding

FA10G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FA10G2 FUSION G2 FA10	927 CRI>90/ 2700K	15 15°	22 22W	N No Driver	W White	B Black	
	930 CRI>90/ 3000K	24 24°		F On-Off	B Black		
	940 CRI>90/ 4000K	48 48°		P Phase Dim			
		60 60°		A 1-10V Dim			
				D DALI Dim			

BACK

FUSION
Linear System

Modular Design Flexible Linear Profile System

Light Line with 50mm Profile Width, Customized Lengths

Pendant, Surface, Trimless Recessed, Trim Recessed

Opal, Accent Light, Spotlight, Wall Washer Optics

Can also Put FUSlON Downlights into Profile

On-Off, Phase Dim, 1-10V Dim, DALI Dim


4
3
2
1
G

FUSION Linear System – Modular Design Flexible Linear Profile System

Channels



Profil: 59,00 € / lfm

Inserts



FUSION Module
(FF/ FW/ FS/ FG)



Accent Light Module
(300mm)



General Light Module
(600mm)



Wall Washer Module
(1200mm/1800mm)



Spot Light Module
(300mm)



Uplight Module
(1070mm/ 1605mm)

Covers



Blind Cover
25,00 € / lfm

Opal Cover
19,00 € / lfm




Flexible Opal Cover
19,00 € / lfm

Mounting Kits



Recessed Mounting Kit
(2pcs/ Set)
45,00 €




Surface Mounted Kit
(2pcs/ Set)
25,00 €




Pendant Kit
(Ceiling Box in White/ Black)
49,00 €

BACK

Corner Modules and Linear Connector

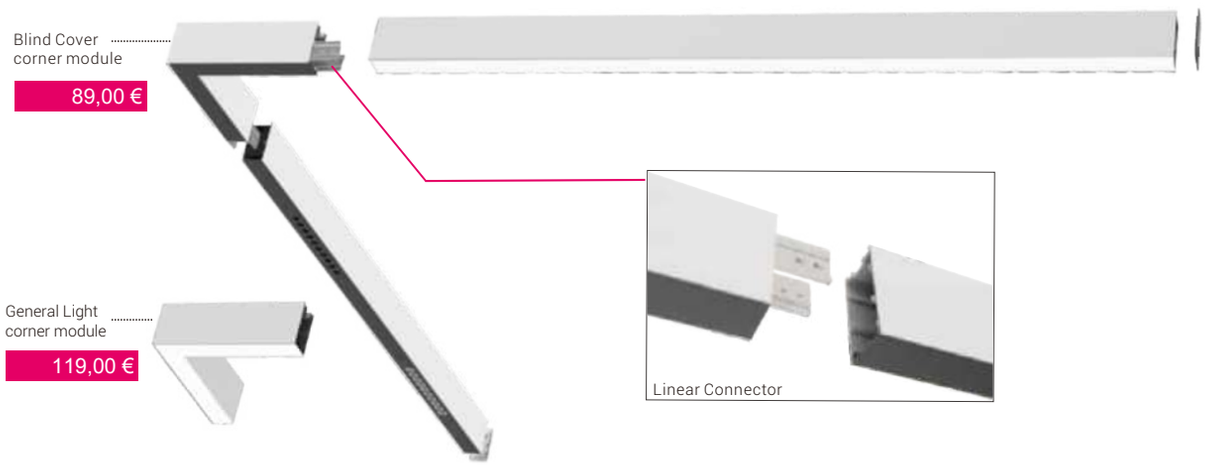

System details

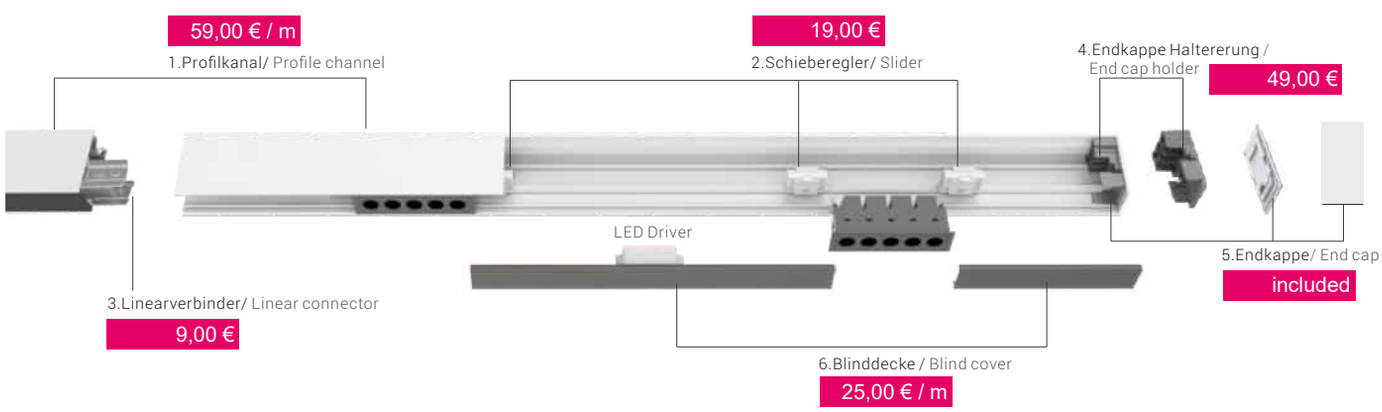





Intelligentes Linear-Profildesign
Einfachste Installation der FUSION Einbauleuchte in den Profilkanal

Smart linear profile design
Easy to install FUSION downlight into profile channel

FUSION Linear System – General Light Module







105°

2700K
3000K
4000K

CRI >80

CRI >90

CE

CB

SAMSUNG
50,000h@L80B10


5 YEARS GUARANTEE

Quick Info

- Linkable General Light Module
- General Light Version also Available
- SAMSUNG LED: 11W, 16W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 105°
- Lumen Output: Up to 1900lm System Luminous Flux
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K



Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	12W	46V	250mA	80	2700K	105°	1600lm	1200lm	GL600-11W-827-105°N
					3000K	105°	1700lm	1300lm	GL600-11W-830-105°N
					4000K	105°	1800lm	1400lm	GL600-11W-840-105°N
				90	2700K	105°	1500lm	1100lm	GL600-11W-927-105°N
					3000K	105°	1600lm	1200lm	GL600-11W-930-105°N
					4000K	105°	1700lm	1300lm	GL600-11W-940-105°N
16W	18W	46V	300mA	80	2700K	105°	2100lm	1700lm	GL600-16W-827-105°N
					3000K	105°	2200lm	1800lm	GL600-16W-830-105°N
					4000K	105°	2400lm	1900lm	GL600-16W-840-105°N
				90	2700K	105°	1900lm	1600lm	GL600-16W-927-105°N
					3000K	105°	2000lm	1700lm	GL600-16W-930-105°N
					4000K	105°	2200lm	1900lm	GL600-16W-940-105°N


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


No Driver 79,00 €

BACK

FUSION Linear System – Wall Washer Light Module








Wall Washer | 2700K 3000K 4000K | CRI >80 | CRI >90 | CE | CB | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- Wall Wash Light Module
- SAMSUNG LED: 22W, 32W, 48W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: Wall washer
- Lumen Output: Up to 3700lm System Luminous Flux
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K




Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	26W	46V	500mA	80	2700K	WW	3200lm	1700lm	WW1200-22W-827N
					3000K	WW	3400lm	1800lm	WW1200-22W-830N
					4000K	WW	3600lm	1900lm	WW1200-22W-840N
No Driver	129,00 €			90	2700K	WW	3000lm	1500lm	WW1200-22W-927N
					3000K	WW	3200lm	1600lm	WW1200-22W-930N
					4000K	WW	3400lm	1700lm	WW1200-22W-940N
32W	36W	46V	700mA	80	2700K	WW	4600lm	2300lm	WW1200-32W-827N
					3000K	WW	4800lm	2500lm	WW1200-32W-830N
					4000K	WW	5000lm	2700lm	WW1200-32W-840N
No Driver	129,00 €			90	2700K	WW	4000lm	2000lm	WW1200-32W-927N
					3000K	WW	4200lm	2200lm	WW1200-32W-930N
					4000K	WW	4400lm	2400lm	WW1200-32W-940N
32W	36W	46V	700mA	80	2700K	WW	4600lm	2500lm	WW1800-32W-827N
					3000K	WW	4800lm	2700lm	WW1800-32W-830N
					4000K	WW	5000lm	2900lm	WW1800-32W-840N
No Driver	179,00 €			90	2700K	WW	4000lm	2100lm	WW1800-32W-927N
					3000K	WW	4200lm	2300lm	WW1800-32W-930N
					4000K	WW	4400lm	2500lm	WW1800-32W-940N
48W	52W	46V	700+350mA	80	2700K	WW	6200lm	3300lm	WW1800-48W-827N
					3000K	WW	6400lm	3500lm	WW1800-48W-830N
					4000K	WW	6600lm	3700lm	WW1800-48W-840N
No Driver	179,00 €			90	2700K	WW	5500lm	2900lm	WW1800-48W-927N
					3000K	WW	5700lm	3100lm	WW1800-48W-930N
					4000K	WW	5900lm	3300lm	WW1800-48W-940N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

FUSION Linear System – SL300-1S-4W Adjustable Spotlight Module






15° 30° 55° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP40 | CE | CB | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- Adjustable Spotlight Module
- CREE LED: 4W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 55°
- Lumen Output: Up to 420lm System Luminous Flux
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K







Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	12 V	350mA	80	2700K	15°	470lm	350lm	SL300-1S-4W-827-15°
						30°	470lm	350lm	SL300-1S-4W-827-30°
						55°	470lm	350lm	SL300-1S-4W-827-55°
No Driver	99,00 €				3000K	15°	500lm	380lm	SL300-1S-4W-830-15°
						30°	500lm	380lm	SL300-1S-4W-830-30°
						55°	500lm	380lm	SL300-1S-4W-830-55°
					4000K	15°	550lm	420lm	SL300-1S-4W-840-15°
						30°	550lm	420lm	SL300-1S-4W-840-30°
						55°	550lm	420lm	SL300-1S-4W-840-55°

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim

BACK

FUSION Linear System – SL300-2S-8W Adjustable Spotlight Module




15° 30° 55° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19

IP40 | CE | CB | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- Adjustable Spotlight Module
- CREE LED: 8W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 55°
- Lumen Output: Up to 750lm System Luminous Flux
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim




Light Distribution

3000K







Order Info


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8W	10W	24 V	350mA	80	2700K	15°	850lm	650lm	SL300-2S-8W-827-15°N
						30°	850lm	650lm	SL300-2S-8W-827-30°N
						55°	850lm	650lm	SL300-2S-8W-827-55°N
No Driver	159,00 €				3000K	15°	900lm	700lm	SL300-2S-8W-830-15°N
						30°	900lm	700lm	SL300-2S-8W-830-30°N
						55°	900lm	700lm	SL300-2S-8W-830-55°N
					4000K	15°	950lm	750lm	SL300-2S-8W-840-15°N
						30°	950lm	750lm	SL300-2S-8W-840-30°N
						55°	950lm	750lm	SL300-2S-8W-840-55°N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

BACK

FUSION Linear System – SL450-3S-13W Adjustable Spotlight Module






15° 30° 55° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP40 | CE | CB | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- Adjustable Spotlight Module
- CREE LED: 13W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 55°
- Lumen Output: Up to 1100lm System Luminous Flux
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K Per Single Spot:







Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36 V	350mA	80	2700K	15°	1200lm	950lm	SL450-3S-13W-827-15°N
						30°	1200lm	950lm	SL450-3S-13W-827-30°N
						55°	1200lm	950lm	SL450-3S-13W-827-55°N
No Driver	219,00 €				3000K	15°	1300lm	1000lm	SL450-3S-13W-830-15°N
						30°	1300lm	1000lm	SL450-3S-13W-830-30°N
						55°	1300lm	1000lm	SL450-3S-13W-830-55°N
					4000K	15°	1400lm	1100lm	SL450-3S-13W-840-15°N
						30°	1400lm	1100lm	SL450-3S-13W-840-30°N
						55°	1400lm	1100lm	SL450-3S-13W-840-55°N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

BACK

FUSION Linear System – AL300-13W Accent Light Module





15° 30° 40° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19

CE CB OSRAM 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Accent Light Module
- OSRAM LED: 13W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 40°
- Lumen Output: Up to 1300lm System Luminous Flux
- LED Driver: No Driver, ON-OFF, Phase Dim, 1-10V Dim, DALI Dim







Light Distribution

3000K







Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	18 V	700mA	80	2700K	15°	1300lm	1000lm	AL300-13W-827-15°N
						30°	1300lm	1000lm	AL300-13W-827-30°N
						40°	1300lm	1100lm	AL300-13W-827-40°N
					3000K	15°	1400lm	1100lm	AL300-13W-830-15°N
						30°	1400lm	1100lm	AL300-13W-830-30°N
						40°	1400lm	1200lm	AL300-13W-830-40°N
					4000K	15°	1500lm	1200lm	AL300-13W-840-15°N
						30°	1500lm	1200lm	AL300-13W-840-30°N
						40°	1500lm	1300lm	AL300-13W-840-40°N


No Driver 99,00 €


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

BACK

FUSION Linear System – UL1200-11W/ UL1800-16W Uplight Module







110°

2700K
3000K
4000K

CRI >80

CRI >90

CE

CB

SAMSUNG
50,000h@L80B10


5 YEARS GUARANTEE

Quick Info

- Uplight Module
- SAMSUNG LED: 11W, 16W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 110°
- Lumen Output: Up to 2400lm System Luminous Flux
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K Per Single Spot:




Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	46 V	250mA	80	2700K	110°	1700lm	1500lm	UL1200-11W-827-110°
No Driver		39,00 €			3000K	110°	1800lm	1600lm	UL1200-11W-830-110°
					4000K	110°	1900lm	1700lm	UL1200-11W-840-110°
16W	18W	46 V	350mA	80	2700K	110°	2300lm	2000lm	UL1800-16W-827-110°
No Driver		59,00 €			3000K	110°	2500lm	2200lm	UL1800-16W-830-110°
					4000K	110°	2700lm	2400lm	UL1800-16W-840-110°

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim

BACK


FUSION Linear System – Linear Downlight Profile System

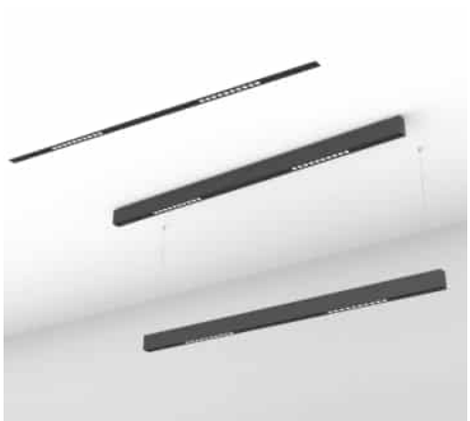




Quick Info


- Linear Accent Light Profile System
- OSRAM LED: 44W, 22W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40° (FUSION G2 in 15°, 24°, 48°, 60°)
- Lumen Output: Up to 3800lm System Luminous Flux
- Mounting Type: Pendant, Surface mounted, Trimless Recessed, Trim Recessed
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K





Order Info (in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Code
44W	48W	31+31V	700mA	80	2700K	24°	5000lm	3400lm	1500mm	FL1500(X)-2*FF10-48W-82724F-BB
						40°	5000lm	3400lm	1500mm	FL1500(X)-2*FF10-48W-82740F-BB
					3000K	24°	5200lm	3600lm	1500mm	FL1500(X)-2*FF10-48W-83024F-BB
						40°	5200lm	3600lm	1500mm	FL1500(X)-2*FF10-48W-83040F-BB
					4000K	24°	5600lm	3800lm	1500mm	FL1500(X)-2*FF10-48W-84024F-BB
						40°	5600lm	3800lm	1500mm	FL1500(X)-2*FF10-48W-84040F-BB
22W	26W	16+16V	700mA	80	2700K	24°	2400lm	1700lm	1200mm	FL1200(X)-2*FF5-26W-82724F-BB
						40°	2400lm	1700lm	1200mm	FL1200(X)-2*FF5-26W-82740F-BB
					3000K	24°	2600lm	1800lm	1200mm	FL1200(X)-2*FF5-26W-83024F-BB
						40°	2600lm	1800lm	1200mm	FL1200(X)-2*FF5-26W-83040F-BB
					4000K	24°	2800lm	1900lm	1200mm	FL1200(X)-2*FF5-26W-84024F-BB
						40°	2800lm	1900lm	1200mm	FL1200(X)-2*FF5-26W-84040F-BB


Code Remark: (X)=P (Pendant) (X)= S (Surface mounted) (X)= T (Trimless Recessed) (X)= F (Trim Recessed)


Code Remark: F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Model	ON-OFF	DALI Dim
FL1500-2*FF10 - Surface mounted	999,00 €	1159,00 €
FL1500-2*FF10 - Pendant	1009,00 €	1169,00 €
FL1200-2*FF5 - Surface mounted	669,00 €	829,00 €
FL1200-2*FF5 - Pendant	689,00 €	849,00 €

**NOTE: Recessed profile on request*


FUSION Linear System – Linear General Light Profile System

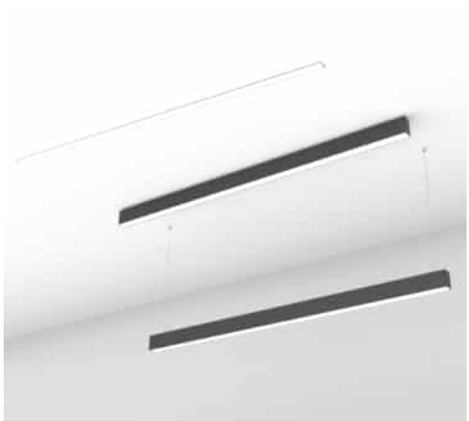

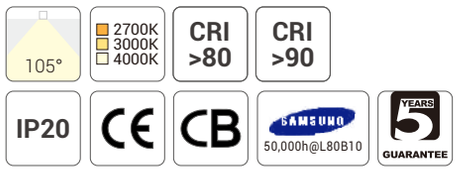


Quick Info

- Linear General Light Profile System
- SAMSUNG LED: 22W, 32W, 48W, CRI>80, CRI>90,
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 105°
- Lumen Output: Up to 5500lm System Luminous Flux
- Mounting Type: Pendant, Surface mounted, Trimless Recessed, Trim Recessed
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K



Model	ON-OFF	DALI Dim
FL1200-GL1200 - Surface mounted	509,00 €	619,00 €
FL1200-GL1200 - Pendant mounted	529,00 €	649,00 €
FL1800-GL1800 - Surface mounted	679,00 €	789,00 €
FL1800-GL1800 - Pendant mounted	689,00 €	799,00 €

**NOTE: Recessed profile on request*

Order Info (in Black Housing as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Code
32W	36W	46V	700mA	80	2700K	105°	4600lm	3400lm	1800mm	FL1800(X)-GL1800-36W-827A1F-BN
					3000K	105°	4800lm	3600lm	1800mm	FL1800(X)-GL1800-36W-830A1F-BN
					4000K	105°	5000lm	3800lm	1800mm	FL1800(X)-GL1800-36W-840A1F-BN
48W	52W	46V	700+350mA	80	2700K	105°	6200lm	5000lm	1800mm	FL1800(X)-GL1800-52W-827A1F-BN
					3000K	105°	6400lm	5200lm	1800mm	FL1800(X)-GL1800-52W-830A1F-BN
					4000K	105°	7000lm	5500lm	1800mm	FL1800(X)-GL1800-52W-840A1F-BN
22W	26W	46V	500mA	80	2700K	105°	3200lm	2300lm	1200mm	FL1200(X)-GL1200-26W-827A1F-BN
					3000K	105°	3400lm	2700lm	1200mm	FL1200(X)-GL1200-26W-830A1F-BN
					4000K	105°	3600lm	2900lm	1200mm	FL1200(X)-GL1200-26W-840A1F-BN
32W	36W	46V	700mA	80	2700K	105°	4200lm	3400lm	1200mm	FL1200(X)-GL1200-36W-827A1F-BN
					3000K	105°	4400lm	3600lm	1200mm	FL1200(X)-GL1200-36W-830A1F-BN
					4000K	105°	4800lm	3800lm	1200mm	FL1200(X)-GL1200-36W-840A1F-BN


Code Remark: (X)=P (Pendant) (X)= S (Surface mounted) (X)= T (Trimless Recessed) (X)= F (Trim Recessed)

Code Remark: F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

BACK


FUSION Linear System – Linear Wall Washer Light Profile System

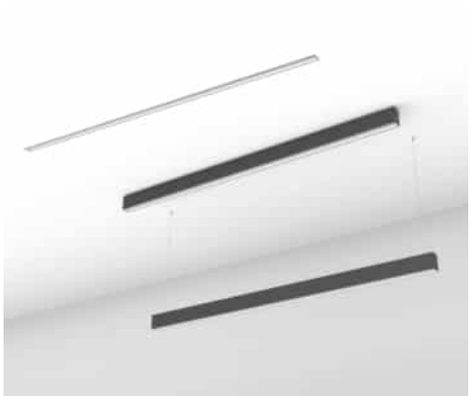

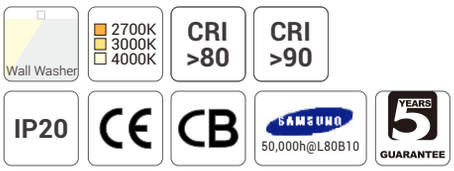


Quick Info

- Linear Wall Washer Light Profile System
- SAMSUNG LED: 22W, 32W, 48W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: Wall washer
- Lumen Output: Up to 3700lm System Luminous Flux
- Mounting Type: Pendant, Surface mounted, Trimless Recessed, Trim Recessed
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K



Order Info (in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Code
32W	36W	46V	700mA	80	2700K	WW	4600lm	2500lm	1800mm	FL1800(X)-WW1800-36W-827WWF-BN
					3000K	WW	4800lm	2700lm	1800mm	FL1800(X)-WW1800-36W-830WWF-BN
					4000K	WW	5000lm	2900lm	1800mm	FL1800(X)-WW1800-36W-840WWF-BN
48W	52W	46V	700+350mA	80	2700K	WW	6200lm	3300lm	1800mm	FL1800(X)-WW1800-52W-827WWF-BN
					3000K	WW	6400lm	3500lm	1800mm	FL1800(X)-WW1800-52W-830WWF-BN
					4000K	WW	6600lm	3700lm	1800mm	FL1800(X)-WW1800-52W-840WWF-BN
22W	26W	46V	500mA	80	2700K	WW	3200lm	1700lm	1200mm	FL1200(X)-WW1200-26W-827WWF-BN
					3000K	WW	3400lm	1800lm	1200mm	FL1200(X)-WW1200-26W-830WWF-BN
					4000K	WW	3600lm	1900lm	1200mm	FL1200(X)-WW1200-26W-840WWF-BN
32W	36W	46V	700mA	80	2700K	WW	4200lm	2300lm	1200mm	FL1200(X)-WW1200-36W-827WWF-BN
					3000K	WW	4400lm	2500lm	1200mm	FL1200(X)-WW1200-36W-830WWF-BN
					4000K	WW	5000lm	2700lm	1200mm	FL1200(X)-WW1200-36W-840WWF-BN


Code Remark: (X)=P(Pendant) (X)= S(Surface mounted) (X)= T(Trimless Recessed) (X)= F(Trim Recessed)


Code Remark: F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Model	ON-OFF	DALI Dim
FL1800-WW1800 - Surface mounted	619,00 €	729,00 €
FL1800-WW1800 - Pendant	629,00 €	749,00 €
FL1200-WW1200 - Surface mounted	479,00 €	599,00 €
FL1200-WW1200 - Pendant	509,00 €	619,00 €

**NOTE: Recessed profile on request*

FUSION Linear System – Linear Accent Light Profile System

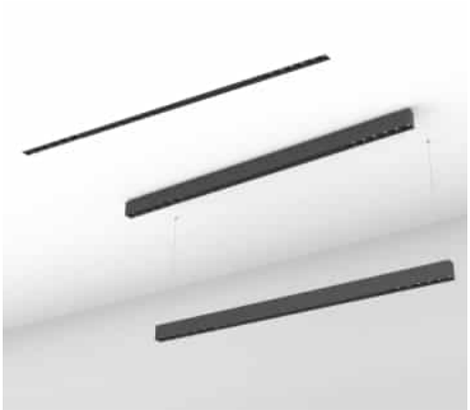



15° 30° 40° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19


IP20 | CE | CB | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- Linear Accent Light Profile System
- OSRAM LED: 26W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 40°
- Lumen Output: Up to 2600lm System Luminous Flux
- Mounting Type: Pendant, Surface mounted, Trimless Recessed, Trim Recessed
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K







Model	ON-OFF	DALI Dim
FL1500-2*AL300 - Surface mounted	629,00 €	749,00 €
FL1500-2*AL300 - Pendant	639,00 €	759,00 €
FL1200-2*AL300 - Surface mounted	549,00 €	659,00 €
FL1200-2*AL300 - Pendant	569,00 €	679,00 €

**NOTE: Recessed profile on request*

Order Info (in Black Housing as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Code
26W	30W	36V	700mA	80	2700K	15°	2800lm	2000lm	1200mm	FL1200(X)-2*AL300-30W-82715F-BB
						30°	2800lm	2000lm	1200mm	FL1200(X)-2*AL300-30W-82730F-BB
						40°	2800lm	2200lm	1200mm	FL1200(X)-2*AL300-30W-82740F-BB
					3000K	15°	3000lm	2200lm	1200mm	FL1200(X)-2*AL300-30W-83015F-BB
						30°	3000lm	2200lm	1200mm	FL1200(X)-2*AL300-30W-83030F-BB
						40°	3000lm	2400lm	1200mm	FL1200(X)-2*AL300-30W-83040F-BB
					4000K	15°	3400lm	2400lm	1200mm	FL1200(X)-2*AL300-30W-84015F-BB
						30°	3400lm	2400lm	1200mm	FL1200(X)-2*AL300-30W-84030F-BB
						40°	3400lm	2600lm	1200mm	FL1200(X)-2*AL300-30W-84040F-BB
26W	30W	36V	700mA	80	2700K	15°	2800lm	2000lm	1500mm	FL1500(X)-2*AL300-30W-82715F-BB
						30°	2800lm	2000lm	1500mm	FL1500(X)-2*AL300-30W-82730F-BB
						40°	2800lm	2200lm	1500mm	FL1500(X)-2*AL300-30W-82740F-BB
					3000K	15°	3000lm	2200lm	1500mm	FL1500(X)-2*AL300-30W-83015F-BB
						30°	3000lm	2200lm	1500mm	FL1500(X)-2*AL300-30W-83030F-BB
						40°	3000lm	2400lm	1500mm	FL1500(X)-2*AL300-30W-83040F-BB
					4000K	15°	3400lm	2400lm	1500mm	FL1500(X)-2*AL300-30W-84015F-BB
						30°	3400lm	2400lm	1500mm	FL1500(X)-2*AL300-30W-84030F-BB
						40°	3400lm	2600lm	1500mm	FL1500(X)-2*AL300-30W-84040F-BB


Code Remark: (X)=P (Pendant) (X)= S (Surface mounted) (X)= T (Trimless Recessed) (X)= F (Trim Recessed)

Code Remark: F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

BACK

FUSION Linear System – Linear General Light & Accent Light Profile System

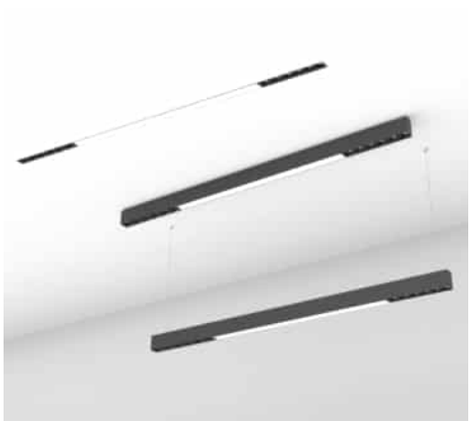




Quick Info

- Linear General Light & Accent Light Profile System
- SAMSUNG LED, OSRAM LED: 37W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°+105°, 30°+105°, 40°+105°
- Lumen Output: Up to 3300lm-4000lm System Luminous Flux
- Mounting Type: Pendant, Surface mounted, Trimless Recessed, Trim Recessed
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K

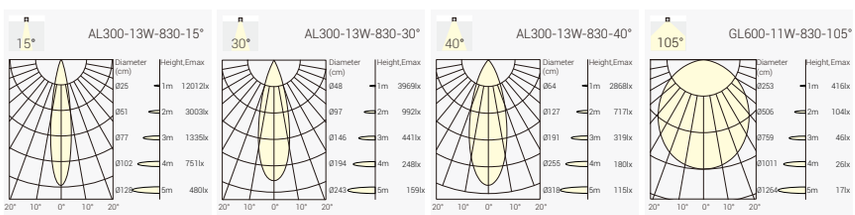

Order Info (in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
37W	41W	47 V	700mA	80	2700K	15°+105°	4500lm	3300lm	FL1200(X)-2*AL300+GL600-41W-82715F-BB
						30°+105°	4500lm	3300lm	FL1200(X)-2*AL300+GL600-41W-82730F-BB
						40°+105°	4500lm	3500lm	FL1200(X)-2*AL300+GL600-41W-82740F-BB
					3000K	15°+105°	4700lm	3500lm	FL1200(X)-2*AL300+GL600-41W-83015F-BB
						30°+105°	4700lm	3500lm	FL1200(X)-2*AL300+GL600-41W-83030F-BB
						40°+105°	4700lm	3700lm	FL1200(X)-2*AL300+GL600-41W-83040F-BB
					4000K	15°+105°	5100lm	3800lm	FL1200(X)-2*AL300+GL600-41W-84015F-BB
						30°+105°	5100lm	3800lm	FL1200(X)-2*AL300+GL600-41W-84030F-BB
						40°+105°	5100lm	4000lm	FL1200(X)-2*AL300+GL600-41W-84040F-BB

Code Remark: (X)=P (Pendant) (X)= S (Surface mounted) (X)= T (Trimless Recessed) (X)= F (Trim Recessed)

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Model	ON-OFF	DALI Dim
FL1200-2*AL300+GL600 - Surface mounted	629,00 €	739,00 €
FL1200-2*AL300+GL600 - Pendant	649,00 €	769,00 €

**NOTE: Recessed profile on request*

SPACE 60

Ideal Profile System for Office Lighting
Profile-Based Basic Lighting




SPACE 60 – Pendant Direct & Indirect



105° 80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UK CA | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- General Lighting, Pendant Direct & Indirect
- SAMSUNG LED: 21W, 31W, 38W, 47W, 56W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓ 105° ↑
- Lumen Output: Up to 6400lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

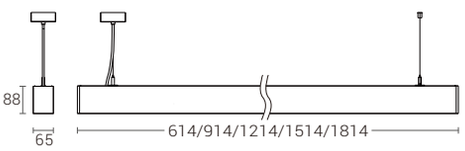

Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
19W	21W	33V	600mA	614mm	White	80	4000K	80° ↓ 105° ↑	1250lm ↓ 950lm ↑	SE6M-8408021F-WN-U
29W	31W	33V	900mA	914mm	White	80	4000K	80° ↓ 105° ↑	2050lm ↓ 1150lm ↑	SE9M-8408031F-WN-U
35W	38W	33V	1050mA	1214mm	White	80	4000K	80° ↓ 105° ↑	2500lm ↓ 1700lm ↑	SEAP-8408038F-WN-U
43W	47W	33V	1300mA	1514mm	White	80	4000K	80° ↓ 105° ↑	3300lm ↓ 2300lm ↑	SEBP-8408047F-WN-U
52W	56W	33V	1600mA	1814mm	White	80	4000K	80° ↓ 105° ↑	3800lm ↓ 2600lm ↑	SECP-8408056F-WN-U

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SEAP – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SE6M 600mm Module	830 CRI80/ 3000K	80 80° ↓	21 21W	F On-Off	w White	N None	U Uplight
SE9M 900mm Module	840 CRI80/ 4000K	80 80° ↓ 105° ↑	31 21W	A 1-10V Dim	B Black		
SEAP Pendant 1200mm	930 CRI90/ 3000K		38 38W	D DALI Dim			
SEBP Pendant 1500mm	940 CRI90/ 4000K		47 47W				
SECP Pendant 1800mm			56 56W				

Driver	614mm	914mm	1214mm	1514mm	1814mm
ON-OFF	279,00 €	369,00 €	429,00 €	549,00 €	619,00 €
DALI Dim	339,00 €	429,00 €	579,00 €	629,00 €	759,00 €

BACK

SPACE 60 – Pendant Direct



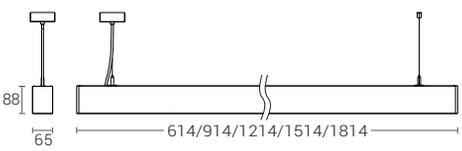



Quick Info

- General Light Version also Available
- SAMSUNG LED: 13W, 21W, 26W, 34W, 39W,
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80°↓
- Lumen Output: Up to 3900lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
11W	13W	33V	350mA	614mm	White	80	4000K	80° ↓	1250lm	SE6M-8408013F-WN
19W	21W	33V	600mA	914mm	White	80	4000K	80° ↓	2050lm	SE9M-8408021F-WN
23W	26W	33V	700mA	1214mm	White	80	4000K	80° ↓	2600lm	SEAP-8408026F-WN
30W	34W	33V	900mA	1514mm	White	80	4000K	80° ↓	3400lm	SEBP-8408034F-WN
35W	39W	33V	1050mA	1814mm	White	80	4000K	80° ↓	3900lm	SECP-8408039F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding


SEAM	–	***	**	**	*	–	*	*	–	*

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SE6M 600mm Module	830 CRI80/ 3000K	80 80°↓	13 13W	F On-Off	w White	N None	
SE9M 900mm Module	840 CRI80/ 4000K		21 21W	A 1-10V Dim	B Black		
SEAP Pendant 1200mm	930 CRI90/ 3000K		26 26W	D DALI Dim			
SEBP Pendant 1500mm	940 CRI90/ 4000K		34 34W				
SECP Pendant 1800mm			39 39W				

Driver	614mm	914mm	1214mm	1514mm	1814mm
ON-OFF	239,00 €	319,00 €	359,00 €	449,00 €	509,00 €
DALI Dim	309,00 €	379,00 €	429,00 €	559,00 €	589,00 €

SPACE 60 – Surface Mounted






80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- General Light Version also Available
- SAMSUNG LED: 13W, 21W, 26W, 34W, 39W,
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80°↓
- Lumen Output: Up to 3900lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
11W	13W	33V	350mA	614mm	White	80	4000K	80° ↓	1250lm	SE6M-8408013F-WN
19W	21W	33V	600mA	914mm	White	80	4000K	80° ↓	2050lm	SE9M-8408021F-WN
23W	26W	33V	700mA	1214mm	White	80	4000K	80° ↓	2600lm	SEAC-8408026F-WN
30W	34W	33V	900mA	1514mm	White	80	4000K	80° ↓	3400lm	SEBC-8408034F-WN
35W	39W	33V	1050mA	1814mm	White	80	4000K	80° ↓	3900lm	SECC-8408039F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding


SEAC – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SE6M 600mm Module	830 CRI80/ 3000K	80 80°↓	13 13W	F On-Off	w White	N None	
SE9M 900mm Module	840 CRI80/ 4000K		21 21W	A 1-10V Dim	B Black		
SEAC Surface Mounted 1200mm	930 CRI90/ 3000K		26 26W	D DALI Dim			
SEBC Surface Mounted 1500mm	940 CRI90/ 4000K		34 34W				
SECC Surface Mounted 1800mm			39 39W				

Driver	614mm	914mm	1214mm	1514mm	1814mm
ON-OFF	239,00 €	319,00 €	339,00 €	419,00 €	539,00 €
DALI Dim	309,00 €	379,00 €	409,00 €	529,00 €	619,00 €

BACK


SPACE 60 – Trim Recessed

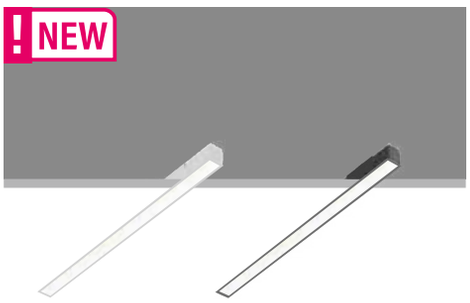

80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- General Light Version also Available
- SAMSUNG LED: 13W, 21W, 26W, 34W, 39W,
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80°↓
- Lumen Output: Up to 3900lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim



Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
11W	13W	33V	350mA	614mm	White	80	4000K	80° ↓	1250lm	SE6F-8408013F-WN
19W	21W	33V	600mA	914mm	White	80	4000K	80° ↓	2050lm	SE9F-8408021F-WN
23W	26W	33V	700mA	1214mm	White	80	4000K	80° ↓	2600lm	SEAF-8408026F-WN
30W	34W	33V	900mA	1514mm	White	80	4000K	80° ↓	3400lm	SEBF-8408034F-WN
35W	39W	33V	1050mA	1814mm	White	80	4000K	80° ↓	3900lm	SECF-8408039F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)


Coding

SEAF – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SE6F Trim Recessed 600mm	**830** CRI80/ 3000K	**80** 80°↓	**13** 13W	**F** On-Off	**w** White	**N** None	
SE9F Trim Recessed 900mm	**840** CRI80/ 4000K		**21** 21W	**A** 1-10V Dim	**B** Black		
SEAF Trim Recessed 1200mm	**930** CRI90/ 3000K		**26** 26W	**D** DALI Dim			
SEBF Trim Recessed 1500mm	**940** CRI90/ 4000K		**34** 34W				
SECF Trim Recessed 1800mm			**39** 39W				

Driver	614mm	914mm	1214mm	1514mm	1814mm
ON-OFF	239,00 €	319,00 €	369,00 €	469,00 €	539,00 €
DALI Dim	309,00 €	379,00 €	439,00 €	569,00 €	619,00 €


SPACE 60 – Trimless Recessed

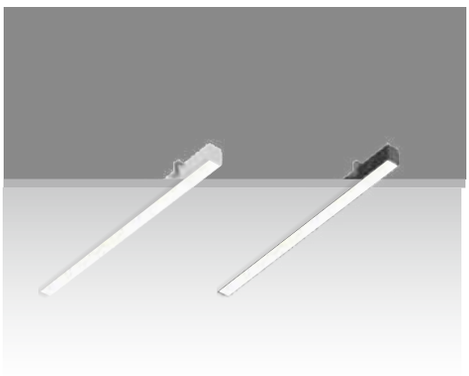

80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- General Light Version also Available
- SAMSUNG LED: 13W, 21W, 26W, 34W, 39W,
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80°↓
- Lumen Output: Up to 3900lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim



Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
11W	13W	33V	350mA	614mm	White	80	4000K	80° ↓	1250lm	SE6M-8408013F-WN
19W	21W	33V	600mA	914mm	White	80	4000K	80° ↓	2050lm	SE9M-8408021F-WN
23W	26W	33V	700mA	1214mm	White	80	4000K	80° ↓	2600lm	SEAT-8408026F-WN
30W	34W	33V	900mA	1514mm	White	80	4000K	80° ↓	3400lm	SEBT-8408034F-WN
35W	39W	33V	1050mA	1814mm	White	80	4000K	80° ↓	3900lm	SECT-8408039F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SEAT – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SE6M 600mm Module	**830** CRI80/ 3000K	**80** 80°↓	**13** 13W	**F** On-Off	**w** White	**N** None	
SE9M 900mm Module	**840** CRI80/ 4000K		**21** 21W	**A** 1-10V Dim	**B** Black		
SEAT Trimless Recessed 1200mm	**930** CRI90/ 3000K		**26** 26W	**D** DALI Dim			
SEBT Trimless Recessed 1500mm	**940** CRI90/ 4000K		**34** 34W				
SECT Trimless Recessed 1800mm			**39** 39W				

Driver	614mm	914mm	1214mm	1514mm	1814mm
ON-OFF	239,00 €	319,00 €	339,00 €	429,00 €	489,00 €
DALI Dim	309,00 €	379,00 €	409,00 €	529,00 €	569,00 €

BACK

DASH Smart

The Fexible Lighting System for Office, Administration & Retail Applications

Sustainable, Replaceable & Repairable LEDlight Sources with GR6d Socket in Accordance with IEC63356-1 / ZHAGA Book 14 for Reuse in Luminaires.

Designed for Use in 3-Phase Track Systems & Aluminum Profiles, Available in Fixed Lengths or as Continuous Light Strips.



Project: Office Project in Hunxe, Germany

NEW



3-Phase Track System

Global
Stucchi
Powergear




Linear Accent Light

80° beam angle, UGR<19
Uniform illumination and visual comfort
Reflector in Chrome Black or Specular
Housing color in Black or White
Lumen efficiency up to 140lm/W

Linear General Light

Within microprismatic cover,
to ensure homogeneous lighting
Housing color in Black or White
Lumen efficiency up to 120lm/W





In-Track LED Driver and Lamp Holder

DASH Smart 50W in-Track LED Driver (ON-OFF or DALI Dim)

· Dimension: 672mm x 13.8mm (31mm) x 31.5mm
· Maximum Secondary Power: 50.4W
· Output Voltage Range: 24-48V; Maximum Output Voltage: 60V
· Input Voltage: 220-240V~50/60Hz; Overvoltage Resistance: 320V, 1h
· Inrush current: 20A, 280μs
· Automatic Circuit Breaker: 22pcs on B16A, 37pcs on C16A

① Adjustable Output Current between 350-1050mA via DIP Switch
② L1, L2 and L3 phase switchable
③ Lamp Holder within GR6d Retaining Element for 3-phase Power Rails with Locking Mechanism



DASH SMART – The Modular Design 3-Phase Linear Tracklight

NEW






Project: Office Project in Hunxe, Germany

DASH SMART – GR6d 3-Phase Linear Tracklight






Quick Info

- The Modular Design 3-phase Linear Tracklight
- Length 864 mm/1164 mm/1464mm available,1764mm on request
- Housing color in White or Black
- Reflector color in Chrome-black or Specular
- 80° beam angle and UGR<19
- Uniform illumination and visual comfort
- CCT: 3000K, 4000K Available as Standard
- Lumen output adjustable via dip switch on LED driver
- Lumen efficiency up to 140lm/W
- LED Driver: ON-OFF or DALI Dim

Light Distribution

3000K



Color Options



Black-Chrome Black | Black-Specular | White-Specular

Driver	864mm	1164mm	1464mm
No Driver	59,00 €	69,00 €	89,00 €

Order Info (DSD26 in black housing & chrome-black reflector as an example)

Length	Code	LED Current	System Power	CRI	CCT	Beam	System Output
864mm	DSD26-L090-83080N-BC	@350 mA	17 W	80	3000K	80°	2350lm
					4000K	80°	2500lm
		@500 mA	24 W	80	3000K	80°	3300lm
					4000K	80°	3600lm
1164mm	DSD26-L120-83080N-BC	@350 mA	17 W	80	3000K	80°	2350lm
					4000K	80°	2500lm
		@500 mA	24 W	80	3000K	80°	3300lm
					4000K	80°	3600lm
		@700 mA	34 W	80	3000K	80°	4500lm
					4000K	80°	4900lm
1464mm	DSD26-L150-83080N-BC	@350 mA	17 W	80	3000K	80°	2350lm
					4000K	80°	2500lm
		@500 mA	24 W	80	3000K	80°	3300lm
					4000K	80°	3600lm
		@700 mA	34 W	80	3000K	80°	4500lm
					4000K	80°	4900lm
		@1050 mA	50 W	80	3000K	80°	7250lm
					4000K	80°	7500lm

Code Remark: N=N(No Driver) F=F(ON-OFF) D=D(DALI Dim)

Coding

DSD26-L*** –*** ** * – * *

Model	CRI/ CCT	Beam Angle	Control	Housing Finish	Reflector Color
DSD26-L090 DSD26 864mm	830 CRI80/ 3000K	80 80°	N No Driver	W White	C Chrome Black
DSD26-L120 DSD26 1164mm	840 CRI80/ 4000K		F On-Off	B Black	S Specular
DSD26-L150 DSD26 1464mm			D DALI Dim		

BACK


DASH SMART – DSO26 3-Phase Linear Tracklight



90° | 3000K 4000K | CRI >80 | IP20 | CE | 5 YEARS GUARANTEE


Quick Info

- The Modular Design 3-phase Linear Tracklight
- Length 864 mm/1164 mm/1464mm available,1764mm on request
- Housing color in White or Black
- General Light in Microprismatic Cover
- 90° beam angle, homogeneous lighting
- CCT: 3000K, 4000K Available as Standard
- Lumen output adjustable via dip switch on LED driver
- Lumen efficiency up to 120lm/W
- LED Driver: ON-OFF or DALI Dim



Light Distribution

3000K




Order Info (DSO26 in black housing as an example)

Length	Code	LED Current	System Power	CRI	CCT	Beam	System Output
864mm	DSO26-L090-83090N-BN	@350 mA	17 W	80	3000K	90°	2000lm
					4000K	90°	2200lm
		@500 mA	24 W	80	3000K	90°	2750lm
					4000K	90°	3000lm
1164mm	DSO26-L120-83090N-BN	@350 mA	17 W	80	3000K	90°	2000lm
					4000K	90°	2200lm
		@500 mA	24 W	80	3000K	90°	2750lm
					4000K	90°	3000lm
		@700 mA	34 W	80	3000K	90°	3600lm
					4000K	90°	3900lm
1464mm	DSO26-L150-83090N-BN	@350 mA	17 W	80	3000K	90°	2000lm
					4000K	90°	2200lm
		@500 mA	24 W	80	3000K	90°	2750lm
					4000K	90°	3000lm
		@700 mA	34 W	80	3000K	90°	3600lm
					4000K	90°	3900lm
		@1050 mA	50 W	80	3000K	90°	5000lm
					4000K	90°	5500lm

Code Remark: N=N(No Driver) F=F(ON-OFF) D=D(DALI Dim)

Color Options



Black White

Driver	864mm	1164mm	1464mm
No Driver	59,00 €	79,00 €	89,00 €

Coding

DSO26-L***	–***	**	*	–	*	*
Model	CRI/ CCT	Beam Angle	Control		Trim Finish	Reflector Color
DSO26-L090 DSO26 864mm	830 CRI80/ 3000K	90 90°	N No Driver		W White	N None
DSO26-L120 DSO26 1164mm	840 CRI80/ 4000K		F On-Off		B Black	
DSO26-L150 DSO26 1464mm			D DALI Dim			


DASH SMART – In Track Driver



IP20 | CE | 5 YEARS GUARANTEE

Quick Info

- In Track track driver for DASH Smart GR6d & DSO26 tracklight
- Adaptation of the housing not only for Eurtac but also for Global 3-phase tracks (13.8 mm width)
- DALI-2 version for Global 3-phase tracks and other brands
- Phase selection without dismounting required
- Power adjustment via dip-switch without dismounting
- Driver color in black or white
- Operating current in 350-1050mA
- System output 50.4W
- Driver: ON-OFF or DALI Dim




Order Info (DSD26 in black housing & chrome-black reflector as an example)

Length	Code	LED Current	System Power
672mm	DS-B-GR6D-50W-350-1050-F	@350-1050 mA	50.4W
672mm	DS-W-GR6D-50W-350-1050-F	@350-1050 mA	50.4W
672mm	DS-B-GR6D-50W-350-1050-D	@350-1050 mA	50.4W
672mm	DS-W-GR6D-50W-350-1050-D	@350-1050 mA	50.4W

Code Remark: B=Black W=White F=F(ON-OFF) D=D(DALI Dim)

ON-OFF	90,00 €
DALI Dim	120,00 €

Color Options



Black-Chrome Black White-Specular



BACK



DASH SMART – Surface Light


NEW



80° | 3000K 4000K | CRI >80 | UGR<19 | IP20 | CE | 5 YEARS GUARANTEE


Quick Info

- Linear Surface tracklight made by aluminum
- Length 1182mm/1482mm available
- Housing color in White or Black
- Reflector color in Chrome-black or Specular
- 80° beam angle and UGR<19
- Uniform illumination and visual comfort
- CCT: 3000K, 4000K Available as Standard
- Lumen output adjustable via dip switch on LED driver
- Lumen efficiency up to 128lm/W
- LED Driver: ON-OFF or DALI Dim

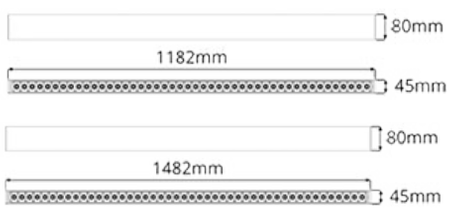


Light Distribution

3000K



Color Options



Black-Chrome Black | Black-Specular | White-Specular

Driver	1182mm	1482mm
ON-OFF	349,00 €	379,00 €
DALI Dim	369,00 €	399,00 €

Order Info (DSD26 in black housing & chrome-black reflector as an example)

Length	Code	LED Current	System Power	CRI	CCT	Beam	System Output
1182mm	DSC12-83080F-BC	@300-800 mA	40W Max.	80	3000K	80°	4646lm Max.
	DSC12-84080F-BC	@300-800 mA	40W Max.	80	4000K	80°	4887lm Max.
1482mm	DSC15-83080F-BC	@300-1050 mA	54W Max	80	3000K	80°	6537lm Max.
	DSC15-84080F-BC	@300-1050 mA	54W Max	80	4000K	80°	6876lm Max.

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

DSC1***	–***	**	*	–	*	*
Model	CRI/ CCT	Beam Angle	Control		Housing Finish	Reflector Color
DSC12 DSC12 1182mm	830 CRI80/ 3000K	80 80°	F On-Off		W White	C Chrome Black
DSC15 DSC12 1482mm	840 CRI80/ 4000K		D DALI Dim		B Black	S Specular

From April, it will be possible to order special lengths in freely configurable options with blind panels

BACK


DASH SMART – Pendant Light






Quick Info

- Linear Pendant tracklight made by aluminum
- Direct lighting with extra indirect lighting configuration available
- Length 1182mm/1482mm available
- Housing color in White or Black
- Reflector color in Chrome-black or Specular
- 80° beam angle and UGR<19
- Uniform illumination and visual comfort
- CCT: 3000K, 4000K Available as Standard
- Lumen output adjustable via dip switch on LED driver
- Lumen efficiency up to 136lm/W
- LED Driver: ON-OFF or DALI Dim

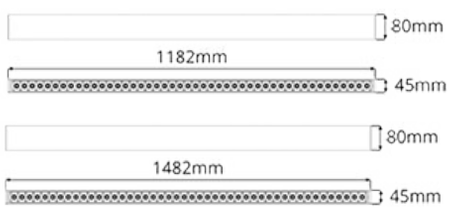

Light Distribution

3000K

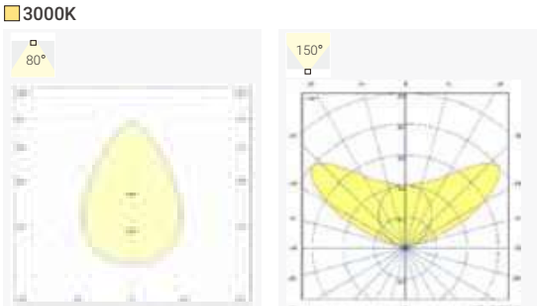

Color Options



Black-Chrome Black | Black-Specular | White-Specular

Order Info (DSO26 in black housing as an example)

Length	Code	LED Current	System Power	CRI	CCT	Beam	System Output
1182mm	DSP12-83080F-BC	@300-800 mA	40W Max.	80	3000K	80°	4646lm Max.
	DSP12-83080F-BC-U	@350-600 mA	60W Max.	80	4000K	80°/150°	7526lm Max.
	DSP12-84080F-BC	@300-800 mA	40W Max.	80	3000K	80°	4887lm Max.
	DSP12-84080F-BC-U	@350-600 mA	60W Max.	80	4000K	80°/150°	7916lm Max.
1482mm	DSP15-83080F-BC	@300-1050 mA	54W Max.	80	3000K	80°	6537lm Max.
	DSP15-83080F-BC-U	@350-600 mA	60W Max.	80	4000K	80°/150°	7761lm Max.
	DSP15-84080F-BC	@300-1050 mA	54W Max.	80	3000K	80°	6876lm Max.
	DSP15-84080F-BC-U	@350-600 mA	60W Max.	80	4000K	80°/150°	8146lm Max.

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Direct:

Driver	1182mm	1482mm
ON-OFF	399,00 €	439,00 €
DALI Dim	419,00 €	459,00 €

Direct/Indirect:

Driver	1182mm	1482mm
ON-OFF	459,00 €	499,00 €
DALI Dim	499,00 €	539,00 €

Coding

DSP1*	–***	**	*	–	*	*
Model	CRI/ CCT	Beam Angle	Control		Trim Finish	Reflector Color
DSP12 DSP12 1182mm	830 CRI80/ 3000K	80 80°	F On-Off		W White	N None
DSP12 DSP12 1482mm	840 CRI80/ 4000K		D DALI Dim		B Black	

and for example, presence and daylight sensors - Please contact our sales team!

DASH SMART – 100 Recessed Light


NEW



80° | 3000K 4000K | CRI >80 | UGR<19 | IP20 | CE | 5 YEARS GUARANTEE


Quick Info

- Linear recessed light with external dimension 1196mm x 84mm/1496mm x 84mm
- Required cut-out in size 1185mm x 74mm/1485mmmm x 74mm
- Made by sheet steel, housing color in white
- Reflector color in Specular
- 80° beam angle and UGR<19
- Uniform illumination and visual comfort
- CCT: 3000K, 4000K Available as Standard
- Lumen output adjustable via dip switch on LED driver
- Lumen efficiency up to 142lm/W
- LED Driver: ON-OFF or DALI Dim

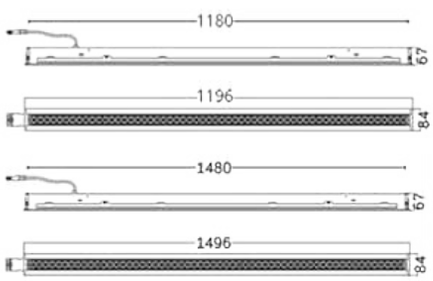

Light Distribution

3000K



Color Options



White-Specular

Driver	1196mm	1496mm
ON-OFF	349,00 €	419,00 €
DALI Dim	369,00 €	439,00 €

Order Info (DSD26 in black housing & chrome-black reflector as an example)

Length	Code	LED Current	System Power	CRI	CCT	Beam	System Output
1196mm	DS1R12-83080F-WS	@300-800 mA	40W Max.	80	3000K	80°	5162lm Max.
	DS1R12-84080F-WS	@300-800 mA	40W Max.	80	4000K	80°	4887lm Max.
1496mm	DS1R15-83080F-BC	@300-1050 mA	54W Max	80	3000K	80°	7263lm Max.
	DS1R15-84080F-BC	@300-1050 mA	54W Max	80	4000K	80°	7640lm Max.

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

DS1R1*	–***	**	*	–	*	*
Model	CRI/ CCT	Beam Angle	Control		Housing Finish	Reflector Color
DS1R12 DS1R12 1196mm	830 CRI80/ 3000K	80 80°	F On-Off		W White	S Specular
DS1R15 DS1R15 1496mm	840 CRI80/ 4000K		D DALI Dim			

BACK

DASH SMART – 625 Recessed Light


NEW



80° | 3000K | 4000K | CRI >80 | IP20 | CE | 5 YEARS GUARANTEE


Quick Info

- Recessed Panel light made by sheet steel
- Housing color in White, could be used for ceiling with T-profile support
- Cut-out size: 604mm x 604mm, 48mm depth.
- Reflector color in Specular
- 80° beam angle and UGR<19
- Uniform illumination and visual comfort
- CCT: 3000K, 4000K available as Standard
- Lumen output adjustable via dip switch on LED driver
- Lumen efficiency up to 137lm/W
- LED Driver: ON-OFF or DALI Dim




Light Distribution

3000K



Color Options



White-Specular

ON-OFF	199,00 €
DALI Dim	239,00 €

Accessories:

Surface frame	50,00 €
Installation Kit, 4pcs	10,00 €

Order Info (DSO26 in black housing as an example)

Length	Code	LED Current	System Power	CRI	CCT	Beam	System Output
625mm	DSR625-83080F-WS	@300-800 mA	40W Max.	80	3000K	80°	5150lm Max.
	DSR625-83080F-WS	@300-800 mA	40W Max.	80	4000K	80°	5450lm Max.

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

DSR625*	–***	**	*	–	*	*
Model	CRI/ CCT	Beam Angle	Control		Trim Finish	Reflector Color
DSR625 DSR625 625mm	830 CRI80/ 3000K 840 CRI80/ 4000K	80 80°	F On-Off D DALI Dim		W White B Black	S Specular


BACK

MODULINE 05

The Ultra-Slim 24V Modular Linear System.


Epitomizing Minimalist Elegance, Boasting an Ultra-Slim Track with a 5mm Width Aperture.


Its Seamless Integration into any Environment Ensures a Natural & Effortless Aesthetic, Ideal for Residential, Retail, or any Setting where Sleek Design Reigns Supreme.

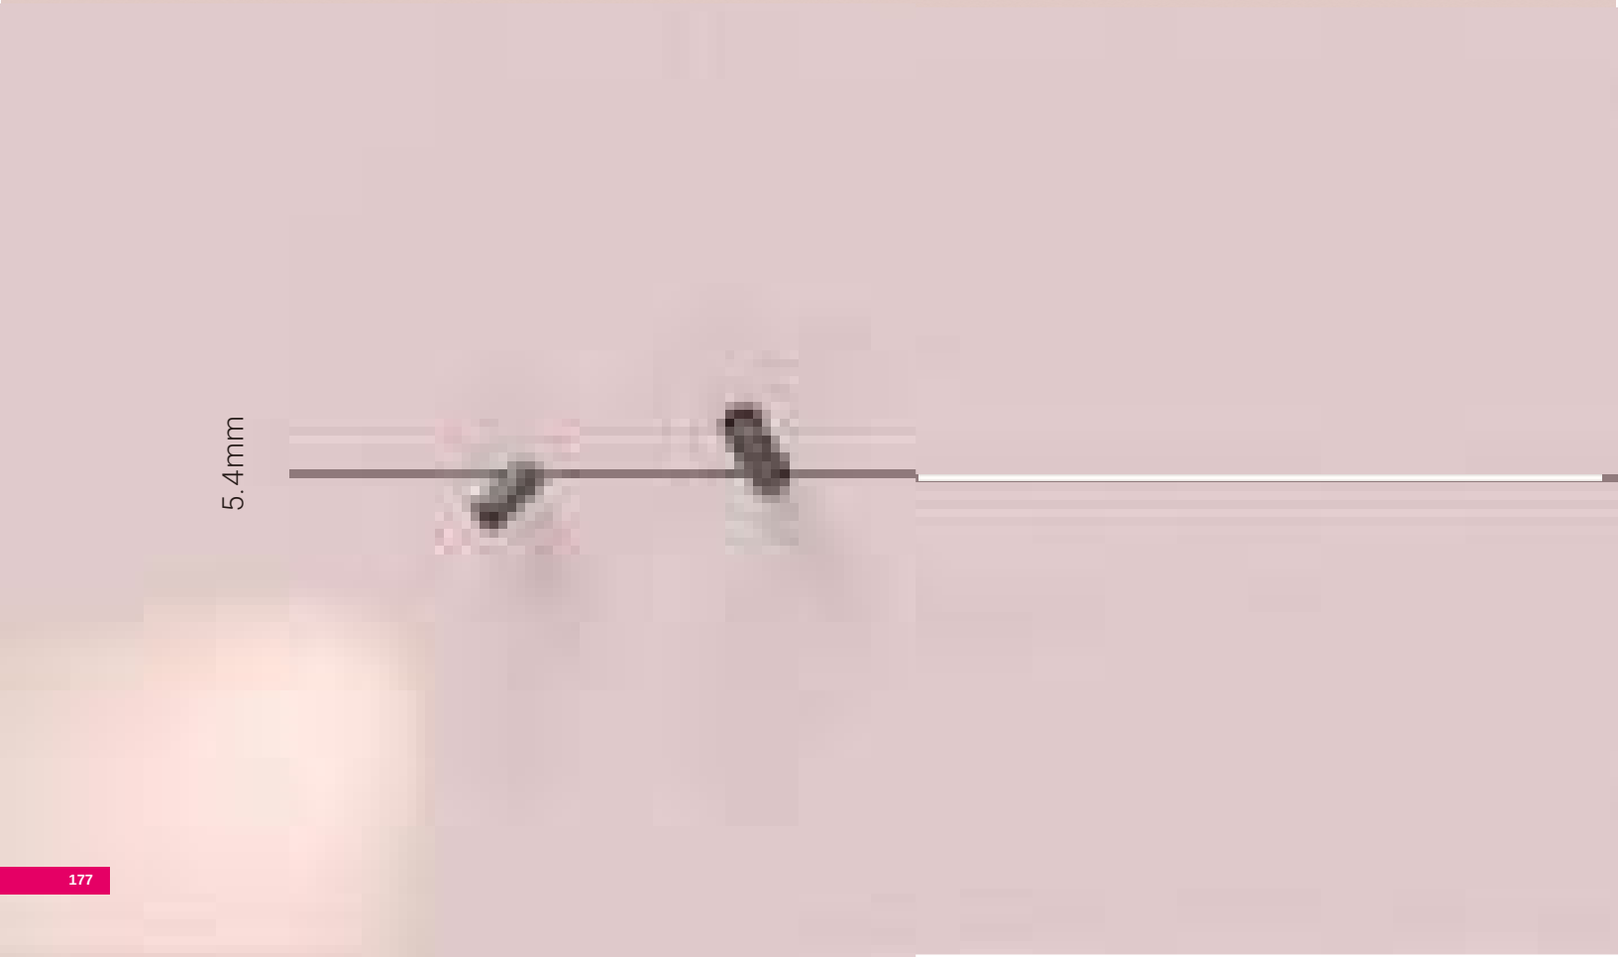




NEW

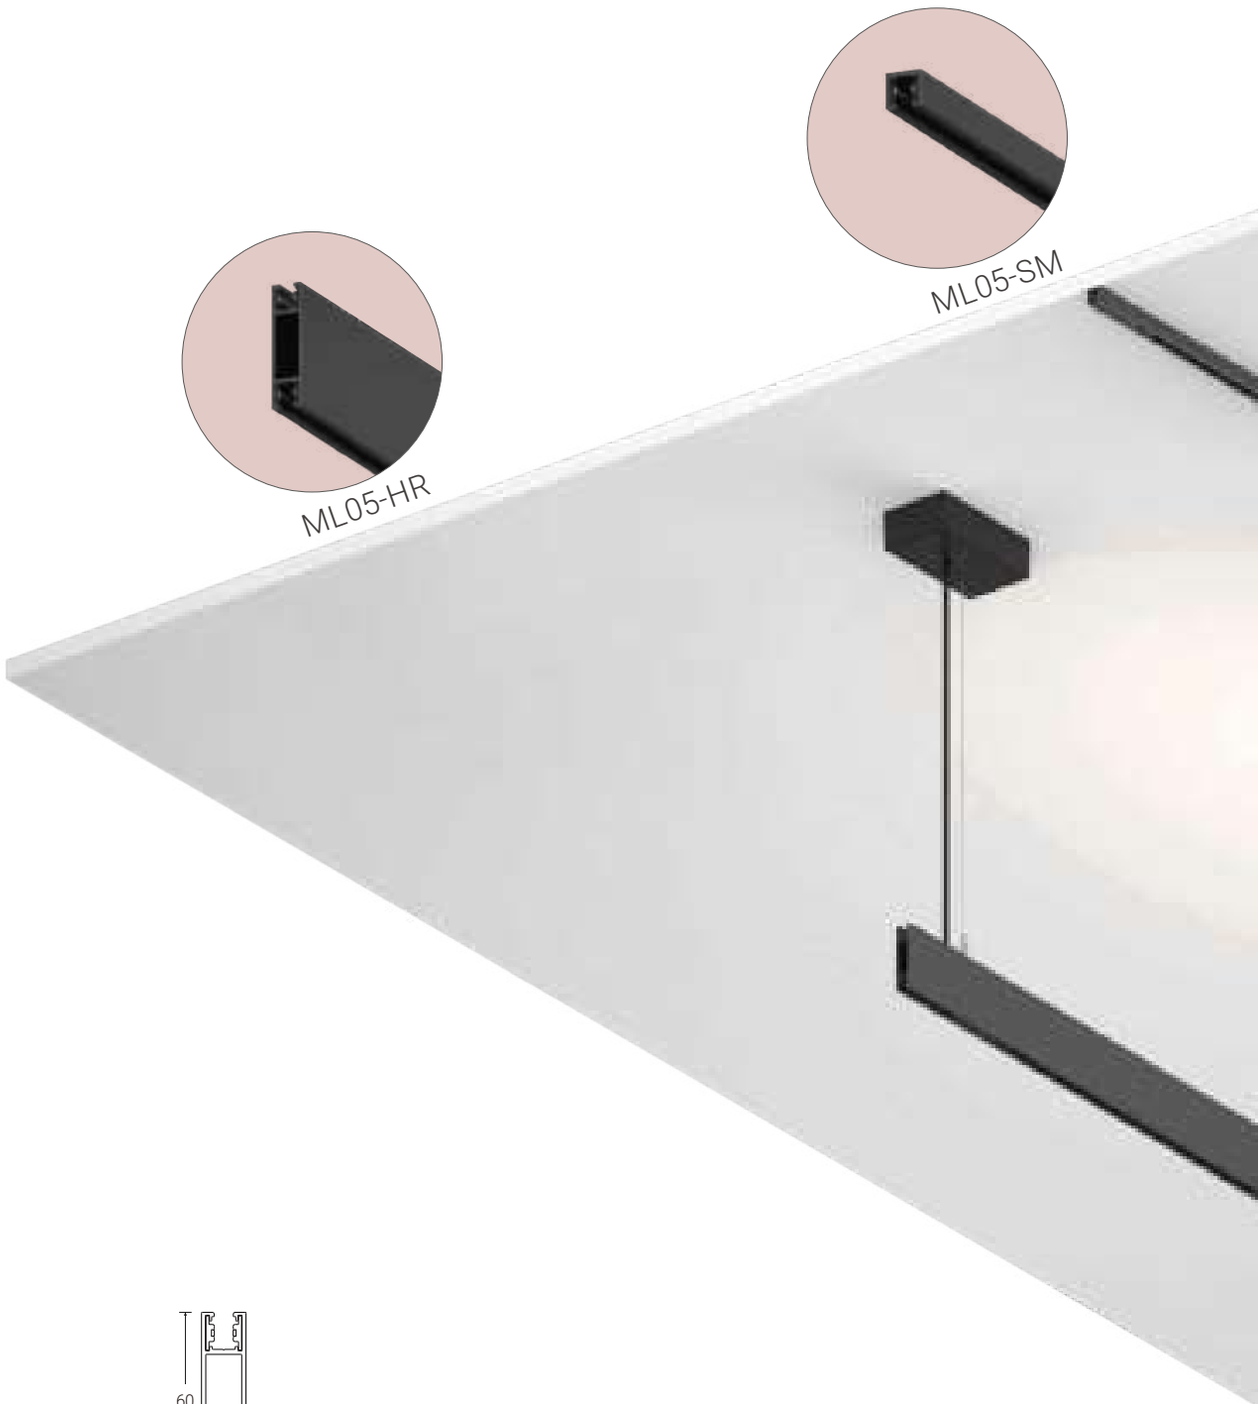





ML05-HR



ML05-SM




ML05-TR



ML05-TR

NEW





Surface-Mounted Track

Order Info

Length	Description	Code/ Model (Black)	Code/ Model (White)	
1000mm	Surface Mounted Track Rail	ML05-SM1000-B	ML05-SM1000-W	39,00 €
2000mm	Surface Mounted Track Rail	ML05-SM2000-B	ML05-SM2000-W	79,00 €
3000mm	Surface Mounted Track Rail	ML05-SM3000-B	ML05-SM3000-W	109,00 €

Accessories



Track Rail Cover
ML05-RC1000/ 2000/ 3000
9,00 €



Power Feeder Unit
ML05-PF-B/W
39,00 €



Flexible Continuous Kit
ML05-CKF-B/W
19,00 €



L Shape Horizontal Connector
ML05-SMLHC-B/W
69,00 €





L Shape Vertical Connector
ML05-SMLVC-B/W
69,00 €



Endcap Kits
ML05-SMEK-B/W
5,00 €

NEW

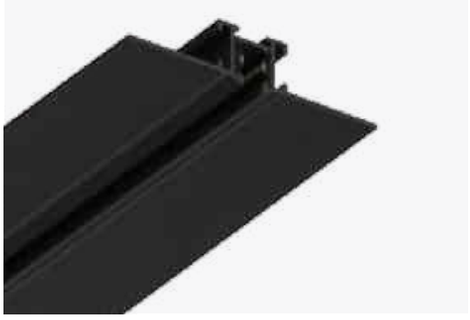



Trimless-recessed Track

Order Info

Length	Description	Code/ Model (Black)	Code/ Model (White)	
1000mm	Trimless-recessed Track Rail	ML05-TR1000-B	ML05-TR1000-W	59,00 €
2000mm	Trimless-recessed Track Rail	ML05-TR2000-B	ML05-TR2000-W	109,00 €
3000mm	Trimless-recessed Track Rail	ML05-TR3000-B	ML05-TR3000-W	159,00 €

Accessories



Track Rail Cover
ML05-RC1000/ 2000/ 3000
9,00 €



Power Feeder Unit
ML05-PF-B/W
19,00 €



Flexible Continuous Kit
ML05-CKF-B/W
19,00 €



L Shape Horizontal Connector
ML05-TRELHC-B/W
89,00 €



L Shape Vertical Connector
ML05-TRELVC-B/W
89,00 €



Endcap Kits
LX05-TREEK-B/W
9,00 €


BACK



Pendant H Track

Order Info

	Length	Description	Code/ Model (Black)	Code/ Model (White)
69,00 €	1000mm	Pendant H Track Rail	ML05-HR1000-B	ML05-HR1000-W
129,00 €	2000mm	Pendant H Track Rail	ML05-HR2000-B	ML05-HR2000-W
189,00 €	3000mm	Pendant H Track Rail	ML05-HR3000-B	ML05-HR3000-W



Accessories



Track Rail Cover
ML05-RC1000/ 2000/ 3000
9,00 €



Power Feeder Unit
ML05-PF-P-B/W
39,00 €



Flexible Continuous Kit
ML05-CKF-B/W
19,00 €



Flexible Continuous Kit
ML05-UCKF-B/W
39,00 €



L Shape Horizontal Connector
ML05-HRLHC-B/W
99,00 €



Mechanical Linear Connector
ML05-HRLC
19,00 €



Endcap Kits
LX05-HREK-B/W
9,00 €



Pendant H Track Pendant Kits
ML05-PK-H-B/W
79,00 €



Pendant H Track Pendant Wire Kits
ML05-PWK-H
59,00 €

NEW




18° 24° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 24V DC

IP20 | CE | CB | UK CA | ETL Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to 280lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K

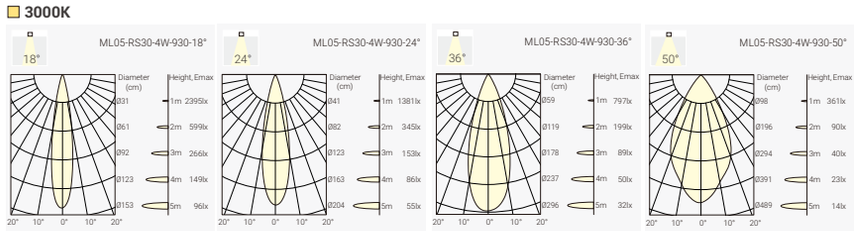

Finish



White



Black

Order Info (ML05-RS30 in Black Hosing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
3.5W	4W	24V	90	2700K	18°	370lm	250lm	MSR1-9271804N-BB
					24°	370lm	250lm	MSR1-9272404N-BB
					36°	370lm	250lm	MSR1-9273604N-BB
					50°	370lm	250lm	MSR1-9275004N-BB
				3000K	18°	400lm	260lm	MSR1-9301804N-BB
					24°	400lm	260lm	MSR1-9302404N-BB
					36°	400lm	260lm	MSR1-9303604N-BB
					50°	400lm	260lm	MSR1-9305004N-BB
				4000K	18°	440lm	280lm	MSR1-9401804N-BB
					24°	440lm	280lm	MSR1-9402404N-BB
					36°	440lm	280lm	MSR1-9403604N-BB
					50°	440lm	280lm	MSR1-9405004N-BB

No Driver | 99,00 €

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for MSR1-9301804F with **H**oneycomb
MSR1-9301804F-**H**

Honeycomb: +9,00€

Coding

MSR1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MSR1 ML05-RS30 Single Spot	**927** CRI>90/ 2700K	**18** 18°	**04** 3.5W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
	930 CRI>90/ 3000K	**24** 24°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K	**36** 36°		**P** Phase Dim			
		50 50°		**A** 1-10V Dim			
				D DALI Dim			

BACK

NEW




18° 24° 36° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 24V DC

IP20 | CE | CB | UKCA | Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 8W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K

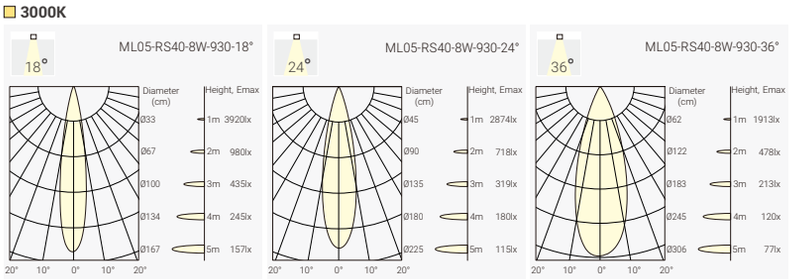

Finish



White



Black

Order Info (ML05-RS40 in Black Hosing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
7W	8W	24V	90	2700K	18°	900lm	520lm	MSR2-9271808F-BB
	No Driver	109,00 €			24°	900lm	520lm	MSR2-9271824F-BB
					36°	900lm	520lm	MSR2-9271836F-BB
				3000K	18°	950lm	550lm	MSR2-9301808F-BB
					24°	950lm	550lm	MSR2-9302408F-BB
					36°	950lm	550lm	MSR2-9303608F-BB
				4000K	18°	1000lm	600lm	MSR2-9401808F-BB
					24°	1000lm	600lm	MSR2-9402408F-BB
					36°	1000lm	600lm	MSR2-9403608F-BB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for MSR2-9301808F with **H**oneycomb
MSR2-9301808F-**H**

Honeycomb: +9,00€

Coding

MSR2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MSR2 ML05-RS40 Single Spot	**927** CRI>90/ 2700K	**18** 18°	**08** 8W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
	930 CRI>90/ 3000K	**24** 24°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K	**36** 36°		**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			


NEW



110° | 2700K 3000K 4000K | CRI >90 | 24V DC | IP20 | CE | CB | UKCA | ETL Intertek | 5 YEARS GUARANTEE

Quick Info


- System: 6W, 12W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 110°
- Lumen Output: Up to 1000lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim




ML05-GL1250: 1250mm
ML05-GL2500: 2500mm

Light Distribution

3000K





Order Info (ML05-GL1250 in Black Adapter as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
5W	6W	24V	90	2700K	110°	650lm	230lm	MSG1-927A106N-BN
				3000K	110°	700lm	250lm	MSG1-930A106N-BN
				4000K	110°	750lm	275lm	MSG1-940A106N-BN
11W	12W	24V	90	2700K	110°	1300lm	460lm	MSG2-927A112N-BN
				3000K	110°	1400lm	500lm	MSG2-930A112N-BN
				4000K	110°	1500lm	550lm	MSG2-940A112N-BN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

6W

No Driver	109,00 €

12W

No Driver	199,00 €

Coding

MSG1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Adaoter Finish	Reflector Color	Accessory
MSG1 ML05-GL1250	**927** CRI>90/ 2700K	**A1** 110°	**06** 6W	**N** No Driver	**W** White	**N** None	
MSG2 ML05-GL2500	**930** CRI>90/ 3000K		**12** 12W	**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

BACK


MODULINE 26

48V Low Voltage Minimalist Modular Linear Track System
Trim & Trimless Recessed, Surface Mounted, Pendant, Pendant H Track
Various Light Insets for Different Applications



EXPERTS
ANTI-AGING

MODULINE 26 – 48V Low Voltage Modular Linear System


1 H Track




2 Standard Track




3 Slim Track




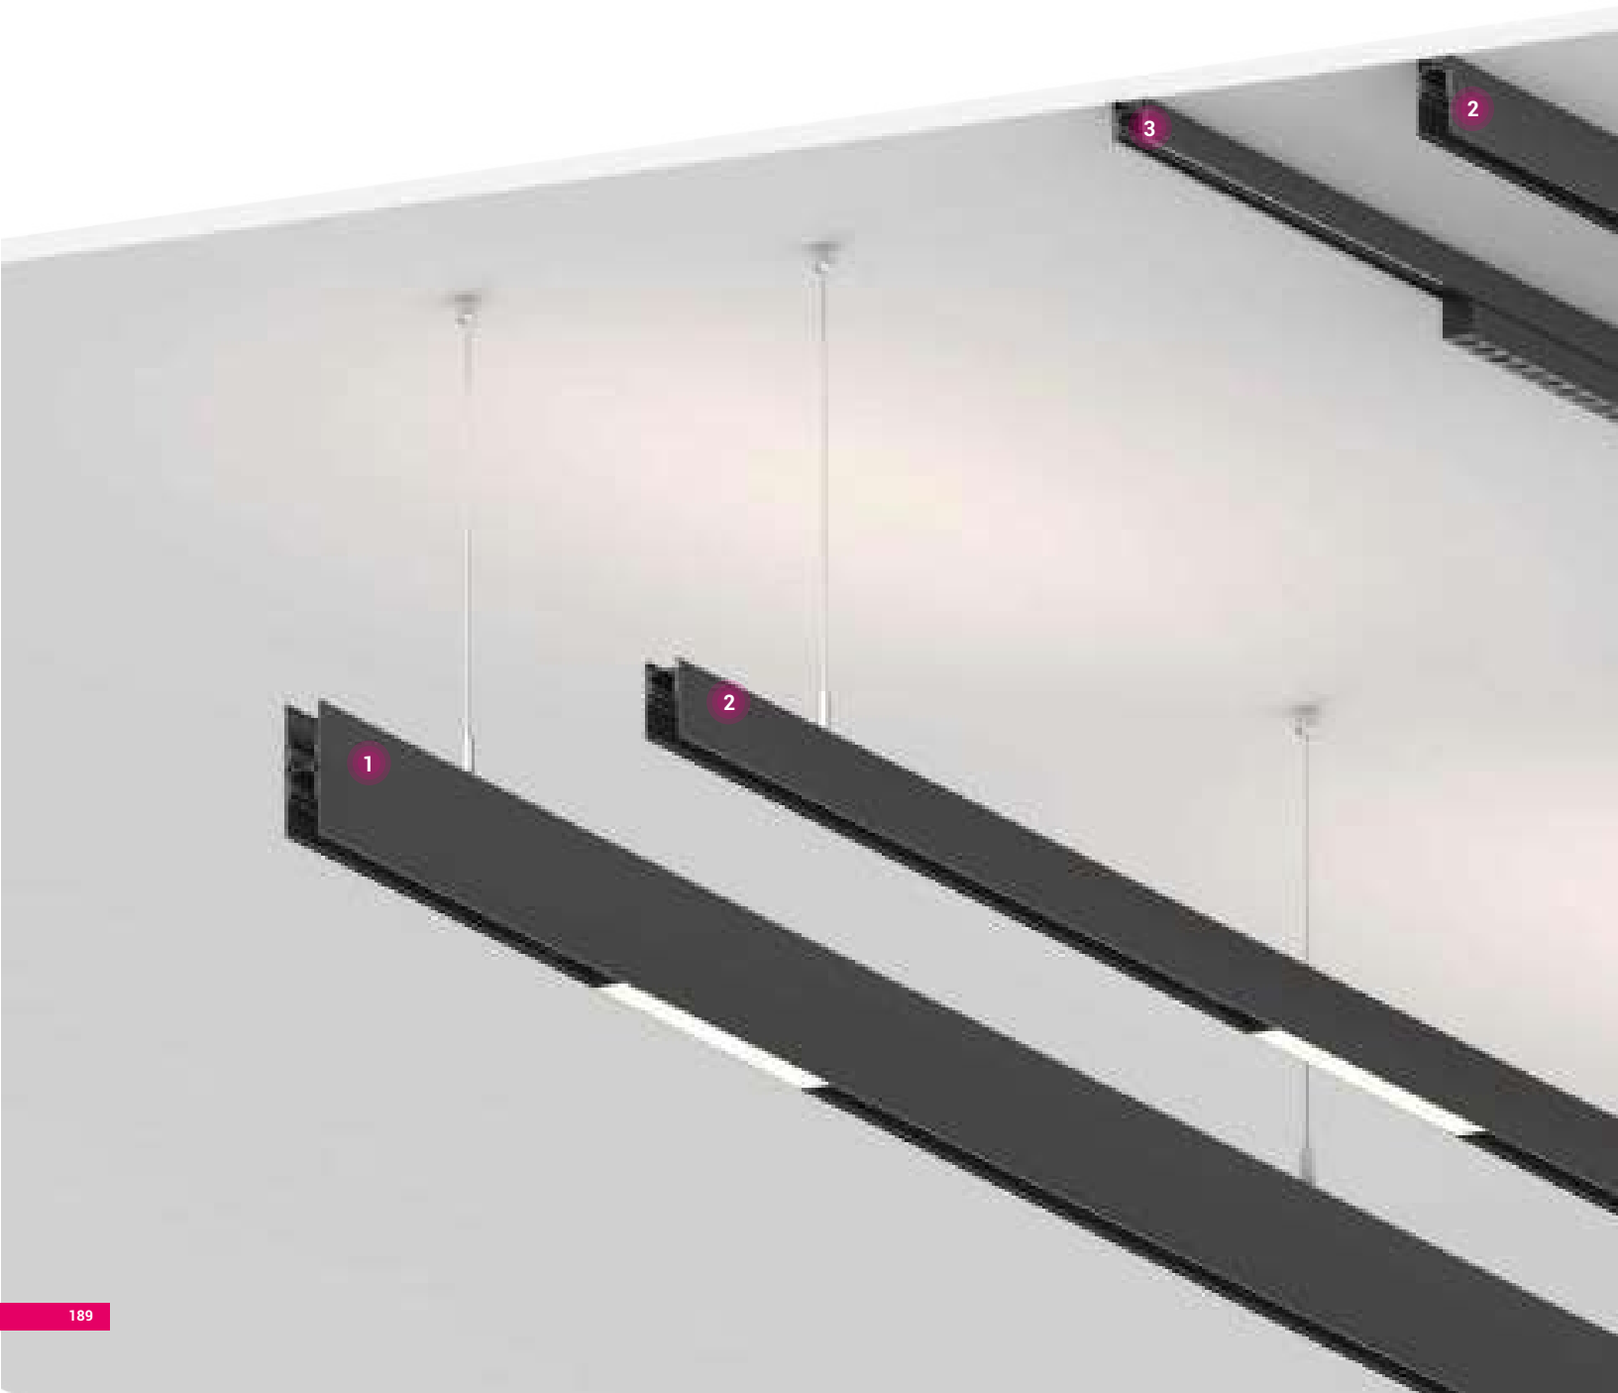

4 Trim Recessed Track




5 Trimless Recessed Track-EI



6 Trimless Recessed Track



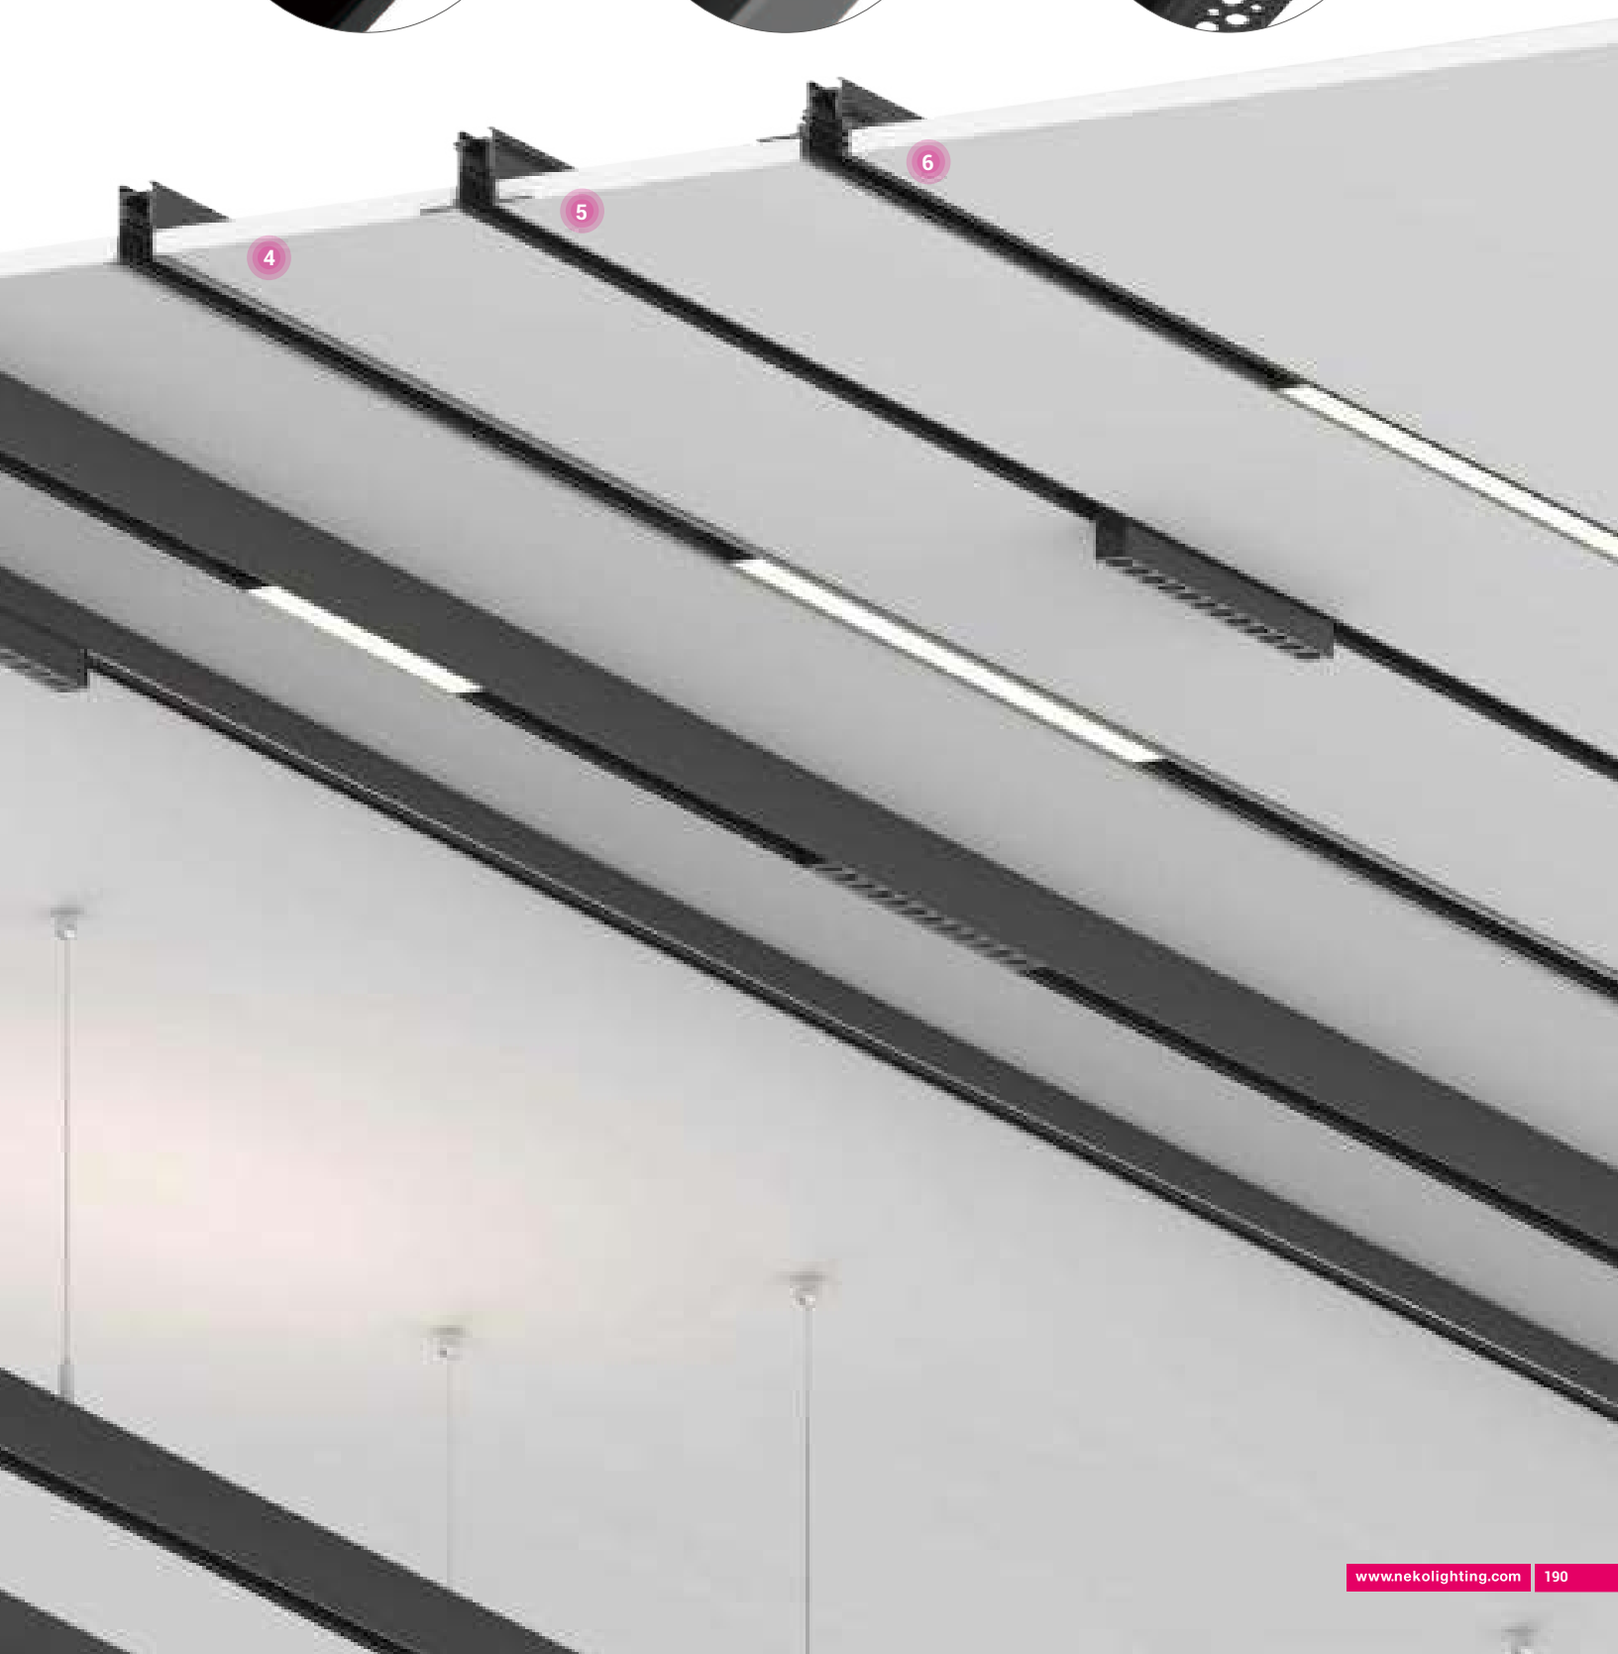

Spotlight Inset




ML26-RS25-3W



ML26-RS25-5W



ML26-RS40-8W



ML26-RS40-16W



ML26-RS40-12W



ML26-RS40-24W



NEW

ML26-RS55-14W




ML26-RT55-10W



ML26-RS72-19W
ML26-RS72-26W



ML26-FRS72-10W



ML26-FRS72-20W



ML26-RS96-9W



NEW

ML26-RB120-5W
ML26-RB150-7W



NEW

ML26-FRD80-10W




NEW

ML26-FSD80-10W



NEW

ML26-FRDH80-10W



NEW

ML26-FSDH80-10W

BACK

Accent Light Inset



ML26-AL190-3W
ML26-AL190-7W



ML26-AL280-9W
ML26-AL280-13W



NEW
ML26-AL560-26W



ML26-SA280-13W

General Light Inset



NEW
ML26-CL280-7W/ 10W
ML26-CL560-13W/ 19W
ML26-CL840-19W/ 26W
ML26-CL1120-26W



ML26-GL280-7W/ 10W
ML26-GL560-13W/ 19W
ML26-GL840-19W/ 26W
ML26-GL1120-26W



ML26-SG280-7W/ 10W



ML26-WW280-7W
ML26-WW560-13W

Pendant Light Inset



ML26-PS60-5W



ML26-PB120-5W
ML26-PB150-7W



ML26-PS40-12W



NEW
ML26-PS55-10W



NEW
ML26-NHP10-14W



NEW
ML26-NHU12-19W



NEW
ML26-NVP12-19W

MODULINE 26 – 48V Low Voltage Modular Linear System

Surface Mounted/ Pendant Version



ML26-RS25-5W ML26-RS40-16W ML26-RS40-24W ML26-RS40-8W ML26-RS40-12W ML26-RT55-10W


ML26-PS40-12W



ML26-RS25-5W ML26-RS40-16W ML26-RS40-24W ML26-RS40-8W ML26-RS40-12W ML26-RT55-10W

ML26-PS40-12W

BACK

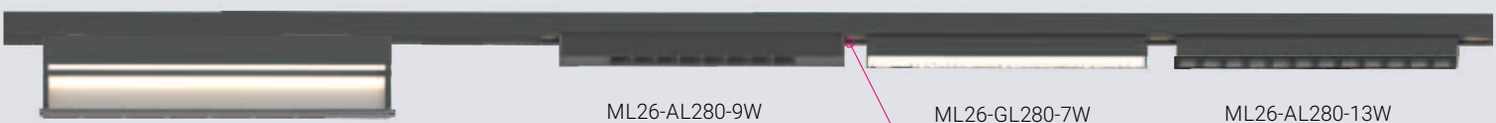


ML26-WW280-7W

ML26-AL280-9W


ML26-GL280-7W

ML26-AL280-13W

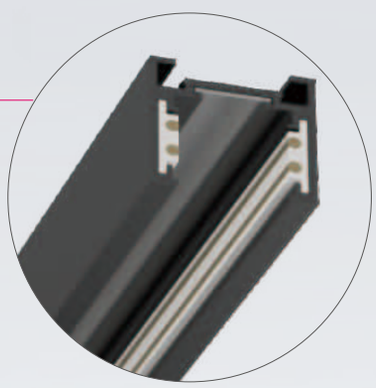

Slim Track



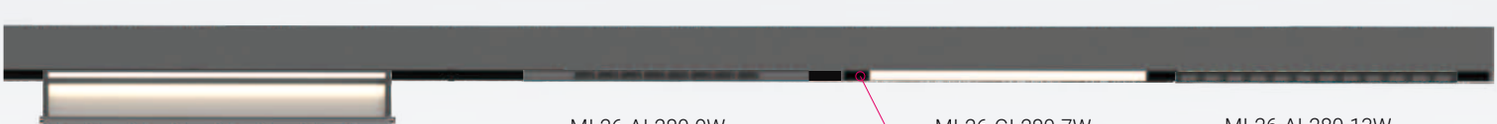


ML26-WW280-7W


ML26-AL280-9W

ML26-GL280-7W

ML26-AL280-13W

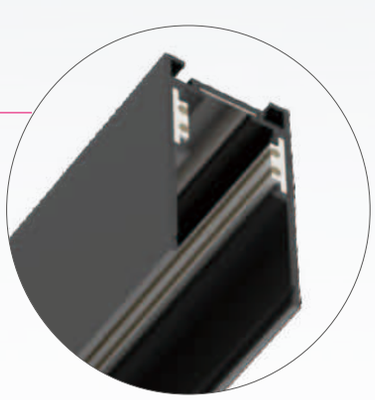

Standard Track



MODULINE 26 – 48V Low Voltage Modular Linear System

Recessed Version



ML26-RS25-5W ML26-RS40-16W ML26-RS40-24W ML26-RS40-8W ML26-RS40-12W ML26-RT55-10W


ML26-PS40-12W



ML26-RS25-5W ML26-RS40-16W ML26-RS40-24W ML26-RS40-8W ML26-RS40-12W ML26-RT55-10W

ML26-PS40-12W

BACK




ML26-AL280-9W


ML26-GL280-7W

ML26-AL280-13W

ML26-WW280-7W

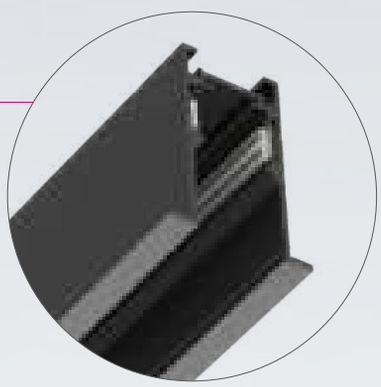

Trim Recessed Track






ML26-AL280-9W


ML26-GL280-7W


ML26-AL280-13W

ML26-WW280-7W

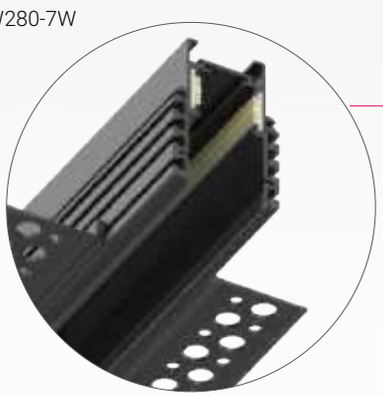


Trimless Recessed Track

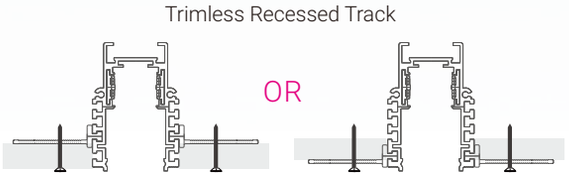

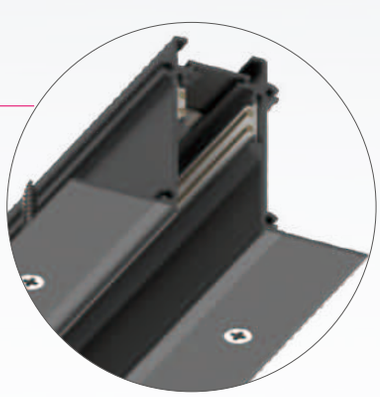


Trimless Recessed Track-EI



MODULINE 26 – 48V Low Voltage Modular Linear System

Pendant Version-H Track

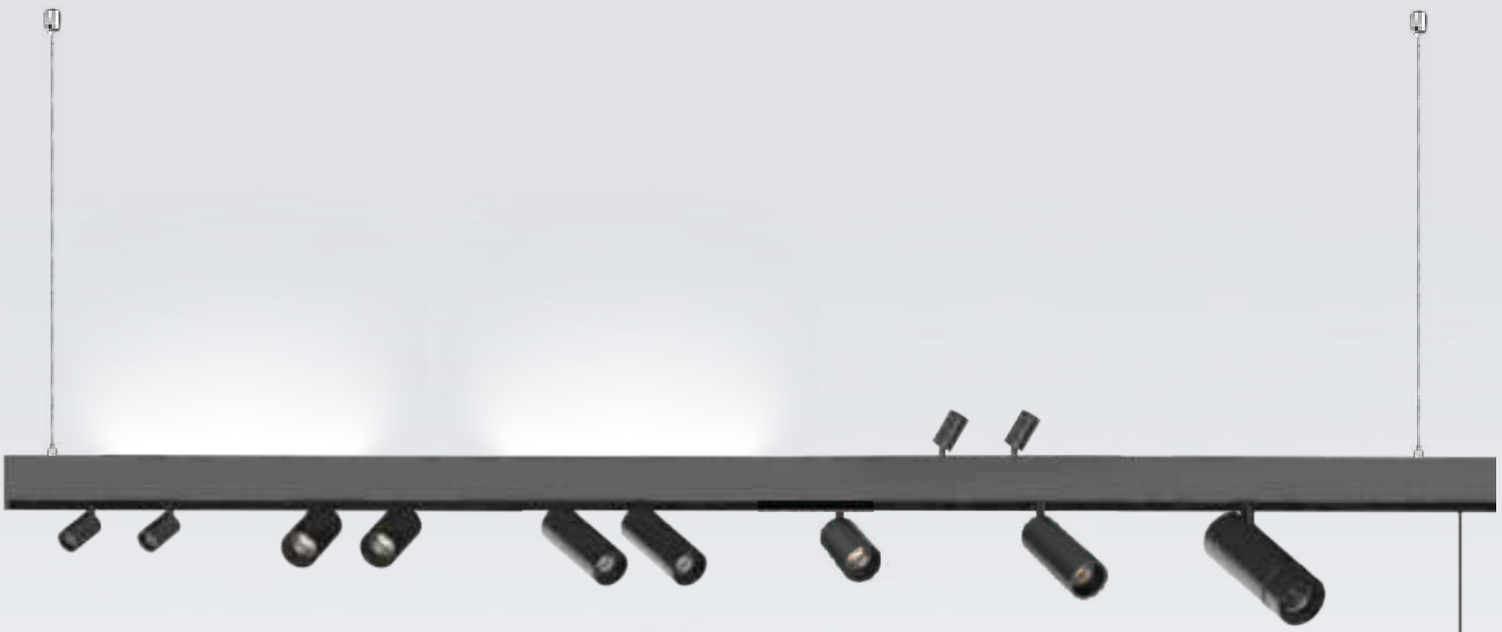


ML26-RS25-5W ML26-RS40-16W ML26-RS40-24W ML26-RS40-8W ML26-RS40-12W ML26-RT55-10W



ML26-PS40-12W

BACK

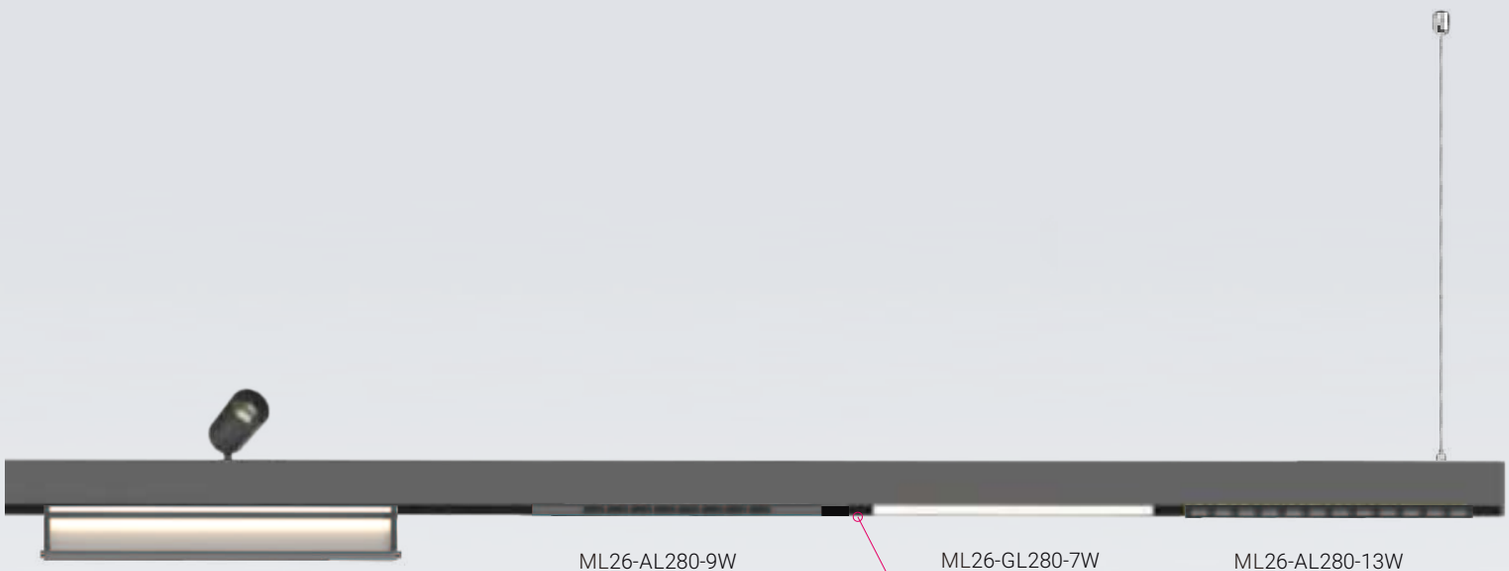


ML26-WW280-7W


ML26-AL280-9W

ML26-GL280-7W

ML26-AL280-13W

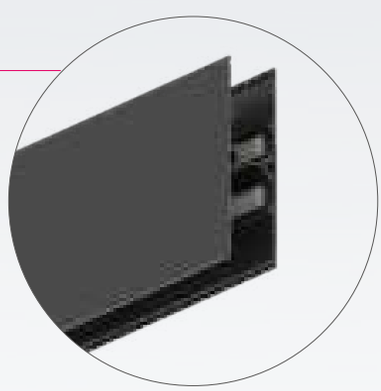


H Track




MODULINE 26 – 48V Low Voltage Modular Linear System

Slim Track Configuration

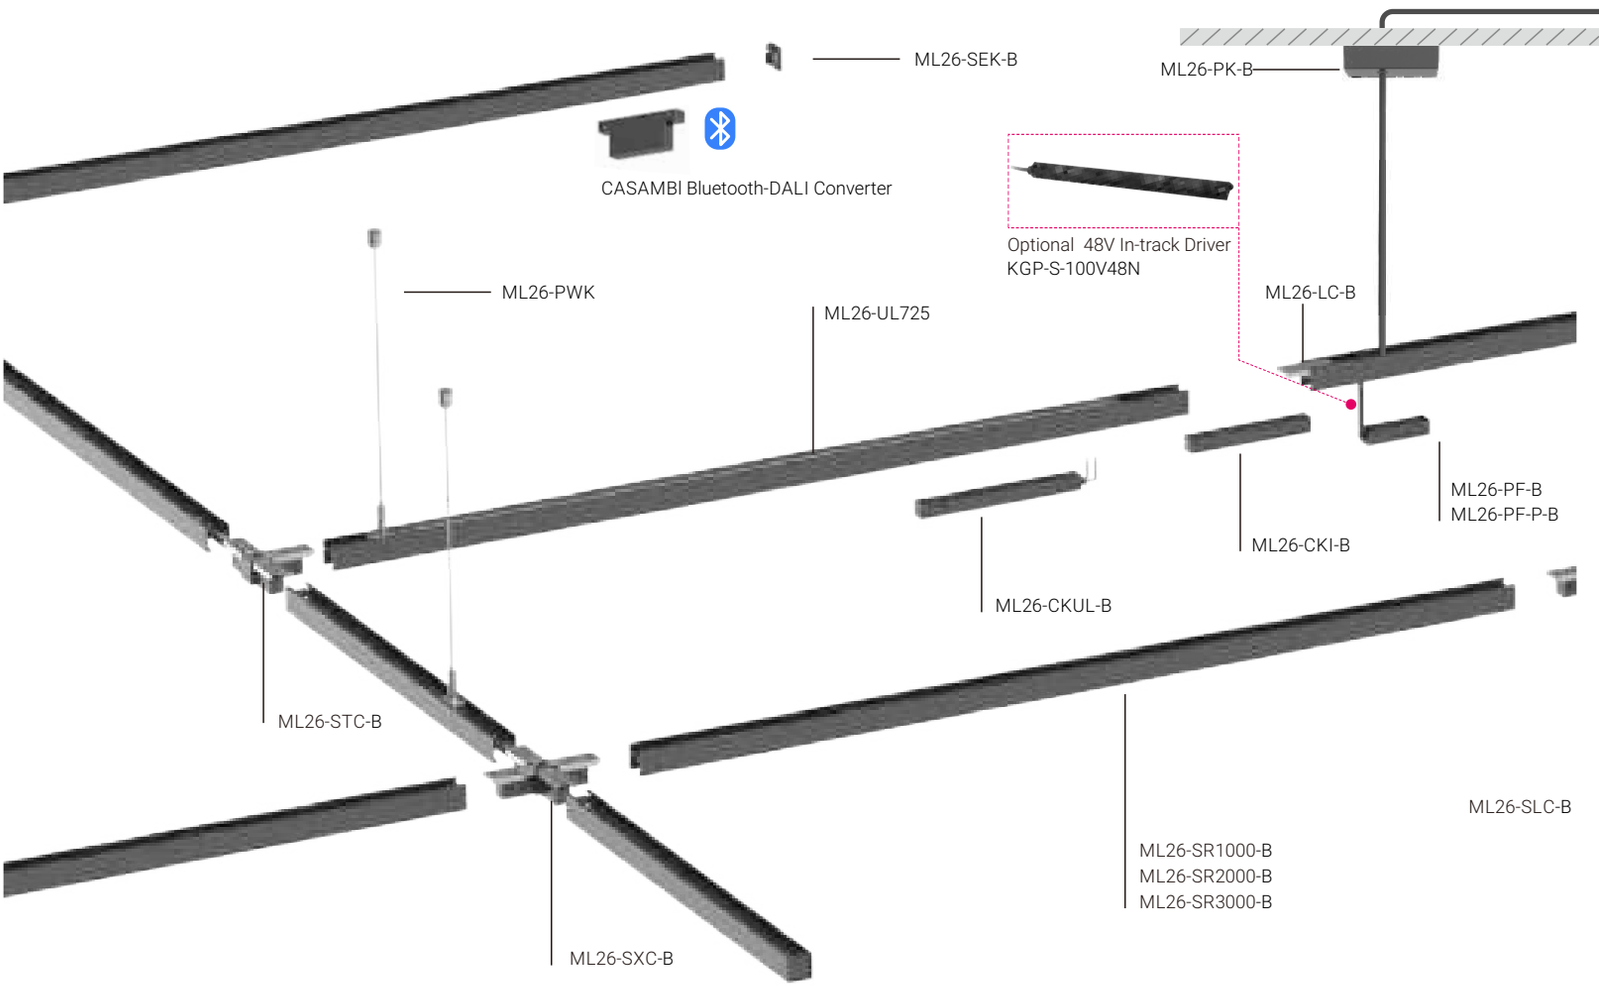

Moduline 26 Slim Track System
Please order installation track rail, light insets and mounting accessories separately.



Slim Track System Installation Track Rail | for surface or pendant mounting

L x W x H : 1000 x 26 x 27mm	ML26-SR1000-B	ML26-SR1000-W	59,00 €
L x W x H : 2000 x 26 x 27mm	ML26-SR2000-B	ML26-SR2000-W	99,00 €
L x W x H : 3000 x 26 x 27mm	ML26-SR3000-B	ML26-SR3000-W	159,00 €

*Track Rail including endcaps.


Accessories of Slim Track System

Vertical 'L' Shape Corner Module-Inner, 80 x 80mm	ML26-SCM-V-B	ML26-SCM-V-W	109,00 €
Vertical 'L' Shape Corner Module-Outer, 80 x 80mm	ML26-SCM-V-O-B	ML26-SCM-V-O-W	109,00 €
'L' Shape Connector Set, 26 x 26mm	ML26-SLC-B	ML26-SLC-W	89,00 €
'T' Shape Connector Set, 26 x 26mm	ML26-STC-B	ML26-STC-W	99,00 €
'X' Shape Connector Set, 26 x 26mm	ML26-SXC-B	ML26-SXC-W	99,00 €
Endcap Kit (2pcs/ set) of Slim Track Rail	ML26-SEK-B	ML26-SEK-W	5,00 €
Power Feeder Unit with feeder cables 500mm for surface mounted	ML26-PF-B	ML26-PF-W	19,00 €
Power Feeder Unit with feeder cables 2000mm for pendant	ML26-PF-P-B	ML26-PF-P-W	39,00 €
Linear Connector with screws	ML26-LC-B	ML26-LC-W	9,00 €
Straight Continuous Kit*, Electrical	ML26-CKI-B	ML26-CKI-W	49,00 €
Flexible Continuous Kit*, Electrical	ML26-CKF-C-B	ML26-CKF-C-W	49,00 €
Surface mounted installation kit, 1set for 1000mm track	ML26-SMK	ML26-SMK	5,00 €
Moduline 26 Pendant Installation Kits, with 1pcs Ceiling Box & 2pcs Pendant Wire (2000mm) Kits	ML26-PK-B	ML26-PK-W	49,00 €
Pendant Wire Kit, Wire in 2000mm Length, 2pcs/ set for 1000mm Track	ML26-PWK	ML26-PWK	19,00 €
48V In-track Driver, 3000mm **supply line** incl. DALI, KGP48V Constant Voltage 100W LED Driver, Black/White	KGP-100V48N		89,00 €
48V In-track Driver, 3000mm **supply line** incl. DALI, KGP48V Constant Voltage 250W LED Driver, Black/White	KGP-250V48N		109,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	ELG-100-48-3Y		129,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	ELG-150-48-3Y		129,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	ELG-240-48-3Y		169,00 €
CASAMBI Bluetooth-DALI Converter, Black/White	ML26-CBDC-B		499,00 €

*Continuous Kit needs to be used together with Linear Connector as a set.

BACK

Remote 48V LED Driver (Max. 300W each circuit)
HLG-100H-48A/ HLG-150H-48A/ HLG-240H-48A

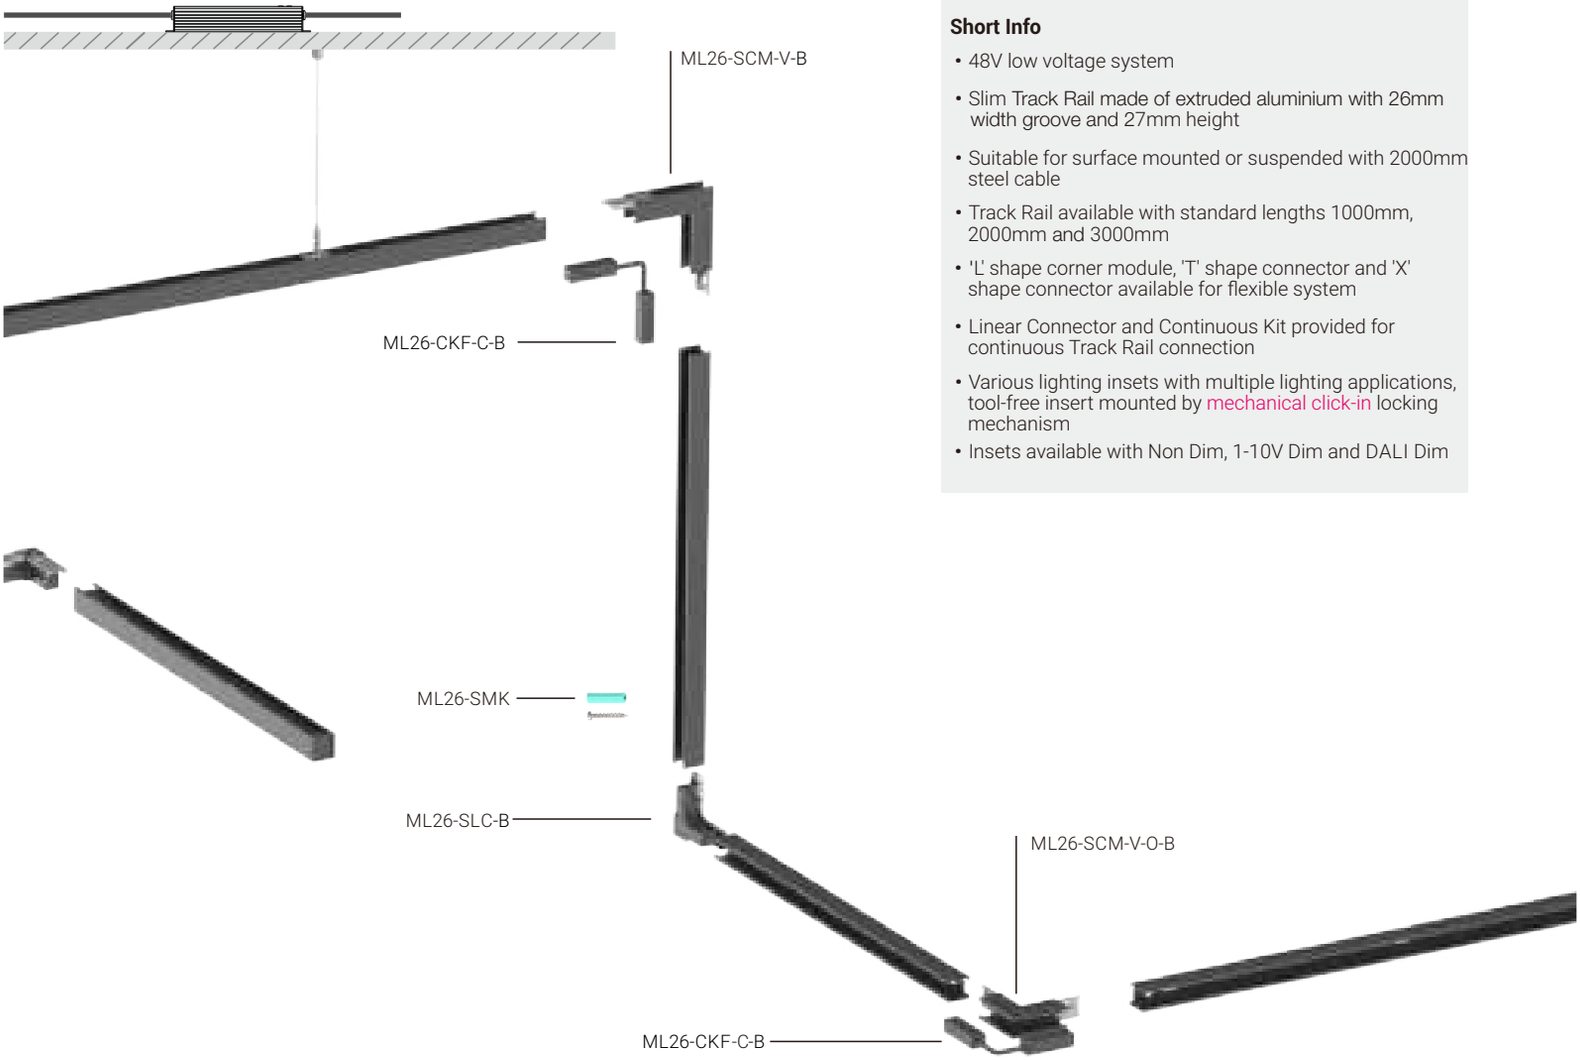

Short Info

- 48V low voltage system
- Slim Track Rail made of extruded aluminium with 26mm width groove and 27mm height
- Suitable for surface mounted or suspended with 2000mm steel cable
- Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
- 'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, tool-free insert mounted by mechanical click-in locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets

Spotlight



Accent Light



General Light



Wall Wash Light




Pendant Spotlight




* Check details of light insets at following pages

MODULINE 26 – 48V Low Voltage Modular Linear System

Standard Track Configuration

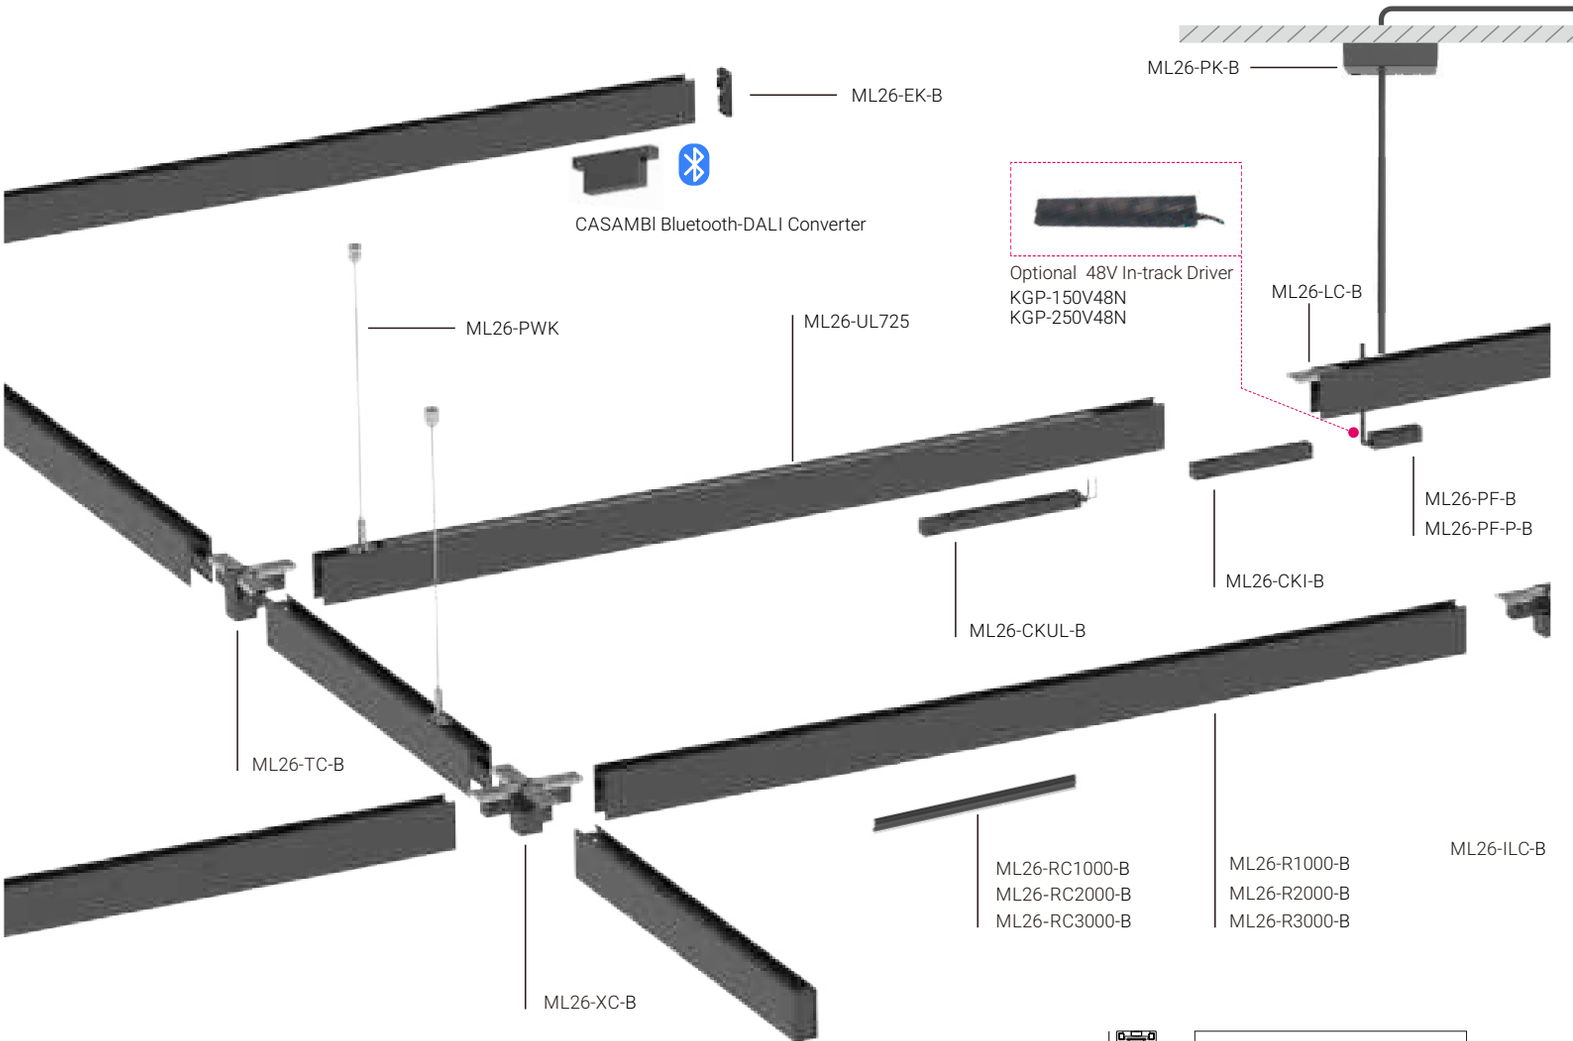

Moduline 26 Standard Track System
Please order installation track rail, light insets and mounting accessories separately.



Standard Track System Installation Track Rail | for surface or pendant mounting

Tracks can be shortened on site	Code/ Model (Black-Standard)	Code/ Model (White-Option)	
L x W x H : 1000 x 26 x 52mm	ML26-R1000-B	ML26-R1000-W	59,00 €
L x W x H : 2000 x 26 x 52mm	ML26-R2000-B	ML26-R2000-W	109,00 €
L x W x H : 3000 x 26 x 52mm	ML26-R3000-B	ML26-R3000-W	119,00 €

*Track Rail including endcaps.


Accessories of Standard Track System

Vertical 'L' Shape Corner Module-Inner, 80 x 80mm	ML26-CM-V-B	ML26-CM-V-W	119,00 €
Vertical 'L' Shape Corner Module-Outer, 80 x 80mm	ML26-CM-V-O-B	ML26-CM-V-O-W	119,00 €
'L' Shape Connector Set, 26 x 26mm	ML26-ILC-B	ML26-ILC-W	89,00 €
'T' Shape Connector Set, 26 x 26mm	ML26-TC-B	ML26-TC-W	99,00 €
'X' Shape Connector Set, 26 x 26mm	ML26-XC-B	ML26-XC-W	99,00 €
Endcap Kit (2pcs/ set) of Slim Track Rail	ML26-EK-B	ML26-EK-W	5,00 €
Power Feeder Unit with feeder cables 500mm for surface mounted	ML26-PF-B	ML26-PF-W	19,00 €
Power Feeder Unit with feeder cables 2000mm for pendant	ML26-PF-P-B	ML26-PF-P-W	39,00 €
Linear Connector with screws	ML26-LC-B	ML26-LC-W	9,00 €
Straight Continuous Kit*, Electrical	ML26-CKI-B	ML26-CKI-W	49,00 €
Flexible Continuous Kit*, Electrical	ML26-CKF-C-B	ML26-CKF-C-W	49,00 €
Surface mounted installation kit, 1set for 1000mm track	ML26-SMK	ML26-SMK	5,00 €
Moduline 26 Pendant Installation Kits, with 1pcs Ceiling Box & 2pcs Pendant Wire (2000mm) Kits	ML26-PK-B	ML26-PK-W	49,00 €
Pendant Wire Kit, Wire in 2000mm Length, 2pcs/ set for 1000mm Track	ML26-PWK	ML26-PWK	19,00 €
Track Rail Cover 1000mm/2000mm/3000mm, can be shortened at site	ML26-RC1000-B	ML26-RC1000-W	19,00 €
48V In-Track Driver, 3000mm supply line incl. DALI, KGP48V Constant Voltage 100W LED Driver, Black/White	KGP-100V48N		89,00 €
48V In-Track Driver, 3000mm supply line incl. DALI, KGP48V Constant Voltage 250W LED Driver, Black/White	KGP-250V48N		109,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	ELG-100-48-3Y		129,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	ELG-150-48-3Y		129,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	ELG-240-48-3Y		169,00 €
CASAMBI Bluetooth-DALI Converter, Black/White	ML26-CBDC-B		499,00 €

*Continuous Kit needs to be used together with Linear Connector as a set.

BACK

Remote 48V LED Driver (Max. 300W each circuit)
HLG-100H-48A/ HLG-150H-48A/ HLG-240H-48A

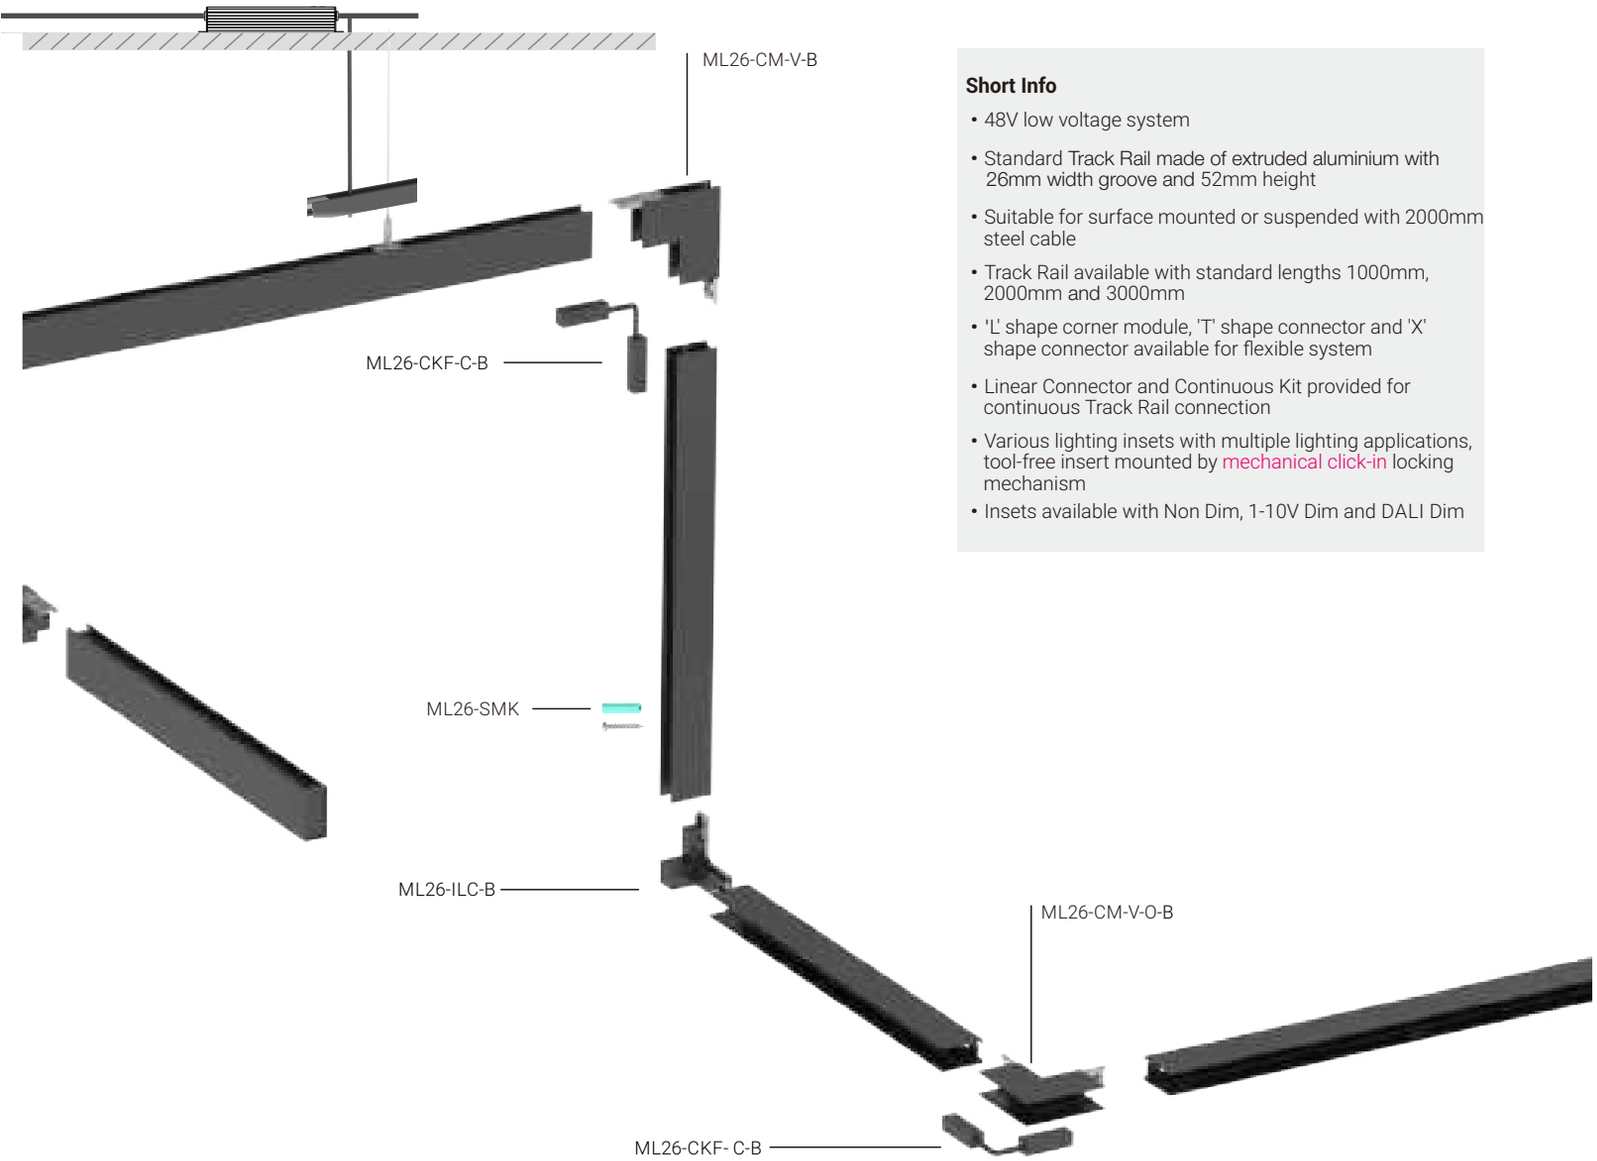

Short Info

- 48V low voltage system
- Standard Track Rail made of extruded aluminium with 26mm width groove and 52mm height
- Suitable for surface mounted or suspended with 2000mm steel cable
- Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
- 'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, tool-free insert mounted by mechanical click-in locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets

Spotlight



Accent Light



General Light



Wall Wash Light




Pendant Spotlight




* Check details of light insets at following pages

MODULINE 26 – 48V Low Voltage Modular Linear System

H Track Configuration

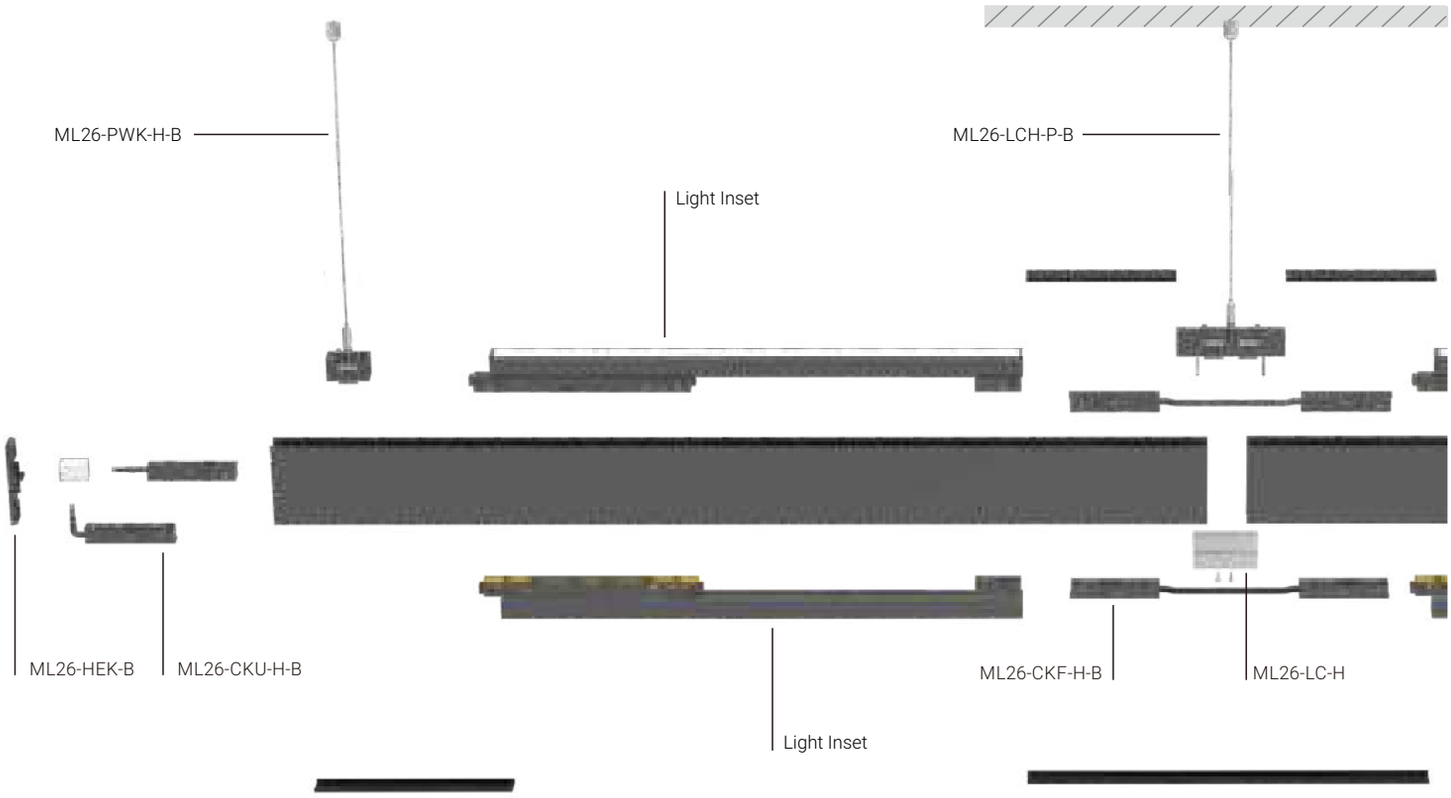

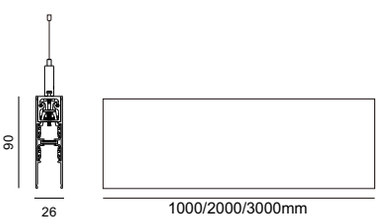

Moduline 26 H Track System

Please order installation track rail, light insets and mounting accessories separately.

H Track System Installation Track Rail | for surface or pendant mounting

Tracks can be shortened on site	Code/ Model (Black-Standard)	Code/ Model (White-Option)	
L x W x H : 1000 x 26 x 90mm	ML26-HR1000-B	ML26-HR1000-W	109,00 €
L x W x H : 2000 x 26 x 90mm	ML26-HR2000-B	ML26-HR2000-W	209,00 €
L x W x H : 3000 x 26 x 90mm	ML26-HR3000-B	ML26-HR3000-W	319,00 €


*Track Rail including endcaps.

Accessories of H Track System

Endcap Kit (2pcs/ set) of H Track Rail	ML26-HEK-B	ML26-HEK-W	9,00 €
Power Feeder Unit with feeder cables 2000mm for pendant	ML26-PF-P-B	ML26-PF-P-W	39,00 €
Flexible Continuous Kit, Electrical, for Up Track and Down Track connection	ML26-CKU-H-B	ML26-CKU-H-W	79,00 €
Flexible Continuous Kit, Electrical, for straight connection	ML26-CKF-H-B	ML26-CKF-H-W	59,00 €
Linear Connector with Pendant Kit of H Track System	ML26-LCH-P-B	ML26-LCH-P-W	129,00 €
Linear Connector Kit of H Track System*	ML26-LC-H	ML26-LC-H	9,00 €
Moduline 26 Pendant Installation Kits, with 1pcs Ceiling Box & 1pcs H Track Pendant Wire (2000mm) Kits	ML26-PK-H-B	ML26-PK-H-W	69,00 €
H Track Pendant Wire Kit, Wire in 2000mm Length, 2pcs/ set for 1000mm Track	ML26-PWK-H-B	ML26-PWK-H-W	79,00 €
Track Rail Cover 1000mm/2000mm/3000mm, can be shortened at site	ML26-RC1000-B	ML26-RC1000-W	19,00 €
48V In-Track Driver, 3000 mm supply line incl. DALI, KGP48V Constant Voltage 100W LED Driver, Black/White	KGP-100V48N		89,00 €
48V In-Track Driver, 3000 mm supply line incl. DALI, KGP48V Constant Voltage 250W LED Driver, Black/White	KGP-250V48N		109,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	ELG-100-48-3Y		129,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	ELG-150-48-3Y		129,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	ELG-240-48-3Y		169,00 €
CASAMBI Bluetooth-DALI Converter, Black/White	ML26-CBDC-B		499,00 €

*Linear Connector Kit needs to be used together with Linear Connector with Pendant Kit

BACK

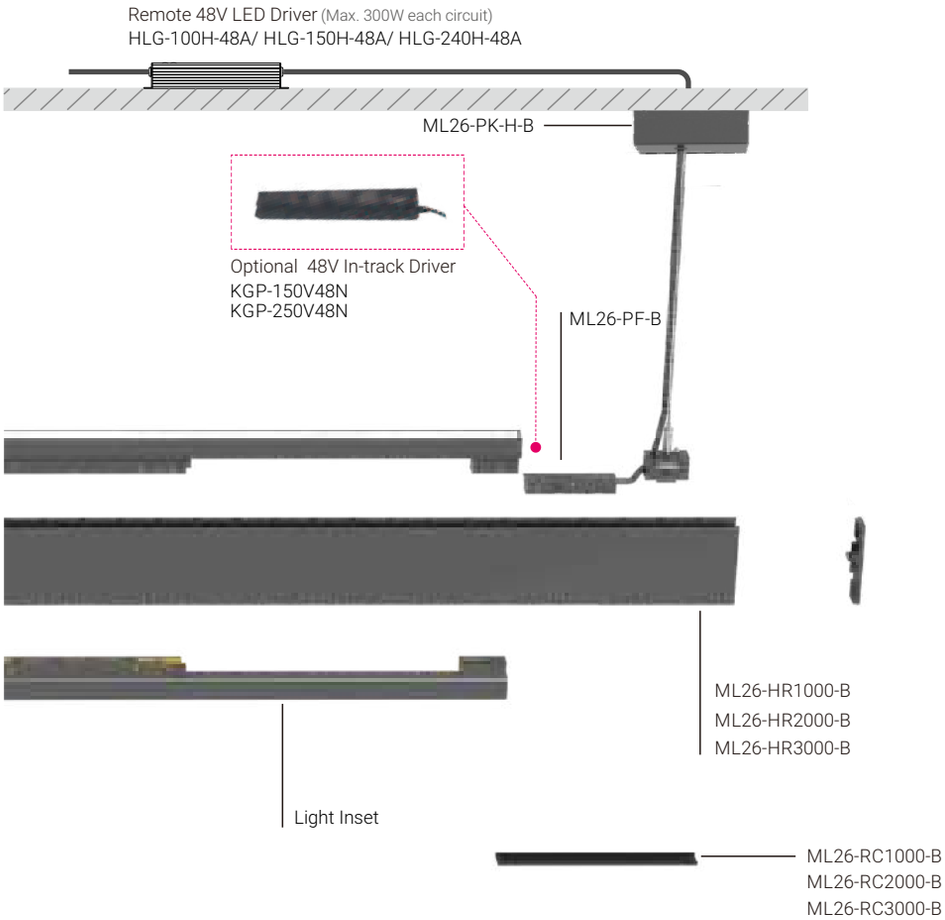

Short Info

- 48V low voltage system
- H Track Rail made of extruded aluminium with 26mm width groove and 90mm height
- Suitable for surface mounted or suspended with 2000mm steel cable
- Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, tool-free insert mounted by mechanical click-in locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets

Spotlight



Accent Light



General Light



Wall Wash Light



Pendant Spotlight




* Check details of light insets at following pages


MODULINE 26 – 48V Low Voltage Modular Linear System




Slim Track

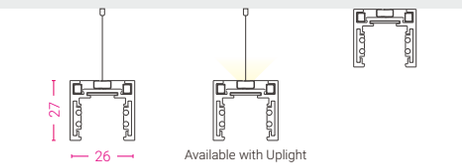


Standard Track

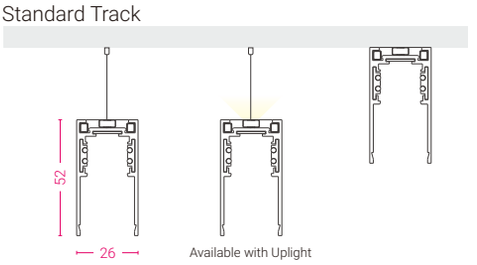


Trim Recessed Track




Trimless Recessed Track-EI



Trimless Recessed Track

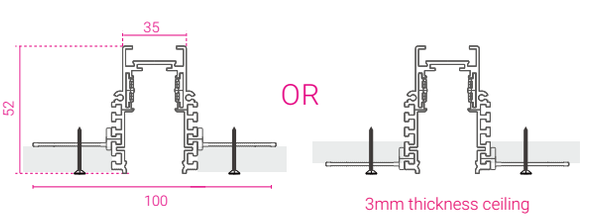



5mm/9mm/12.5mm/15mm/18mm/20mm/25mm thickness ceilings




BACK

H Track



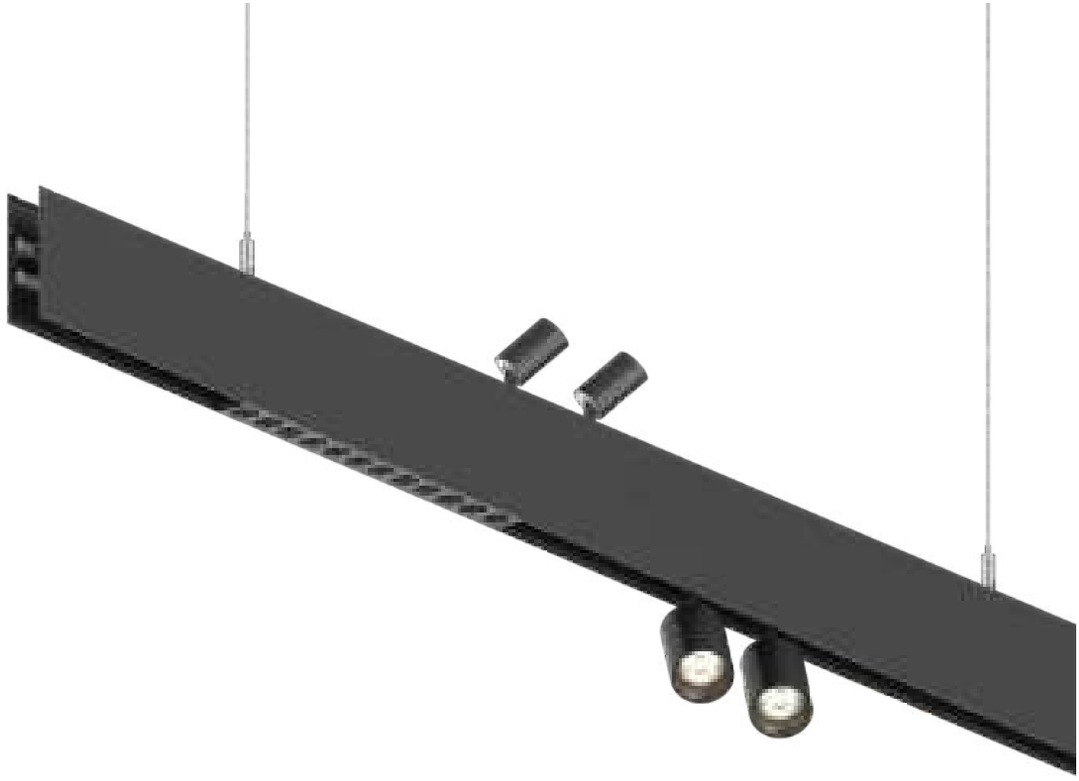

Installations

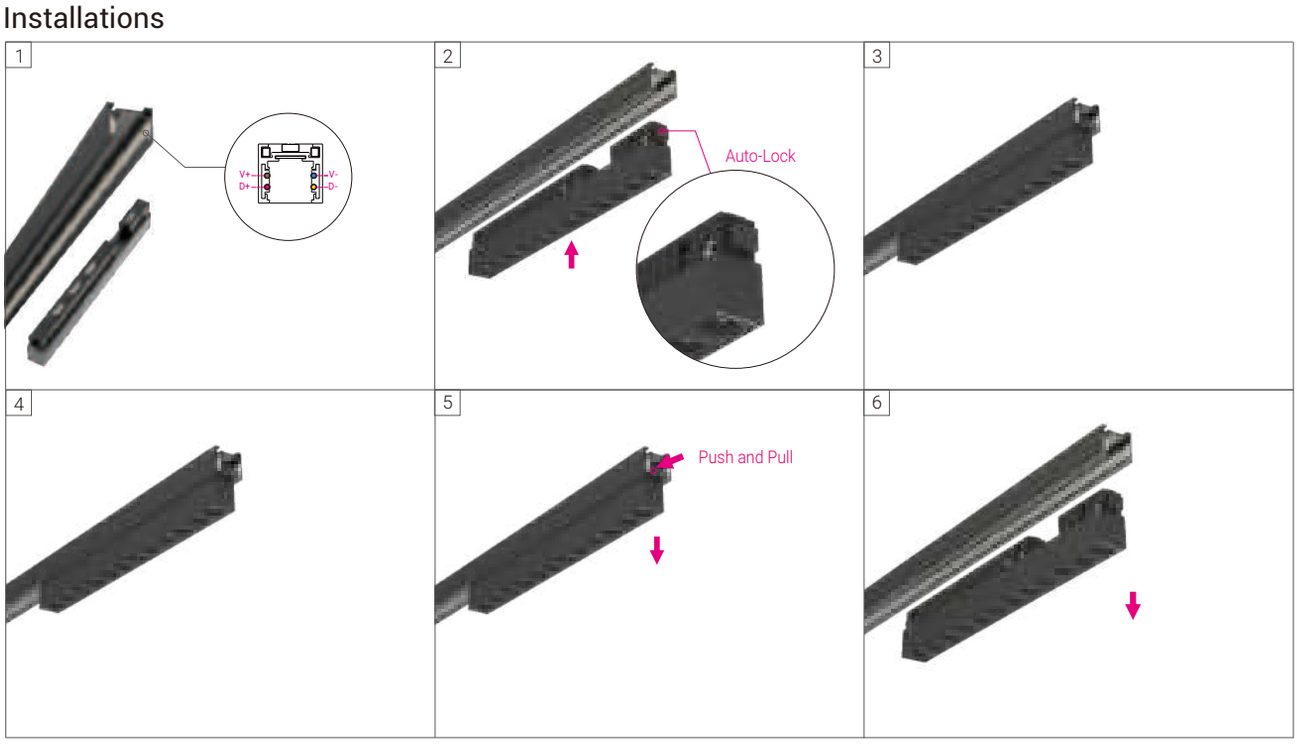

* Tool-free insert mounted by mechanical click-in locking mechanism

MODULINE 26 – 48V Low Voltage Modular Linear System

Recessed Track Configuration



1


ML26-FCM-V (Trim)
ML26-TCM-V (Trimless)
ML26-TCM-EI-V (Trimless-EI)

BACK

5

6

2




ML26-FTC (Trim)
ML26-TTC (Trimless)
ML26-TTC-EI (Trimless-EI)

3




ML26-FXC (Trim)
ML26-TXC (Trimless)
ML26-TXC-EI (Trimless-EI)

4




ML26-FCM (Trim)
ML26-TCM (Trimless)
ML26-TCM-EI (Trimless-EI)

5



ML26-FCM-O (Trim)
ML26-TCM-O (Trimless)
ML26-TCM-EI-O (Trimless-EI)

6




ML26-CKI + ML26-LC

BACK

MODULINE 26 – 48V Low Voltage Modular Linear System

Trim Recessed Track System

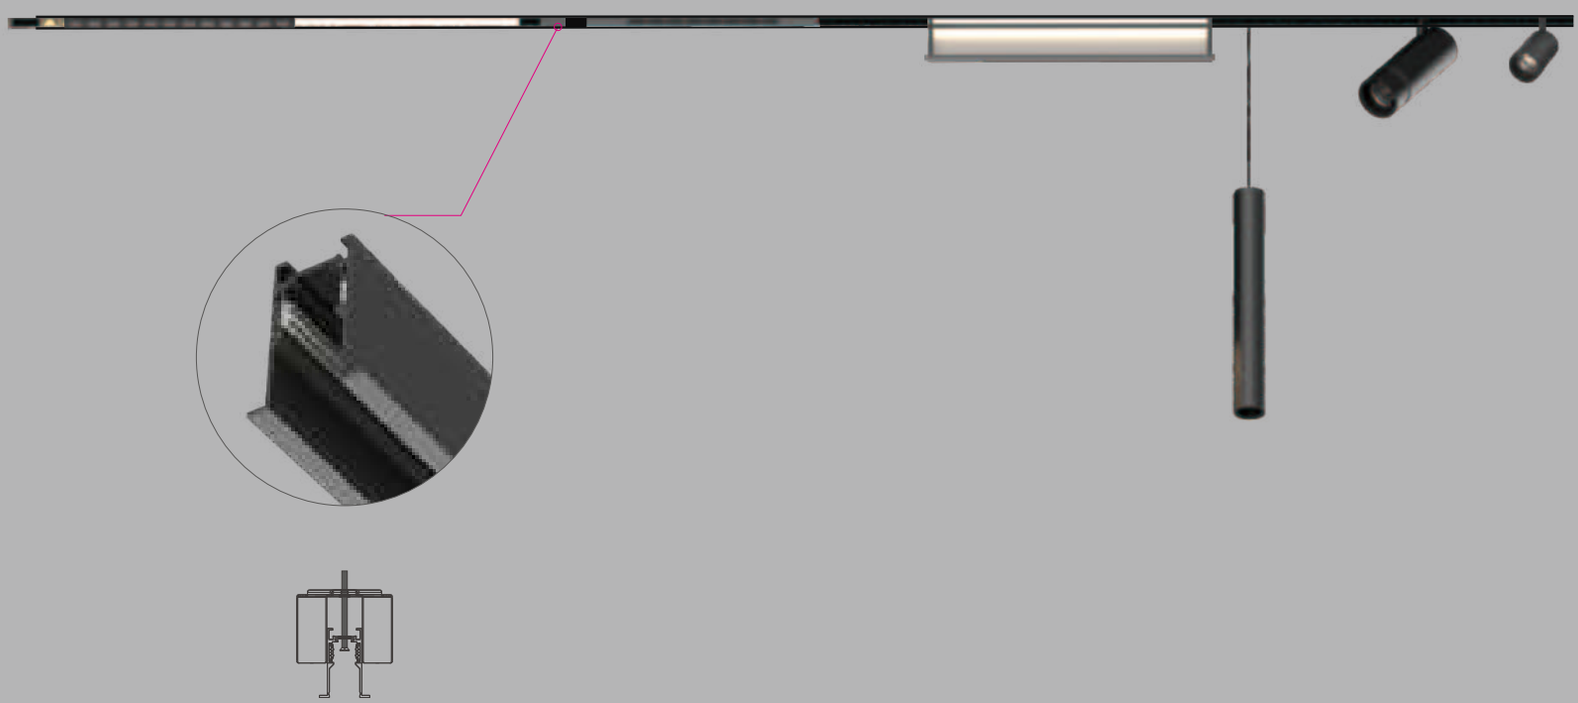

Short Info


·48V low voltage system
·Trim Recessed Track Rail Version made of extruded aluminium with 26mm width groove and 52mm height
·Mounted from inner track , suitable for all thickness ceiling heights
·Track Rail available with standard lengths 1000mm, 2000mm and 1000mm
·'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
·Linear Connector and Continuous Kit provided for continuous Track Rail connection
·Various lighting insets with multiple lighting applications, tool-free insert mounted by mechanical click-in locking mechanism
·Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets



* Check details of light insets at following pages

Features

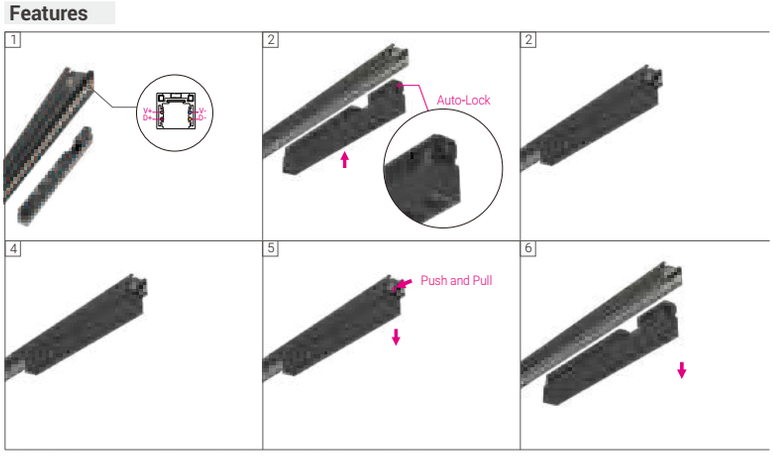

* Tool-free insert mounted by mechanical click-in locking mechanism

BACK

Short Info

Moduline 26 Trim Recessed Track System



Moduline 26 Trim Recessed Track System


Please order installation track rail, light insets and mounting accessories separately.

Electrical

Non Dim

1-10V Dim

DALI Dim



Fixture Colour

Black White(Option)








Trim Recessed Track System Version Installation Track Rail

L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)	
1000	Trim Recessed Track Rail	ML26-FR1000-B	ML26-FR1000-W	109,00 €
2000	Trim Recessed Track Rail	ML26-FR2000-B	ML26-FR2000-W	199,00 €
3000	Trim Recessed Track Rail	ML26-FR3000-B	ML26-FR3000-W	299,00 €

*Track Rail including endcaps.

Accessories of Trim Recessed Track System

	L (mm)	Cutout (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)	
	80x80	(32x28)+(32x28)	Vertical 'L' shape corner module-Inner	ML26-FCM-V-B	ML26-FCM-V-W	129,00 €
	80X80	(32x80)+(32x80)	Vertical 'L' shape corner module-Outer	ML26-FCM-O-B	ML26-FCM-O-W	129,00 €
	80x80	(32x77)+(32x45)	Horizontal 'L' shape corner module	ML26-FCM-B	ML26-FCM-W	129,00 €
	120x80	(32x120)+(32x45)	'T' Shape Connector Set	ML26-FTC-B	ML26-FTC-W	119,00 €
	120X120	(32x120)+(32x120)	'X' Shape Connector Set	ML26-FXC-B	ML26-FXC-W	219,00 €
	Flexible Continuous Kit, Electrical			ML26-CKF-C-B	ML26-CKF-C-W	49,00 €

*For Corner Connection.

	Trim Recessed Track Rail Mounting Kit, 2pcs/ set	ML26-FIK	ML26-FIK	19,00 €
	Endcap Kit (2pcs/ set) of Trim Recessed Track	ML26-FEK-B	ML26-FEK-W	19,00 €
	Power Feeder Unit with feeder cables 500mm	ML26-PF-B	ML26-PF-W	19,00 €
	Track Rail Cover 1000mm	ML26-RC1000-B	ML26-RC1000-W	19,00 €
	Track Rail Cover 2000mm	ML26-RC2000-B	ML26-RC2000-W	
	Track Rail Cover 3000mm	ML26-RC3000-B	ML26-RC3000-W	

*Track Rail Cover can be shortened as desired.


	Linear Connector with screws	ML26-RLC-B	ML26-RLC-W	9,00 €
	Straight Continuous Kit*, Electrical	ML26-CKI-B	ML26-CKI-W	49,00 €

*Continuous Kit needs to be used together with Linear Connector as a set.

	48V In-Track Driver, 3000 mm supply line incl. DALI, KGP48V Constant Voltage 100W LED Driver, Black/White		KGP-100V48N	89,00 €
	48V In-Track Driver, 3000 mm supply line incl. DALI, KGP48V Constant Voltage 250W LED Driver, Black/White		KGP-250V48N	109,00 €
	48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	ELG-100-48-3Y		129,00 €
	48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	ELG-150-48-3Y		129,00 €
	48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	ELG-240-48-3Y		169,00 €
	CASAMBI Bluetooth-DALI Converter, Black/White Max. 64 DALI Light Insets Divided into 8 Groups. Each Group Can be Controlled Separately. LxH: 143x58mm	ML26-CBDC-B		499,00 €

MODULINE 26 – 48V Low Voltage Modular Linear System

Trimless Recessed Track System
Ceiling Thickness Adjustable Version

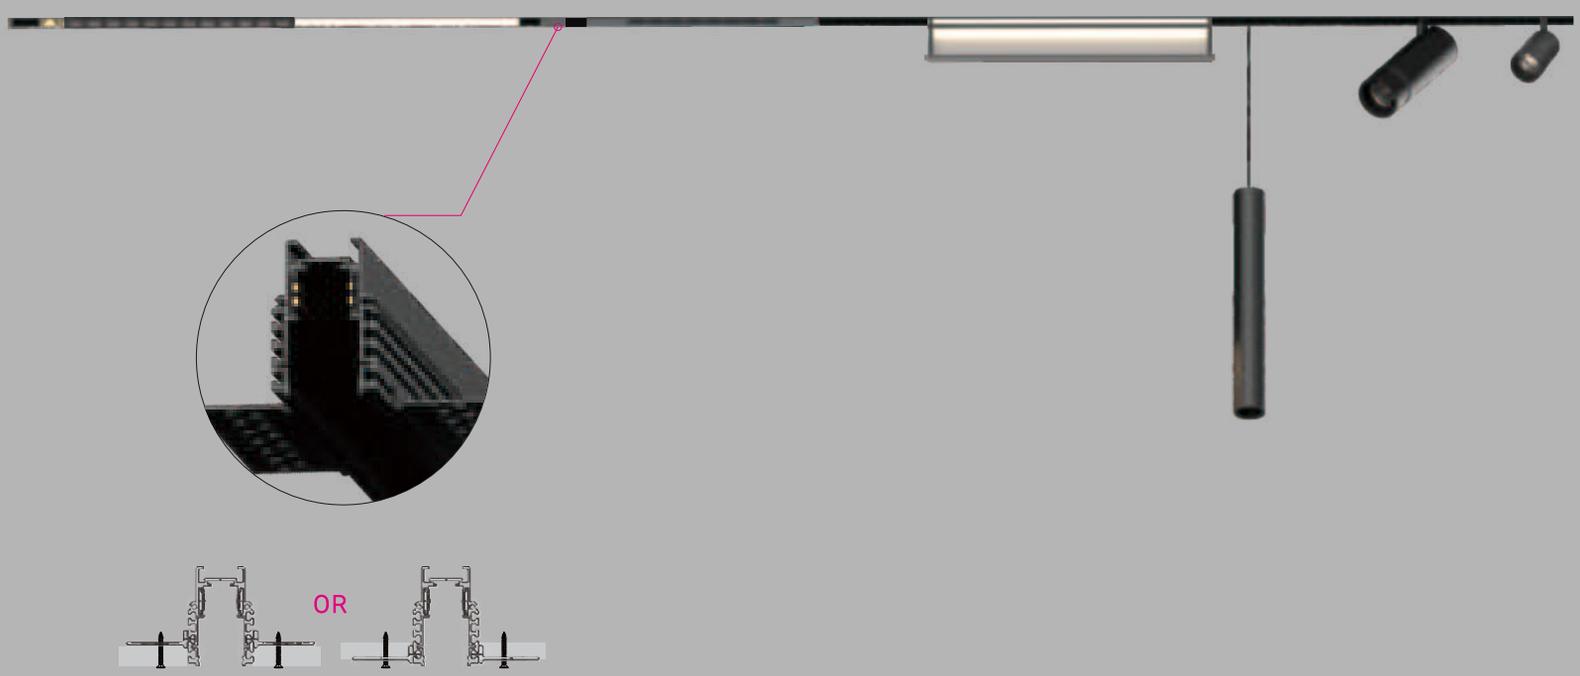

Short Info


·48V low voltage system
·Trimless Recessed Track Rail Version made of extruded aluminium with 35mm width groove and 52mm height
·Suitable for 3mm/5mm/9mm/12.5mm/15mm/18mm/20mm/25mm thickness ceilings heights
·Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
·'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
·Linear Connector and Continuous Kit provided for continuous Track Rail connection
·Various lighting insets with multiple lighting applications, tool-free insert mounted by mechanical click-in locking mechanism
·Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets



* Check details of light insets at following pages

Features

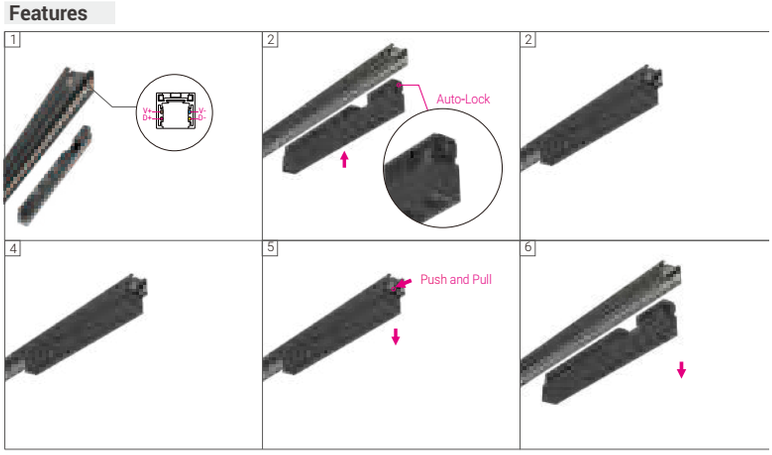

* Tool-free insert mounted by mechanical click-in locking mechanism


BACK

Short Info

Moduline 26 Trimless Recessed Track System
Ceiling Thickness Adjustable


Electrical

Non Dim
1-10V Dim
DALI Dim



Fixture Colour

Black White(Option)





Moduline 26 Trimless Recessed Track System
Ceiling Thickness Adjustable


Please order installation track rail, light insets and mounting accessories separately.

Trimless Recessed Track System Ceiling Thickness Adjustable Version Installation Track Rail


L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)	
1000	Trimless Recessed Track Rail	ML26-TAR1000-B	ML26-TAR1000-W	99,00 €
2000	Trimless Recessed Track Rail	ML26-TAR2000-B	ML26-TAR2000-W	179,00 €
3000	Trimless Recessed Track Rail	ML26-TAR3000-B	ML26-TAR3000-W	279,00 €

*Track Rail including endcaps.


Accessories of Ceiling Thickness Adjustable Trimless Recessed Track System




L (mm)	Cutout (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)	
80x80	(40x28)+(40x28)	Vertical 'L' shape corner module-Inner	ML26-TACM-V-B	ML26-TACM-V-W	99,00 €




80x80	(40x80)+(40x80)	Vertical 'L' shape corner module-Outer	ML26-TACM-O-B	ML26-TACM-O-W	99,00 €



80x80	(40x82)+(40x42)	Horizontal 'L' shape corner module	ML26-TACM-B	ML26-TACM-W	99,00 €



80x120	(40x120)+(40x42)	'T' Shape Connector Set	ML26-TATC-B	ML26-TATC-W	119,00 €



120X120	(40x120)+(40x120)	'X' Shape Connector Set	ML26-TAXC-B	ML26-TAXC-W	239,00 €

Flexible Continuous Kit, Electrical		ML26-CKF-C-B	ML26-CKF-C-W	49,00 €

*For Corner Connection.



Endcap Kit (2pcs/ set) of Trim Recessed Track		ML26-TAEK-B	ML26-TAEK-W	9,00 €



Power Feeder Unit with feeder cables 500mm		ML26-PF-B	ML26-PF-W	19,00 €




Track Rail Cover 1000mm		ML26-RC1000-B	ML26-RC1000-W	19,00 €
Track Rail Cover 2000mm		ML26-RC2000-B	ML26-RC2000-W	
Track Rail Cover 3000mm		ML26-RC3000-B	ML26-RC3000-W	

*Track Rail Cover can be shortened as desired.



Linear Connector with screws		ML26-RLC-B	ML26-RLC-W	9,00 €
Straight Continuous Kit*, Electrical		ML26-CKI-B	ML26-CKI-W	49,00 €

*Continuous Kit needs to be used together with Linear Connector as a set.



Trimless Recessed installation kit 1set for 1000mm track		ML26-TAIK	ML26-TAIK	9,00 €



48V In-Track Driver, 3000mm supply line incl. DALI, KGP48V Constant Voltage 100W LED Driver, Black/White			KGP-100V48N	89,00 €
48V In-Track Driver, 3000mm supply line incl. DALI, KGP48V Constant Voltage 250W LED Driver, Black/White			KGP-250V48N	109,00 €




48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver		ELG-100-48-3Y		129,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver		ELG-150-48-3Y		129,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver		ELG-240-48-3Y		169,00 €



CASAMBI Bluetooth-DALI Converter, Black/White Max. 64 DALI Light Insets Divided into 8 Groups. Each Group Can be Controlled Separately. LxH: 143x58mm		ML26-CBDC-B		499,00 €

MODULINE 26 – 48V Low Voltage Modular Linear System

Trimless Recessed Track System-EI
Easy Installation Version

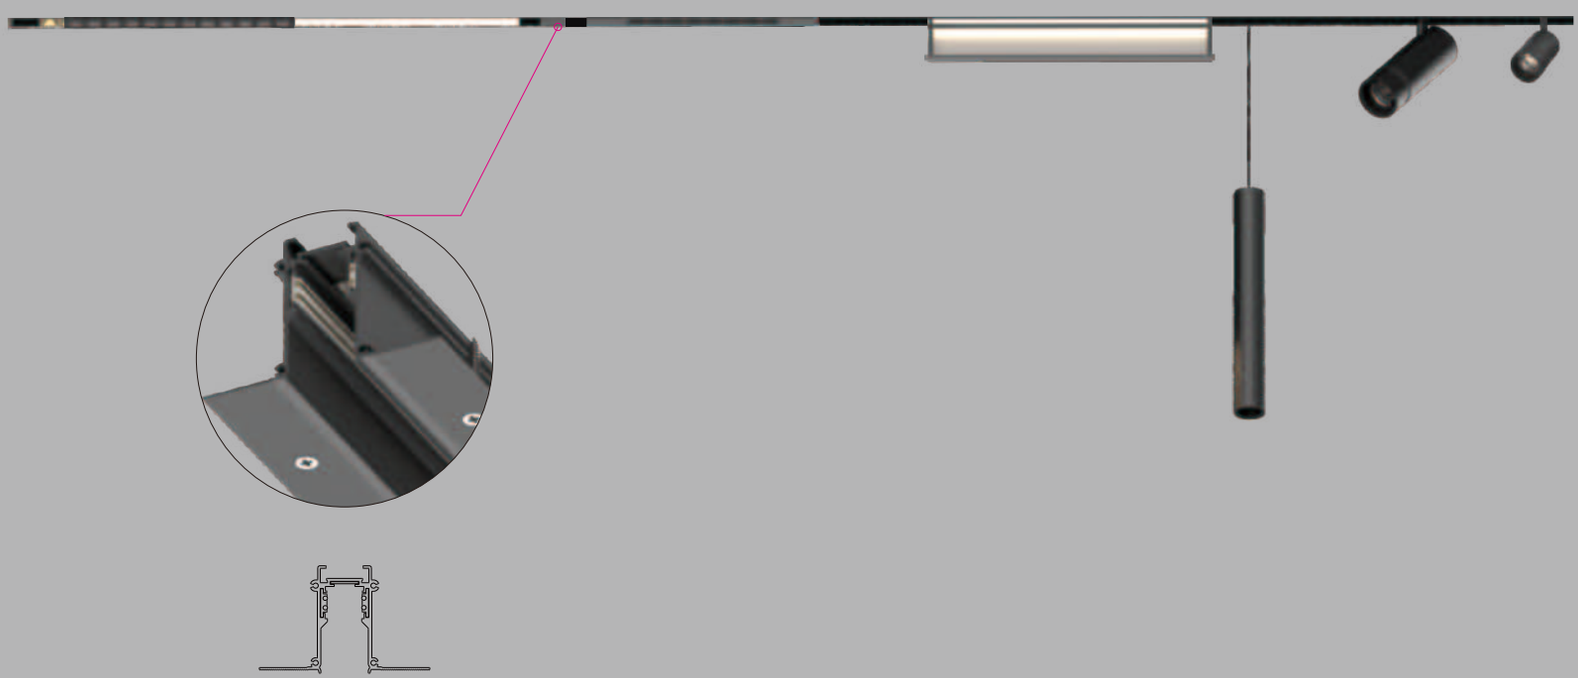

Short Info


·48V low voltage system
·Trimless Recessed Track Rail Easy Installation Version made of extruded aluminium with 26mm width groove and 52mm height
·Mounted from surface, suitable for all thickness ceiling heights
·Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
·'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
·Linear Connector and Continuous Kit provided for continuous Track Rail connection
·Various lighting insets with multiple lighting applications, tool-free insert mounted by mechanical click-in locking mechanism
·Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets



* Check details of light insets at following pages

Features

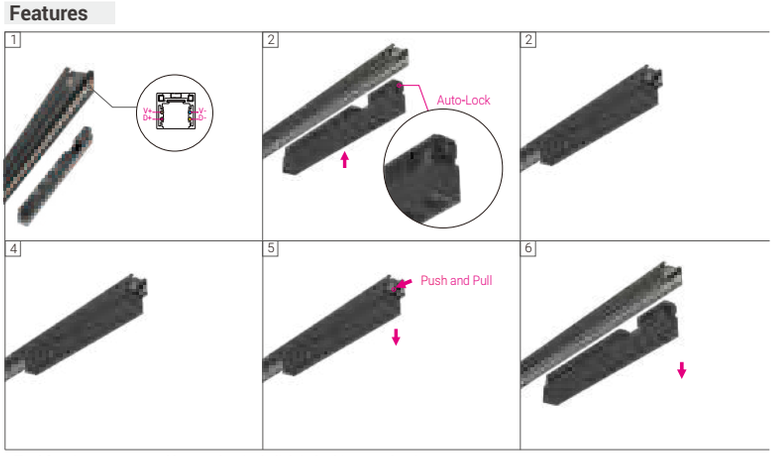

* Tool-free insert mounted by mechanical click-in locking mechanism

BACK

Short Info

Moduline 26 Trimless Recessed Track System
Easy Installation Version


Electrical

Non Dim
1-10V Dim
DALI Dim

Fixture Colour

Black White(Option)







Moduline 26 Trimless Recessed Track System
Easy Installation Version






Please order installation track rail, light insets and mounting accessories separately.

Trimless Recessed Track System Easy Installation Version Installation Track Rail

L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)	
1000	Trimless Recessed Track Rail-EI	ML26-TR1000-EI-B	ML26-TR1000-EI-W	89,00 €
2000	Trimless Recessed Track Rail-EI	ML26-TR2000-EI-B	ML26-TR2000-EI-W	159,00 €
3000	Trimless Recessed Track Rail-EI	ML26-TR3000-EI-B	ML26-TR3000-EI-W	239,00 €

*Track Rail including endcaps.

Accessories of Easy Installation Version Trimless Recessed Track System

	L (mm)	Cutout (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)	
	100x100	(40x48)+(40x48)	Vertical 'L' shape corner module-Inner	ML26-TCM-EI-V-B	ML26-TCM-EI-V-W	99,00 €
	100x100	(40x100)+(40x100)	Vertical 'L' shape corner module-Outer	ML26-TCM-EI-O-B	ML26-TCM-EI-O-W	99,00 €
	100x100	(40x80)+(40x40)	Horizontal 'L' shape corner module	ML26-TCM-EI-B	ML26-TCM-EI-W	99,00 €
	100x120	(40x120)+(40x40)	'T' Shape Connector Set	ML26-TTC-EI-B	ML26-TTC-EI-W	149,00 €
	120X120	(40x120)+(40x120)	'X' Shape Connector Set	ML26-TXC-EI-B	ML26-TXC-EI-W	249,00 €
			Flexible Continuous Kit, Electrical	ML26-CKF-C-B	ML26-CKF-C-W	49,00 €

*For Corner Connection.

	Endcap Kit (2pcs/ set) of Trim Recessed Track	ML26-TEK-EI-B	ML26-TEK-EI-W	9,00 €
	Power Feeder Unit with feeder cables 500mm	ML26-PF-B	ML26-PF-W	19,00 €
	Track Rail Cover 1000mm	ML26-RC1000-B	ML26-RC1000-W	19,00 €
	Track Rail Cover 2000mm	ML26-RC2000-B	ML26-RC2000-W	
	Track Rail Cover 3000mm	ML26-RC3000-B	ML26-RC3000-W	

*Track Rail Cover can be shortened as desired.

	Linear Connector with screws	ML26-RLC-B	ML26-RLC-W	9,00 €
	Straight Continuous Kit*, Electrical	ML26-CKI-B	ML26-CKI-W	49,00 €

*Continuous Kit needs to be used together with Linear Connector as a set.

	Trimless Recessed Track mounting kit 1set for 1000mm track	ML26-RMK	ML26-RMK	5,00 €
	48V In-Track Driver, 3000mm supply line incl. DALI, KGP48V Constant Voltage 100W LED Driver, Black/White		KGP-100V48N	89,00 €
	48V In-Track Driver, 3000mm supply line incl. DALI, KGP48V Constant Voltage 250W LED Driver, Black/White		KGP-250V48N	109,00 €
	48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	ELG-100-48-3Y		129,00 €
	48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	ELG-150-48-3Y		129,00 €
	48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	ELG-240-48-3Y		169,00 €
	CASAMBI Bluetooth-DALI Converter, Black/White Max. 64 DALI Light Insets Divided into 8 Groups. Each Group Can be Controlled Separately. LxH: 143x58mm	ML26-CBDC-B		499,00 €


MODULINE 26 – ML26-RS25 Spotlight Inset




ML26-RS25-3W
Single Spot



ML26-RS25-5W
Double Spot









Quick Info


- System: 3W, 5W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 380lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 1-10V Dim, DALI Dim

Light Distribution

3000K







Finish



Black(B)



White(W)



Brushed Bronze(Z)



Brushed Gold(G)

3W:

Driver	Black/White	Brone/Gold
ON-OFF	99,00 €	119,00 €
DALI Dim	149,00 €	169,00 €

5W:

Driver	Black/White	Brone/Gold
ON-OFF	119,00 €	159,00 €
DALI Dim	179,00 €	219,00 €

Optional accessary



Honeycomb

Code for MLR1-9403005F with Honeycomb
MLR1-9403005F-H

Honeycomb: +9,00€

Order Info (ML26-RS25 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
2W	3W	48V	90	2700K	18°	220lm	170lm	MLR0-9271803F-BB
					30°	220lm	170lm	MLR0-9273003F-BB
					45°	220lm	170lm	MLR0-9274503F-BB
				3000K	18°	230lm	180lm	MLR0-9301803F-BB
					30°	230lm	180lm	MLR0-9303003F-BB
					45°	230lm	180lm	MLR0-9304503F-BB
				4000K	18°	250lm	190lm	MLR0-9401803F-BB
					30°	250lm	190lm	MLR0-9403003F-BB
					45°	250lm	190lm	MLR0-9404503F-BB
4W	5W	48V	90	2700K	18°	420lm	330lm	MLR1-9271805F-BB
					30°	420lm	330lm	MLR1-9273005F-BB
					45°	420lm	330lm	MLR1-9274505F-BB
				3000K	18°	450lm	350lm	MLR1-9301805F-BB
					30°	450lm	350lm	MLR1-9303005F-BB
					45°	450lm	350lm	MLR1-9304505F-BB
				4000K	18°	500lm	380lm	MLR1-9401805F-BB
					30°	500lm	380lm	MLR1-9403005F-BB
					45°	500lm	380lm	MLR1-9404505F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLR0 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLR0 ML26-RS25-3W Single Spot	927 CRI>90/ 2700K	18 18°	03 3W	F On-Off	W White	B Black	H Honeycomb
MLR1 ML26-RS25-5W Double Spot	930 CRI>90/ 3000K	30 30°	05 5W	A 1-10V Dim	B Black		
	940 CRI>90/ 4000K	45 45°		D DALI Dim	Z Brushed Bronze		
					G Brushed Gold		

ML26-CKI-W
-C-W
1000-W


MODULINE 26 – ML26-RS40 Spotlight Inset




ML26-RS40-8W
Single Spot



ML26-RS40-16W
Double Spot





18° 30° 45° 2700K 3000K 4000K CRI >90 UGR<19 48V DC


IP20 CE CB UKCA Intertek 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info


- System: 8W, 16W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 1-10V Dim, DALI Dim

Light Distribution

3000K







Finish



Black(B)



White(W)



Brushed Bronze(Z)



Brushed Gold(G)

8W:

Driver	Black/White	Brone/Gold
ON-OFF	109,00 €	129,00 €
DALI Dim	169,00 €	189,00 €

16W:

Driver	Black/White	Brone/Gold
ON-OFF	169,00 €	219,00 €
DALI Dim	219,00 €	269,00 €

Optional accessary



Honeycomb

Code for MLR3-9403016F with Honeycomb
MLR3-9403016F-**H**

Honeycomb: +9,00€

Order Info (ML26-RS40 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
7.5W	8W	48V	90	2700K	18°	700lm	550lm	MLR2-9271808F-BB
					30°	700lm	550lm	MLR2-9273008F-BB
					45°	700lm	400lm	MLR2-9274508F-BB
				3000K	18°	750lm	580lm	MLR2-9301808F-BB
					30°	750lm	580lm	MLR2-9303008F-BB
					45°	750lm	420lm	MLR2-9304508F-BB
				4000K	18°	800lm	640lm	MLR2-9401808F-BB
					30°	800lm	640lm	MLR2-9403008F-BB
					45°	800lm	460lm	MLR2-9404508F-BB
15W	16W	48V	90	2700K	18°	1400lm	1000lm	MLR3-9271816F-BB
					30°	1400lm	1000lm	MLR3-9273016F-BB
					45°	1400lm	800lm	MLR3-9274516F-BB
				3000K	18°	1500lm	1100lm	MLR3-9301816F-BB
					30°	1500lm	1000lm	MLR3-9303016F-BB
					45°	1500lm	850lm	MLR3-9304516F-BB
				4000K	18°	1600lm	1200lm	MLR3-9401816F-BB
					30°	1600lm	1200lm	MLR3-9403016F-BB
					45°	1600lm	900lm	MLR3-9404516F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding


MLR2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessary
MLR2 ML26-RS40-8W Single Spot	927 CRI>90/ 2700K	18 18°	08 8W	F On-Off	W White	B Black	H Honeycomb
MLR3 ML26-RS40-16W Double Spot	930 CRI>90/ 3000K	30 30°	16 16W	A 1-10V Dim	B Black		
	940 CRI>90/ 4000K	45 45°		D DALI Dim	Z Brushed Bronze		
					G Brushed Gold		


MODULINE 26 – ML26-RS40 Spotlight Inset



ML26-RS40-12W
Single Spot



ML26-RS40-24W
Double Spot

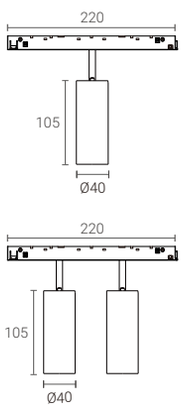





Quick Info


- System: 12W, 24W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 1600lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 1-10V Dim, DALI Dim

Light Distribution

3000K







Finish



Black(B)



White(W)



Brushed Bronze(Z)



Brushed Gold(G)

12W:

Driver	Black/White	Brone/Gold
ON-OFF	109,00 €	139,00 €
DALI Dim	169,00 €	199,00 €

24W:

Driver	Black/White	Brone/Gold
ON-OFF	179,00 €	239,00 €
DALI Dim	229,00 €	289,00 €

Optional accessary



Honeycomb

Code for MLR5-9401824F with Honeycomb
MLR5-9401824F-H

Honeycomb: +9,00€

Order Info (ML26-RS40 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
11W	12W	48V	90	2700K	18°	1000lm	700lm	MLR4-9271812F-BB
					30°	1000lm	700lm	MLR4-9273012F-BB
					45°	1000lm	550lm	MLR4-9274512F-BB
				3000K	18°	1100lm	750lm	MLR4-9301812F-BB
					30°	1100lm	750lm	MLR4-9303012F-BB
					45°	1100lm	600lm	MLR4-9304512F-BB
				4000K	18°	1200lm	800lm	MLR4-9401812F-BB
					30°	1200lm	800lm	MLR4-9403012F-BB
					45°	1200lm	650lm	MLR4-9404512F-BB
22W	24W	48V	90	2700K	18°	2000lm	1400lm	MLR5-9271824F-BB
					30°	2000lm	1400lm	MLR5-9273024F-BB
					45°	2000lm	1100lm	MLR5-9274524F-BB
				3000K	18°	2200lm	1500lm	MLR5-9301824F-BB
					30°	2200lm	1500lm	MLR5-9303024F-BB
					45°	2200lm	1200lm	MLR5-9304524F-BB
				4000K	18°	2400lm	1600lm	MLR5-9401824F-BB
					30°	2400lm	1600lm	MLR5-9403024F-BB
					45°	2400lm	1300lm	MLR5-9404524F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding


MLR4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLR4 ML26-RS40-12W Single Spot	927 CRI>90/ 2700K	18 18°	12 12W	F On-Off	W White	B Black	H Honeycomb
MLR5 ML26-RS40-24W Double Spot	930 CRI>90/ 3000K	30 30°	24 24W	A 1-10V Dim	B Black		
	940 CRI>90/ 4000K	45 45°		D DALI Dim	Z Brushed Bronze		
					G Brushed Gold		

MODULINE 26 – ML26-RT55 Spotlight Inset



ML26-RT55-10W
Zooming Spot




20°~40° | 35°~60° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°-40°, 35°-60°, Zooming Spot
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 1-10V Dim, DALI Dim

Light Distribution

3000K

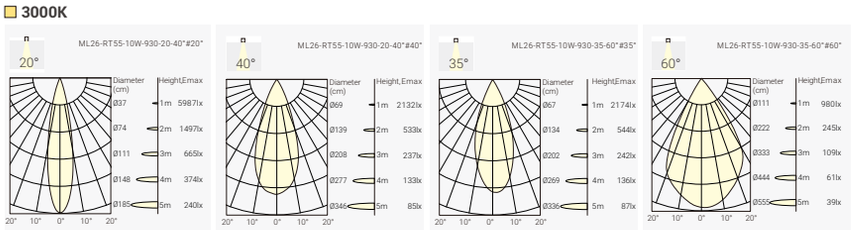

Finish



White Black

Order Info (ML26-RT55 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	20°-40°	1200lm	1000lm	MLR6-927Z410F-BB
					35°-60°	1200lm	950lm	MLR6-927Z610F-BB
				3000K	20°-40°	1300lm	1100lm	MLR6-930Z410F-BB
					35°-60°	1300lm	1000lm	MLR6-930Z610F-BB
				4000K	20°-40°	1400lm	1200lm	MLR6-940Z410F-BB
					35°-60°	1400lm	1100lm	MLR6-940Z610F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black/White
ON-OFF	149,00 €
DALI Dim	209,00 €

Optional accessary



Honeycomb

Code for MLR6-940Z410F with **H**oneycomb
MLR6-940Z410F-**H**

Honeycomb: +9,00€

Coding

MLR6 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLR6 ML26-RS55-10W	**927** CRI>90/ 2700K	**Z4** 20°~40°	**10** 10W	**F** On-Off	**W** White	**B** Black	
	930 CRI>90/ 3000K	**Z6** 35°~60°		**A** 1-10V Dim	**B** Black		
	940 CRI>90/ 4000K			**D** DALI Dim			

MODULINE 26 – ML26-RS55 Spotlight Inset

NEW




ML26-RS55-14W

20° 30° 40° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 14W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 30°, 40°, 50°
- Lumen Output: Up to 1300lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K

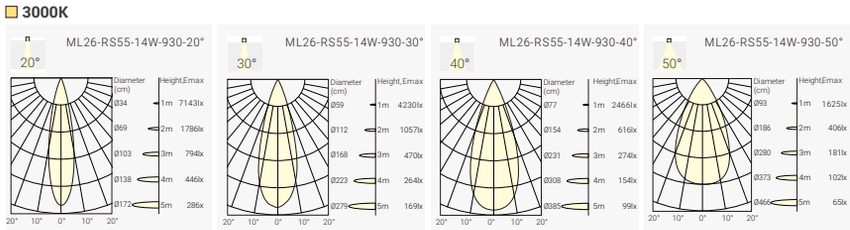

Finish



White Black

Order Info (ML26-RS55 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
12W	14W	48V	90	2700K	20°	1400lm	1100lm	MLR8-9272014F-BB
					30°	1400lm	1100lm	MLR8-9273014F-BB
					40°	1400lm	1100lm	MLR8-9274014F-BB
					50°	1400lm	1050lm	MLR8-9275014F-BB
				3000K	20°	1500lm	1200lm	MLR8-9302014F-BB
					30°	1500lm	1200lm	MLR8-9303014F-BB
					40°	1500lm	1200lm	MLR8-9304014F-BB
					50°	1500lm	1100lm	MLR8-9305014F-BB
				4000K	20°	1600lm	1300lm	MLR8-9402014F-BB
					30°	1600lm	1300lm	MLR8-9403014F-BB
					40°	1600lm	1300lm	MLR8-9404014F-BB
					50°	1600lm	1200lm	MLR8-9405014F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black/White
ON-OFF	149,00 €
DALI Dim	209,00 €

Optional accessary



Honeycomb

Code for MLR8-9403014F with Honeycomb
MLR8-9403014F-**H**

Honeycomb: +9,00€

Coding

MLR8 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLR8 ML26-RS55-14W Single Spot	**927** CRI>90/ 2700K	**20** 20°	**14** 14W	**F** On-Off	**W** White	**B** Black	**H** Honeycomb
	930 CRI>90/ 3000K	**30** 30°		**A** 1-10V Dim	**B** Black		
	940 CRI>90/ 4000K	**40** 40°		**D** DALI Dim			
		50 50°					

BACK

MODULINE 26 – ML26-RS72 Spotlight Inset



ML26-RS72-19W
ML26-RS72-26W



20° 35° 55° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- System: 19W, 26W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 2600lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 1-10V Dim, DALI Dim

Light Distribution

3000K

ML26-RS72-26W-930-20°

Diameter (cm)	Height, Emax
Ø35	1m 12756lx
Ø71	2m 3189lx
Ø107	3m 1417lx
Ø143	4m 797lx
Ø178	5m 510lx

20° 10° 0° 10° 20°

ML26-RS72-26W-930-35°

Diameter (cm)	Height, Emax
Ø58	1m 6375lx
Ø117	2m 1594lx
Ø176	3m 708lx
Ø234	4m 398lx
Ø293	5m 255lx


20° 10° 0° 10° 20°

ML26-RS72-26W-930-55°

Diameter (cm)	Height, Emax
Ø104	1m 2805lx
Ø208	2m 701lx
Ø312	3m 312lx
Ø416	4m 175lx
Ø520	5m 112lx

20° 10° 0° 10° 20°

Finish



White Black

Order Info (ML26-RS72 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W	19W	48V	90	2700K	20°	1800lm	1500lm	MLR7-9272019F-BB
					35°	1800lm	1600lm	MLR7-9273519F-BB
					55°	1800lm	1600lm	MLR7-9275519F-BB
				3000K	20°	1900lm	1600lm	MLR7-9302019F-BB
					35°	1900lm	1700lm	MLR7-9303519F-BB
					55°	1900lm	1700lm	MLR7-9305519F-BB
				4000K	20°	2100lm	1700lm	MLR7-9402019F-BB
					35°	2100lm	1800lm	MLR7-9403519F-BB
					55°	2100lm	1800lm	MLR7-9405519F-BB
25W	26W	48V	90	2700K	20°	2500lm	2100lm	MLR7-9272026F-BB
					35°	2500lm	2300lm	MLR7-9273526F-BB
					55°	2500lm	2300lm	MLR7-9275526F-BB
				3000K	20°	2700lm	2200lm	MLR7-9302026F-BB
					35°	2700lm	2400lm	MLR7-9303526F-BB
					55°	2700lm	2400lm	MLR7-9305526F-BB
				4000K	20°	2900lm	2400lm	MLR7-9402026F-BB
					35°	2900lm	2600lm	MLR7-9403526F-BB
					55°	2900lm	2600lm	MLR7-9405526F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black/White
ON-OFF	179,00 €
DALI Dim	239,00 €

Optional accessary



Honeycomb

Code for MLR7-9402026F with **H**oneycomb
MLR7-9402026F-**H**

Honeycomb: +9,00€

Coding

MLR7 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLR7 ML26-RS72-19W	927 CRI>90/ 2700K	20 20°	19 19W	F On-Off	W White	B Black	
	930 CRI>90/ 3000K	35 35°	26 26W	A 1-10V Dim	B Black		
MLR7 ML26-RS72-26W	940 CRI>90/ 4000K	55 55°		D DALI Dim			

BACK

MODULINE 26 – ML26-RS96 Spotlight Inset




ML26-RS96-9W

15° 25° 35° | 2700K 3000K 4000K | CRI >90 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- System: 9W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 25°, 35°
- Lumen Output: Up to 830lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 1-10V Dim, DALI Dim




Light Distribution

3000K







Finish



White Black

Order Info (ML26-RS96 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
8W	9W	48V	90	2700K	15°	900lm	700lm	MLR9-9271509N-BN
					25°	900lm	720lm	MLR9-9272509N-BN
					35°	900lm	720lm	MLR9-9273509N-BN
				3000K	15°	950lm	720lm	MLR9-9301509N-BN
					25°	950lm	750lm	MLR9-9302509N-BN
					35°	950lm	750lm	MLR9-9303509N-BN
				4000K	15°	1050lm	780lm	MLR9-9401509N-BN
					25°	1050lm	830lm	MLR9-9402509N-BN
					35°	1050lm	830lm	MLR9-9403509N-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black/White
ON-OFF	139,00 €
DALI Dim	199,00 €

Coding

MLR9 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLR9 ML26-RS96-9W	927 CRI>90/ 2700K	15 15°	09 9W	F On-Off	W White	N None	
	930 CRI>90/ 3000K	25 25°		A 1-10V Dim	B Black		
	940 CRI>90/ 4000K	35 35°		D DALI Dim			

BACK

MODULINE 26 – ML26-FRS72 Spotlight Inset




ML26-FRS72-10W
Singble Spot




Quick Info


- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 25°, 36°, 50°
- Lumen Output: Up to 780lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 1-10V Dim, DALI Dim




Light Distribution

3000K







Finish



Black(B) White(W) Brushed Bronze(Z) Brushed Gold(G)

Order Info (ML26-FRS72 in Black Housing & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	25°	900lm	620lm	MLF1-9272510F-BC
					36°	900lm	650lm	MLF1-9273610F-BC
					50°	900lm	650lm	MLF1-9275010F-BC
				3000K	25°	950lm	650lm	MLF1-9302510F-BC
					36°	950lm	700lm	MLF1-9303610F-BC
					50°	950lm	700lm	MLF1-9305010F-BC
				4000K	25°	1050lm	700lm	MLF1-9402510F-BC
					36°	1050lm	780lm	MLF1-9403610F-BC
					50°	1050lm	780lm	MLF1-9405010F-BC

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Reflector Options



Dark Light Black Specular Matt White

Driver	Black/White	Brone/Gold
ON-OFF	139,00 €	179,00 €
DALI Dim	199,00 €	239,00 €

Optional accessary



Honeycomb

Code for MLF1-9302510F with **H**oneycomb
MLF1-9302510F-**H**


Honeycomb: +9,00€

Coding

MLF1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessary
MLF1 ML26-FRS72-10W Single Spot	**927** CRI>90/ 2700K	**25** 25°	**10** 10W	**F** On-Off	**W** White	**W** White	**H** Honeycomb
	930 CRI>90/ 3000K	**36** 36°		**A** 1-10V Dim	**B** Black	**B** Black	
	940 CRI>90/ 4000K	**50** 50°		**D** DALI Dim	**Z** Brushed Bronze	**S** Specular	
					G Brushed Gold	**C** Dark Light	
						M Matt	

MODULINE 26 – ML26-FRS72 Double Spotlight Inset




ML26-FRS72-20W
Double Inset




Quick Info


- System: 20W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 25°, 36°, 50°
- Lumen Output: Up to 1550lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 1-10V Dim, DALI Dim




Light Distribution

3000K







Finish



Black(B) White(W) Brushed Bronze(Z) Brushed Gold(G)

Order Info (ML26-FRS72 in Black Housing & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W	20W	48V	90	2700K	25°	1800lm	1250lm	MLF2-9272520F-BC
					36°	1800lm	1300lm	MLF2-9273620F-BC
					50°	1800lm	1300lm	MLF2-9275020F-BC
				3000K	25°	1900lm	1300lm	MLF2-9302520F-BC
					36°	1900lm	1400lm	MLF2-9303620F-BC
					50°	1900lm	1400lm	MLF2-9305020F-BC
				4000K	25°	2100lm	1400lm	MLF2-9402520F-BC
					36°	2100lm	1550lm	MLF2-9403620F-BC
					50°	2100lm	1550lm	MLF2-9405020F-BC

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Reflector Options



Dark Light Black Specular Matt White

Driver	Black/White	Brone/Gold
ON-OFF	229,00 €	309,00 €
DALI Dim	289,00 €	369,00 €

Optional accessary



Honeycomb

Code for MLF2-9302520F with Honeycomb
MLF2-9302520F-**H**

Honeycomb: +9,00€

Coding

MLF2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLF2 ML26-FRS72-20W Double Spot	**927** CRI>90/ 2700K	**25** 25°	**20** 20W	**F** On-Off	**W** White	**W** White	**H** Honeycomb
	930 CRI>90/ 3000K	**36** 36°		**A** 1-10V Dim	**B** Black	**B** Black	
	940 CRI>90/ 4000K	**50** 50°		**D** DALI Dim	**Z** Brushed Bronze	**S** Specular	
					G Brushed Gold	**C** Dark Light	
						M Matt	

BACK

MODULINE 26 – ML26-FRD80 Round Downlight Inset

NEW




ML26-FRD80-10W

30° | Cut-off 30° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UK CA | Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 30°
- Lumen Output: Up to 1000lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim
- Can only fit with MODULINE 26 Slim Track



Light Distribution

3000K



Finish



White



Black

Order Info (ML26-FRD80 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	30°	1100lm	900lm	MLRD-9273010F-BB
				3000K	30°	1200lm	950lm	MLRD-9303010F-BB
				4000K	30°	1300lm	1000lm	MLRD-9403010F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black/White
ON-OFF	149,00 €
DALI Dim	209,00 €

Optional accessary



Honeycomb

Code for MLRD-9303010F with Honeycomb
MLRD-9303010F-H

Honeycomb: +9,00€

Coding

MLRD – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLRD ML26-FRD80-10W	927 CRI>90/ 2700K	30 30°	10 10W	F On-Off	W White	W White	H Honeycomb
	930 CRI>90/ 3000K			A 1-10V Dim	B Black	B Black	
	940 CRI>90/ 4000K			D DALI Dim			

BACK

MODULINE 26 – ML26-FRDH80 Round Downlight Inset

NEW




ML26-FRDH80-10W

30° | Cut-off 30° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 30°
- Lumen Output: Up to 1000lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim
- Can only fit with MODULINE 26 Standard Track



Light Distribution

3000K



Finish



White



Black

Order Info (ML26-FRDH80 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	30°	1100lm	900lm	MLRH-9273010F-BB
				3000K	30°	1200lm	950lm	MLRH-9303010F-BB
				4000K	30°	1300lm	1000lm	MLRH-9403010F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black/White
ON-OFF	169,00 €
DALI Dim	229,00 €

Optional accessary



Honeycomb

Code for MLRH-9303010F with **H**oneycomb
MLRH-9303010F-**H**

Honeycomb: +9,00€

Coding

MLRH – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLRH ML26-FRH80-10W	927 CRI>90/ 2700K	30 30°	10 10W	F On-Off	W White	W White	H Honeycomb
	930 CRI>90/ 3000K			A 1-10V Dim	B Black	B Black	
	940 CRI>90/ 4000K			D DALI Dim			

BACK

MODULINE 26 – ML26-FSD80 Square Downlight Inset

NEW




ML26-FSD80-10W

30° | Cut-off 30° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 30°
- Lumen Output: Up to 1050lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim
- Can only fit with MODULINE 26 Slim Track




Light Distribution

3000K



Finish



White Black

Order Info (ML26-FSD80 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	30°	1100lm	950lm	MLSD-9273010F-BB
				3000K	30°	1200lm	1000lm	MLSD-9303010F-BB
				4000K	30°	1300lm	1050lm	MLSD-9403010F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black/White
ON-OFF	169,00 €
DALI Dim	229,00 €

Optional accessary



Honeycomb

Code for MLSD-9303010F-BB with Honeycomb
MLSD-9303010F-BB-H

Honeycomb: +9,00€

Coding

MLSD – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLSD ML26-FSD80-10W	927 CRI>90/ 2700K	30 30°	10 10W	F On-Off	W White	W White	H Honeycomb
	930 CRI>90/ 3000K			A 1-10V Dim	B Black	B Black	
	940 CRI>90/ 4000K			D DALI Dim			

BACK

MODULINE 26 – ML26-FSDH80 Square Downlight Inset

NEW




ML26-FSDH80-10W

30° | Cut-off 30° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 30°
- Lumen Output: Up to 1050lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim
- Can only fit with MODULINE 26 Standard Track



Light Distribution

3000K



Finish



White



Black

Order Info (ML26-FSDH80 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	30°	1100lm	950lm	MLSH-9273010F-BB
				3000K	30°	1200lm	1000lm	MLSH-9303010F-BB
				4000K	30°	1300lm	1050lm	MLSH-9403010F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black/White
ON-OFF	189,00 €
DALI Dim	249,00 €

Optional accessary



Honeycomb

Code for MLSH-9303010F-BB with Honeycomb
MLSH-9303010F-BB-**H**

Honeycomb: +9,00€

Coding

MLSH – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLSH ML26-FSH80-10W	927 CRI>90/ 2700K	30 30°	10 10W	F On-Off	W White	W White	H Honeycomb
	930 CRI>90/ 3000K			A 1-10V Dim	B Black	B Black	
	940 CRI>90/ 4000K			D DALI Dim			

BACK

MODULINE 26 – ML26-AL190 Accent Light Inset




ML26-AL190-3W ML26-AL190-7W

20° 35° 55° 2700K 3000K 4000K CRI >90 UGR<19 48V DC

IP20 CE CB UKCA Intertek OSRAM 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info


- System: 3W, 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim




Light Distribution

3000K







Finish



White Black

Order Info (ML26-AL190 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
2W	3W	48V	90	2700K	20°	230lm	170lm	MLA3-9272003F-BB
					35°	230lm	170lm	MLA3-9273503F-BB
					55°	230lm	160lm	MLA3-9275503F-BB
				3000K	20°	250lm	180lm	MLA3-9302003F-BB
					35°	250lm	180lm	MLA3-9303503F-BB
					55°	250lm	170lm	MLA3-9305503F-BB
				4000K	20°	270lm	200lm	MLA3-9402003F-BB
					35°	270lm	200lm	MLA3-9403503F-BB
					55°	270lm	190lm	MLA3-9405503F-BB

Driver	Black/White
ON-OFF	99,00 €
DALI Dim	159,00 €

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48V	90	2700K	20°	700lm	500lm	MLA4-9272007F-BB
					35°	700lm	500lm	MLA4-9273507F-BB
					55°	700lm	470lm	MLA4-9275507F-BB
				3000K	20°	750lm	550lm	MLA4-9302007F-BB
					35°	750lm	550lm	MLA4-9303507F-BB
					55°	750lm	500lm	MLA4-9305507F-BB
				4000K	20°	820lm	600lm	MLA4-9402007F-BB
					35°	820lm	600lm	MLA4-9403507F-BB
					55°	820lm	550lm	MLA4-9405507F-BB

Driver	Black/White
ON-OFF	119,00 €
DALI Dim	179,00 €

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLA3 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLA3 ML26-AL190-3W	927 CRI>90/ 2700K	20 20°	03 3W	F On-Off	W White	B Black	
	930 CRI>90/ 3000K	35 35°	07 7W	A 1-10V Dim	B Black		
MLA4 ML26-AL190-7W	940 CRI>90/ 4000K	55 55°		D DALI Dim			

MODULINE 26 – ML26-AL280 Accent Light Inset




ML26-AL280-9W ML26-AL280-13W

20° 35° 55° 2700K 3000K 4000K CRI >90 UGR<19 48V DC

IP20 CE CB UKCA ETL Intertek OSRAM 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info


- System: 9W, 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim




Light Distribution

3000K







Finish



White Black

Order Info (ML26-AL280 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
8W	9W	48V	90	2700K	20°	950lm	700lm	MLA1-9272009F-BB
					35°	950lm	700lm	MLA1-9273509F-BB
					55°	950lm	650lm	MLA1-9275509F-BB
				3000K	20°	1000lm	750lm	MLA1-9302009F-BB
					35°	1000lm	750lm	MLA1-9303509F-BB
					55°	1000lm	680lm	MLA1-9305509F-BB
				4000K	20°	1100lm	800lm	MLA1-9402009F-BB
					35°	1100lm	800lm	MLA1-9403509F-BB
					55°	1100lm	750lm	MLA1-9405509F-BB
12W	13W	48V	90	2700K	20°	1400lm	1000lm	MLA2-9272013F-BB
					35°	1400lm	1000lm	MLA2-9273513F-BB
					55°	1400lm	950lm	MLA2-9275513F-BB
				3000K	20°	1500lm	1100lm	MLA2-9302013F-BB
					35°	1500lm	1100lm	MLA2-9303513F-BB
					55°	1500lm	1000lm	MLA2-9305513F-BB
				4000K	20°	1600lm	1200lm	MLA2-9402013F-BB
					35°	1600lm	1200lm	MLA2-9403513F-BB
					55°	1600lm	1100lm	MLA2-9405513F-BB

Driver	Black/White
ON-OFF	139,00 €
DALI Dim	199,00 €

Driver	Black/White
ON-OFF	159,00 €
DALI Dim	219,00 €

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLA1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLA1 ML26-AL280-9W	927 CRI>90/ 2700K	20 20°	09 9W	F On-Off	W White	B Black	
	930 CRI>90/ 3000K	35 35°	13 13W	A 1-10V Dim	B Black		
MLA2 ML26-AL280-13W	940 CRI>90/ 4000K	55 55°		D DALI Dim			

BACK

MODULINE 26 – ML26-AL560 Accent Light Inset

NEW




ML26-AL560-26W

20° 35° 55° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC

IP20 | CE | CB | UKCA | Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- System: 26W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim




Light Distribution

3000K







Finish



White Black

Order Info (ML26-AL560 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
24W	26W	48V	90	2700K	20°	2800lm	2200lm	MLA6-9272026F-BB
					35°	2800lm	2350lm	MLA6-9273526F-BB
					55°	2800lm	1900lm	MLA6-9275526F-BB
				3000K	20°	3000lm	2300lm	MLA6-9302026F-BB
					35°	3000lm	2450lm	MLA6-9303526F-BB
					55°	3000lm	2000lm	MLA6-9305526F-BB
				4000K	20°	3200lm	2400lm	MLA6-9402026F-BB
					35°	3200lm	2550lm	MLA6-9403526F-BB
					55°	3200lm	2100lm	MLA6-9405526F-BB

Driver	Black/White
ON-OFF	249,00 €
DALI Dim	309,00 €

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLA6 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLA6 ML26-AL560-26W	927 CRI>90/ 2700K	20 20°	26 26W	F On-Off	W White	B Black	
	930 CRI>90/ 3000K	35 35°		A 1-10V Dim	B Black		
	940 CRI>90/ 4000K	55 55°		D DALI Dim			

BACK

MODULINE 26 – ML26-SA280 Adjustable Accent Light Inset



ML26-SA280-13W

20° 35° 55°

2700K
3000K
4000K

CRI >90

UGR<19

48V DC


IP20

OSRAM 50,000h@L80B10

5 YEARS GUARANTEE

Quick Info


- System: 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim

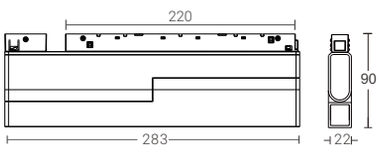


Light Distribution

3000K


ML26-SA280-13W-930-20°



ML26-SA280-13W-930-35°



ML26-SA280-13W-930-55°



Finish



White Black

Order Info (ML26-SA280 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	48V	90	2700K	20°	1400lm	1000lm	MLA5-9272013F-BB
					35°	1400lm	1000lm	MLA5-9273513F-BB
					55°	1400lm	950lm	MLA5-9275513F-BB
				3000K	20°	1500lm	1000lm	MLA5-9302013F-BB
					35°	1500lm	1000lm	MLA5-9303513F-BB
					55°	1500lm	1100lm	MLA5-9305513F-BB
				4000K	20°	1600lm	1200lm	MLA5-9402013F-BB
					35°	1600lm	1200lm	MLA5-9403513F-BB
					55°	1600lm	1100lm	MLA5-9405513F-BB

Driver	Black/White
ON-OFF	229,00 €
DALI Dim	289,00 €

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLA5 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLA5 ML26-SA280-13W Adjustable Accent	927 CRI>90/ 2700K	20 20°	13 13W	F On-Off	W White	B Black	
	930 CRI>90/ 3000K	35 35°		A 1-10V Dim	B Black		
	940 CRI>90/ 4000K	55 55°		D DALI Dim			

BACK

MODULINE 26 – ML26-SG280 Adjustable General Light Inset




ML26-SG280-7W

110° | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | Intertek | 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 110°
- Lumen Output: Up to 450lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim

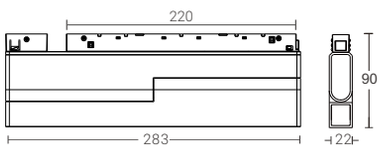


Light Distribution

3000K



Finish



White



Black

Order Info (ML26-SG280 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48V	90	2700K	110°	550lm	430lm	MLG5-927A107F-BN
				3000K	110°	600lm	400lm	MLG5-930A107F-BN
				4000K	110°	650lm	450lm	MLG5-940A107F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black/White
ON-OFF	159,00 €
DALI Dim	219,00 €

Coding

MLG5 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLG5 ML26-SG280-7W General Light	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	A1 110°	07 7W	F On-Off A 1-10V Dim D DALI Dim	W White B Black	N None	

MODULINE 26 – ML26-GL280 & ML26-GL560 General Light Inset




ML26-GL280-7W ML26-GL560-13W

110° | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- System: 7W, 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 110°
- Lumen Output: Up to 450lm or 900lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K





Finish



White Black

Order Info (ML26-GL280 & ML26-GL560 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48V	90	2700K	110°	550lm	430lm	MLG1-927A107F-BN
				3000K	110°	600lm	400lm	MLG1-930A107F-BN
				4000K	110°	650lm	450lm	MLG1-940A107F-BN
12W	13W	48V	90	2700K	110°	1100lm	750lm	MLG2-927A113F-BN
				3000K	110°	1200lm	800lm	MLG2-930A113F-BN
				4000K	110°	1300lm	900lm	MLG2-940A113F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

7W:

Driver	Black/White
ON-OFF	79,00 €
DALI Dim	139,00 €

13W:

Driver	Black/White
ON-OFF	119,00 €
DALI Dim	179,00 €

Coding

MLG1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLG1 ML26-GL280-7W General Light	927 CRI>90/ 2700K	A1 110°	07 7W	F On-Off	W White	N None	
MLG2 ML26-GL560-13W General Light	930 CRI>90/ 3000K		13 13W	A 1-10V Dim	B Black		
	940 CRI>90/ 4000K			D DALI Dim			

BACK

MODULINE 26 – ML26-GL840 & ML26-GL1120 General Light Inset




ML26-GL840-19W ML26-GL1120-26W

110° | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | Intertek | 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- System: 19W, 26W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 110°
- Lumen Output: Up to 1300lm or 1700lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K





Finish



White Black

Order Info (ML26-GL840 & ML26-GL1120 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W	19W	48V	90	2700K	110°	1700lm	1100lm	MLG3-927A119F-BN
				3000K	110°	1800lm	1200lm	MLG3-930A119F-BN
				4000K	110°	1900lm	1300lm	MLG3-940A119F-BN
24W	26W	48V	90	2700K	110°	2200lm	1500lm	MLG4-927A126F-BN
				3000K	110°	2400lm	1600lm	MLG4-930A126F-BN
				4000K	110°	2600lm	1700lm	MLG4-940A126F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

19W:

Driver	Black/White
ON-OFF	139,00 €
DALI Dim	199,00 €

26W:

Driver	Black/White
ON-OFF	179,00 €
DALI Dim	229,00 €

Coding

MLG3 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLG3 ML26-GL840-19W General Light	**927** CRI>90/ 2700K	**A1** 110°	**19** 19W	**F** On-Off	**W** White	**N** None	
MLG4 ML26-GL1120-26W General Light	**930** CRI>90/ 3000K		**26** 26W	**A** 1-10V Dim	**B** Black		
	940 CRI>90/ 4000K			**D** DALI Dim			

MODULINE 26 – ML26-CL280 & ML26-CL560 General Light Inset

NEW




ML26-CL280-7W ML26-CL560-13W

65° | 2700K 3000K 4000K | CRI >90 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- System: 7W, 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 65° (Microprismatic Cover Version)
- Lumen Output: Up to 420lm or 800lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K





Finish



White Black

Order Info (ML26-CL280 & ML26-CL560 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48V	90	2700K	65°	550lm	360lm	MLC1-9276507F-BN
				3000K	65°	600lm	380lm	MLC1-9276507F-BN
				4000K	65°	650lm	420lm	MLC1-9276507F-BN
12W	13W	48V	90	2700K	65°	1100lm	720lm	MLC2-9276513F-BN
				3000K	65°	1200lm	750lm	MLC2-9276513F-BN
				4000K	65°	1300lm	800lm	MLC2-9276513F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

7W:

Driver	Black/White
ON-OFF	89,00 €
DALI Dim	149,00 €

13W:

Driver	Black/White
ON-OFF	129,00 €
DALI Dim	189,00 €

Coding

MLC1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLC1 ML26-CL280-7W General Light	927 CRI>90/ 2700K	65 65° Microprismatic Cover Version	07 7W	F On-Off	W White	N None	
MLC2 ML26-CL560-13W General Light	930 CRI>90/ 3000K		13 13W	A 1-10V Dim	B Black		
	940 CRI>90/ 4000K			D DALI Dim			

BACK


MODULINE 26 – ML26-CL840 & ML26-CL1120 General Light Inset



65° | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | Intertek | 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- System: 19W, 26W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 65° (Microprismatic Cover Version)
- Lumen Output: Up to 1200lm or 1600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim




Light Distribution

3000K





Finish



Order Info (ML26-CL840 & ML26-CL1120 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W	19W	48V	90	2700K	65°	1700lm	1000lm	MLC3-9276519F-BN
				3000K	65°	1800lm	1100lm	MLC3-9276519F-BN
				4000K	65°	1900lm	1200lm	MLC3-9276519F-BN
24W	26W	48V	90	2700K	65°	2200lm	1400lm	MLC4-9276526F-BN
				3000K	65°	2400lm	1500lm	MLC4-9276526F-BN
				4000K	65°	2600lm	1600lm	MLC4-9276526F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

19W:

Driver	Black/White
ON-OFF	159,00 €
DALI Dim	209,00 €

26W:

Driver	Black/White
ON-OFF	189,00 €
DALI Dim	249,00 €

Coding

MLC3 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLC3 ML26-CL840-19W General Light	**927** CRI>90/ 2700K	**65** 65° Microprismatic Cover Version	**19** 19W	**F** On-Off	**W** White	**N** None	
MLC4 ML26-CL1120-26W General Light	**930** CRI>90/ 3000K		**26** 26W	**A** 1-10V Dim	**B** Black		
	940 CRI>90/ 4000K			**D** DALI Dim			

MODULINE 26 – ML26-RB120 & ML26-RB150 Pendant Light Inset

NEW




ML26-RB120-5W
ML26-RB150-7W
(Frosted Glass)

300° | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 5W, 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 300°
- Lumen Output: Up to 470lm or 550lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K



Finish



White



Black

Order Info (ML26-PB120 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
4W	5W	48V	90	2700K	300°	500lm	300lm	MLRB-927C005F-BN
				3000K	300°	550lm	350lm	MLRB-930C005F-BN
				4000K	300°	600lm	400lm	MLRB-940C005F-BN
6W	7W	48V	90	2700K	300°	600lm	500lm	MLRB-927C007F-BN
				3000K	300°	650lm	550lm	MLRB-930C007F-BN
				4000K	300°	700lm	600lm	MLRB-940C007F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLRB – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLRB ML26-RB120-5W Pendant Spot	**927** CRI>90/ 2700K	**C0** 300°	**05** 5W	**F** On-Off	**W** White	**N** None	
MLRB ML26-RB150-7W Pendant Spot	**930** CRI>90/ 3000K		**07** 7W	**A** 1-10V Dim	**B** Black		
	940 CRI>90/ 4000K			**D** DALI Dim			

Driver	Black/White
ON-OFF	149,00 €
DALI Dim	209,00 €

BACK

MODULINE 26 – ML26-PB120 & ML26-PB150 Decorative Ball Inset




ML26-PB120-5W
ML26-PB150-7W
(Frosted Glass)

300° | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | Intertek | 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 5W, 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 300°
- Lumen Output: Up to 470lm or 550lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K



Finish



White Black

Driver	Black/White
ON-OFF	169,00 €
DALI Dim	229,00 €

Order Info (ML26-PB120 & ML26-PB150 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
4W	5W	48V	90	2700K	300°	500lm	300lm	MLPB-927C005F-BN
				3000K	300°	550lm	350lm	MLPB-930C005F-BN
				4000K	300°	600lm	400lm	MLPB-940C005F-BN
6W	7W	48V	90	2700K	300°	600lm	500lm	MLPB-927C007F-BN
				3000K	300°	650lm	550lm	MLPB-930C007F-BN
				4000K	300°	700lm	600lm	MLPB-940C007F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLPB – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLPB ML26-PB120-5W MLPB ML26-PB150-7W	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	C0 300°	05 5W 07 7W	F On-Off A 1-10V Dim D DALI Dim	W White B Black	N None	

MODULINE 26 – ML26-PS40 Pendant Spot Inset




ML26-PS40-12W

18° 30° 45° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- System: 12W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 800lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim

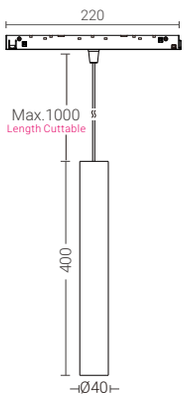


Light Distribution

3000K







Finish



Black(B) White(W) Brushed Bronze(Z) Brushed Gold(G)

Order Info (ML26-PS40 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
11W	12W	48V	90	2700K	18°	1000lm	700lm	MLP1-9271812F-BB
					30°	1000lm	700lm	MLP1-9273012F-BB
					45°	1000lm	550lm	MLP1-9274512F-BB
				3000K	18°	1100lm	750lm	MLP1-9301812F-BB
					30°	1100lm	750lm	MLP1-9303012F-BB
					45°	1100lm	600lm	MLP1-9304512F-BB
				4000K	18°	1200lm	800lm	MLP1-9401812F-BB
					30°	1200lm	800lm	MLP1-9403012F-BB
					45°	1200lm	650lm	MLP1-9404512F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

Hier Text eingeben

MLP1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLP1 ML26-PS40-12W Pendant Spot	927 CRI>90/ 2700K	18 18°	12 12W	F On-Off	W White	B Black	H Honeycomb
	930 CRI>90/ 3000K	30 30°		A 1-10V Dim	B Black		
	940 CRI>90/ 4000K	45 45°		D DALI Dim	Z Brushed Bronze		
					G Brushed Gold		

Driver	Black/White	Bronze/Gold
ON-OFF	169,00 €	209,00 €
DALI Dim	229,00 €	259,00 €

Optional accessary



Honeycomb

Code for MLP1-9301812F with **H**oneycomb
MLP1-9301812F-**H**

Honeycomb: +9,00€

BACK

MODULINE 26 – ML26-PS55 Pendant Spot Inset

NEW



ML26-PS55-10W

18° 24° 36° 50°

2700K
3000K
4000K

CRI >90

UGR<19

48V DC

IP20

CE

CB

UKCA


Intertek

CITIZEN 50,000h@L80B10

5 YEARS GUARANTEE


Quick Info

- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to 870lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K

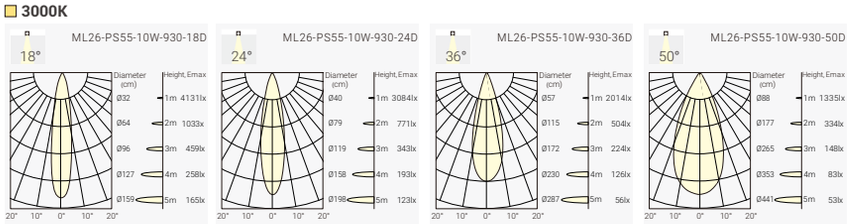

Finish



Black(B) White(W) Brushed Bronze(Z) Brushed Gold(G)

Order Info (ML26-PS55 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	18°	850lm	620lm	MLP4-9271810F-BB
					24°	850lm	620lm	MLP4-9272410F-BB
					36°	850lm	620lm	MLP4-9273610F-BB
					50°	850lm	700lm	MLP4-9275010F-BB
				3000K	18°	950lm	650lm	MLP4-9301810F-BB
					24°	950lm	650lm	MLP4-9302410F-BB
					36°	950lm	650lm	MLP4-9303610F-BB
					50°	950lm	800lm	MLP4-9305010F-BB
				4000K	18°	1000lm	700lm	MLP4-9401810F-BB
					24°	1000lm	700lm	MLP4-9402410F-BB
					36°	1000lm	700lm	MLP4-9403610F-BB
					50°	1000lm	870lm	MLP4-9405010F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLP4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLP4 ML26-PS40-10W Pendant Spot	927 CRI>90/ 2700K	18 18°	10 10W	F On-Off	W White	B Black	H Honeycomb
	930 CRI>90/ 3000K	30 30°		A 1-10V Dim	B Black		
	940 CRI>90/ 4000K	45 45°		D DALI Dim	Z Brushed Bronze		
		50 50°			G Brushed Gold		

Driver	Black/White	Brone/Gold
ON-OFF	179,00 €	209,00 €
DALI Dim	239,00 €	269,00 €

Optional accessary



Honeycomb

Code for MLP4-9301810F with Honeycomb
MLP4-9301810F-H

Honeycomb: +9,00€

BACK

MODULINE 26 – ML26-PS60 Pendant Light Inset




ML26-PS60-5W

18° 24° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 5W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to 450lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim




Light Distribution

3000K

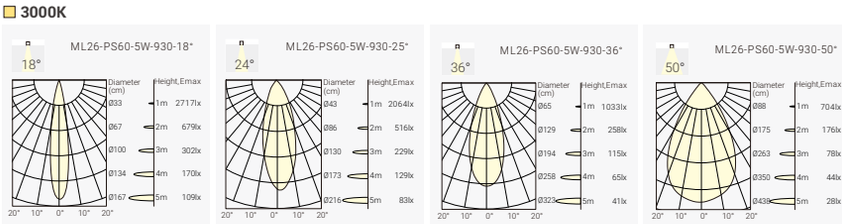

Finish



White Black

Order Info (ML26-PS60 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
4.5W	5W	48V	90	2700K	18°	370lm	370lm	MLP3-9271805F-BB
					24°	370lm	370lm	MLP3-9272405F-BB
					36°	370lm	370lm	MLP3-9273605F-BB
					50°	370lm	370lm	MLP3-9275005F-BB
				3000K	18°	500lm	400lm	MLP3-9301805F-BB
					24°	500lm	400lm	MLP3-9302405F-BB
					36°	500lm	400lm	MLP3-9303605F-BB
					50°	500lm	400lm	MLP3-9305005F-BB
				4000K	18°	550lm	450lm	MLP3-9401805F-BB
					24°	550lm	450lm	MLP3-9402405F-BB
					36°	550lm	450lm	MLP3-9403605F-BB
					50°	550lm	450lm	MLP3-9405005F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black/White
ON-OFF	179,00 €
DALI Dim	239,00 €

Coding

MLP3 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLP3 ML26-PS60-5W Pendant Spot	**927** CRI>90/ 2700K	**18** 18°	**05** 5W	**F** On-Off	**W** White	**B** Black	
	930 CRI>90/ 3000K	**24** 24°		**A** 1-10V Dim	**B** Black		
	940 CRI>90/ 4000K	**36** 36°		**D** DALI Dim			
		50 50°					

BACK

MODULINE 26 – ML26-WW280 & ML26-WW560 Wall Washer Inset



ML26-WW280-7W



ML26-WW560-13W

Wall Washer | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | Intertek | 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- System: 7W, 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: Wall Washer
- Lumen Output: Up to 450lm or 750lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K





Finish



White



Black

7W:

Driver	Black/White
ON-OFF	119,00 €
DALI Dim	179,00 €

13W:

Driver	Black/White
ON-OFF	149,00 €
DALI Dim	209,00 €

Order Info (ML26-WW280 & WW560 in Black Housing & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48V	90	2700K	WW	550lm	330lm	MLW1-927WW07F-BM
				3000K	WW	600lm	350lm	MLW1-930WW07F-BM
				4000K	WW	650lm	450lm	MLW1-940WW07F-BM
12W	13W	48V	90	2700K	WW	1100lm	670lm	MLW2-927WW13F-BM
				3000K	WW	1200lm	700lm	MLW2-930WW13F-BM
				4000K	WW	1300lm	750lm	MLW2-940WW13F-BM

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLW1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLW1 ML26-WW280-7W	927 CRI>90/ 2700K	WW Wall Washer	07 7W	F On-Off	W White	M Matt	
MLW2 ML26-WW560-13W	930 CRI>90/ 3000K		13 13W	A 1-10V Dim	B Black		
	940 CRI>90/ 4000K			D DALI Dim			

MODULINE 26 – ML26-NHU12 Neon Strip Inset

NEW




ML26-NHU12-19W

360° | 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 19W, CRI>90
- CCT: 3000K, 4000K Availabl as Standard
- Beam Angle: 360°
- Lumen Output: Up to 1400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim




Light Distribution

3000K



Finish



White



Black

Order Info (ML26-NHU12 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
17W	19W	48V	90	3000K	360°	2200lm	1300lm	MNHU-930C619F-BN
				4000K	360°	2400lm	1400lm	MNHU-940C619F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black/White
ON-OFF	299,00 €
DALI Dim	359,00 €

Coding

MNHU – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MNHU ML26-NHU12-19W Neon Strip	930 CRI>90/ 3000K 940 CRI>90/ 4000K	C6 360°	19 19W	F On-Off A 1-10V Dim D DALI Dim	W White B Black	N None	

BACK

MODULINE 26 – ML26-NHP10 Neon Strip Inset

NEW




ML26-NHP10-14W

360° | 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 14W, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 360°
- Lumen Output: Up to 1050lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim

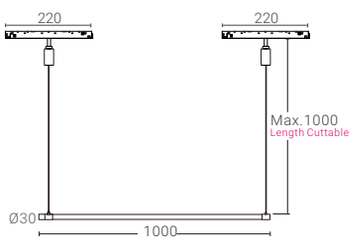

Light Distribution

3000K



Finish



White



Black

Order Info (ML26-NHP10 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
13W	14W	48V	90	3000K	360°	1600lm	1000lm	MNHP-930C614F-BN
				4000K	360°	1700lm	1050lm	MNHP-940C614F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black/White
ON-OFF	229,00 €
DALI Dim	349,00 €

Coding

MNHU – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MNHU ML26-NHU10-14W Neon Strip	930 CRI>90/ 3000K 940 CRI>90/ 4000K	C6 360°	19 19W	F On-Off A 1-10V Dim D DALI Dim	W White B Black	N None	

MODULINE 26 – ML26-NVP12 Neon Strip Inset

NEW



ML26-NVP12-19W

360° | 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 19W, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 360°
- Lumen Output: Up to 1100lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K



Finish



White



Black

Order Info (ML26-NVP12 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
17W	19W	48V	90	3000K	360°	2200lm	1050lm	MNVP-930C619F-BN
				4000K	360°	2400lm	1100lm	MNVP-940C619F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black/White
ON-OFF	289,00 €
DALI Dim	349,00 €

Coding

MNVP – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MNVP ML26-NVP12-19W Neon Strip	930 CRI>90/ 3000K 940 CRI>90/ 4000K	C6 360°	19 19W	F On-Off A 1-10V Dim D DALI Dim	W White B Black	N None	

BACK

GAME & SUGAR

The High-Efficiency Modern Ceiling Light Series

GAME:
A Classical Flat Design, Available in White & Black

SUGAR:
A Decorative Recessed Frame Design, Available in in White-Gold & Black-Gold.

Featuring a Top-Level Microprismatic Cover to Enhance Visual Comfort (UGR<19) Combined with Homogeneous Lighting.

Four Housing Diameters Available: Ø350, Ø450, Ø600 & Ø900.

Can Be Surface-Mounted Onto the Ceiling, or Pendant Through Wire or Rod.

An Indirect Light Module is Available as an Option, Easily Mounted Onto the Luminaire.

Light Color Temperature Options: 3000K, 4000K, or Tunable White.

Lumen Efficiency up to 140 lm/W.

Well-Suited for Offices, Meeting Rooms, Schools, Shops, & More



Project: Aurum University in Turku, Finland

GAME & SUGAR – Ceiling Light System




Magnetic Uplight Module




UPLIGHT





8W Up Light(250mA) 950lm
12W Down Light(350mA) 1800lm
16W Down Light(500mA) 2350lm
ON-OFF/Phase Dim/1-10V/DALI Dim






11W Up Light(350mA) 1200lm
16W Down Light(500mA) 2500lm
24W Down Light(700mA) 3400lm
ON-OFF/Phase Dim/1-10V/DALI Dim






18W Up Light(500mA) 1800lm
24W Down Light(700mA) 3300lm
36W Down Light(1050mA) 5300lm
46W Down Light(1400mA) 6700lm
ON-OFF/Phase Dim/1-10V/DALI Dim

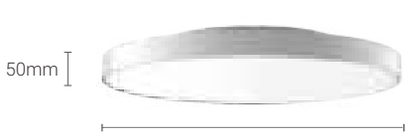



25W Up Light(700mA) 2700lm
65W Down Light(1400mA) 8700lm
ON-OFF/1-10V/DALI Dim

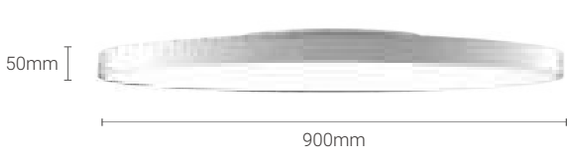




GAME

D1:GAME 350: D1=Ø350mm
GAME 450: D1=Ø450mm
GAME 600: D1=Ø600mm
GAME 900: D1=Ø900mm

D2:GAME 350/ 450: D2=Ø235mm
GAME 600/ 900: D2=Ø350mm

D3:Ø136mm

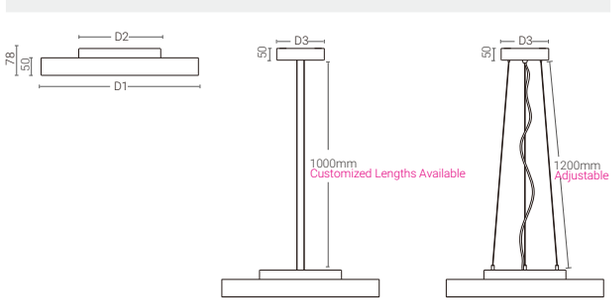


SUGAR

D1:SUGAR 350: D1=Ø350mm
SUGAR 450: D1=Ø450mm
SUGAR 600: D1=Ø600mm
SUGAR 900: D1=Ø900mm


D2: SUGAR 350/ 450: D2=Ø235mm
SUGAR 600/ 900: D2=Ø350mm

D3:Ø136mm

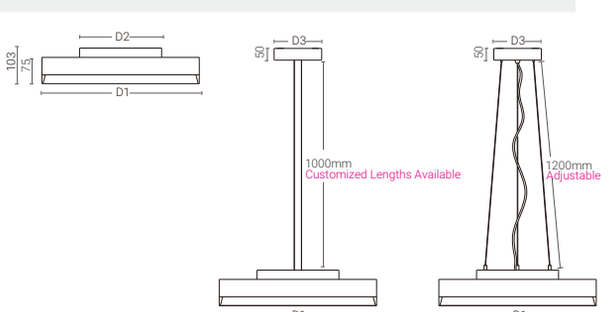

GAME 350 – Ceiling Light System





90° | 2700K 3000K 4000K | Tunable White | CRI >80 | CRI >90 | UGR<19 | IP40


CE | CB | UKCA | Intertek | 5 YEARS GUARANTEE


Quick Info

- LED: 12W, 16W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 2350lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K





Order Info (Surface/ Wall Mounted GAME 350 in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	14W	34V	350mA	80	2700K	90°	2000lm	1600lm	G3SM-8279012N-BN
					3000K	90°	2100lm	1700lm	G3SM-8309012N-BN
					4000K	90°	2300lm	1800lm	G3SM-8409012N-BN
					2700K–6500K	90°	Max.2100lm	Max.1750lm	G3SM-8T29012N-BN
16W	18W	34V	500mA	80	2700K	90°	2500lm	2000lm	G3SM-8279016N-BN
					3000K	90°	2700lm	2150lm	G3SM-8309016N-BN
					4000K	90°	2900lm	2350lm	G3SM-8409016N-BN
Uplight Module					2700K–6500K	90°	Max.2900lm	Max.2500lm	G3SM-8T29012N-BN
8W	10W	33V	250mA	80	2700K	110°	950lm	850lm	UM35-827A108N-NN
					3000K	110°	1000lm	900lm	UM35-830A108N-NN
					4000K	110°	1100lm	950lm	UM35-840A108N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Surface	Pendant Rod	Pendant Wire
ON-OFF	279,00 €	369,00 €	349,00 €
Phase Dim	289,00 €	379,00 €	359,00 €
DALI Dim	329,00 €	409,00 €	389,00 €
Tunable White DALI Dim	479,00 €	569,00 €	549,00 €

Finish

Surface/ Wall Mounted


White


Black

Pendant Rod Mounted

* Standard pendant rod length: 1000mm
* Field cuttable pendant rod solution optional


White


Black

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm


White


Black

Optional Uplight Module


Magnetic Uplight Module 350

Code for G3PR-8309012N-WN with Uplight Module G3PR-8309012N-WN-U

ON-OFF	+120,00 €
Phase Dim	+130,00 €
DALI Dim	+160,00 €

Coding


G3SM – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
G3SM GAME 350 Surface/ Wall Mounted	**827** CRI80/ 2700K	**90** 90°	**12** 12W	**N** No Driver	**W** White	**N** None	**U** Uplight Module
G3PW GAME 350 Pendant Wires	**830** CRI80/ 3000K		**16** 16W	**F** On-Off	**B** Black		
G3PR GAME 350 Pendant Rod	**840** CRI80/ 4000K			**P** Phase Dim			
	8T2 CRI80 2700K–6500K Tunable White			**A** 1-10V Dim			
	927 CRI90/ 2700K			**D** DALI Dim			
	930 CRI90/ 3000K						
	940 CRI90/ 4000K						
	9T2 CRI90 2700K–6500K Tunable White						

BACK

GAME 450 – Ceiling Light System





90° | 2700K 3000K 4000K | Tunable White | CRI >80 | CRI >90 | UGR<19 | IP40


CE | CB | UKCA | Intertek | 5 YEARS GUARANTEE


Quick Info

- LED: 16W, 24W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 3400lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K





Order Info (Surface/ Wall Mounted GAME 450 in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16W	18W	34V	500mA	80	2700K	90°	2500lm	2150lm	G4SM-8279016N-BN
					3000K	90°	2700lm	2300lm	G4SM-8309016N-BN
					4000K	90°	2900lm	2500lm	G4SM-8409016N-BN
					2700K–6500K	90°	Max.2900lm	Max.2300lm	G4SM-8T09016N-BN
24W	26W	34V	700mA	80	2700K	90°	3500lm	3000lm	G4SM-8279024N-BN
					3000K	90°	3700lm	3150lm	G4SM-8309024N-BN
					4000K	90°	4000lm	3400lm	G4SM-8409024N-BN
Uplight Module					2700K–6500K	90°	Max.4100lm	Max.3200lm	G4SM-8T29024N-BN
11W	13W	33V	350mA	80	2700K	110°	1100lm	1000lm	UM45-827A111N-NN
					3000K	110°	1200lm	1100lm	UM45-830A111N-NN
					4000K	110°	1300lm	1200lm	UM45-840A111N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Surface	Pendant Rod	Pendant Wire
ON-OFF	359,00 €	449,00 €	429,00 €
Phase Dim	369,00 €	459,00 €	439,00 €
DALI Dim	409,00 €	489,00 €	469,00 €
Tunable White DALI Dim	629,00 €	709,00 €	689,00 €

Finish

Surface/ Wall Mounted



White Black

Pendant Rod Mounted


* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm



White Black

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm



White Black

Optional Uplight Module



Magnetic Uplight Module 450

Code for G4PR-8309016N-WN with Uplight Module G4PR-8309016N-WN-U

ON-OFF	+130,00 €
Phase Dim	+140,00 €
DALI Dim	+190,00 €


Coding

G4SM – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
G4SM GAME 450 Surface/ Wall Mounted	**827** CRI80/ 2700K	**90** 90°	**16** 16W	**N** No Driver	**W** White	**N** None	**U** Uplight Module
G4PW GAME 450 Pendant Wires	**830** CRI80/ 3000K		**24** 24W	**F** On-Off	**B** Black		
G4PR GAME 450 Pendant Rod	**840** CRI80/ 4000K			**P** Phase Dim			
	8T2 CRI80 2700K–6500K Tunable White			**A** 1-10V Dim			
	927 CRI90/ 2700K			**D** DALI Dim			
	930 CRI90/ 3000K						
	940 CRI90/ 4000K						
	9T2 CRI90 2700K–6500K Tunable White						

GAME 600 – Ceiling Light System





Finish

Surface/ Wall Mounted



White Black

Pendant Rod Mounted

* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm



White Black

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm



White Black

24W/36W:

Driver	Surface	Pendant Rod	Pendant Wire
ON-OFF	569,00 €	649,00 €	629,00 €
Phase Dim	579,00 €	659,00 €	639,00 €
DALI Dim	609,00 €	689,00 €	669,00 €
Tunable White DALI Dim	989,00 €	1069,00 €	1049,00 €

46W:

Driver	Surface	Pendant Rod	Pendant Wire
ON-OFF	599,00 €	679,00 €	659,00 €
DALI Dim	669,00 €	759,00 €	729,00 €

Optional Uplight Module



Magnetic Uplight Module 600

Code for G6PR-8309036N-WN with Uplight Module G6PR-8309036N-WN-U

ON-OFF	+190,00 €
Phase Dim	+200,00 €
DALI Dim	+230,00 €


90° | 2700K 3000K 4000K | Tunable White | CRI >80 | CRI >90 | UGR<19 | IP40 | CE | CB | UKCA | ETL Intertek | 5 YEARS GUARANTEE


Quick Info

- LED: 24W, 36W, 46W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 6700lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K





Order Info (Surface/ Wall Mounted GAME 600 in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24W	26W	34V	700mA	80	2700K	90°	3500lm	2850lm	G6SM-8279024N-BN
					3000K	90°	3700lm	3000lm	G6SM-8309024N-BN
					4000K	90°	4000lm	3300lm	G6SM-8409024N-BN
					2700K–6500K	90°	Max.4100lm	Max.3400lm	G6SM-8T29024N-BN
36W	40W	34V	1050mA	80	2700K	90°	5800lm	4750lm	G6SM-8279036N-BN
					3000K	90°	6200lm	5000lm	G6SM-8309036N-BN
					4000K	90°	6600lm	5300lm	G6SM-8409036N-BN
					2700K–6500K	90°	Max.6600lm	Max.5700lm	G6SM-8T29036N-BN
46W	50W	34V	1400mA	80	2700K	90°	7200lm	5850lm	G6SM-8279046N-NN
					3000K	90°	8100lm	6150lm	G6SM-8309046N-NN
					4000K	90°	8600lm	6700lm	G6SM-8409046N-NN
Uplight Module									
18W	20W	36V	500mA	80	2700K	110°	1800lm	1600lm	UM60-827A118N-NN
					3000K	110°	1900lm	1700lm	UM60-830A118N-NN
					4000K	110°	2000lm	1800lm	UM60-840A118N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Coding

G6SM – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
G6SM GAME 600 Surface/ Wall Mounted	**827** CRI80/ 2700K	**90** 90°	**24** 24W	**N** No Driver	**W** White	**N** None	**U** Uplight Module
G6PW GAME 600 Pendant Wires	**830** CRI80/ 3000K		**36** 36W	**F** On-Off	**B** Black		
G6PR GAME 600 Pendant Rod	**840** CRI80/ 4000K		**46** 46W *	**P** Phase Dim			
	8T2 CRI80 2700K–6500K Tunable White			**A** 1-10V Dim			
	927 CRI90/ 2700K			**D** DALI Dim			
	930 CRI90/ 3000K						
	940 CRI90/ 4000K						
	9T2 CRI90 2700K–6500K Tunable White						

* LED 46W is not available with Tunable White

BACK

GAME 900 – Ceiling Light System






90° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP40 | CE | CB | UK CA | Intertek | 5 YEARS GUARANTEE

Quick Info

- LED: 60W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 90°
- Lumen Output: Up to 8700lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, 1-10V Dim, DALI Dim

Light Distribution

3000K



Finish


Surface/ Wall Mounted



White Black

Pendant Rod Mounted


* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm

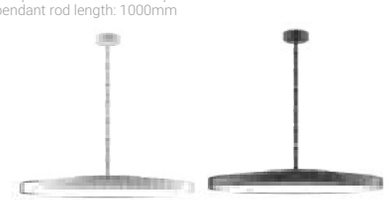

White Black

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm

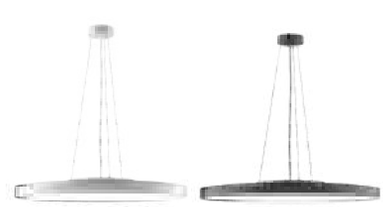

White Black

Optional Uplight Module



Magnetic Uplight Module 900

Code for G9PR-8309060N-WN with Uplight Module G9PR-8309060N-WN-U

ON-OFF	+290,00 €
Phase Dim	+320,00 €

Order Info (Surface/ Wall Mounted GAME 900 in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
60W	62W	43V	1400mA	80	2700K	90°	9900lm	7500lm	G9SM-8279060N-BN
					3000K	90°	10500lm	7900lm	G9SM-8309060N-BN
					4000K	90°	11000lm	8700lm	G9SM-8409060N-BN
Uplight Module									
25W	28W	36V	700mA	80	2700K	110°	2900lm	2500lm	UM90-827A128N-NN
					3000K	110°	3100lm	2700lm	UM90-830A128N-NN
					4000K	110°	3300lm	2950lm	UM90-840A128N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Surface	Pendant Rod	Pendant Wire
ON-OFF	1099,00 €	1189,00 €	1159,00 €
DALI Dim	1149,00 €	1239,00 €	1209,00 €


Coding

G9SM – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
G9SM GAME 900 Surface/ Wall Mounted	**827** CRI80/ 2700K	**90** 90°	**60** 60W	**N** No Driver	**W** White	**N** None	**U** Uplight Module
G94PW GAME 900 Pendant Wires	**830** CRI80/ 3000K			**F** On-Off	**B** Black		
G94PR GAME 900 Pendant Rod	**840** CRI80/ 4000K			**A** 1-10V Dim			
	927 CRI90/ 2700K			**D** DALI Dim			
	930 CRI90/ 3000K						
	940 CRI90/ 4000K						

SUGAR 350 – Ceiling Light System






90° | 2700K 3000K 4000K | Tunable White | CRI >80 | CRI >90 | UGR<19 | IP40 | CE | CB | UKCA | ETL Intertek | 5 YEARS GUARANTEE


Quick Info

- LED: 12W, 16W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 2350lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K





Order Info (Surface/ Wall Mounted SUGAR 350 in Black -Gold Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	14W	34V	350mA	80	2700K	90°	2000lm	1600lm	S3SM-8279012N-BG
					3000K	90°	2100lm	1700lm	S3SM-8309012N-BG
					4000K	90°	2300lm	1800lm	S3SM-8409012N-BG
					2700K–6500K	90°	Max.2100lm	Max.1750lm	S3SM-8T29012N-BG
16W	18W	34V	500mA	80	2700K	90°	2500lm	2000lm	S3SM-8279016N-BG
					3000K	90°	2700lm	2150lm	S3SM-8309016N-BG
					4000K	90°	2900lm	2350lm	S3SM-8409016N-BG
Uplight Module					2700K–6500K	90°	Max.2900lm	Max.2500lm	S3SM-8T29016N-BG
8W	10W	33V	250mA	80	2700K	110°	950lm	850lm	UM35-827A108N-NN
					3000K	110°	1000lm	900lm	UM35-830A108N-NN
					4000K	110°	1100lm	950lm	UM35-840A108N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Surface	Pendant Rod	Pendant Wire
ON-OFF	299,00 €	379,00 €	359,00 €
Phase Dim	309,00 €	389,00 €	369,00 €
DALI Dim	339,00 €	419,00 €	399,00 €
Tunable White DALI Dim	499,00 €	589,00 €	559,00 €

Finish

Surface/ Wall Mounted



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Rod Mounted

* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Optional Uplight Module



Magnetic Uplight Module 350

Code for S3SM-8309012N-BG with Uplight Module S3SM-8309012N-BG-U

ON-OFF	+120,00 €
Phase Dim	+130,00 €
DALI Dim	+160,00 €

Coding


S3SM – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Accessory
S3SM SUGAR 350 Surface/ Wall Mounted	**827** CRI80/ 2700K	**90** 90°	**12** 12W	**N** No Driver	**WW** White-White	**U** Uplight Module
S3PW SUGAR 350 Pendant Wires	**830** CRI80/ 3000K		**16** 16W	**F** On-Off	**BB** Black-Black	
S3PR SUGAR 350 Pendant Rod	**840** CRI80/ 4000K			**P** Phase Dim	**BG** Black-Gold	
	8T2 CRI80 2700K–6500K Tunable White			**A** 1-10V Dim	**WG** White-Gold (Optional)	
	927 CRI90/ 2700K			**D** DALI Dim		
	930 CRI90/ 3000K					
	940 CRI90/ 4000K					
	9T2 CRI90 2700K–6500K Tunable White					

BACK

SUGAR 450 – Ceiling Light System









Quick Info

- LED: 16W, 24W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 3400lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K





Order Info (Surface/ Wall Mounted SUGAR 450 in Black -Gold Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16W	18W	34V	500mA	80	2700K	90°	2400lm	2150lm	S4SM-8279016N-BG
					3000K	90°	2600lm	2300lm	S4SM-8309016N-BG
					4000K	90°	2800lm	2500lm	S4SM-8409016N-BG
				2700K–6500K		90°	Max.2900lm	Max.2300lm	S4SM-8T29016N-BG
24W	26W	34V	700mA	80	2700K	90°	3500lm	3000lm	S4SM-8279024N-BG
					3000K	90°	3700lm	3150lm	S4SM-8309024N-BG
					4000K	90°	4000lm	3400lm	S4SM-8409024N-BG
Uplight Module				2700K–6500K		90°	Max.4100lm	Max.3200lm	S4SM-8T29024N-BG
11W	13W	33V	350mA	80	2700K	110°	1100lm	1000lm	UM45-827A111N-NN
					3000K	110°	1200lm	1100lm	UM45-830A111N-NN
					4000K	110°	1300lm	1200lm	UM45-840A111N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Finish

Surface/ Wall Mounted



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Rod Mounted

* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Driver	Surface	Pendant Rod	Pendant Wire
ON-OFF	379,00 €	469,00 €	439,00 €
Phase Dim	389,00 €	479,00 €	449,00 €
DALI Dim	419,00 €	509,00 €	479,00 €
Tunable White DALI Dim	579,00 €	669,00 €	649,00 €

Coding

G4SM – *** ** ** * ** – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Accessory
G4SM SUGAR 450 Surface/ Wall Mounted	**827** CRI80/ 2700K	**90** 90°	**16** 16W	**N** No Driver	**WW** White-White	**U** Uplight Module
G34PW SUGAR 450 Pendant Wires	**830** CRI80/ 3000K		**24** 24W	**F** On-Off	**BB** Black-Black	
G34PR SUGAR 450 Pendant Rod	**840** CRI80/ 4000K			**P** Phase Dim	**BG** Black-Gold	
	8T2 CRI80 2700K–6500K Tunable White			**A** 1-10V Dim	**WG** White-Gold (Optional)	
	927 CRI90/ 2700K			**D** DALI Dim		
	930 CRI90/ 3000K					
	940 CRI90/ 4000K					
	9T2 CRI90 2700K–6500K Tunable White					

Optional Uplight Module




Magnetic Uplight Module 450

Code for S4SM-8309016N-WN **with** Uplight Module S4SM-8309016N-WN-U

ON-OFF	+130,00 €
Phase Dim	+140,00 €
DALI Dim	+190,00 €

SUGAR 600 – Ceiling Light System





Finish

Surface/ Wall Mounted



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Rod Mounted

* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

24W/36W:

Driver	Surface	Pendant Rod	Pendant Wire
ON-OFF	599,00 €	689,00 €	659,00 €
Phase Dim	609,00 €	699,00 €	669,00 €
DALI Dim	639,00 €	729,00 €	699,00 €
Tunable White DALI Dim	989,00 €	1069,00 €	1049,00 €

46W:

Driver	Surface	Pendant Rod	Pendant Wire
ON-OFF	629,00 €	719,00 €	689,00 €
DALI Dim	699,00 €	789,00 €	759,00 €

Optional Uplight Module



Magnetic Uplight Module 600

Code for G6PR-8309036N-BG with Uplight Module G6PR-8309036N-BG-U

ON-OFF	+190,00 €
Phase Dim	+200,00 €
DALI Dim	+230,00 €





Quick Info

- LED: 24W, 36W, 46W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 6700lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K





Order Info (Surface/ Wall Mounted SUGAR 600 in Black -Gold Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24W	26W	34V	700mA	80	2700K	90°	3500lm	2850lm	S6SM-8279024N-BG
					3000K	90°	3700lm	3000lm	S6SM-8309024N-BG
					4000K	90°	4000lm	3300lm	S6SM-8409024N-BG
					2700K–6500K	90°	Max.4100lm	Max.3400lm	S6SM-8T29024N-BG
36W	40W	34V	1050mA	80	2700K	90°	5800lm	4750lm	S6SM-8279036N-BG
					3000K	90°	6200lm	5000lm	S6SM-8309036N-BG
					4000K	90°	6600lm	5300lm	S6SM-8409036N-BG
					2700K–6500K	90°	Max.6600lm	Max.5700lm	S6SM-8T29036N-BG
46W	50W	34V	1400mA	80	2700K	90°	7200lm	5850lm	S6SM-8279046N-BG
					3000K	90°	8100lm	6150lm	S6SM-8309046N-BG
					4000K	90°	8600lm	6700lm	S6SM-8409046N-BG
Uplight Module									
18W	20W	36V	500mA	80	2700K	110°	1800lm	1600lm	UM60-827A118N-NN
					3000K	110°	1900lm	1700lm	UM60-830A118N-NN
					4000K	110°	2000lm	1800lm	UM60-840A118N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Coding

S6SM	–	***	**	**	*	–	**	–	*

Model

G6SM SUGAR 600 Surface/ Wall Mounted

G6PW SUGAR 600 Pendant Wires

G6PR SUGAR 600 Pendant Rod

CRI/ CCT

827 CRI80/ 2700K

830 CRI80/ 3000K

840 CRI80/ 4000K

8T2 CRI80 2700K–6500K Tunable White

927 CRI90/ 2700K

930 CRI90/ 3000K

940 CRI90/ 4000K

9T2 CRI90 2700K–6500K Tunable White

Beam Angle

90 90°

LED Power

24 24W

36 36W

46 46W *

Control

N No Driver

F On-Off

P Phase Dim

A 1-10V Dim

D DALI Dim

Finish

WW White-White

BB Black-Black

BG Black-Gold

WG White-Gold (Optional)

Accessory


U Uplight Module

LED 46W is not available with Tunable White

BACK

SUGAR 900 – Ceiling Light System






Quick Info

- LED: 60W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 90°
- Lumen Output: Up to 8700lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, 1-10V Dim, DALI Dim

Light Distribution

3000K



Finish

Surface/ Wall Mounted



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Rod Mounted
* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Wires Mounted
* Standard pendant Wires length: 1200mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Order Info (Surface/ Wall Mounted SUGAR 900 in Black -Gold Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
60W	62W	43V	1400mA	80	2700K	90°	9900lm	7500lm	S9SM-8279060N-BG
					3000K	90°	10500lm	7900lm	S9SM-8309060N-BG
					4000K	90°	11000lm	8700lm	S9SM-8409060N-BG
Uplight Module									
25W	28W	36V	700mA	80	2700K	110°	2900lm	2500lm	UM90-827A128N-NN
					3000K	110°	3100lm	2700lm	UM90-830A128N-NN
					4000K	110°	3300lm	2950lm	UM90-840A128N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Surface	Pendant Rod	Pendant Wire
ON-OFF	1119,00 €	1209,00 €	1189,00 €
DALI Dim	1169,00 €	1259,00 €	1239,00 €

Coding

S9SM – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Accessory
S9SM SUGAR 900 Surface/ Wall Mounted	**827** CRI80/ 2700K	**90** 90°	**60** 60W	**N** No Driver	**WW** White-White	**U** Uplight Module
S9PW SUGAR 900 Pendant Wires	**830** CRI80/ 3000K			**F** On-Off	**BB** Black-Black	
S9PR SUGAR 900 Pendant Rod	**840** CRI80/ 4000K			**A** 1-10V Dim	**BG** Black-Gold	
	927 CRI90/ 2700K			**D** DALI Dim	**WG** White-Gold (Optional)	
	930 CRI90/ 3000K					
	940 CRI90/ 4000K					

Optional Uplight Module



Magnetic Uplight Module 900

Code for S9PR-8309060N-BG **with** Uplight Module S9PR-8309060N-BG-U

ON-OFF	+290,00 €
DALI Dim	+320,00 €

GLAMOR

3000K-3500K-4000K CCT Switchable
Lumen Efficiency up to 130 lm/W
Three Diameters Available: Ø300, Ø400, Ø600
Surface Mounted & Pendant
IP44, UGR≤15




GLAMOR 300 – CCT Switchable LED Ceiling Light






Quick Info


- LED: 8W, 11W, CRI>80
- CCT: 3000K-3500K-4000K Switchable
- Beam Angle: 80°
- Lumen Output: Up to 1200lm, 1600lm System Luminous Flux
- IP Class: IP44
- LED Driver: On-off, Phase Dim, 1-10V Dim, DALI Dim

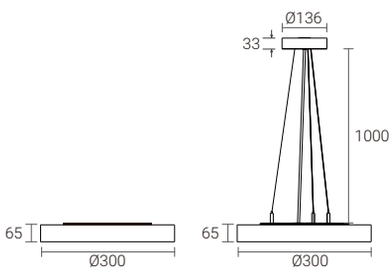

Light Distribution

☐ 4000K






Finish

Surface/ Wall Mounted



White Black

Pendant Wires Mounted
* Standard pendant Wires length: 1000mm



White Black

Order Info (Surface/ Wall Mounted GLAMOR 300 in White Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8W	10W	33V	250mA	80	@3000K @3500K @4000K	80° 80° 80°	1650lm 1700lm 1800lm	1100lm 1150lm 1200lm	G3RS-8S38010F-WN
11W	13W	33V	350mA	80	@3000K @3500K @4000K	80° 80° 80°	2150lm 2200lm 2300lm	1450lm 1500lm 1600lm	G3RS-8S38013F-WN

Code Remark: F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Surface	Pendant
ON-OFF	159,00 €	219,00 €
Phase Dim	169,00 €	229,00 €
DALI Dim	219,00 €	279,00 €

Coding

G3RS – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
G3RS GLAMOR 300 Suface/ Wall Mounted **G3RP** GLAMOR 300 Pendant Wires	**8S3** CRI>80/ 3000K -3500K-4000K Switchable	**80** 80°	**10** 10W **13** 13W	**F** On-Off **P** Phase Dim **A** 1-10V Dim **D** DALI Dim	**W** White **B** Black	**N** None	

BACK

GLAMOR 400 – CCT Switchable LED Ceiling Light


NEW



80° | 3000K 3500K 4000K | CRI >80 | UGR<19 | IP44 | CE | 5 YEARS GUARANTEE


Quick Info


- LED: 16W, 23W, CRI>80
- CCT: 3000K-3500K-4000K Switchable
- Beam Angle: 80°
- Lumen Output: Up to 2400lm, 3400lm System Luminous Flux
- IP Class: IP44
- LED Driver: On-off, Phase Dim, 1-10V Dim, DALI Dim

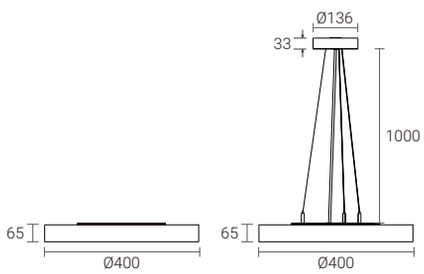

Light Distribution

☐ 4000K





Finish

Surface/ Wall Mounted



White Black

Pendant Wires Mounted
* Standard pendant Wires length: 1000mm



White Black

Order Info (Surface/ Wall Mounted GLAMOR 400 in White Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16W	18W	33V	500mA	80	@3000K	80°	3100lm	2200lm	G4RS-8S38018F-WN
					@3500K	80°	3200lm	2300lm	
					@4000K	80°	3300lm	2400lm	
23W	25W	33V	700mA	80	@3000K	80°	4400lm	3100lm	G4RS-8S38025F-WN
					@3500K	80°	4550lm	3200lm	
					@4000K	80°	4650lm	3400lm	

Code Remark: F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Surface	Pendant
ON-OFF	229,00 €	289,00 €
Phase Dim	249,00 €	309,00 €
DALI Dim	289,00 €	359,00 €

Coding

G4RS – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
G4RS GLAMOR 400 Suface/ Wall Mounted	**8S3** CRI>80/ 3000K -3500K-4000K Switchable	**80** 80°	**18** 18W	**F** On-Off	**W** White	**N** None	
G4RP GLAMOR 400 Pendant Wires			**25** 25W	**P** Phase Dim	**B** Black		
				A 1-10V Dim			
				D DALI Dim			

BACK


GLAMOR 600 – CCT Switchable LED Ceiling Light






Quick Info


- LED: 34W, 40W,CRI>80
- CCT: 3000K-3500K-4000K Switchable
- Beam Angle: 80°
- Lumen Output: Up to 5300lm, 5900lm System Luminous Flux
- IP Class: IP44
- LED Driver: On-off, Phase Dim, 1-10V Dim, DALI Dim

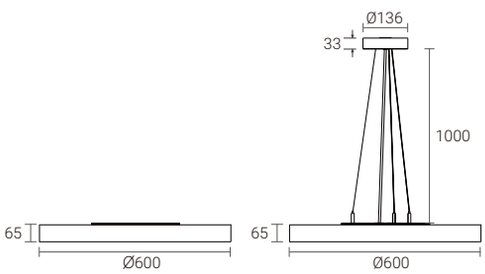

Light Distribution

☐ **4000K**





Finish

Surface/ Wall Mounted



White Black

Pendant Wires Mounted
* Standard pendant Wires length: 1000mm



White Black

Order Info (Surface/ Wall Mounted GLAMOR 600 in White Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
34W	37W	33V	1050mA	80	@3000K	80°	6650lm	5000lm	G6RS-8S38037F-WN
					@3500K	80°	6800lm	5200lm	
					@4000K	80°	6950lm	5300lm	
40W	43W	33V	1200mA	80	@3000K	80°	7500lm	5600lm	G6RS-8S38043F-WN
					@3500K	80°	7650lm	5700lm	
					@4000K	80°	7800lm	5900lm	

Code Remark: F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Surface	Pendant
ON-OFF	389,00 €	449,00 €
Phase Dim	409,00 €	469,00 €
DALI Dim	499,00 €	559,00 €

Coding

G6RS – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
G6RS GLAMOR 600 Suface/ Wall Mounted	**8S3** CRI>80/ 3000K -3500K-4000K Switchable	**80** 80°	**37** 37W	**F** On-Off	**W** White	**N** None	
G6RP GLAMOR 600 Pendant Wires			**43** 43W	**P** Phase Dim	**B** Black		
				A 1-10V Dim			
				D DALI Dim			

BACK

MINT

3000K-3500K-4000K CCT Switchable
Power Switchable
IP54




MINT 280 – CCT Switchable & Power Switchable LED Ceiling Light



120° | CRI >80 | IK10 | IP54 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info


- Power Switchable 13W-18W-24W, CRI>80
- CCT Switchable 2700K-3000K-4000K
- Beam Angle: 120°
- Lumen Output: Up to 2350lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off




Light Distribution

3000K







Finish



White

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	78V	155mA	80	@2700K	120°	1600lm	1350lm	MASM-8S3A224F-WN
					@3000K	120°	1700lm	1400lm	
					@4000K	120°	1800lm	1500lm	
16W	18W	78V	200mA	80	@2700K	120°	2000lm	1700lm	MASM-8S3A224F-WN
					@3000K	120°	2100lm	1800lm	
					@4000K	120°	2200lm	1900lm	
22W	24W	78V	280mA	80	@2700K	120°	2400lm	2100lm	MASM-8S3A224F-WN
					@3000K	120°	2550lm	2200lm	
					@4000K	120°	2600lm	2350lm	

Code Remark: F=F(On-Off LED Driver, Power Switchable)

ON-OFF 79,00 €

BACK


MINT 280 – CCT Switchable & Power Switchable LED Ceiling Light




120° | CRI >80 | IK10 | IP54 | CE | UKCA | Microwave Sensor | 5 YEARS GUARANTEE

Quick Info


- Power Switchable 13W-18W-24W, CRI>80
- CCT Switchable 2700K-3000K-4000K
- Beam Angle: 120°
- Lumen Output: Up to 2350lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off LED Driver+Microwave Sensor




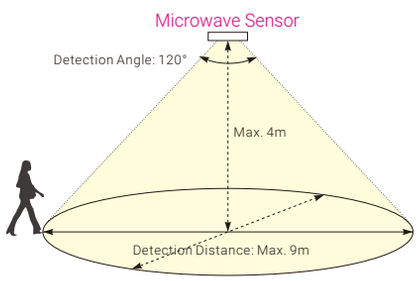


Light Distribution

3000K







Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	78V	155mA	80	@2700K @3000K @4000K	120° 120° 120°	1600lm 1700lm 1800lm	1350lm 1400lm 1500lm	MASM-8S3A224S-WN
16W	18W	78V	200mA	80	@2700K @3000K @4000K	120° 120° 120°	2000lm 2100lm 2200lm	1700lm 1800lm 1900lm	MASM-8S3A224S-WN
22W	24W	78V	280mA	80	@2700K @3000K @4000K	120° 120° 120°	2400lm 2550lm 2600lm	2100lm 2200lm 2350lm	MASM-8S3A224S-WN

Code Remark: S=S(On-Off LED Driver+Microwave Sensor)

Finish




White

ON-OFF | 139,00 €

MINT 280 – CCT Switchable & Power Switchable LED Ceiling Light







Quick Info


- Power Switchable 13W-18W-24W, CRI>80
- CCT Switchable 2700K-3000K-4000K
- Beam Angle: 120°
- Lumen Output: Up to 2350lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off LED Driver+Emergency Backup

Light Distribution

3000K







Finish



White

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	78V	155mA	80	@2700K @3000K @4000K	120° 120° 120°	1600lm 1700lm 1800lm	1350lm 1400lm 1500lm	MASM-8S3A224E-WN
16W	18W	78V	200mA	80	@2700K @3000K @4000K	120° 120° 120°	2000lm 2100lm 2200lm	1700lm 1800lm 1900lm	MASM-8S3A224E-WN
22W	24W	78V	280mA	80	@2700K @3000K @4000K	120° 120° 120°	2400lm 2550lm 2600lm	2100lm 2200lm 2350lm	MASM-8S3A224E-WN

Code Remark: E=E(On-Off LED Driver+Emergency Backup)

ON-OFF 149,00 €

BACK


MINT 420 – CCT Switchable & Power Switchable LED Ceiling Light



120° | CRI >80 | IK10 | IP54 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info


- Power Switchable 20W-28W-35W, CRI>80
- CCT Switchable 2700K-3000K-4000K
- Beam Angle: 120°
- Lumen Output: Up to 3600lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off LED Driver+Power Switchable




Light Distribution

3000K







Finish



White

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	20W	130V	138mA	80	@2700K @3000K @4000K	120° 120° 120°	2100lm 2200lm 2400lm	1900lm 2050lm 2200lm	MASM-8S3A235F-WN
26W	28W	130V	190mA	80	@2700K @3000K @4000K	120° 120° 120°	2800lm 3000lm 3300lm	2550lm 2800lm 3000lm	MASM-8S3A235F-WN
22W	35W	130V	250mA	80	@2700K @3000K @4000K	120° 120° 120°	3400lm 3700lm 4000lm	3100lm 3400lm 3600lm	MASM-8S3A235F-WN

Code Remark: F=(On-Off LED Driver, Power Switchable)

ON-OFF | 109,00 €

BACK


MINT 420 – CCT Switchable & Power Switchable LED Ceiling Light




120° | CRI >80 | IK10 | IP54 | CE | UKCA | Microwave Sensor | 5 YEARS GUARANTEE

Quick Info


- Power Switchable 20W-28W-35W, CRI>80
- CCT Switchable 2700K-3000K-4000K
- Beam Angle: 120°
- Lumen Output: Up to 3600lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off LED Driver+Microwave Sensor




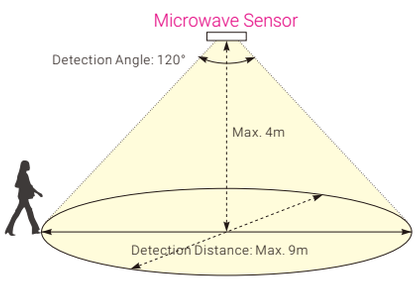


Light Distribution

3000K







Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	20W	130V	138mA	80	@2700K @3000K @4000K	120° 120° 120°	2100lm 2200lm 2400lm	1900lm 2050lm 2200lm	MASM-8S3A235S-WN
26W	28W	130V	190mA	80	@2700K @3000K @4000K	120° 120° 120°	2800lm 3000lm 3300lm	2550lm 2800lm 3000lm	MASM-8S3A235S-WN
22W	35W	130V	250mA	80	@2700K @3000K @4000K	120° 120° 120°	3400lm 3700lm 4000lm	3100lm 3400lm 3600lm	MASM-8S3A235S-WN

Code Remark: S=(On-Off LED Driver, Microwave Sensor)

Finish



White

ON-OFF | 159,00 €


MINT 420 – CCT Switchable & Power Switchable LED Ceiling Light



120° | CRI >80 | IK10 | IP54 | CE | UKCA | Emergency Version | 5 YEARS GUARANTEE


Quick Info


- Power Switchable 20W-28W-35W, CRI>80
- CCT Switchable 2700K-3000K-4000K
- Beam Angle: 120°
- Lumen Output: Up to 3600lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off LED Driver+Emergency Backup




Light Distribution

3000K







Finish



White

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	20W	130V	138mA	80	@2700K @3000K @4000K	120° 120° 120°	2100lm 2200lm 2400lm	1900lm 2050lm 2200lm	MASM-8S3A235E-WN
26W	28W	130V	190mA	80	@2700K @3000K @4000K	120° 120° 120°	2800lm 3000lm 3300lm	2550lm 2800lm 3000lm	MASM-8S3A235E-WN
22W	35W	130V	250mA	80	@2700K @3000K @4000K	120° 120° 120°	3400lm 3700lm 4000lm	3100lm 3400lm 3600lm	MASM-8S3A235E-WN

Code Remark: E=E(On-Off LED Driver+Emergency Backup)

ON-OFF | 169,00 €

BACK

SKYDRIVER
SKYJOY
SKYLINE

LED Ceiling Light
Incl. Phase Dim Driver & Fast Connector



SKYDRIVER SDRC – LED Ceiling Light incl. Phase Dim Driver






25°Tiltable and 355° Rotation




Quick Info

- CITIZEN LED: 10W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 780lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim




Light Distribution

2700K



3000K



Finish

White



Black

Order Info


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8W	10W	36V	230mA	90	2700K	36°	950lm	750lm	SDRC-9273610P-WW
					3000K	36°	1000lm	780lm	SDRC-9303610P-WW
8W	10W	36V	230mA	90	2700K	36°	950lm	750lm	SDRC-9273610P-BB
					3000K	36°	1000lm	780lm	SDRC-9303610P-BB

Code Remark: P=P(Phase Dim)

Phase Dim | 109,00 €

BACK

SKYDRIVER SDSC – LED Ceiling Light incl. Phase Dim Driver

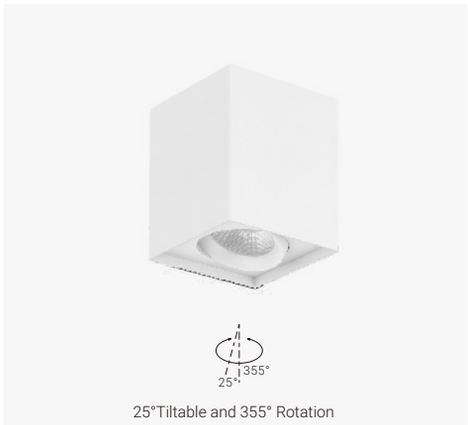


25°Tiltable and 355° Rotation




Quick Info

- CITIZEN LED: 10W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 780lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim




Light Distribution


2700K



3000K



Finish


White Black


Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8W	10W	36V	230mA	90	2700K	36°	950lm	750lm	SDSC-9273610P-WW
					3000K	36°	1000lm	780lm	SDSC-9303610P-WW
8W	10W	36V	230mA	90	2700K	36°	950lm	750lm	SDSC-9273610P-BB
					3000K	36°	1000lm	780lm	SDSC-9303610P-BB

Code Remark: P=P(Phase Dim)

Phase Dim 109,00 €

SKYJOY SJSC – LED Ceiling Light incl. Phase Dim Driver

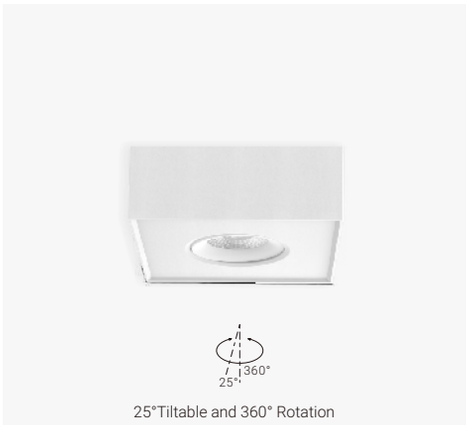


25°Tiltable and 360° Rotation




Quick Info

- CITIZEN LED: 8W, CRI>90
- CCT: 2700K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 580lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim



Light Distribution

2700K



Finish



White Black

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	10W	36V	200mA	90	2700K	36°	750lm	580lm	SJSC-9303610P-WW
7W	10W	36V	200mA	90	2700K	36°	750lm	580lm	SJSC-9303610P-BB

Code Remark: P=P(Phase Dim)

Phase Dim 119,00 €

BACK

SKYJOY SJSC – LED Ceiling Light incl. Phase Dim Driver






25°Tiltable and 360° Rotation




Quick Info

- BRIDGELUX LED: 10W, CRI>90
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 36°
- Lumen Output: Up to Max.650lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim



Light Distribution

3000K



Finish



White Black

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	36V	250mA	90	1800K-3000K	36°	850lm	Max.650lm	SJSC-9D33610P-WW
9W	10W	36V	250mA	90	1800K-3000K	36°	850lm	Max.650lm	SJSC-9D33610P-BB

Code Remark: P=P(Phase Dim)

Phase Dim 129,00 €



SKYJOY SJDC – LED Ceiling Light incl. Phase Dim Driver




25°Tiltable and 360° Rotation




Quick Info

- CITIZEN LED: 16W, CRI>90
- CCT: 2700K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 1300lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim



Light Distribution

2700K



Finish


White

Black

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
14W	16W	36V	400mA	90	2700K	36°	1600lm	1300lm	SJDC-9273616P-WW
14W	16W	36V	400mA	90	2700K	36°	1600lm	1300lm	SJDC-9273616P-BB

Code Remark: P=P(Phase Dim)


Phase Dim 179,00 €

BACK

SKYJOY SJDC – LED Ceiling Light incl. Phase Dim Driver



25°Tiltable and 360° Rotation




36° | CRI >90 | UGR<19 | IP20 | CE | bridgelux 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- BRIDGELUX LED: 16W, CRI>90
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 36°
- Lumen Output: Up to Max.1300lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim

Light Distribution

3000K



Finish



White



Black

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	20W	36V	500mA	90	1800K-3000K	36°	1700lm	Max.1300lm	SJDC-9D33620P-WW
18W	20W	36V	500mA	90	1800K-3000K	36°	1700lm	Max.1300lm	SJDC-9D33620P-BB

Code Remark: P=P(Phase Dim)

Phase Dim | 189,00 €




SKYLINE SL5C – LED Ceiling Light incl. Phase Dim Driver






Quick Info

- Bridgelux LED: 8.5W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 30°
- Lumen Output: Up to 750lm System Luminous Flux
- IP Class: IP20 from Front
- LED Driver: Phase Dim




Light Distribution

2700K



3000K



Finish



White-Specular (WS)



Black-Specular (BS)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8.5W	10W	14.5V	600mA	90	2700K	30°	950lm	720lm	SL5C-9273010P-WS
					3000K	30°	1000lm	750lm	SL5C-9303010P-WS
8.5W	10W	14.5V	600mA	90	2700K	30°	950lm	720lm	SL5C-9273010P-BS
					3000K	30°	1000lm	750lm	SL5C-9303010P-BS

Code Remark: P=P(Phase Dim)

Phase Dim 139,00 €

BACK

MIU

Architectural Ceiling & Pendant Light
Elegant Design, No Visible Screw



Project: Office Borg Forvaltning Trondheim, Norway





Project : Office Borg Forvaltning Trondheim, Norway



MIU-C M – Ceiling Mounted Light




18° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- CITIZEN LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 36°, 50°
- Lumen Output: Up to 1900lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim




Light Distribution

3000K







Finish



White Black

Dali 209,00

Order Info (MIU-C M in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	15°	1400lm	1100lm	MCM1-9271515F-WB
						36°	1400lm	1150lm	MCM1-9273615F-WB
						50°	1400lm	1100lm	MCM1-9275015F-WB
ON-OFF	149,00 €				3000K	15°	1500lm	1200lm	MCM1-9301515F-WB
Phase Dim	159,00 €					36°	1500lm	1250lm	MCM1-9303615F-WB
						50°	1500lm	1200lm	MCM1-9305015F-WB
					4000K	15°	1600lm	1300lm	MCM1-9401515F-WB
						36°	1600lm	1350lm	MCM1-9403615F-WB
						50°	1600lm	1300lm	MCM1-9405015F-WB
18W	21W	36V	500mA	90	2700K	15°	1900lm	1600lm	MCM2-9271521F-WB
						36°	1900lm	1700lm	MCM2-9273621F-WB
						50°	1900lm	1600lm	MCM2-9275021F-WB
ON-OFF	159,00 €				3000K	15°	2000lm	1700lm	MCM2-9301521F-WB
						36°	2000lm	1800lm	MCM2-9303621F-WB
						50°	2000lm	1700lm	MCM2-9305021F-WB
					4000K	15°	2100lm	1800lm	MCM2-9401521F-WB
						36°	2100lm	1900lm	MCM2-9403621F-WB
						50°	2100lm	1800lm	MCM2-9405021F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Reflector Options



Black White Gold

Coding

MCM1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MCM1 MIU-C M-15W	927 CRI90/ 2700K	15 15°	15 15W	F On-Off	W Wihte	W Wihte	H Honeycomb
MCM2 MIU-C M-21W	930 CRI90/ 3000K	36 36°	21 21W	P* Phase Dim	B Black	B Black	
	940 CRI90/ 4000K	50 50°		D* DALI Dim		G Gold	

* 21W is not available with Phase Dim, DALI Dim

Optional accessary



Honeycomb

Code for MCM1-9301515F-WB with Honeycomb MCM1-9301515F-WB-H

Honeycomb: +9,00€

BACK

MIU-C L – Ceiling Mounted Light




18° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 36°, 50°
- Lumen Output: Up to 2900lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim




Light Distribution

3000K







Finish



White Black

Order Info (MIU-C L in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	18°	3200lm	2500lm	MCL1-9271828F-WB
						36°	3200lm	2500lm	MCL1-9273628F-WB
						50°	3200lm	2500lm	MCL1-9275028F-WB
					3000K	18°	3400lm	2700lm	MCL1-9301828F-WB
						36°	3400lm	2700lm	MCL1-9303628F-WB
						50°	3400lm	2700lm	MCL1-9305028F-WB
					4000K	18°	3600lm	2900lm	MCL1-9401828F-WB
						36°	3600lm	2900lm	MCL1-9403628F-WB
						50°	3600lm	2900lm	MCL1-9405028F-WB

ON-OFF	199,00 €
DALI Dim	239,00 €

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Reflector Options



Black White Gold

Coding

MCL1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MCM1 MIU-C L	927 CRI90/ 2700K	18 18°	28 28W	F On-Off	W Wihte	W Wihte	H Honeycomb
	930 CRI90/ 3000K	36 36°		D DALI Dim	B Black	B Black	
	940 CRI90/ 4000K	50 50°				G Gold	

Optional accessary




Honeycomb

Code for MCL1-9301828F-WB with Honeycomb
MCL1-9301828F-WB-H

Honeycomb: +9,00€

MIU-P S – Pendant Light






18° 36° 50°
2700K
3000K
4000K
CRI >90
UGR<19
IP20
CE
CB
UK CA
CITIZEN 50,000h@L80B10
5 YEARS GUARANTEE


Quick Info


- CITIZEN LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 36°, 50°
- Lumen Output: Up to 880lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, DALI Dim

Light Distribution

3000K







Finish



White Black

Order Info (MIU-P S in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	36V	250mA	90	2700K	18°	900lm	750lm	MPS1-9271811F-WB
						36°	900lm	750lm	MPS1-9273611F-WB
						50°	900lm	750lm	MPS1-9275011F-WB
					3000K	18°	1000lm	800lm	MPS1-9301811F-WB
						36°	1000lm	800lm	MPS1-9303611F-WB
						50°	1000lm	800lm	MPS1-9305011F-WB
					4000K	18°	1100lm	880lm	MPS1-9401811F-WB
						36°	1100lm	880lm	MPS1-9403611F-WB
						50°	1100lm	880lm	MPS1-9405011F-WB

ON-OFF	179,00 €
Phase Dim	199,00 €
DALI Dim	219,00 €

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Reflector Options



Black White Gold

Coding

MPS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MPS1 MIU-P S-11W	927 CRI90/ 2700K	15 15°	11 11W	F On-Off	W Wihte	W Wihte	H Honeycomb
	930 CRI90/ 3000K	36 36°		P Phase Dim	B Black	B Black	
	940 CRI90/ 4000K	50 50°		D DALI Dim		G Gold	

Optional accessary



Honeycomb


Code for MPS1-9301811F-WB with Honeycomb
MPS1-9301811F-WB-H

Honeycomb: +9,00€

BACK

MIU-P M – Pendant Light






18° 36° 50° 2700K 3000K 4000K CRI >90 UGR<19 IP20 CE CB UKCA CITIZEN 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info


- CITIZEN LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 36°, 50°
- Lumen Output: Up to 1900lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim

Light Distribution

3000K







Finish



White Black

Order Info (MIU-P M in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	15°	1400lm	1100lm	MPM1-9271515F-WB
						36°	1400lm	1150lm	MPM1-9273615F-WB
						50°	1400lm	1100lm	MPM1-9275015F-WB
ON-OFF 199,00 €					3000K	15°	1500lm	1200lm	MPM1-9301515F-WB
Phase Dim 229,00 €						36°	1500lm	1250lm	MPM1-9303615F-WB
DALI Dim 259,00 €						50°	1500lm	1200lm	MPM1-9305015F-WB
					4000K	15°	1600lm	1300lm	MPM1-9401515F-WB
						36°	1600lm	1350lm	MPM1-9403615F-WB
						50°	1600lm	1300lm	MPM1-9405015F-WB
18W	21W	36V	500mA	90	2700K	15°	1900lm	1600lm	MPM2-9271521F-WB
						36°	1900lm	1700lm	MPM2-9273621F-WB
						50°	1900lm	1600lm	MPM2-9275021F-WB
ON-OFF 219,00 €					3000K	15°	2000lm	1700lm	MPM2-9301521F-WB
						36°	2000lm	1800lm	MPM2-9303621F-WB
						50°	2000lm	1700lm	MPM2-9305021F-WB
					4000K	15°	2100lm	1800lm	MPM2-9401521F-WB
						36°	2100lm	1900lm	MPM2-9403621F-WB
						50°	2100lm	1800lm	MPM2-9405021F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Reflector Options



Black White Gold

Coding

MPM1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MPM1 MIU-P M-15W	927 CRI90/ 2700K	15 15°	15 15W	F On-Off	W Wihte	W Wihte	H Honeycomb
MPM2 MIU-P M-21W	930 CRI90/ 3000K	36 36°	21 21W	P* Phase Dim	B Black	B Black	
	940 CRI90/ 4000K	50 50°		D* DALI Dim		G Gold	

* 21W is not available with Phase Dim, DALI Dim

Optional accessary



Honeycomb


Code for MPM1-9301515F-WB with Honeycomb MPM1-9301515F-WB-H

Honeycomb: +9,00€

BACK

MIU -P L – Pendant Light



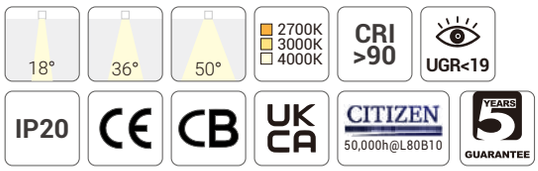


Quick Info


- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 36°, 50°
- Lumen Output: Up to 2900lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim




Light Distribution

3000K







Finish



White Black

Order Info (MIU-P L in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	18°	3200lm	2500lm	MPL1-9271828F-WB
						36°	3200lm	2500lm	MPL1-9273628F-WB
						50°	3200lm	2500lm	MPL1-9275028F-WB
					3000K	18°	3400lm	2700lm	MPL1-9301828F-WB
						36°	3400lm	2700lm	MPL1-9303628F-WB
						50°	3400lm	2700lm	MPL1-9305028F-WB
					4000K	18°	3600lm	2900lm	MPL1-9401828F-WB
						36°	3600lm	2900lm	MPL1-9403628F-WB
						50°	3600lm	2900lm	MPL1-9405028F-WB

ON-OFF	239,00 €
DALI Dim	279,00 €

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Reflector Options



Black White Gold

Coding

MPL1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MPL1 MIU-P L-28W	927 CRI90/ 2700K	15 15°	28 28W	F On-Off	W Wihte	W Wihte	H Honeycomb
	930 CRI90/ 3000K	36 36°		D DALI Dim	B Black	B Black	
	940 CRI90/ 4000K	50 50°				G Gold	

Optional accessary



Honeycomb

Code for MPL1-9301828F-WB with Honeycomb
MPL1-9301828F-WB-H

Honeycomb: +9,00€

BACK



MIU Art

Minimum & Flat Design
Within AC LED Board, No Additional Power Supply Required
Phase Dimming Compatible
Easy Installation



MIU Art-S – Ceiling Mounted Light

NEW





36°

2700K
3000K
4000K

CRI >90

UGR<19

IP20

CE

LUMENS
50,000h@L80B10


5 YEARS GUARANTEE

Quick Info

- LUMENS LED: AC COB, 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 240lm System Luminous Flux
- IP Class: IP20
- Dimming: 220-240VAC Direct Input, Phase Dim

Light Distribution

3000K



Standard Finish



White Black

Optional Finish



Gold Chrome

*Customized Colors Optional

Color customization: +29,00 €

Order Info (MIU Art-S in Black Housing as an Example)

LED Power	System Power	Input Power	CRI	CCT	Beam	LED Output	System Output	Code
3W	4W	220-240VAC	90	2700K	36°	300lm	210lm	MIAS-9273604P-BB
				3000K	36°	320lm	220lm	MIAS-9303604P-BB
				4000K	36°	350lm	240lm	MIAS-9403604P-BB

Phase Dim 119,00 €

Code Remark: P=P(Phase Dim)

Coding


MIAS – *** ** ** * – ** –

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
MIAS MIU Art-S-4W	927 CRI90/ 2700K 930 CRI90/ 3000K 940 CRI90/ 4000K	36 36°	04 4W	P Phase Dim	WW Wihte BB Black GG Gold CR Chrome SL Silver BR Brown	

BACK

MIU Art-M – Ceiling Mounted Light

NEW

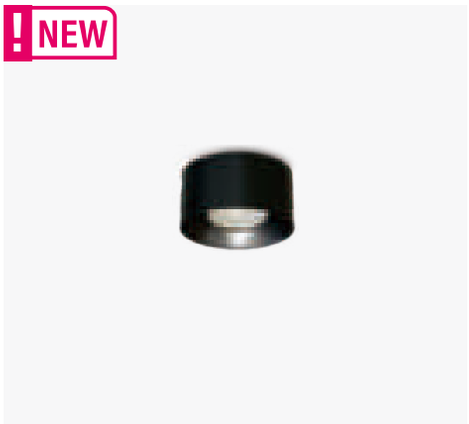




Quick Info

- LUMENS LED: AC COB, 8W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 48°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: IP20
- Dimming: 220-240VAC Direct Input, Phase Dim



Light Distribution

3000K



Standard Finish



White Black

Order Info (MIU Art-M in Black Housing as an Example)

LED Power	System Power	Input Power	CRI	CCT	Beam	LED Output	System Output	Code
7W	8W	220-240VAC	90	2700K	48°	670lm	520lm	MIAM-9274808P-BB
				3000K	48°	700lm	550lm	MIAM-9304808P-BB
				4000K	48°	750lm	600lm	MIAM-9404808P-BB

Phase Dim 129,00 €

Code Remark: P=P(Phase Dim)

Optional Finish



Gold Chrome

*Customized Colors Optional

Color customization: +29,00 €

Coding

MIAM – *** ** ** * – ** –

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
MIAM MIU Art-M-8W	927 CRI90/ 2700K 930 CRI90/ 3000K 940 CRI90/ 4000K	48 48°	08 8W	P Phase Dim	WW Wihte BB Black GG Gold CR Chrome SL Silver BR Brown	

BREEZE

Ceiling Mounted Spotlight
Incl. Phase Dim Driver & Fast Connector




BREEZE SINGLE – Ceiling Mounted Soptlight






Quick Info

- Bridgelux LED: 7W, CRI>90
- CCT: 2700K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 700lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim




Light Distribution

2700K



Finish



White Black

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	36V	200mA	90	2700K	36°	800lm	700lm	B1SC-9273609P-WB
7W	9W	36V	200mA	90	2700K	36°	800lm	700lm	B1SC-9273609P-BB

Code Remark: P=P(Phase Dim)

Phase Dim 149,00 €

BACK


BREEZE DOUBLE – Ceiling Mounted Soptlight






Quick Info

- Bridgelux LED: 14W, CRI>90
- CCT: 2700K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 1400lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim



Light Distribution

2700K



Finish



White Black

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x7W	2x9W	36V	2x200mA	90	2700K	36°	1600lm	1400lm	B2SC-9273618P-WB
2x7W	2x9W	36V	2x200mA	90	2700K	36°	1600lm	1400lm	B2SC-9273618P-BB

Code Remark: P=P(Phase Dim)

Phase Dim 249,00 €


BREEZE TRIPLE – Ceiling Mounted Soptlight






Quick Info

- Bridgelux LED: 21W, CRI>90
- CCT: 2700K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 2100lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim

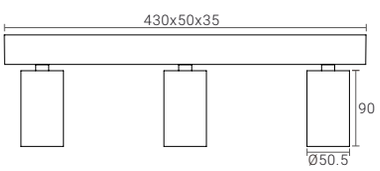

Light Distribution

2700K



Finish



White Black

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
3x7W	3x9W	36V	3x200mA	90	2700K	36°	2400lm	2100lm	B3SC-9273627P-WB
3x7W	3x9W	36V	3x200mA	90	2700K	36°	2400lm	2100lm	B3SC-9273627P-BB

Code Remark: P=P(Phase Dim)

Phase Dim 349,00 €

BACK

VIBES



Different Mounting Bases (White/ Black)

Surface Mounted



1RC Base



1SC Base



2RC Base



2SC Base

Recessed Mounted



1RR Base



1SR Base



2RR Base



2SR Base



Accessory



Honeycomb

Module Color



Black



Brushed Gold



Chrome



White


VIBES V1RC – Single-Head Ceiling Mounted Spotlight






Quick Info

- CITIZEN LED: 14W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim




Light Distribution

2700K



3000K



Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Black-Chrome/ Black-Gold + 40,00 €

Optional accessary



Honeycomb

Code for V1RC-9273614P-WW with Honeycomb
V1RC-9273614P-WW-H

Honeycomb: + 9,00 €

Order Info (VIBES V1RC in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5W	14W	36V	350mA	90	2700K	36°	1400lm	1100lm	V1RC-9273614P-WW
					3000K	36°	1500lm	1200lm	V1RC-9303614P-WW

Code Remark: P=P(Phase Dim)

Phase Dim 159,00 €

Coding

V1RC – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
V1RC	927 CRI90/ 2700K	36 36°	14 14W	P Phase Dim	WW Wihte-Wihte (WW)	H Honeycomb
	930 CRI90/ 3000K				BB Black-Black (BB)	
					BC Black-Chrome (BC)	
					BG Black-Gold (BG)	

BACK


VIBES V2RC – Double-Head Ceiling Mounted Spotlight



36° | 2700K 3000K | CRI >90 | IP20 | CE | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim




Light Distribution

2700K



3000K



Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Black-Chrome/ Black-Gold + 80,00 €

Optional accessary



Honeycomb

Code for V2RC-9273628P-WW with Honeycomb
V2RC-9273628P-WW-H

Honeycomb: + 9,00 €

Order Info (VIBES V2RC in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5W	2x14W	36V	2x350mA	90	2700K	36°	2900lm	2300lm	V2RC-9273628P-WW
					3000K	36°	3000lm	2400lm	V2RC-9303628P-WW

Code Remark: P=P(Phase Dim)

Phase Dim 309,00 €

Coding

V2RC – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
V2RC	927 CRI90/ 2700K	36 36°	28 28W	P Phase Dim	WW Wihte-Wihte (WW)	H Honeycomb
	930 CRI90/ 3000K				BB Black-Black (BB)	
					BC Black-Chrome (BC)	
					BG Black-Gold (BG)	


VIBES V1SC – Single-Head Ceiling Mounted Spotlight






Quick Info

- CITIZEN LED: 14W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim




Light Distribution

2700K



3000K



Base Finish


White-White (WW)


Black-Black (BB)


Black-Chrome (BC)


Black-Gold (BG)

Black-Chrome/ Black-Gold + 40,00 €

Optional accessary


Honeycomb

Code for V1SC-9273614P-WW with Honeycomb
V1SC-9273614P-WW-H

Honeycomb: +9,00€

Order Info (VIBES V1SC in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5W	14W	36V	350mA	90	2700K	36°	1400lm	1100lm	V1SC-9273614P-WW
					3000K	36°	1500lm	1200lm	V1SC-9303614P-WW

Code Remark: P=P(Phase Dim)

Phase Dim 169,00 €

Coding

V1SC – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
V1SC	927 CRI90/ 2700K	36 36°	14 14W	P Phase Dim	WW Wihte-Wihte (WW)	H Honeycomb
	930 CRI90/ 3000K				BB Black-Black (BB)	
					BC Black-Chrome (BC)	
					BG Black-Gold (BG)	

BACK


VIBES V2SC – Double-Head Ceiling Mounted Spotlight



36° | 2700K 3000K | CRI >90 | IP20 | CE | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim




Light Distribution

2700K



3000K



Base Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Black-Chrome/ Black-Gold + 80,00 €

Order Info (VIBES V2SC in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5W	2x14W	36V	2x350mA	90	2700K	36°	2900lm	2300lm	V2SC-9273628P-WW
					3000K	36°	3000lm	2400lm	V2SC-9303628P-WW

Code Remark: P=P(Phase Dim)

Phase Dim 329,00 €

Coding

V2SC – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
V2SC	927 CRI90/ 2700K	36 36°	28 28W	P Phase Dim	WW Wihte-Wihte (WW)	H Honeycomb
	930 CRI90/ 3000K				BB Black-Black (BB)	
					BC Black-Chrome (BC)	
					BG Black-Gold (BG)	

Optional accessary



Honeycomb

Code for V2SC-9273628P-WW with Honeycomb V2SC-9273628P-WW-H

Honeycomb: +9,00€


VIBES V1RR – Single-Head Recessed Soptlight






Quick Info


- CITIZEN LED: 14W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

2700K



3000K



Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Black-Chrome/ Black-Gold + 40,00 €

Optional accessary



Honeycomb

Code for V1RR-9273614P-WW with Honeycomb V1RR-9273614P-WW-H

Honeycomb: +9,00€

Order Info (VIBES V1RR in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5W	14W	36V	350mA	90	2700K	36°	1400lm	1100lm	V1RR-9273614P-WW
					3000K	36°	1500lm	1200lm	V1RR-9303614P-WW

Code Remark: P=P(Phase Dim)

Phase Dim 149,00 €

Coding

V1RR – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
V1RR	927 CRI90/ 2700K	36 36°	14 14W	P Phase Dim	WW Wihte-Wihte (WW)	H Honeycomb
	930 CRI90/ 3000K			D DALI Dim	BB Black-Black (BB)	
					BC Black-Chrome (BC)	
					BG Black-Gold (BG)	

BACK


VIBES V2RR – Double-Head Recessed Soptlight






Quick Info

- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim, DALI Dim, Casambi Wireless Dim




Light Distribution

2700K



3000K




Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Black-Chrome/ Black-Gold + 80,00 €

Order Info (VIBES V2RR in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5W	2x14W	36V	2x350mA	90	2700K	36°	2900lm	2300lm	V2RR-9273628P-WW
					3000K	36°	3000lm	2400lm	V2RR-9303628P-WW

Code Remark: P=P(Phase Dim)

Phase Dim 309,00 €

Coding

V2RR – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
V2RR	927 CRI90/ 2700K	36 36°	28 28W	P Phase Dim	WW Wihte-Wihte (WW)	H Honeycomb
	930 CRI90/ 3000K			D DALI Dim	BB Black-Black (BB)	
					BC Black-Chrome (BC)	
					BG Black-Gold (BG)	

Optional accessary



Honeycomb

Code for V2RR-9273628P-WW with Honeycomb V2RR-9273628P-WW-H

Honeycomb: +9,00€


VIBES V1SR – Single-Head Recessed Soptlight






Quick Info


- CITIZEN LED: 14W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

2700K



3000K



Finish


White-White (WW)


Black-Black (BB)


Black-Chrome (BC)


Black-Gold (BG)

Black-Chrome/ Black-Gold + 40,00 €

Optional accessary


Honeycomb

Code for V1SR-9273614P-WW with Honeycomb V1SR-9273614P-WW-H

Honeycomb: +9,00€

Order Info (VIBES V1SR in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5W	14W	36V	350mA	90	2700K	36°	1400lm	1100lm	V1SR-9273614P-WW
					3000K	36°	1500lm	1200lm	V1SR-9303614P-WW

Code Remark: P=P(Phase Dim)

Phase Dim 149,00 €

Coding

V1SR – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
V1SR	927 CRI90/ 2700K	36 36°	14 14W	P Phase Dim	WW Wihte-Wihte (WW)	H Honeycomb
	930 CRI90/ 3000K			D DALI Dim	BB Black-Black (BB)	
					BC Black-Chrome (BC)	
					BG Black-Gold (BG)	

BACK


VIBES V2SR – Double-Head Recessed Soptlight






Quick Info

- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

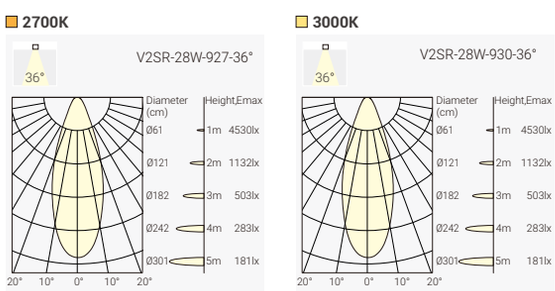

Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Black-Chrome/ Black-Gold + 80,00 €

Order Info (VIBES V2SR in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5W	2x14W	36V	2x350mA	90	2700K	36°	2900lm	2300lm	V2SR-9273628P-WW
					3000K	36°	3000lm	2400lm	V2SR-9303628P-WW

Code Remark: P=P(Phase Dim)

Phase Dim 309,00 €

Coding

V2SR – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
V2SR	927 CRI90/ 2700K	36 36°	28 28W	P Phase Dim	WW Wihte-Wihte (WW)	H Honeycomb
	930 CRI90/ 3000K			D DALI Dim	BB Black-Black (BB)	
					BC Black-Chrome (BC)	
					BG Black-Gold (BG)	

Optional accessary



Honeycomb

Code for V2SR-9273628P-WW with Honeycomb V2SR-9273628P-WW-H

Honeycomb: +9,00€

PURE-C


Ceiling Mounted Spotlight
Integrated LED Driver
No Visible Screw



Project: Clarence House, UK


PURE Art-C – Ceiling Mounted Spotlight



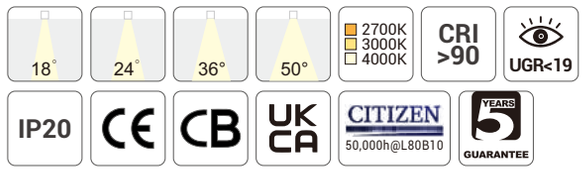


Quick Info


- CITIZEN LED: 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to1000lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim




Light Distribution


3000K







Finish



White Black

Order Info (PURE Art-C in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	18°	850lm	900lm	PUAC-9271815F-WB
						24°	1100lm	900lm	PUAC-9272415F-WB
						36°	1100lm	900lm	PUAC-9273615F-WB
						50°	1100lm	900lm	PUAC-9275015F-WB
					3000K	18°	1200lm	950lm	PUAC-9301815F-WB
						24°	1200lm	950lm	PUAC-9302415F-WB
						36°	1200lm	950lm	PUAC-9303615F-WB
						50°	1200lm	950lm	PUAC-9305015F-WB
					4000K	18°	1300lm	1000lm	PUAC-9401815F-WB
						24°	1300lm	1000lm	PUAC-9402415F-WB
						36°	1300lm	1000lm	PUAC-9403615F-WB
						50°	1300lm	1000lm	PUAC-9405015F-WB

ON-OFF	159,00 €
Phase Dim	189,00 €

Code Remark: F=F(ON-OFF) P=P(Phase Dim)

Optional accessary



Honeycomb

Code for PUAC-9302511F-WB with Honeycomb
PUAC-9302511F-WB-H

Honeycomb: +9,00€

Coding

PUAC – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUAC PURE Art-C	**927** CRI90/ 2700K	**18** 18°	**15** 15W	**F** On-Off	**W** Wihte	**B** Black	**H** Honeycomb
	930 CRI90/3000K	**24** 24°		**P** Phase Dim	**B** Black		
	940 CRI90/ 4000K	**36** 36°					
		50 50°					

BACK

PURE S-C – Ceiling Mounted Spotlight





15° 25° 30° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- CITIZEN LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 25°, 30°, 50°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, DALI Dim







Light Distribution


3000K







Finish



White Black

Order Info (PURE S-C in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	250mA	90	2700K	15°	1400lm	1100lm	PUSC-9271515F-WB
						25°	1400lm	1100lm	PUSC-9272515F-WB
						30°	1400lm	1100lm	PUSC-9273015F-WB
						50°	1400lm	850lm	PUSC-9275015F-WB
					3000K	15°	1500lm	1200lm	PUSC-9301515F-WB
						25°	1500lm	1200lm	PUSC-9302515F-WB
						30°	1500lm	1200lm	PUSC-9303015F-WB
						50°	1500lm	900lm	PUSC-9305015F-WB
					4000K	15°	1600lm	1300lm	PUSC-9401515F-WB
						25°	1600lm	1300lm	PUSC-9402515F-WB
						30°	1600lm	1300lm	PUSC-9403015F-WB
						50°	1600lm	1000lm	PUSC-9405015F-WB
18W	21W	36V	500mA	90	2700K	15°	1900lm	1500lm	PUSC-9271521F-WB
						25°	1900lm	1500lm	PUSC-9272521F-WB
						30°	1900lm	1500lm	PUSC-9273021F-WB
						50°	1900lm	1100lm	PUSC-9275021F-WB
					3000K	15°	2000lm	1600lm	PUSC-9301521F-WB
						25°	2000lm	1600lm	PUSC-9302521F-WB
						30°	2000lm	1600lm	PUSC-9303021F-WB
						50°	2000lm	1200lm	PUSC-9305021F-WB
					4000K	15°	2100lm	1700lm	PUSC-9401521F-WB
						25°	2100lm	1700lm	PUSC-9402521F-WB
						30°	2100lm	1700lm	PUSC-9403021F-WB
						50°	2100lm	1300lm	PUSC-9405021F-WB

ON-OFF	169,00 €
Phase Dim	199,00 €
DALI Dim	319,00 €

ON-OFF	189,00 €
Phase Dim	199,00 €
DALI Dim	319,00 €

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for PUSC--9302515F-WB with Honeycomb
PUSC--9302515F-WB-H

Honeycomb: +9,00€

Coding

PUSC – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUSC PURE-S-C	**927** CRI90/ 2700K	**15** 15°	**15** 15W	**F** On-Off	**W** Wihte	**B** Black	**H** Honeycomb
	930 CRI90/3000K	**25** 25°	**21** 21W	**P** Phase Dim	**B** Black		
	940 CRI90/ 4000K	**30** 30°		**D** DALI Dim			
		50 50°					

PURE

LED Tracklight
Integrated LED Driver
Elegant Design



Project: VALO Hotel Helsinki, Finland


PURE Art – LED Tracklight



18° 24° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- CITIZEN LED: 11W, 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to1000lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim




Light Distribution

3000K







Finish


White


Black

Order Info (PURE Art in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	36V	250mA	90	2700K	18°	850lm	640lm	PUA2-9271811F-WB
						24°	850lm	640lm	PUA2-9272411F-WB
						36°	850lm	640lm	PUA2-9273611F-WB
						50°	850lm	640lm	PUA2-9275011F-WB
					3000K	18°	950lm	720lm	PUA2-9301811F-WB
						24°	950lm	720lm	PUA2-9302411F-WB
						36°	850lm	720lm	PUA2-9303611F-WB
						50°	850lm	720lm	PUA2-9305011F-WB
					4000K	18°	1050lm	800lm	PUA2-9401811F-WB
						30°	1050lm	800lm	PUA2-9402411F-WB
						36°	1050lm	800lm	PUA2-9403611F-WB
						50°	1050lm	800lm	PUA2-9405011F-WB
13W	15W	36V	350mA	90	2700K	18°	1100lm	900lm	PUA2-9271815F-WB
						24°	1100lm	900lm	PUA2-9272415F-WB
						36°	1100lm	900lm	PUA2-9273615F-WB
						50°	1100lm	900lm	PUA2-9275015F-WB
					3000K	18°	1200lm	950lm	PUA2-9301815F-WB
						24°	1200lm	950lm	PUA2-9302415F-WB
						36°	1200lm	950lm	PUA2-9303615F-WB
						50°	1200lm	950lm	PUA2-9305015F-WB
					4000K	18°	1300lm	1000lm	PUA2-9401815F-WB
						24°	1300lm	1000lm	PUA2-9402415F-WB
						36°	1300lm	1000lm	PUA2-9403615F-WB
						50°	1300lm	1000lm	PUA2-9405015F-WB

ON-OFF	129,00 €
Phase Dim	159,00 €

Code Remark: F=F(ON-OFF) P=P(Phase Dim)


Optional accessary


Honeycomb

Code for PUA2-9302511F-WB with Honeycomb
PUA2-9302511F-WB-H

Honeycomb: +9,00€

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

Coding

PUA2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUA2 PURE Art	**927** CRI90/ 2700K	**18** 18°	**11** 11W	**F** On-Off	**W** Wihte	**B** Black	**H** Honeycomb
	930 CRI90/3000K	**24** 24°	**15** 15W	**P** Phase Dim	**B** Black		
	940 CRI90/ 4000K	**36** 36°					
		50 50°					

BACK

PURE S – LED Tracklight




15° 25° 30° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- CITIZEN LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 25°, 30°, 50°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim




Light Distribution

3000K







Finish



White



Black

Order Info (PURE S in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	250mA	90	2700K	15°	1400lm	1100lm	PUS1-9271515F-WB
						25°	1400lm	1100lm	PUS1-9272515F-WB
						30°	1400lm	1100lm	PUS1-9273015F-WB
						50°	1400lm	850lm	PUS1-9275015F-WB
					3000K	15°	1500lm	1200lm	PUS1-9301515F-WB
						25°	1500lm	1200lm	PUS1-9302515F-WB
						30°	1500lm	1200lm	PUS1-9303015F-WB
						50°	1500lm	900lm	PUS1-9305015F-WB
ON-OFF 159,00 €					4000K	15°	1600lm	1300lm	PUS1-9401515F-WB
Phase Dim 189,00 €						25°	1600lm	1300lm	PUS1-9402515F-WB
						30°	1600lm	1300lm	PUS1-9403015F-WB
						50°	1600lm	1000lm	PUS1-9405015F-WB
18W	21W	36V	500mA	90	2700K	15°	1100lm	1500lm	PUS2-9271521F-WB
						25°	1100lm	1500lm	PUS2-9272521F-WB
						30°	1100lm	1500lm	PUS2-9273021F-WB
						50°	1100lm	1100lm	PUS2-9275021F-WB
					3000K	15°	1200lm	1600m	PUS2-9301521F-WB
						25°	1200lm	1600lm	PUS2-9302521F-WB
						30°	1200lm	1600lm	PUS2-9303021F-WB
						50°	1200lm	1200lm	PUS2-9305021F-WB
ON-OFF 179,00 €					4000K	15°	1300lm	1700lm	PUS2-9401521F-WB
Phase Dim 189,00 €						25°	1300lm	1700lm	PUS2-9402521F-WB
						30°	1300lm	1700lm	PUS2-9403021F-WB
						50°	1300lm	1300lm	PUS2-9405021F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim)

Optional accessary



Honeycomb

Code for PUS1-9301515F-WB with Honeycomb
PUS1-9301515F-WB-H


Honeycomb: +9,00€

Coding

PUS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUS1 PURE S-15W	**927** CRI90/ 2700K	**15** 15°	**15** 15W	**F** On-Off	**W** Wihte	**B** Black	**H** Honeycomb
PUS2 PURE S-21W	**930** CRI90/3000K	**24** 24°	**21** 21W	**P** Phase Dim	**B** Black		
	940 CRI90/ 4000K	**36** 36°					
		50 50°					

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

PURE S – LED Tracklight




15° 25° 30° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | CITIZEN 50,000h@L80B10 | GLOBAL | DALI 2 | 5 YEARS GUARANTEE


Quick Info


- CITIZEN LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 25°, 30°, 50°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: IP20
- LED Driver: DALI Dim




Light Distribution

3000K







Finish


White


Black

Order Info (PURE S in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	250mA	90	2700K	15°	1400lm	1100lm	PUS1-9271515D-WB
						25°	1400lm	1100lm	PUS1-9272515D-WB
						30°	1400lm	1100lm	PUS1-9273015D-WB
						50°	1400lm	850lm	PUS1-9275015D-WB
					3000K	15°	1500lm	1200lm	PUS1-9301515D-WB
						25°	1500lm	1200lm	PUS1-9302515D-WB
						30°	1500lm	1200lm	PUS1-9303015D-WB
						50°	1500lm	900lm	PUS1-9305015D-WB
					4000K	15°	1600lm	1300lm	PUS1-9401515D-WB
						25°	1600lm	1300lm	PUS1-9402515D-WB
DALI Dim	309,00 €					30°	1600lm	1300lm	PUS1-9403015D-WB
						50°	1600lm	1000lm	PUS1-9405015D-WB
18W	21W	36V	500mA	90	2700K	15°	1900lm	1500lm	PUS2-9271521D-WB
						25°	1900lm	1500lm	PUS2-9272521D-WB
						30°	1900lm	1500lm	PUS2-9273021D-WB
						50°	1900lm	1100lm	PUS2-9275021D-WB
					3000K	15°	2000lm	1600lm	PUS2-9301521D-WB
						25°	2000lm	1600lm	PUS2-9302521D-WB
						30°	2000lm	1600lm	PUS2-9303021D-WB
						50°	2000lm	1200lm	PUS2-9305021D-WB
					4000K	15°	2100lm	1700lm	PUS2-9401521D-WB
						25°	2100lm	1700lm	PUS2-9402521D-WB
DALI Dim	309,00 €					30°	2100lm	1700lm	PUS2-9403021D-WB
						50°	2100lm	1300lm	PUS2-9405021D-WB

Code Remark: D=D(DALI Dim)


Optional accessary


Honeycomb

Code for PUS1--9301515D-WB with Honeycomb
PUS1--9301515D-WB-H

Honeycomb: + 9,00 €

Track System



Compatible with GLOBAL 3-Circuit Track System

Coding


PUS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUS1 PURE S-15W	**927** CRI90/ 2700K	**15** 15°	**15** 15W	**D** DALI DIM	**W** Wihte	**B** Black	**H** Honeycomb
PUS2 PURE S-21W	**930** CRI90/3000K	**24** 24°	**21** 21W		**B** Black		
	940 CRI90/ 4000K	**36** 36°					
		50 50°					

BACK


PURE M – LED Tracklight



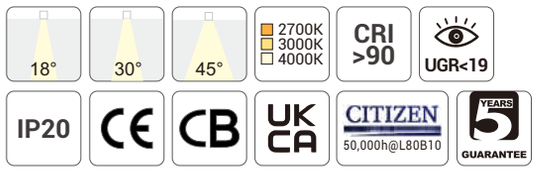


Quick Info


- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 2900lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off




Light Distribution

3000K







Finish



White Black

Order Info (PURE M in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	18°	3200lm	2500lm	PUM1-9271828F-WB
						30°	3200lm	2500lm	PUM1-9273028F-WB
						45°	3200lm	2500lm	PUM1-9274528F-WB
					3000K	18°	3400lm	2700lm	PUM1-9301828F-WB
						30°	3400lm	2700lm	PUM1-9303028F-WB
						45°	3400lm	2700lm	PUM1-9304528F-WB
ON-OFF	209,00 €				4000K	18°	3600lm	2900lm	PUM1-9401828F-WB
						30°	3600lm	2900lm	PUM1-9403028F-WB
						45°	3600lm	2900lm	PUM1-9404528F-WB

Code Remark: F=F(ON-OFF)

Optional accessary



Honeycomb

Code for PUM1-9301828F-WB with Honeycomb
PUM1-9301828F-WB-H

Honeycomb: + 9,00 €

Track System



Compatible with GLOBAL / POWERGEAR
3-Circuit Track System

Coding

PUM1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUM1	**927**	**18**	**28**	**F**	**W**	**B**	**H**
PURE M	CRI90/ 2700K	18°	28W	On-Off	Wihte	Black	Honeycomb
	930	**30**			**B**		
	CRI90/3000K	30°			Black		
	940	**45**					
	CRI90/ 4000K	45°					


PURE M – LED Tracklight






Quick Info


- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 2900lm System Luminous Flux
- IP Class: IP20
- LED Driver: DALI Dim




Light Distribution


3000K







Finish



Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	18°	3200lm	2500lm	PUM1-9271828D-WB
						30°	3200lm	2500lm	PUM1-9273028D-WB
						45°	3200lm	2500lm	PUM1-9274528D-WB
					3000K	18°	3400lm	2700lm	PUM1-9301828D-WB
						30°	3400lm	2700lm	PUM1-9303028D-WB
						45°	3400lm	2700lm	PUM1-9304528D-WB
					4000K	18°	3600lm	2900lm	PUM1-9401828D-WB
						30°	3600lm	2900lm	PUM1-9403028D-WB
						45°	3600lm	2900lm	PUM1-9404528D-WB

DALI Dim 329,00 €

Code Remark: D=D(DALI Dim)

Optional accessary




Honeycomb

Code for PUM1--9301828D-WB with Honeycomb
PUM1--9301828D-WB-H

Honeycomb: + 9,00 €

Track System



Compatible with GLOBAL 3-Circuit Track System

Coding

PUM1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUM1 PURE M	**927** CRI90/ 2700K	**18** 18°	**28** 28W	**D** DALI DIM	**W** Wihte	**B** Black	**H** Honeycomb
	930 CRI90/3000K	**30** 30°			**B** Black		
	940 CRI90/ 4000K	**45** 45°					

BACK

ROXY

In-Track Driver LED Tracklight Clean Design



Project: Clever armaturval för Kv Poolen, Sweden

ROXY Art – In-Track Driver LED Tracklight




18° 24° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UK CA | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CITIZEN LED: 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to 1000lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off




Light Distribution

3000K

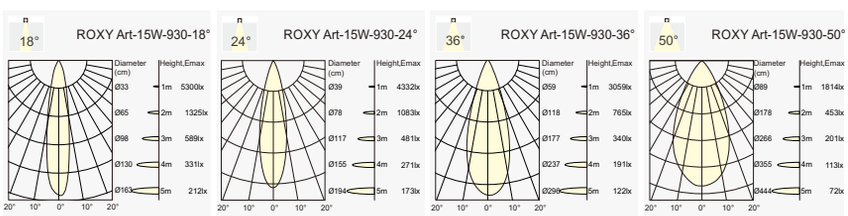

Finish



White Black

Order Info (ROXY Art in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	18°	1200lm	900lm	ROA1-9271815F-WB
						24°	1200lm	900lm	ROA1-9272415F-WB
						36°	1200lm	900lm	ROA1-9273615F-WB
						50°	1200lm	900lm	ROA1-9275015F-WB
					3000K	18°	1300lm	950lm	ROA1-9301815F-WB
						24°	1300lm	950lm	ROA1-9302415F-WB
						36°	1300lm	950lm	ROA1-9303615F-WB
						50°	1300lm	950lm	ROA1-9305015F-WB
					4000K	18°	1400lm	1000lm	ROA1-9401815F-WB
						24°	1400lm	1000lm	ROA1-9402415F-WB
						36°	1400lm	1000lm	ROA1-9403615F-WB
						50°	1400lm	1000lm	ROA1-9405015F-WB
ON-OFF	149,00 €								

Code Remark: F=F(ON-OFF)

Optional accessary




Code for ROA1-9301815F-WB with Honeycomb
ROA1-9301815F-WB-H

Honeycomb

Honeycomb: + 9,00 €

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

Coding

ROA1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROA1 ROXY Art	**927** CRI90/ 2700K	**18** 18°	**15** 15W	**F** On-Off	**W** Wihte	**B** Black	**H** Honeycomb
	930 CRI90/3000K	**24** 24°			**B** Black		
	940 CRI90/ 4000K	**36** 36°					
		50 50°					

BACK

ROXY Art – In-Track Driver LED Tracklight




18° 24° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | CITIZEN 50,000h@L80B10 | DALI 2 | 5 YEARS GUARANTEE


Quick Info

- CITIZEN LED: 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to 1000lm System Luminous Flux
- IP Class: IP20
- LED Driver: DALI Dim



Light Distribution

3000K

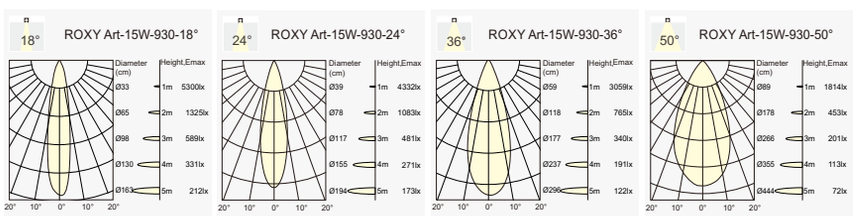

Finish



White Black

Order Info (ROXY Art in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	18°	1200lm	900lm	ROA1-9271815D-WB
						24°	1200lm	900lm	ROA1-9272415D-WB
						36°	1200lm	900lm	ROA1-9273615D-WB
						50°	1200lm	900lm	ROA1-9275015D-WB
					3000K	18°	1300lm	950lm	ROA1-9301815D-WB
						24°	1300lm	950lm	ROA1-9302415D-WB
						36°	1300lm	950lm	ROA1-9303615D-WB
						50°	1300lm	950lm	ROA1-9305015D-WB
					4000K	18°	1400lm	1000lm	ROA1-9401815D-WB
						24°	1400lm	1000lm	ROA1-9402415D-WB
						36°	1400lm	1000lm	ROA1-9403615D-WB
						50°	1400lm	1000lm	ROA1-9405015D-WB

DALI Dim 219,00 €

Code Remark: D=D(DALI Dim)

Optional accessary




Code for ROA1-9301815D-WB with Honeycomb
ROA1-9301815D-WB-H

Honeycomb

Honeycomb: + 9,00 €

Track System




Compatible with GLOBAL / POWERGEAR 3-Circuit Track System


Coding

ROA1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROA1 ROXY Art	**927** CRI90/ 2700K	**18** 18°	**15** 15W	**D** DALI Dim	**W** Wihte	**B** Black	**H** Honeycomb
	930 CRI90/3000K	**24** 24°			**B** Black		
	940 CRI90/ 4000K	**36** 36°					
		50 50°					


ROXY S – In-Track Driver LED Tracklight

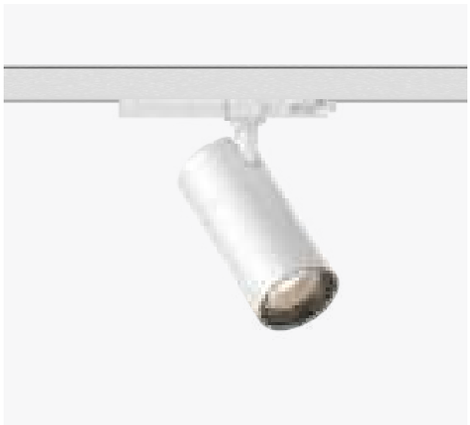

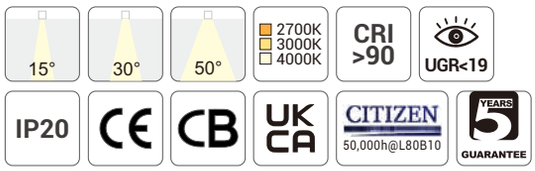


Quick Info


- CITIZEN LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 50°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off




Light Distribution


3000K







Finish



White Black

Order Info (ROXY S in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	250mA	90	2700K	15°	1400lm	1100lm	ROS1-9271515F-WB
						30°	1400lm	1100lm	ROS1-9273015F-WB
						50°	1400lm	850lm	ROS1-9275015F-WB
					3000K	15°	1500lm	1200lm	ROS1-9301515F-WB
						30°	1500lm	1200lm	ROS1-9303015F-WB
						50°	1500lm	900lm	ROS1-9305015F-WB
					4000K	15°	1600lm	1300lm	ROS1-9401515F-WB
						30°	1600lm	1300lm	ROS1-9403015F-WB
						50°	1600lm	1000lm	ROS1-9405015F-WB
18W	21W	36V	500mA	90	2700K	15°	1900lm	1500lm	ROS2-9271521F-WB
						30°	1900lm	1500lm	ROS2-9273021F-WB
						50°	1900lm	1100lm	ROS2-9275021F-WB
					3000K	15°	2000lm	1600lm	ROS2-9301512F-WB
						30°	2000lm	1600lm	ROS2-9303012F-WB
						50°	2000lm	1100lm	ROS2-9305021F-WB
					4000K	15°	2100lm	1700lm	ROS2-9401512F-WB
						30°	2100lm	1700lm	ROS2-9403012F-WB
						50°	2100lm	1300lm	ROS2-9405021F-WB

ON-OFF 149,00 €

Code Remark: F=F(ON-OFF)

Optional accessary




Honeycomb

Code for ROS1-9302515F-WB with Honeycomb
ROS1-9302515F-WB-H

Honeycomb: + 9,00 €

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

Coding

ROS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessary
ROS1 ROXY S-15W	**927** CRI90/ 2700K	**15** 15°	**15** 15W	**F** On-Off	**W** Wihte	**B** Black	**H** Honeycomb
ROS2 ROXY S-21W	**930** CRI90/3000K	**30** 30°	**21** 21W		**B** Black		
	940 CRI90/ 4000K	**50** 50°					

BACK

ROXY S – In-Track Driver LED Tracklight




15° 30° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | CITIZEN 50,000h@L80B10 | DALI 2 | 5 YEARS GUARANTEE


Quick Info


- CITIZEN LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 50°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: IP20
- LED Driver: DALL Dim




Light Distribution

3000K







Finish



White



Black

Order Info (ROXY S in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	250mA	90	2700K	15°	1400lm	1100lm	ROS1-9271515D-WB
						30°	1400lm	1100lm	ROS1-9273015D-WB
						50°	1400lm	850lm	ROS1-9275015D-WB
					3000K	15°	1500lm	1200lm	ROS1-9301515D-WB
						30°	1500lm	1200lm	ROS1-9303015D-WB
						50°	1500lm	900lm	ROS1-9305015D-WB
					4000K	15°	1600lm	1300lm	ROS1-9401515D-WB
						30°	1600lm	1300lm	ROS1-9403015D-WB
						50°	1600lm	1000lm	ROS1-9405015D-WB
18W	21W	36V	500mA	90	2700K	15°	1900lm	1500lm	ROS2-9271521D-WB
						30°	1900lm	1500lm	ROS2-9273021D-WB
						50°	1900lm	1500lm	ROS2-9275021D-WB
					3000K	15°	2000lm	1600lm	ROS2-9301512D-WB
						30°	2000lm	1600lm	ROS2-9303012D-WB
						50°	2000lm	1500lm	ROS2-9305021D-WB
					4000K	15°	2100lm	1700lm	ROS2-9401512D-WB
						30°	2100lm	1700lm	ROS2-9403012D-WB
						50°	2100lm	1700lm	ROS2-9405021D-WB

DALI Dim | 219,00 €

Code Remark: D=D(DALI Dim)

Optional accessary




Honeycomb

Code for ROS1-9302515D-WB with Honeycomb
ROS1-9302515D-WB-H

Honeycomb: + 9,00 €

Track System



Compatible with GLOBAL / POWERGEAR
3-Circuit Track System

Coding

ROS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROS1 ROXY S-15W	**927** CRI90/ 2700K	**15** 15°	**15** 15W	**d** DALI Dim	**W** Wihte	**B** Black	**H** Honeycomb
ROS2 ROXY S-21W	**930** CRI90/3000K	**30** 30°	**21** 21W		**B** Black		
	940 CRI90/ 4000K	**50** 50°					

BACK

ROXY K – In-Track Driver LED Tracklight




20° 35° 55° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA CITIZEN 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info


- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 2600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off




Light Distribution

3000K







Finish


White


Black

Order Info (ROXY K in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	20°	2500lm	2000lm	ROK1-9272028F-WB
						35°	2500lm	2200lm	ROK1-9273528F-WB
						55°	2500lm	2200lm	ROK1-9275528F-WB
					3000K	15°	2700lm	2200lm	ROK1-9302028F-WB
						35°	2700lm	2400lm	ROK1-9303528F-WB
						55°	2700lm	2400lm	ROK1-9305528F-WB
					4000K	20°	2900lm	2400lm	ROK1-9402028F-WB
						35°	2900lm	2600lm	ROK1-9403528F-WB
						55°	2900lm	2600lm	ROK1-9405528F-WB

ON-OFF 209,00 €

Code Remark: F=F(ON-OFF)

Optional accessary


Honeycomb

Code for ROK1-9303528F-WB with Honeycomb
ROK1-9303528F-WB-H

Honeycomb: + 9,00 €

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

Coding

ROK1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROK1	**927**	**20**	**28**	**F**	**W**	**B**	**H**
ROXY K	CRI90/ 2700K	20°	28W	On-Off	Wihte	Black	Honeycomb
	930	**35**			**B**		
	CRI90/3000K	35°			Black		
	940	**55**					
	CRI90/ 4000K	55°					

BACK


ROXY K – In-Track Driver LED Tracklight






Quick Info


- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 2600lm System Luminous Flux
- IP Class: IP20
- LED Driver: DALL Dim




Light Distribution


3000K







Finish



White Black

Order Info (ROXY K in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	20°	2500lm	2000lm	ROK1-9272028D-WB
						35°	2500lm	2200lm	ROK1-9273528D-WB
						55°	2500lm	2200lm	ROK1-9275528D-WB
					3000K	15°	2700lm	2200lm	ROK1-9302028D-WB
						35°	2700lm	2400lm	ROK1-9303528D-WB
						55°	2700lm	2400lm	ROK1-9305528D-WB
					4000K	20°	2900lm	2400lm	ROK1-9402028D-WB
						35°	2900lm	2600lm	ROK1-9403528D-WB
						55°	2900lm	2600lm	ROK1-9405528D-WB

DALI Dim 269,00 €

Code Remark: F=F(ON-OFF)

Optional accessary



Honeycomb

Code for ROK1-9303528D-WB with Honeycomb
ROK1-9303528D-WB-H

Honeycomb: + 9,00 €

Track System



Compatible with GLOBAL / POWERGEAR
3-Circuit Track System

Coding

ROK1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROK1 ROXY K	**927** CRI90/ 2700K	**20** 20°	**28** 28W	**d** DALI Dim	**W** Wihte	**B** Black	**H** Honeycomb
	930 CRI90/3000K	**35** 35°			**B** Black		
	940 CRI90/ 4000K	**55** 55°					

ROXY Art-Z – In-Track Driver LED Tracklight





20°~35° | 35°~60° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- CITIZEN LED: 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°~35°, 35°~60°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off , DALL Dim








20°-60° Zooming

Light Distribution

3000K







Order Info (ROXY Art-Z in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	20°~35°	1200lm	1000lm	ROA1-927Z315F-WB
					3000K	20°~35°	1300lm	1100lm	ROA1-930Z315F-WB
					4000K	20°~35°	1400lm	1200lm	ROA1-940Z315F-WB
					2700K	35°~60°	1200lm	950lm	ROA1-927Z615F-WB
					3000K	35°~60°	1300lm	1000lm	ROA1-930Z615F-WB
					4000K	35°~60°	1400lm	1100lm	ROA1-940Z615F-WB

ON-OFF	149,00 €
DALI Dim	219,00 €

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Finish



White Black

Coding

ROA1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROA1 ROXY Art-Z	**927** CRI90/ 2700K	**Z3** 20°~35°	**15** 15W	**F** On-Off	**W** Wihte	**B** Black	**H** Honeycomb
	930 CRI90/3000K	**Z6** 35°~60°		**D** DALI Dim	**B** Black		
	940 CRI90/ 4000K						

Optional accessary




Honeycomb

Code for ROA1-930Z315F-WB with Honeycomb
ROA1-930Z315F-WB-H

Honeycomb: + 9,00 €

Track System



Compatible with GLOBAL / POWERGEAR
3-Circuit Track System

BACK

ROXY S-Z – In-Track Driver LED Tracklight





18°~35° | 35°~60° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- CITIZEN LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°~35°, 35°~60°
- Lumen Output: Up to 1800lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off , DALL Dim








20°-60° Zooming

Light Distribution

3000K








Order Info (ROXY S-Z in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	18°~35°	1400lm	1200lm	ROS1-927Z315F-WB
					3000K	18°~35°	1500lm	1300lm	ROS1-930Z315F-WB
					4000K	18°~35°	1600lm	1400lm	ROS1-940Z315F-WB
					2700K	35°~60°	1400lm	1100lm	ROS1-927Z615F-WB
					3000K	35°~60°	1500lm	1200lm	ROS1-930Z615F-WB
					4000K	35°~60°	1600lm	1300lm	ROS1-940Z615F-WB
18W	21W	36V	500mA	90	2700K	18°~35°	1900lm	1600lm	ROS1-927Z321F-WB
					3000K	18°~35°	2000lm	1700lm	ROS1-930Z321F-WB
					4000K	18°~35°	2100lm	1800lm	ROS1-940Z321F-WB
					2700K	35°~60°	1900lm	1500lm	ROS1-927Z621F-WB
					3000K	35°~60°	2000lm	1600lm	ROS1-930Z621F-WB
					4000K	35°~60°	2100lm	1700lm	ROS1-940Z621F-WB

ON-OFF	169,00 €
DALI Dim	239,00 €

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Finish



White Black

Coding

ROS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROS1	**927**	**Z3**	**15**	**F**	**W**	**B**	**H**
ROXY S-Z	CRI90/ 2700K	20°~35°	15W	On-Off	Wihte	Black	Honeycomb
	930	**Z6**	**21**	**D**	**B**		
	CRI90/3000K	35°~60°	21W	DALI Dim	Black		
	940						
	CRI90/ 4000K						

Optional accessary




Honeycomb

Code for ROS1-930Z315F-WB with Honeycomb
ROS1-930Z315F-WB-H

Honeycomb: + 9,00 €

Track System



Compatible with GLOBAL / POWERGEAR
3-Circuit Track System

BACK

INLINE

Single Phase LED Tracklight System
Incl. Phase Dim Driver
Direct Connection 230V – No External Driver




INLINE – Single Phase LED Tracklight System






Quick Info

- LUMINUS LED: 9W, CRI>90
- CCT: 2700K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 700lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim



Light Distribution

2700K



Finish



White



Black


Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	18V	500mA	90	3000K	36°	900lm	700lm	ILST-9273611P-WB
9W	11W	18V	500mA	90	3000K	36°	900lm	700lm	ILST-9273611P-BB

Code Remark: P=P(Phase Dim)

Phase Dim 119,00 €

Track System



Compatible with NEKO INLINE Single Circuit Track System

BACK


INLINE – Single Phase LED Tracklight System






Quick Info

- LUMINUS LED: 6W, CRI>90
- CCT: 2700K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim



Light Distribution

2700K



Finish



White Black


Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	8W	18V	350mA	90	2000K	36°	700lm	500lm	ILSP-9273608P-WB
9W	8W	18V	350mA	90	2000K	36°	700lm	500lm	ILSP-9273608P-BB

Code Remark: P=P(Phase Dim)

Phase Dim 159,00 €

Track System




Compatible with NEKO INLINE Single Circuit Track System

INLINE – Single Phase LED Tracklight System




Quick Info


- Aluminum extrusion track shell
- 2 pieces copper busbars, insulated by plastic
- Single circuit track system for 16A (3500W) input
- Track length available in 1000mm and 2000mm
- Various connectors and accessories available forbuilding comprehensive lighting system
- Color finish in White(RAL9003) or Black(RAL9005)
- Surface mounted



Load of Track

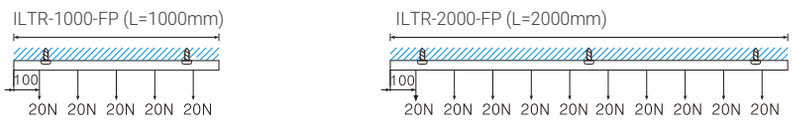


Connection Diagram

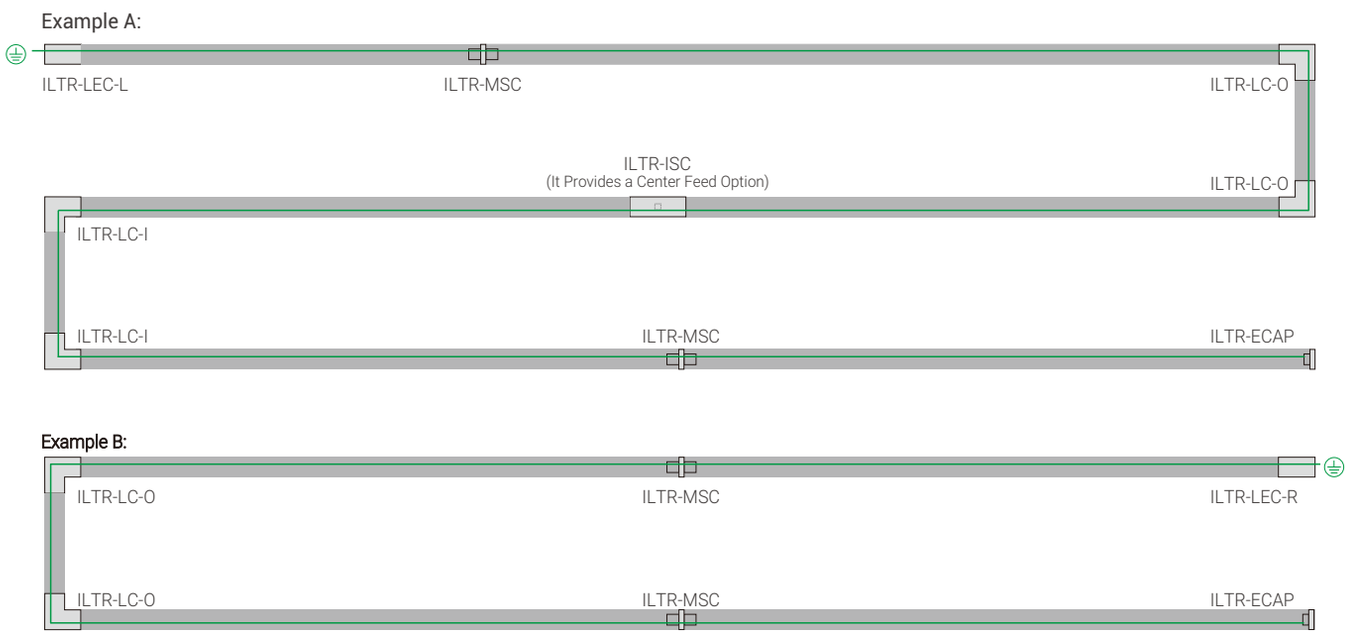

BACK






INLINE Single Phase Track

Description	Code/Model	
INLINE Single Phase Track, 1000mm Length, White	ILTR-1000-FP-W	49,00 €
INLINE Single Phase Track, 1000mm Length, Black	ILTR-1000-FP-W	
INLINE Single Phase Track, 2000mm Length, White	ILTR-2000-FP-W	89,00 €
INLINE Single Phase Track, 2000mm Length, Black	ILTR-2000-FP-B	






Live End Connector


Description	Code/Model	
Live End Connector, Left, White	ILTR-LEC-L-W	19,00 €
Live End Connector, Left, Black	ILTR-LEC-L-B	
Live End Connector, Right, White	ILTR-LEC-R-W	
Live End Connector, Right, Black	ILTR-LEC-R-B	






I Straight Connector

Description	Code/Model	
I Straight Connector, It Provides a Center Feed Option, White	ILTR-ISC-W	29,00 €
I Straight Connector, It Provides a Center Feed Option, Black	ILTR-ISC-B	






L Connector

Description	Code/Model	
L Connector, Outer, White	ILTR-LC-O-W	29,00 €
L Connector, Outer, Black	ILTR-LC-O-B	
L Connector, Inner, White	ILTR-LC-I-W	
L Connector, Inner, Black	ILTR-LC-I-B	





Mini Straight Connector

Description	Code/Model	
Mini Straight Connector, White	ILTR-MSC-W	9,00 €
Mini Straight Connector, Black	ILTR-MSC-B	





Endcap

Description	Code/Model	
Endcap, White	ILTR-ECAP-W	5,00 €
Endcap, Black	ILTR-ECAP-B	


Control NEKO luminaires via CASAMBI

CASAMBI is a versatile Bluetooth-based lighting control solution for commercial, residential, hospitality, office, and retail spaces. Supporting NEKO luminaires, it offers seamless, smart control over lighting networks through an intuitive app, making it ideal for various applications.

Connect NEKO luminaires onto CASAMBI


Here below are the options.

①



NEKO Luminaire


+



CASAMBI-Ready LED Driver


→

②



NEKO Luminaire

+



DALI Dim LED Driver


+



CASAMBI DALI Dim Module


→

③



MODULINE 26 Track
+DALI Version Light Inset

+



48V LED Driver
Any 48V LED Driver

+




CASAMBI Bluetooth-DALI Converter

→

BACK


CASAMBI Wireless Controls




CASAMBI App

CASAMBI Switch

① DALI Dim, CASAMBI-Ready LED Driver

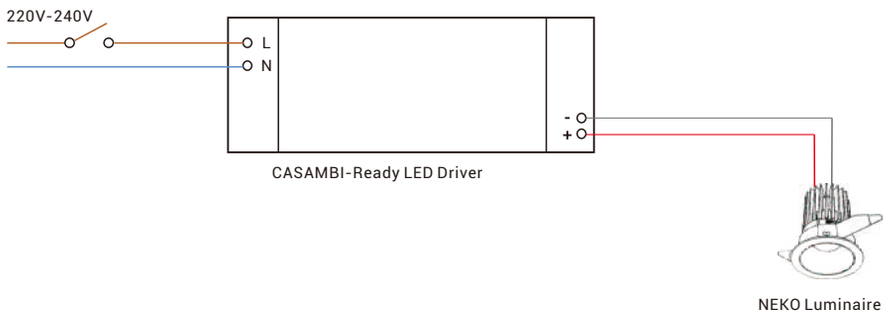


② DALI Dim, CASAMBI DALI Dim Module

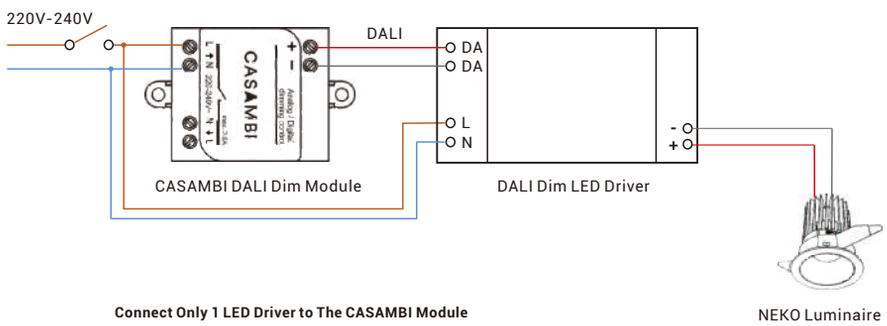

Connect Only 1 LED Driver to The CASAMBI Module


③ CASAMBI DALI Dim Control for NEKO Moduline 26 System

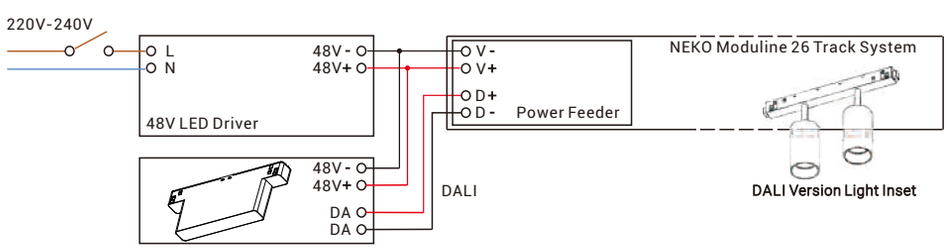


CASAMBI Bluetooth-DALI Converter
Max. 64 DALI Light Insets Divided into 8 Groups
Each Group Can be Controlled Separately
LxH: 143x58mm

Lighting Controls Wiring Diagrams

On-Off/ Non-dim

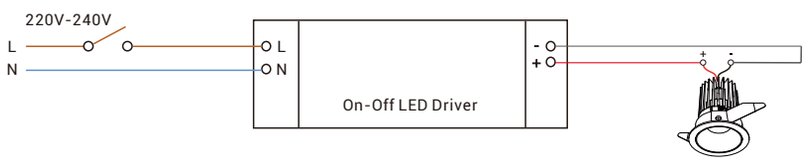


Triac Dim/ Phase Dim

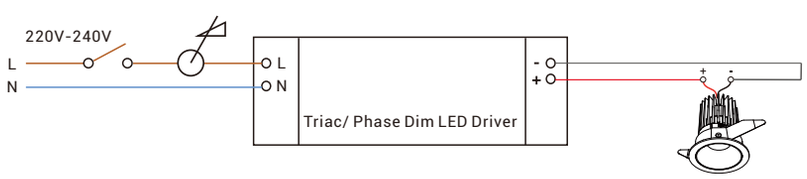


Check the Compatibility of Dimmer and LED Driver

0/1-10V Dim

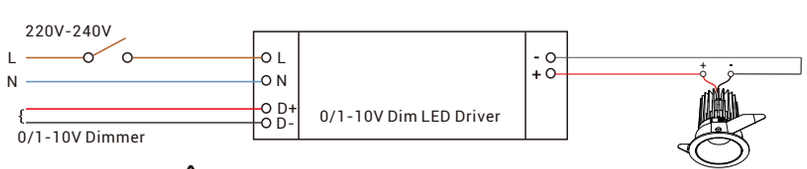

Always Respect Polarity of 0/1-10V Dim Signal


DALI Dim

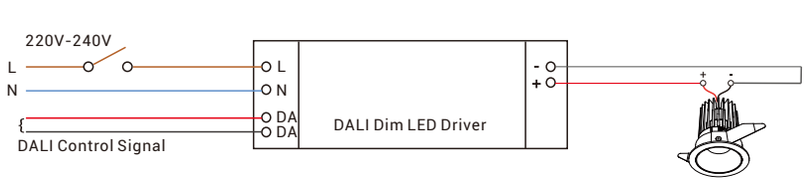


BACK

Wiring Diagrams of Moduline 26 Track System


On-Off/ Non-dim

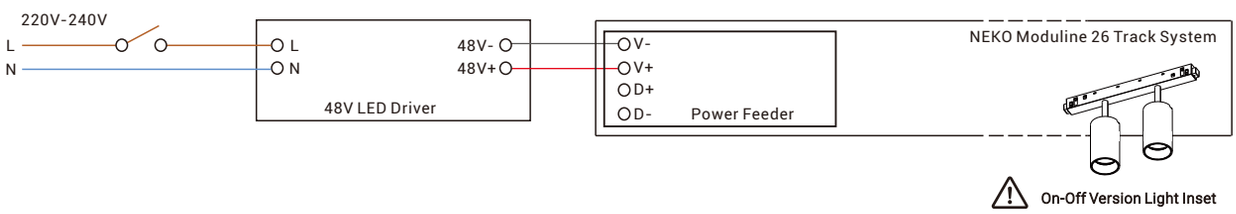


1-10V Dim

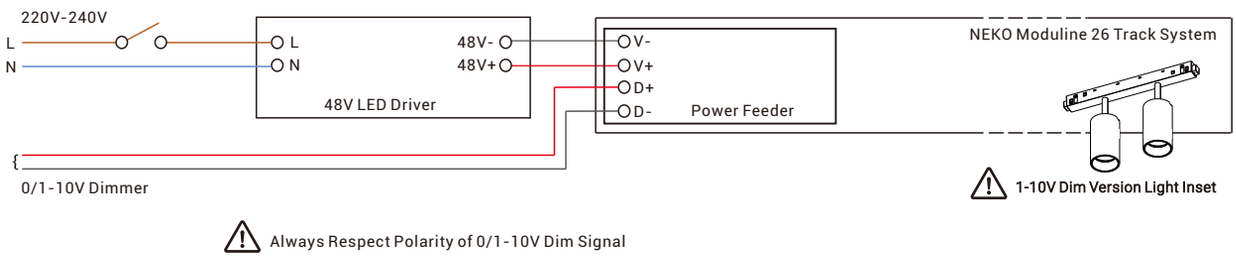

DALI Dim

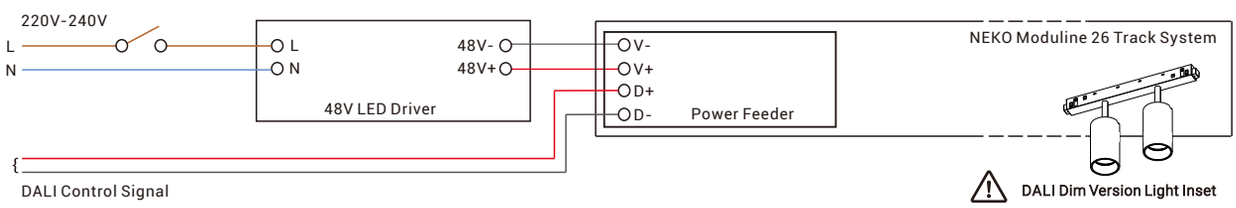


CASAMBI DALI Dim Control for NEKO Moduline 26 System

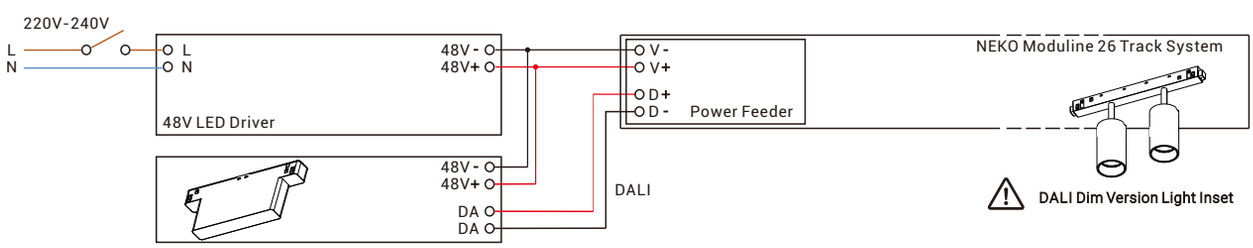

CASAMBI Bluetooth-DALI Converter
Max. 64 DALI Light Insets Divided into 8 Groups
Each Group Can be Controlled Separately
LxH: 143x58mm

CASAMBI


OUTDOOR

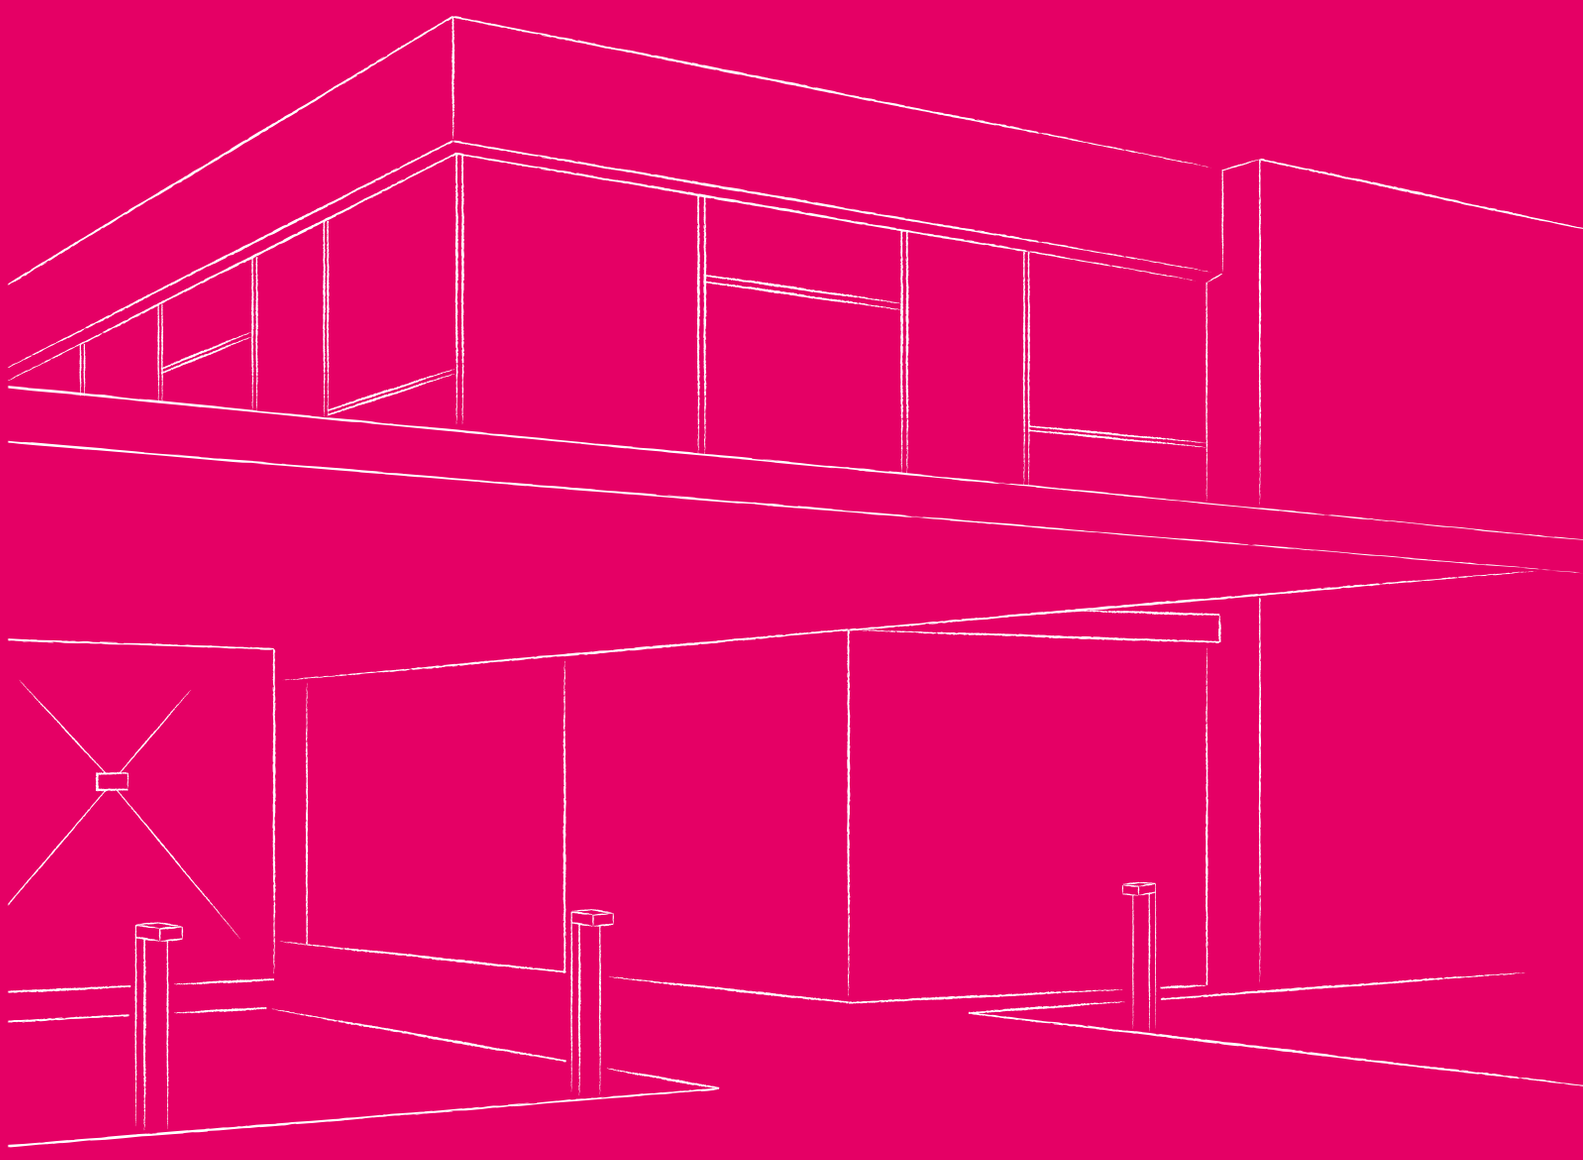

OUTDOOR RANGE

INDEX

SEAPOINT Series



SEAPOINT
■355

LAKEPOINT Series



LAKEPOINT Fixed
■356



LAKEPOINT Adjustable
■357

CARMEL Series



SKYSURFER SSRC
■358



CARMEL Round
■359

CLIFTON Series



CLIFTON
■360

RIVA Series



RIVA Round
■361



RIVA Square
■362

CAMPSBAY Series



CAMPSBAY Single
■363



CAMPSBAY Double

LAGOON Series



LAGOON
■364

CRUZ D Series



CRUZ D
■365

CAPRI Series



CAPRI
■366

BAY Series




BAY
■367

NICE Series



NICE 250S & NICE 250D
■368




NICE 500S & NICE 500D
■369

St.Tropez Series



St.Tropez
■370

Capetown-Recessed Series




Capetown Round-Recessed
■371



Capetown Square-Recessed

Capetown-Surface Series



Capetown Round-Surface
■372




Capetown Square-Surface

CALIFORNIA Series



CALIFORNIA 12
■373

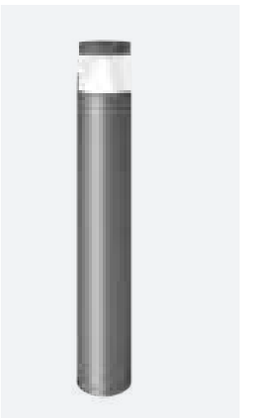


CALIFORNIA 16

DURBAN Series




DURBAN
■374

POSITANO Series

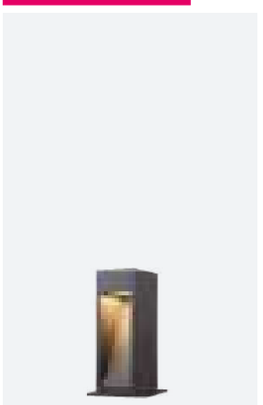

POSITANO 300
■375

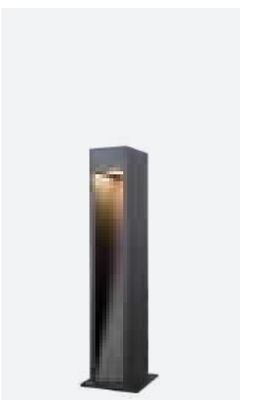

POSITANO 600

PORTOFINO Series



PORTOFINO S
■376



PORTOFINO L



PORTOFINO Adjustable
■377

AFTER7 Series



AFTER7 Mini
■378



AFTER7 Maxi
■379

NEPTUNE Series



NEPTUNE XSU CV
■380




NEPTUNE SU CV
■381



NEPTUNE MU CV
■382



NEPTUNE LU CV
■383



NEPTUNE SR CV
NEPTUNE SR HV
■385



NEPTUNE MR CV
NEPTUNE MR HV
■386



NEPTUNE LR CV
NEPTUNE LR HV
■387

TERARACE Series



TERARACE Micro
■388



TERARACE Nano
■389




TERARACE Mini
■390




TERARACE Maxi
■391

SEAPOINT – Exterior LED Downlight








Quick Info

- Ceiling Cut-out: Ø100mm
- CREE LED: 6W, CRI>90, 3000K
- Beam Angle: 25°
- Lumen Output: Up to 450lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Black
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5W	6W	220-240V	90	3000K	25°	450lm	SEAPOINT-830-25°	SEAP-8302506F-BN


Remark: With internal Non-Dimmable LED driver


ON-OFF 189,00 €

BACK

LAKEPOINT Fixed – Exterior LED Downlight








30° | 3000K | CRI >80 | IP65 | CE | CREE 50,000h@L80B10 | 3 YEAR GUARANTEE

Quick Info

- Ceiling Cut-out: Ø90mm, 3000K
- CREE LED: 6W, CRI>80
- Beam Angle: 30°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: White/ Black
- LED Driver: With Non-Dimmable LED driver

Light Distribution

3000K



Finish



White (WW)



Black (BB)

Order Info


LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
6W	8W	220-240VAC	80	3000K	30°	500lm	LAKEPOINT F-830-30°	LAPF-8303008F-WW LAPF-8303008F-BB


Remark: With internal Non-Dimmable LED driver

ON-OFF | 109,00 €

LAKEPOINT Adjustable – Exterior LED Downlight








30° | 3000K | CRI >80 | ±30° Tiltable | IP65 | CE | CREE 50,000h@L80B10 | 3 YEAR GUARANTEE

Quick Info

- Ceiling Cut-out: Ø100mm
- CREE LED: 6W, CRI>80, 3000K
- Beam Angle: 30°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: White/ Black
- LED Driver: With Non-Dimmable LED driver

Light Distribution

3000K



Finish



White (WW)



Black (BB)

Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
6W	8W	220-240VAC	80	3000K	30°	500lm	LAKEPOINT A-830-30°	LAPA-8303008F-WW LAPA-8303008F-BB


Remark: With internal Non-Dimmable LED driver

ON-OFF | 139,00 €

BACK

SKYSURFER SSRC – IP65 LED Ceiling Light






36° | 3000K | CRI >90 | UGR<19 | IP65 | CE | CITIZEN 50,000h@L80B10

Quick Info

- CITIZEN LED: 8W, CRI>90, 3000K
- Beam Angle: 36°
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Black
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K



Order Info


LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
8W	10W	220-240VAC	90	3000K	36°	850lm	SSRC-10W	SSRC-9303610F-BN

Remark: With internal Non-Dimmable LED driver

ON-OFF 119,00 €

CARMEL – LED Ceiling Light






55° | 3000K | CRI >80 | UGR<19 | IP54 | IK07 | CE | CREE 50,000h@L80B10 | 3 YEAR GUARANTEE

Quick Info

- CREE LED: 5W, CRI>80, 3000K
- Beam Angle: 55°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP54
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5W	6W	220-240VAC	80	3000K	55°	500lm	CARMEL R-830-55°	CARR-8305506F-DN


Remark: With internal Non-Dimmable LED driver

ON-OFF 129,00 €

BACK

CLIFTON – LED Ceiling Light






110°
3000K
CRI >80
IP54
IK10
EDISON 50,000h@L80B10
3 YEAR GUARANTEE

Quick Info

- EDISON LED: 22W, CRI>80, 3000K
- Beam Angle: 110°
- Lumen Output: Up to 2350lm System Luminous Flux
- IP Class: IP54
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
22W	25W	220-240VAC	80	3000K	110°	2350lm	RIVA Round-830-110°	CLIF-830A125F-DN


Remark: With internal Non-Dimmable LED driver

ON-OFF 259,00 €

BACK

RIVA ROUND – LED Ceiling Light






110° | 3000K | CRI >80 | IP54 | CE | PHILIPS 50,000h@L80B10 | 3 YEAR GUARANTEE

Quick Info

- PHILIPS LED: 12W, CRI>80, 3000K
- Beam Angle: 110°
- Lumen Output: Up to 1150lm System Luminous Flux
- IP Class: IP54
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
12W	14W	220-240VAC	80	3000K	110°	1150lm	RIVR-14W-830-110°	RIVR-830A114F-DN


Remark: With internal Non-Dimmable LED driver

ON-OFF 209,00 €

BACK

RIVA SQURE – LED Ceiling Light








Quick Info

- PHILIPS LED: 12W, CRI>80, 3000K
- Beam Angle: 110°
- Lumen Output: Up to 1150lm System Luminous Flux
- IP Class: IP54
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
12W	14W	220-240VAC	80	3000K	110°	1150lm	RIVA Square-830-110°	RIVS-830A114F-DN


Remark: With internal Non-Dimmable LED driver

ON-OFF 209,00 €


CAMPSBAY – LED Wall Light




CAMPSBAY Single



CAMPSBAY Double









Quick Info

- CREE LED: 5W, 10W, CRI>80, 3000K
- CCT: 3000K Available as Standard
- Beam Angle: 45°
- Lumen Output: Up to 500lm/ 1000lm System Luminous Flux
- IP Class: IP54
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K





Order Info

ON-OFF	139,00 €
ON-OFF	159,00 €

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5W	6W	220-240VAC	80	3000K	45°	500lm	CAMPSBAY Single-830-45°	CAMS-8304506F-DN
10W	12W	220-240VAC	80	3000K	45°↑45°↓	1000lm	CAMPSBAY Double-830-45°	CAMD-8304512F-DN

Remark: With internal Non-Dimmable LED driver

BACK


LAGOON – LED Wall Light



100° □ 100° | 3000K | CRI >80 | IP65 | IK07 | CE | CREE 50,000h@L80B10 | 3 YEAR GUARANTEE


Quick Info

- CREE LED: 9W, CRI>80, 3000K
- Beam Angle: 100°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
9W	11W	220-240VAC	80	3000K	100°↓ 100°↑	950lm	LAGOON-830-110°	LAG-830A111F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF | 189,00 €


CRUZ D – LED Wall Light



120° □ 120° | 3000K | CRI >80 | IP65 | IK07 | OSRAM 50,000h@L80B10 | 3 YEAR GUARANTEE


Quick Info

- OSRAM LED: 12W, CRI>80, 3000K
- Beam Angle: 120°
- Lumen Output: Up to 1400lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
12W	14W	220-240VAC	80	3000K	120°↓ 120°↑	1400lm	CRUD-830-120°	CRUD-830A214F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF 119,00 €

BACK


CAPRI – LED Wall Light



100° □ 100° | 3000K | CRI >80 | IP65 | IK07 | CREE 50,000h@L80B10 | 3 YEAR GUARANTEE


Quick Info

- CREE LED: 14W, CRI>80, 3000K
- Beam Angle: 100°
- Lumen Output: Up to 1300lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K



Order Info


LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
14W	16W	220-240VAC	80	3000K	100°↓ 100°↑	1300lm	CAPRI-830-100°	CAPI-830A016F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF | 169,00 €

BAY – LED Wall Light






90°
90°
3000K
CRI >80
IP65
IK07
CE
CREE
50,000h@L80B10
GUARANTEE 3 YEAR

Quick Info

- CREE LED: 5W, CRI>80, 3000K
- Beam Angle: 90°
- Lumen Output: Up to 430lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5W	6W	220-240VAC	80	3000K	90°↓ 90°↑	430lm	BAY-830-90°	BAY-8309006F-DN


Remark: With internal Non-Dimmable LED driver

ON-OFF 129,00 €

BACK

NICE 250 – LED Wall Light






110° | 3000K | CRI >80 | IP65 | IK07 | PHILIPS 50,000h@L80B10 | 3 YEAR GUARANTEE


Quick Info

- PHILIPS LED: 5W,12W, CRI>80, 3000K
- Beam Angle: 110°
- Lumen Output: Up to 650lm/ 1300lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K





Order Info


LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5W	7W	220-240VAC	80	3000K	110°↓	650lm	NICE 250S-830-110°	N25S-830A107F-DN
12W	14W	220-240VAC	80	3000K	110°↓ 110°↑	1300lm	NICE 250D-830-110°	N25D-830A114F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF	169,00 €
ON-OFF	209,00 €

NICE 500 – LED Wall Light






110° | 3000K | CRI >80 | IP65 | IK07 | PHILIPS 50,000h@L80B10 | 3 YEAR GUARANTEE


Quick Info

- PHILIPS LED: 12W, 18W, CRI>80, 3000K
- Beam Angle: 110°
- Lumen Output: Up to 1300lm/ 1800lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K





Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code		
12W	14W	220-240VAC	80	3000K	110°↓	1300lm	NICE500S-830-110°	N50S-830A114F-DN	ON-OFF	239,00 €
18W	20W	220-240VAC	80	3000K	110°↓ 110°↑	1800lm	NICE500D-830-110°	N50D-830A120F-DN	ON-OFF	289,00 €

Remark: With internal Non-Dimmable LED driver

BACK


St.Tropez – Window Light



3° | 3000K | CRI >80 | IP65 | IK10 | CE | CREE 50,000h@L80B10 | 3 YEAR GUARANTEE


Quick Info

- EDISON LED: 4W, CRI>80, 3000K
- Beam Angle: 3°
- Lumen Output: Up to 300lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
4W	6W	220-240VAC	80	3000K	3°	300lm	St.Tropez-830-3°	STTZ-8300306F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF 229,00 €

BACK


CAPETOWN – Recessed LED Step Light




Capetown Round-Recessed



Capetown Square-Recessed






65° | 3000K | CRI >80 | IP65 | IK07 | CE | EDISON 50,000h@L80B10 | 3 YEAR GUARANTEE


Quick Info

- EDISON LED: 3W, CRI>80, 3000K
- Beam Angle: 65°
- Lumen Output: Up to 155lm/ 165lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K





Order Info

LED Power	System Power	Input	Cutout	CRI	CCT	Beam	System Output	Model	Code
3W	4.5W	220-240VAC	Ø110*55	80	3000K	65°	155lm	Capetown RR-830-65°	CTRR-8306505F-DN
3W	4.5W	220-240VAC	110*110*55	80	3000K	65°	165lm	Capetown SR-830-65°	CTSR-8306505F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF 119,00 €

BACK


CAPETOWN – Surface LED Step Light




Capetown Round-Surface



Capetown Square-Surface









Quick Info

- EDISON LED: 3W, CRI>80, 3000K
- Beam Angle: 65°
- Lumen Output: Up to 150lm/ 170lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K





Order Info


LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
3W	4.5W	220-240VAC	80	3000K	65°	150lm	Capetown RS-830-65°	CTRS-8306505F-DN
3W	4.5W	220-240VAC	80	3000K	65°	170lm	Capetown SS-830-65°	CTSS-8306505F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF 79,00 €

CALIFORNIA – LED Bollard Lamp





360° | 3000K | CRI >80 | IP65 | IK07 | CE | EDISON 50,000h@L80B10 | 3 YEAR GUARANTEE


Quick Info

- DISON LED: 11W, 17W, CRI>80, 3000K
- Beam Angle: Light Emission 360°
- Lumen Output: Up to 660m/ 1220lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver


Light Distribution

3000K

CALIFORNIA 12-13W-830-65°

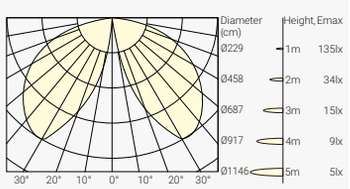

CALIFORNIA 16-19W-830-65°

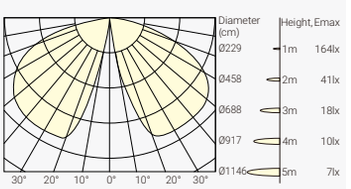

Order Info


		LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
ON-OFF	339,00 €	11W	13W	220-240VAC	80	3000K	65°	660lm	CALIFORNIA 12-830	CA12-830C613F-DN
ON-OFF	499,00 €	17W	19W	220-240VAC	80	3000K	65°	1220lm	CALIFORNIA 16-830	CA16-830C619F-DN

Remark: With internal Non-Dimmable LED driver

BACK

DURBAN – LED Bollard Lamp





270° | 3000K | CRI >80 | IP65 | IK10 | CE | EDISON 50,000h@L80B10 | 3 YEAR GUARANTEE


Quick Info

- EDISON LED: 5W, CRI>80, 3000K
- Beam Angle: Light Emission 270°
- Lumen Output: Up to 450lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K

DURBAN-6W-830-270°




Order Info


LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5W	6W	220-240VAC	80	3000K	270°	450lm	DURBAN-830	DURB-830B706F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF | 319,00 €

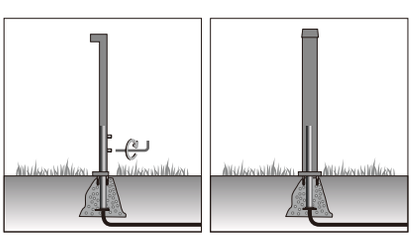


Anchorage installation

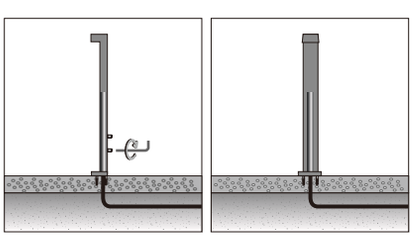

Surface installation

POSITANO – LED Bollard Lamp









Quick Info

- PHILIPS LED: 5W, CRI>80, 3000K
- Beam Angle: 50°
- Lumen Output: Up to 200lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K





Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5W	7W	220-240VAC	80	3000K	50°	200lm	POSITANO 300-830	PTO3-8305007F-DN
							POSITANO 600-830	PTO6-8305007F-DN

Remark: With internal Non-Dimmable LED driver


ON-OFF	289,00 €
ON-OFF	369,00 €


BACK

PORTOFINO – Projector Light



PORTOFINO S PORTOFINO L



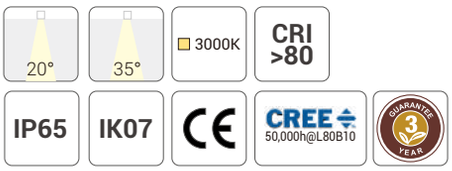



Quick Info

- CREE LED: 3W, 11W, CRI>80, 3000K
- Beam Angle: 20°, 35°
- Lumen Output: Up to 250lm/ 1050lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K





Accessory : Stake for PORTOFINO series projectors



Order Info


LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
3W	4W	220-240VAC	80	3000K	35°	250lm	PORTOFINO S-830-35°	PORS-8303504F-DN
11W	13W	220-240VAC	80	3000K	20°	1050lm	PORTOFINO L-830-20°	PORL-8302013F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF	139,00 €	PORS-8303504F-DN
ON-OFF	209,00 €	PORM-8303504F-DN
ON-OFF	259,00 €	PORD-8303504F-DN

PORTOFINO Adjustable – Beam Angle Zooming Projector Light






15-60° Zooming | 3000K | CRI >80 | IP65 | IK07 | CE | EDISON 50,000h@L80B10 | 3 YEAR GUARANTEE


Quick Info

- EDISON LED: 9W, CRI>80, 3000K
- Beam Angle: 15°-60° Zooming
- Lumen Output: Up to 450lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K






Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
9W	11W	220-240VAC	80	3000K	15°-60°	Max.450lm	PORTOFINO A-830-Z	PORA-830ZM11F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF 249,00 €


+60° 15°-

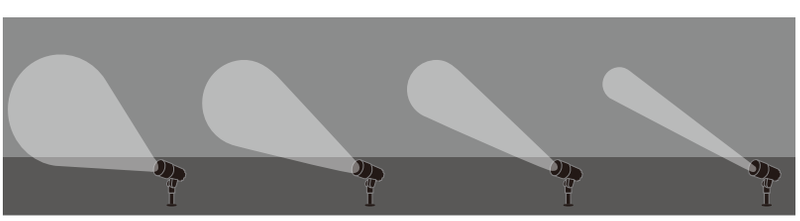

BACK

AFTER7 MINI – Projector Light



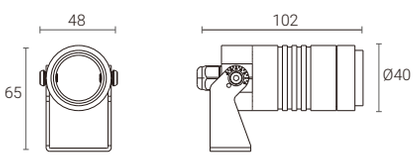

30° 45° 2700K 3000K CRI >80


IP67 IK08 CE CITIZEN 50,000h@L80B10 GUARANTEE 3 YEAR


Quick Info

- CITIZEN LED: 5W, CRI>80, 2700K, 3000K
- Beam Angle: 30°, 45°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)

Light Distribution

3000K





Versions



Without Snoot



Without Snoot (H)

Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5W	5.5W	24V	80	2700K	30°	480lm	AFTER7 Mini-827-30°	AFMI-8273006F-DN
					45°	480lm	AFTER7 Mini-827-45°	AFMI-8274506F-DN
					30°	450lm	AFTER7 Mini-82730°-H	AFMI-8273006F-DN-H
					45°	450lm	AFTER7 Mini-827-45°-H	AFMI-8274506F-DN-H
				3000K	30°	500lm	AFTER7 Mini-830-30°	AFMI-8303006F-DN
					45°	500lm	AFTER7 Mini-830-45°	AFMI-8304506F-DN
					30°	470lm	AFTER7 Mini-830-30°-H	AFMI-8303006F-DN-H
					45°	470lm	AFTER7 Mini-830-45°-H	AFMI-8304506F-DN-H

Remark: Remote 24VDC LED driver is required (Non-Dimmable)

Without Snoot:

ON-OFF(IP67) 159,00 €

Without Snoot (H):

ON-OFF(IP67) 179,00 €


Accessory : Stake for AFTER7 series projectors



BACK

AFTER7 MAXI – Projector Light



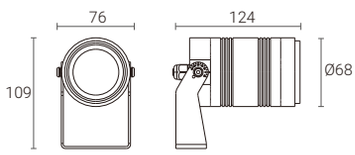

20° 30° 50° 2700K 3000K CRI >80


IP67 IK08 CE UKCA bridgelux. 50,000h@L80B10 GUARANTEE 3 YEAR


Quick Info


- Bridgelux LED: 9W, CRI>80, 2700K, 3000K
- Beam Angle: 20°, 30°, 50°
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)

Light Distribution

3000K







Versions



Without Snoot



Without Snoot (H)

Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
9W	10W	24V	80	2700K	20°	800lm	AFTER7 Maxi-827-20°	AFMA-8272010F-DN
					30°	800lm	AFTER7 Maxi-827-30°	AFMA-8273010F-DN
					50°	800lm	AFTER7 Maxi-827-50°	AFMA-8275010F-DN
					20°	750lm	AFTER7 Maxi-827-20°-H	AFMA-8272010F-DN
					30°	750lm	AFTER7 Maxi-827-30°-H	AFMA-8273010F-DN
					50°	750lm	AFTER7 Maxi-827-50°-H	AFMA-8275010F-DN
				3000K	20°	850lm	AFTER7 Maxi-830-20°	AFMA-8302010F-DN
					30°	850lm	AFTER7 Maxi-830-30°	AFMA-8303010F-DN
					50°	850lm	AFTER7 Maxi-830-50°	AFMA-8305010F-DN
					20°	800lm	AFTER7 Maxi-830-20°-H	AFMA-8302010F-DN
					30°	800lm	AFTER7 Maxi-830-30°-H	AFMA-8303010F-DN
					50°	800lm	AFTER7 Maxi-830-50°-H	AFMA-8305010F-DN

Remark: Remote 24VDC LED driver is required (Non-Dimmable)

Accessory : Stake for AFTER7 series projectors



Without Snoot:

ON-OFF(IP67) 329,00 €

Without Snoot (H):

ON-OFF(IP67) 349,00 €

BACK

NEPTUNE XSU CV – Projector Light

NEW




12° 18° 30° 50° 2700K 3000K CRI >80 UGR<19

IP67 CE OSRAM 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- OSRAM LED: 3W, CRI>80, 2700K, 3000K
- Beam Angle: 12°, 18°, 30°, 50°
- Lumen Output: Up to 150lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Remote 24VDC LED Driver to be Ordered Separately



Light Distribution

2700K

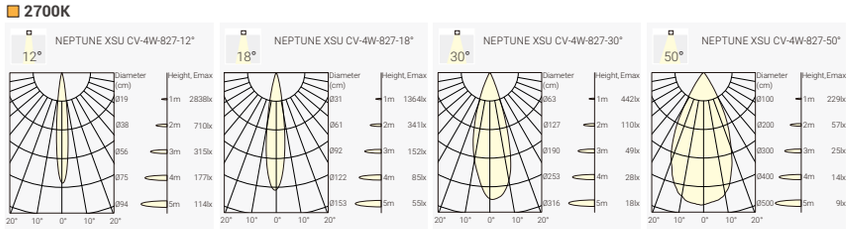

Accessory: Stake for NEPTUNE series projectors




Order Info

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
3W	4W	24VDC	80	2700K	12°	140lm	NEPTUNE XSU-4W-827-12°	NU1C-8271204N-DN
					18°	140lm	NEPTUNE XSU-4W-827-18°	NU1C-8271804N-DN
					30°	140lm	NEPTUNE XSU-4W-827-30°	NU1C-8273004N-DN
					50°	140lm	NEPTUNE XSU-4W-827-50°	NU1C-8275004N-DN
				3000K	12°	150lm	NEPTUNE XSU-4W-830-12°	NU1C-8301204N-DN
					18°	150lm	NEPTUNE XSU-4W-830-18°	NU1C-8301804N-DN
					30°	150lm	NEPTUNE XSU-4W-830-30°	NU1C-8303004N-DN
					50°	150lm	NEPTUNE XSU-4W-830-50°	NU1C-8305004N-DN

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

Optional Accessary



Honeycomb

Honeycomb: +9,00€

ON-OFF 129,00 €

NEPTUNE SU CV – Projector Light

NEW




8° 15° 30° 40° 2700K 3000K CRI >80 UGR<19

IP67 CE CREE 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- OSRAM LED: 4W, CRI>80, 2700K, 3000K
- Beam Angle: 8°, 15°, 30°, 40°
- Lumen Output: Up to 420lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Remote 24VDC LED Driver to be Ordered Separately



Light Distribution

2700K

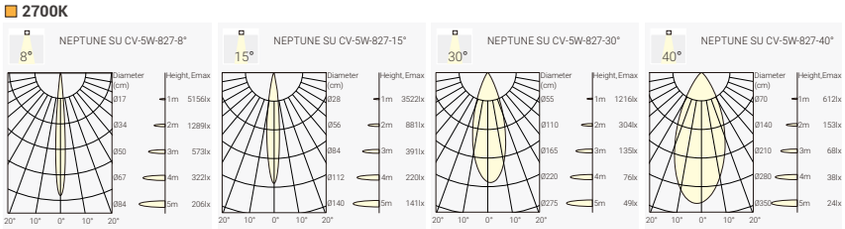

Accessory: Stake for NEPTUNE series projectors




Order Info

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
4W	5W	24VDC	80	2700K	8°	260lm	NEPTUNE SU-5W-827-8°	NU2C-8270805N-DN
				3000K	8°	280lm	NEPTUNE SU-5W-830-8°	NU2C-8300805N-DN
4.2W	5W	24VDC	80	2700K	15°	380lm	NEPTUNE SU-5W-827-15°	NU2C-8271505N-DN
					30°	380lm	NEPTUNE SU-5W-827-30°	NU2C-8273005N-DN
					40°	300lm	NEPTUNE SU-5W-827-40°	NU2C-8274005N-DN
				3000K	15°	420lm	NEPTUNE SU-5W-830-15°	NU2C-8301505N-DN
					30°	420lm	NEPTUNE SU-5W-830-30°	NU2C-8303005N-DN
					40°	350lm	NEPTUNE SU-5W-830-40°	NU2C-8304005N-DN

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

Optional Accessary



Honeycomb



Bevel Snoot



Straight Snoot

Honeycomb: +9,00€

ON-OFF 199,00 €

BACK

NEPTUNE MU CV – Projector Light

NEW




10° 20° 30° 50° | 2700K 3000K | CRI >80 | UGR<19

IP67 | CE | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CREE LED: 11W, CRI>80, 2700K, 3000K
- Beam Angle: 10°, 20°, 30°, 50°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Remote 24VDC LED Driver to be Ordered Separately



Light Distribution

2700K

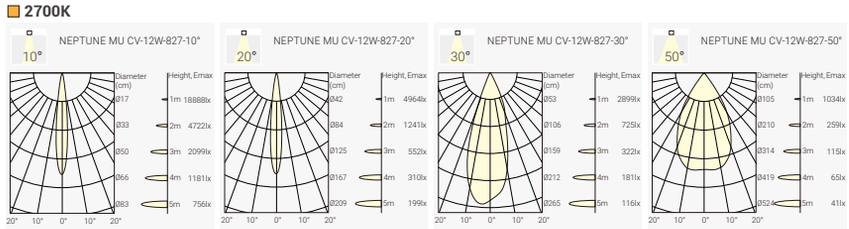

Accessory: Stake for NEPTUNE series projectors




Order Info

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
11W	12W	24VDC	80	2700K	10°	800lm	NEPTUNE MU-12W-827-10°	NU3C-8271012N-DN
					20°	850lm	NEPTUNE MU-12W-827-20°	NU3C-8272012N-DN
					30°	850lm	NEPTUNE MU-12W-827-30°	NU3C-8273012N-DN
					50°	800lm	NEPTUNE MU-12W-827-50°	NU3C-8275012N-DN
				3000K	10°	850lm	NEPTUNE MU-12W-830-10°	NU3C-8301012N-DN
					20°	950lm	NEPTUNE MU-12W-830-20°	NU3C-8302012N-DN
					30°	950lm	NEPTUNE MU-12W-830-30°	NU3C-8303012N-DN
					50°	850lm	NEPTUNE MU-12W-830-50°	NU3C-8305012N-DN

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver Remote 24VDC LED Driver to be Ordered Separately

Optional Accessary



Honeycomb



Bevel Snoot



Straight Snoot

Honeycomb: +9,00€

ON-OFF 289,00 €

NEPTUNE LU CV – Projector Light

NEW




10° 20° 30° 50° | 2700K 3000K | CRI >80 | UGR<19

IP67 | CE | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CREE LED: 16W, CRI>80, 2700K, 3000K
- Beam Angle: 10°, 20°, 30°, 50°
- Lumen Output: Up to 1600lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Remote 24VDC LED Driver to be Ordered Separately



Light Distribution

2700K

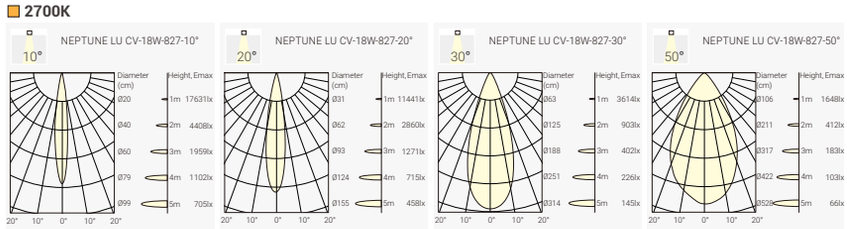

Accessory: Stake for NEPTUNE series projectors




Order Info

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
16W	18W	24VDC	80	2700K	10°	1400lm	NEPTUNE LU-18W-827-10°	NU4C-8271018N-DN
					20°	1450lm	NEPTUNE LU-18W-827-20°	NU4C-8272018N-DN
					30°	1450lm	NEPTUNE LU-18W-827-30°	NU4C-8273018N-DN
					50°	1400lm	NEPTUNE LU-18W-827-50°	NU4C-8275018N-DN
				3000K	10°	1500lm	NEPTUNE LU-18W-830-10°	NU4C-8301018N-DN
					20°	1600lm	NEPTUNE LU-18W-830-20°	NU4C-8302018N-DN
					30°	1600lm	NEPTUNE LU-18W-830-30°	NU4C-8303018N-DN
					50°	1500lm	NEPTUNE LU-18W-830-50°	NU4C-8305018N-DN

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

Optional Accessary



Honeycomb

Honeycomb: +9,00€

ON-OFF	369,00 €

BACK

NEPTUNE Base Version

Standard 24VDC Version
LED Driver Integrated Version Optional

Installation Possibilities:

1 -Rear Cable
2 -Metal Tube
3 -PVC Pipe
4 -Direct Cable
5 -Corrugated Tube
6 -Spike Mounted



NEPTUNE SR – Projector Light


NEW



15° 30° 40° | 2700K 3000K | CRI >80 | UGR<19 | IP66 | CE | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CREE LED: 4W, CRI>80, 2700K, 3000K
- Beam Angle: 15°, 30°, 40°
- Lumen Output: Up to 420lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input



Light Distribution


2700K

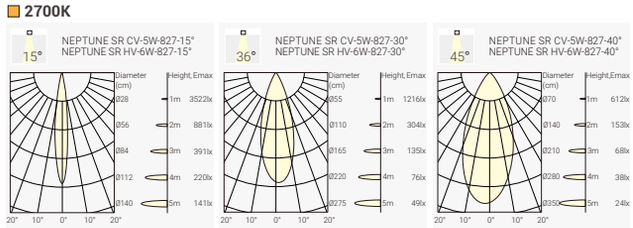

Accessory: Stake for NEPTUNE series projectors



Optional Accessary



Honeycomb



Bevel Snoot



Straight Snoot

Honeycomb: +9,00€
Bevel Snoot:
Straight Snoot:

Order Info

24VDC Verison

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
4W	5W	24VDC	80	2700K	15°	380lm	NEPTUNE SR CV-5W-827-15°	NR1C-8271505F-DN
					30°	380lm	NEPTUNE SR CV-5W-827-30°	NR1C-8273005F-DN
					40°	300lm	NEPTUNE SR CV-5W-827-40°	NR1C-8274005F-DN
				3000K	15°	420lm	NEPTUNE SR CV-5W-830-15°	NR1C-8301505F-DN
					30°	420lm	NEPTUNE SR CV-5W-830-30°	NR1C-8303005F-DN
					40°	350lm	NEPTUNE SR CV-5W-830-40°	NR1C-8304005F-DN

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

ON-OFF	189,00 €

LED Driver Integrated Version

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
4W	6W	220-240VAC	80	2700K	15°	380lm	NEPTUNE SR HV-6W-827-15°	NR1H-8271506F-DN
					30°	380lm	NEPTUNE SR HV-6W-827-30°	NR1H-8273006F-DN
					40°	300lm	NEPTUNE SR HV-6W-827-40°	NR1H-8274006F-DN
				3000K	15°	420lm	NEPTUNE SR HV-6W-830-15°	NR1H-8301506F-DN
					30°	420lm	NEPTUNE SR HV-6W-830-30°	NR1H-8303006F-DN
					40°	350lm	NEPTUNE SR HV-6W-830-40°	NR1H-8304006F-DN


Code Remark: F=(ON-OFF) **Remark**: On-Off LED Driver Integrated, 220~240VAC Input

ON-OFF	189,00 €

BACK

NEPTUNE MR – Projector Light

NEW

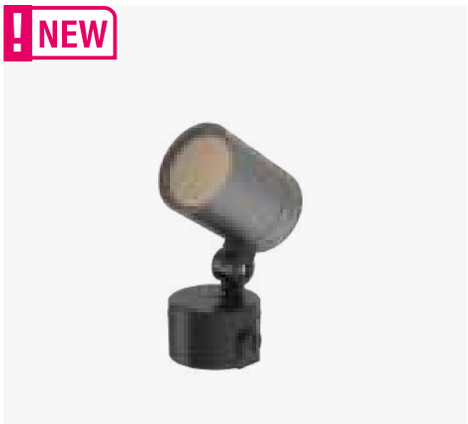


10° 20° 30° 50° 2700K 3000K CRI >80 UGR<19

IP66 CE CREE 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- CREE LED: 11W, CRI>80, 2700K, 3000K
- Beam Angle: 10°, 20°, 30°, 50°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input



Light Distribution

2700K

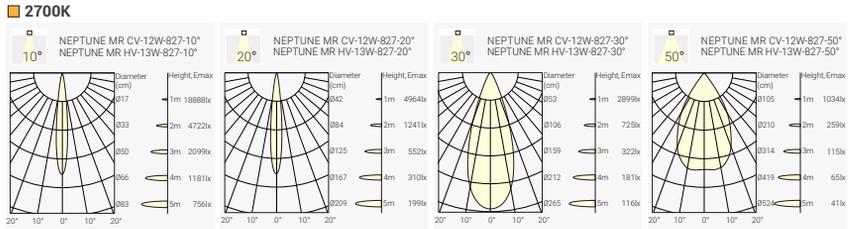

Accessory: Stake for NEPTUNE series projectors



Optional Accessary



Honeycomb



Bevel Snoot



Straight Snoot

Honeycomb: +9,00€

Order Info

24VDC Verison

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
11W	12W	24VDC	80	2700K	10°	800lm	NEPTUNE MR CV-12W-827-10°	NR2C-8271012F-DN
					20°	850lm	NEPTUNE MR CV-12W-827-20°	NR2C-8272012F-DN
					30°	850lm	NEPTUNE MR CV-12W-827-30°	NR2C-8273012F-DN
					50°	800lm	NEPTUNE MR CV-12W-827-50°	NR2C-8275012F-DN
				3000K	10°	850lm	NEPTUNE MR CV-12W-830-10°	NR2C-8301012F-DN
					20°	950lm	NEPTUNE MR CV-12W-830-20°	NR2C-8302012F-DN
					30°	950lm	NEPTUNE MR CV-12W-830-30°	NR2C-8303012F-DN
					50°	850lm	NEPTUNE MR CV-12W-830-50°	NR2C-8305012F-DN

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

ON-OFF 269,00 €

LED Driver Integrated Version


LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
11W	13W	220-240VAC	80	2700K	10°	800lm	NEPTUNE MR HV-13W-827-10°	NR2H-8271013F-DN
					20°	850lm	NEPTUNE MR HV-13W-827-20°	NR2H-8272013F-DN
					30°	850lm	NEPTUNE MR HV-13W-827-30°	NR2H-8273013F-DN
					50°	800lm	NEPTUNE MR HV-13W-827-50°	NR2H-8275013F-DN
				3000K	10°	850lm	NEPTUNE MR HV-13W-830-10°	NR2H-8301013F-DN
					20°	950lm	NEPTUNE MR HV-13W-830-20°	NR2H-8302013F-DN
					30°	950lm	NEPTUNE MR HV-13W-830-30°	NR2H-8303013F-DN
					50°	850lm	NEPTUNE MR HV-13W-830-50°	NR2H-8305013F-DN

Code Remark: F=(ON-OFF) **Remark**: On-Off LED Driver Integrated, 220~240VAC Input

ON-OFF 269,00 €

NEPTUNE LR – Projector Light

NEW

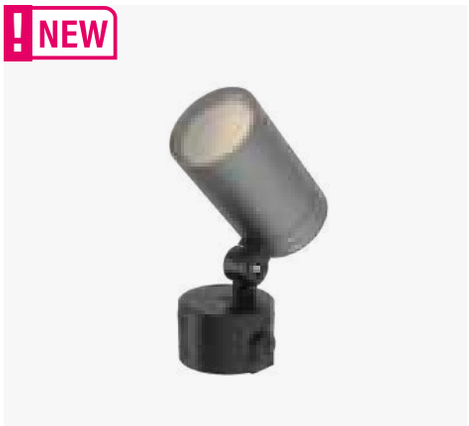


10° 20° 30° 50° | 2700K 3000K | CRI >80 | UGR<19

IP66 | CE | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CREE LED: 16W, CRI>80, 2700K, 3000K
- Beam Angle: 10°, 20°, 30°, 50°
- Lumen Output: Up to 1600lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input



Light Distribution


2700K

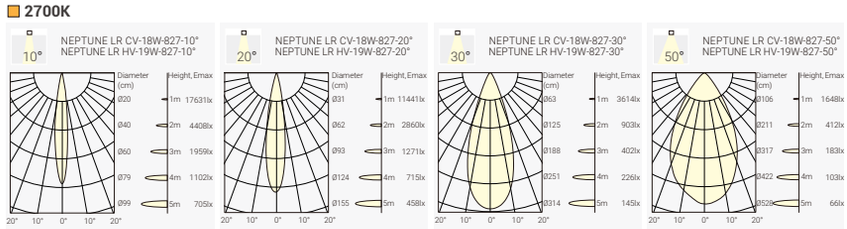

Accessory: Stake for NEPTUNE series projectors



Optional Accessary



Honeycomb

Honeycomb: +9,00€

Order Info

24VDC Verison

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
16W	18W	24VDC	80	2700K	10°	1400lm	NEPTUNE LR CV-18W-827-10°	NR3C-8271018F-DN
					20°	1450lm	NEPTUNE LR CV-18W-827-20°	NR3C-8272018F-DN
					30°	1450lm	NEPTUNE LR CV-18W-827-30°	NR3C-8273018F-DN
					50°	1400lm	NEPTUNE LR CV-18W-827-50°	NR3C-8275018F-DN
				3000K	10°	1500lm	NEPTUNE LR CV-18W-830-10°	NR3C-8301018F-DN
					20°	1600lm	NEPTUNE LR CV-18W-830-20°	NR3C-8302018F-DN
					30°	1600lm	NEPTUNE LR CV-18W-830-30°	NR3C-8303018F-DN
					50°	1500lm	NEPTUNE LR CV-18W-830-50°	NR3C-8305018F-DN

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

ON-OFF 329,00 €

LED Driver Integrated Version

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
16W	19W	220-240VAC	80	2700K	10°	1400lm	NEPTUNE LR HV-19W-827-10°	NR3H-8271019F-DN
					20°	1450lm	NEPTUNE LR HV-19W-827-20°	NR3H-8272019F-DN
					30°	1450lm	NEPTUNE LR HV-19W-827-30°	NR3H-8273019F-DN
					50°	1400lm	NEPTUNE LR HV-19W-827-50°	NR3H-8275019F-DN
				3000K	10°	1500lm	NEPTUNE LR HV-19W-830-10°	NR3H-8301019F-DN
					20°	1600lm	NEPTUNE LR HV-19W-830-20°	NR3H-8302019F-DN
					30°	1600lm	NEPTUNE LR HV-19W-830-30°	NR3H-8303019F-DN
					50°	1500lm	NEPTUNE LR HV-19W-830-50°	NR3H-8305019F-DN


Code Remark: F=(ON-OFF) **Remark**: On-Off LED Driver Integrated, 220~240VAC Input

ON-OFF 329,00 €

BACK

TERARACE MICRO – Recessed Ground Light





18° 40° 65° 2700K 3000K CRI >80


IP67 IK08 CE OSRAM 50,000h@L80B10 GUARANTEE 3 YEAR


Quick Info


- OSRAM LED: 1W, CRI>80, 2700K, 3000K
- Beam Angle: 18°, 40°, 40°
- Lumen Output: Up to 100lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)

Light Distribution

3000K







Accessory: Pre-embedded Tube



Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
1W	1.5W	24V	80	2700K	18°	90lm	TERARACE Micro-827-18°	TEMI-8271802F-DN
					40°	90lm	TERARACE Micro-827-40°	TEMI-8274002F-DN
					65°	90lm	TERARACE Micro-827-65°	TEMI-8276502F-DN
				3000K	18°	100lm	TERARACE Micro-830-18°	TEMI-8301802F-DN
					40°	100lm	TERARACE Micro-830-40°	TEMI-8304002F-DN
					65°	100lm	TERARACE Micro-830-65°	TEMI-8306502F-DN


Remark: Remote 24VDC LED driver is required (Non-Dimmable)

ON-OFF (IP65) 109,00 €

BACK

TERARACE NANO – Recessed Ground Light





18° 35° 60° 2700K 3000K CRI >80


IP67 IK08 CE OSRAM 50,000h@L80B10 GUARANTEE 3 YEAR


Quick Info


- OSRAM LED: 1.6W, CRI>80, 2700K, 3000K
- Beam Angle: 18°, 35°, 60°
- Lumen Output: Up to 120lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)

Light Distribution

3000K







Accessory: Pre-embedded Tube



Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
1.6W	2W	24V	80	2700K	18°	110lm	TERARACE Nano-827-18°	TEMI-8271802F-DN
					35°	110lm	TERARACE Nano-827-35°	TEMI-8273502F-DN
					60°	110lm	TERARACE Nano-827-60°	TEMI-8276002F-DN
				3000K	18°	120lm	TERARACE Nano-830-18°	TEMI-8301802F-DN
					35°	120lm	TERARACE Nano-830-35°	TEMI-8303502F-DN
					60°	120lm	TERARACE Nano-830-60°	TEMI-8306002F-DN


Remark: Remote 24VDC LED driver is required (Non-Dimmable)

ON-OFF (IP65) 139,00 €

BACK

TERARACE MINI – Recessed Ground Light





30° 45° 2700K 3000K CRI >80


IP67 IK10 CE CITIZEN 50,000h@L80B10 GUARANTEE 3 YEAR


Quick Info

- CITIZEN LED: 5 W, CRI>80, 2700K, 3000K
- Beam Angle: 30°, 45°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)

Light Distribution

3000K





Accessory: Pre-embedded Tube



Order Info


LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5W	5.5W	24V	80	2700K	30°	480lm	TERARACE Mini-827-30°	TEMI-8273006F-DN
					45°	480lm	TERARACE Mini-827-45°	TEMI-8274506F-DN
				3000K	30°	500lm	TERARACE Mini-830-30°	TEMI-8303006F-DN
					45°	500lm	TERARACE Mini-830-45°	TEMI-8304506F-DN

Remark: Remote 24VDC LED driver is required (Non-Dimmable)

ON-OFF (IP65) 189,00 €

TERARACE MAXI – Recessed Ground Light





20° 30° 50° 2700K 3000K CRI >80


IP67 IK10 CE bridgelux 50,000h@L80B10 GUARANTEE 3 YEAR


Quick Info


- CITIZEN LED: 9W, CRI>80, 2700K, 3000K
- Beam Angle: 20°, 30°, 45°
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)

Light Distribution

3000K







Accessory: Pre-embedded Tube



Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
9W	10W	24V	80	2700K	20°	850lm	TERARACE Maxi-827-20°	TEMA-8272010F-DN
					30°	850lm	TERARACE Maxi-827-30°	TEMA-8273010F-DN
					50°	850lm	TERARACE Maxi-827-50°	TEMA-8275010F-DN
				3000K	20°	850lm	TERARACE Maxi-830-20°	TEMA-8302010F-DN
					30°	850lm	TERARACE Maxi-830-30°	TEMA-8303010F-DN
					50°	850lm	TERARACE Maxi-830-50°	TEMA-8305010F-DN


Remark: Remote 24VDC LED driver is required (Non-Dimmable)

ON-OFF (IP65) 309,00 €

BACK

Partnerschaft/Partnership

- Headquarters
- Factory
- German Office / Warehouse
- N. America
- UK Office
- France Office
- Beijing Office
- Shanghai Office
- Distributor

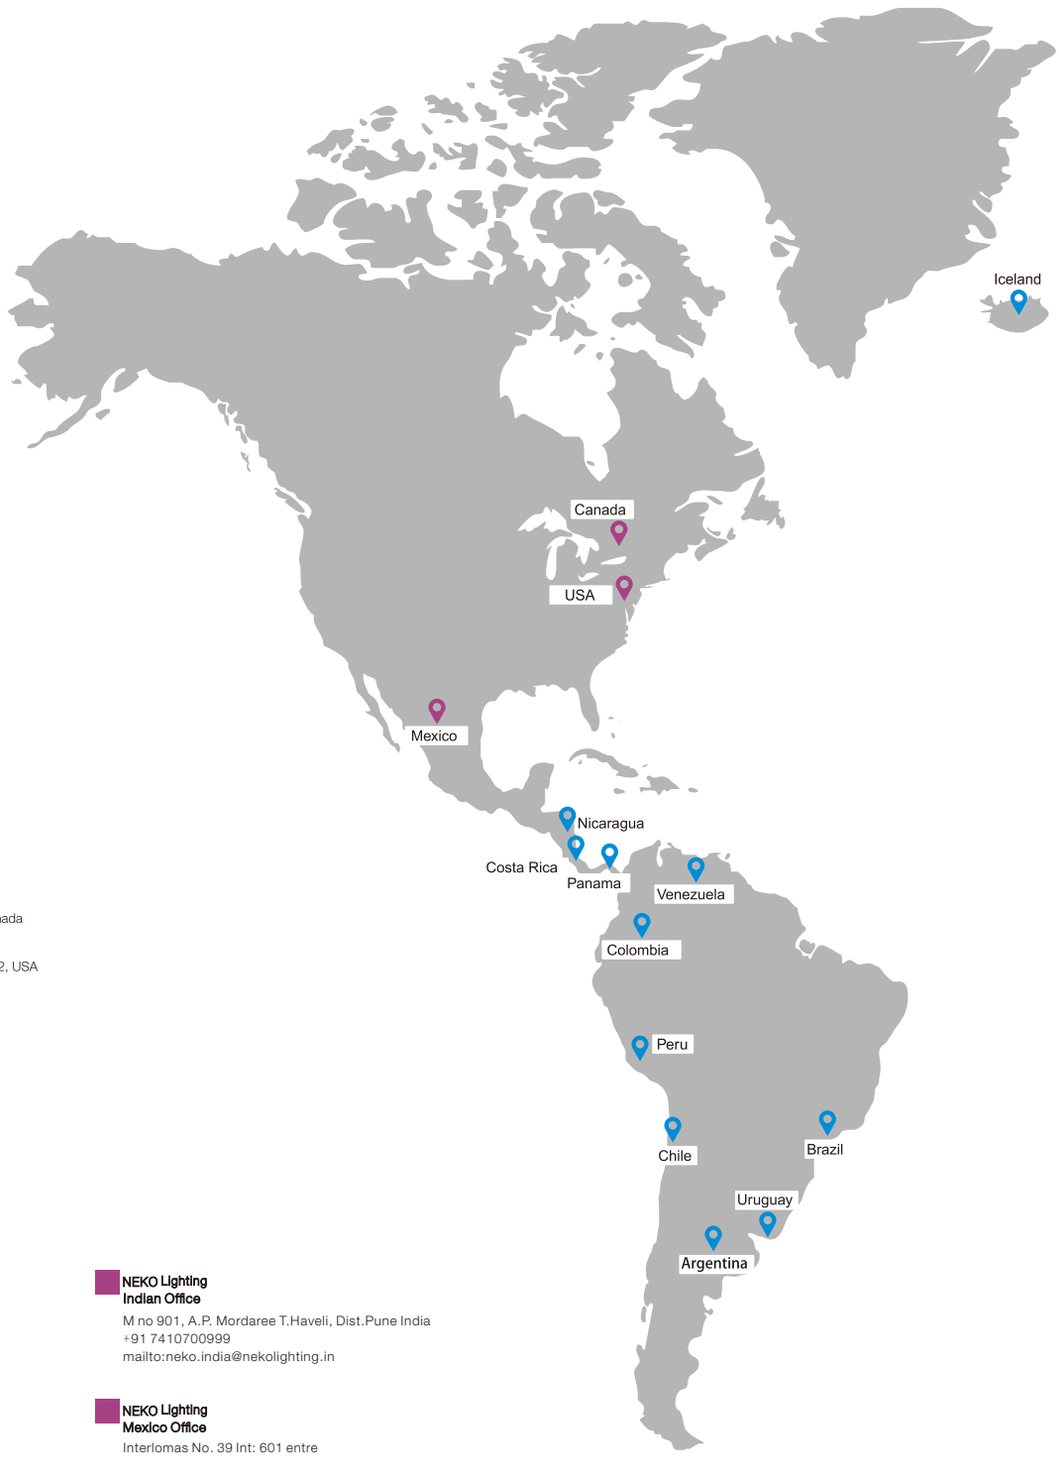

NEKO LIGHTING AG

Switzerland Headquarters
Kreuzstrasse 2, CH-8008 Zürich, Switzerland
Tel: +41 44 451 80 15
sales@nekolighting.com
www.nekolighting.com

NEKO LIGHTING LTD.

China Factory
Huizhou, P.R.China | P.C.: 516057
Tel: +86 755 3669 7712
sales@nekolighting.com
www.nekolighting.com

NEKO LIGHTING GmbH

German Office / Warehouse
Lange Reihe 170, 59071 Hamm, Germany
Tel: +49 2381 8770960
sales@nekolighting.de
www.nekolighting.de

NEKO LIGHTING INC.

Canada Office
3025 Bates Road, Montreal, QC H3S 2W8, Canada

USA Office
132 32nd Street, Suite 313, Brooklyn, NY 11232, USA
Tel: +1 855 LED NEKO (533 6356)
sales@nekolighting.com

NEKO Lighting Ltd.
UK Office
6C Calderdale Business Park, Club Lane,
Ovenden, Halifax, Hx2 8DB
andy@nekolightinguk.com
www.nekolighting.com

NEKO Lighting
France Office
41 rue des dames – 75017 Paris
+33 1 44 50 20 30
sales@nekolighting.fr
www.nekolighting.com

NEKO Lighting Middle East

1905-55 Prism Tower, Business Bay, Dubai
Tel: +971 50 2426 911
david@nekolighting.com

NEKO Beijing Office

Room 218, Huaxi Loft, 5th Da Yang Fang Road,
Chaoyang District, Beijing, P.R.China
Tel: +86 173 2681 1100
sales@nekolighting.com


NEKO Shanghai Office

Haiyang Building Room 2811, No. 550, Yan'an East Road,
Huangfu District, Shanghai, P.R.China
Tel: +86 189 2602 8927
jonson@nekolighting.com

NEKO Lighting
Indian Office
M no 901, A.P. Mordaree T.Haveli, Dist.Pune India
+91 7410700999
mailto:neko.india@nekolighting.in

NEKO Lighting
Mexico Office
Interlomas No. 39 Int: 601 entre
Calle Via magna y Calle Magno Centro,
Col. La Herradura,
CP: 52784, Huixquilucan,
Estado de México, México
administracion@nekolighting.com.mx

NEKO Lighting
Singapore Office
The Quartz, Singapore
+65 96442381
Jeremy@nekolighting.com

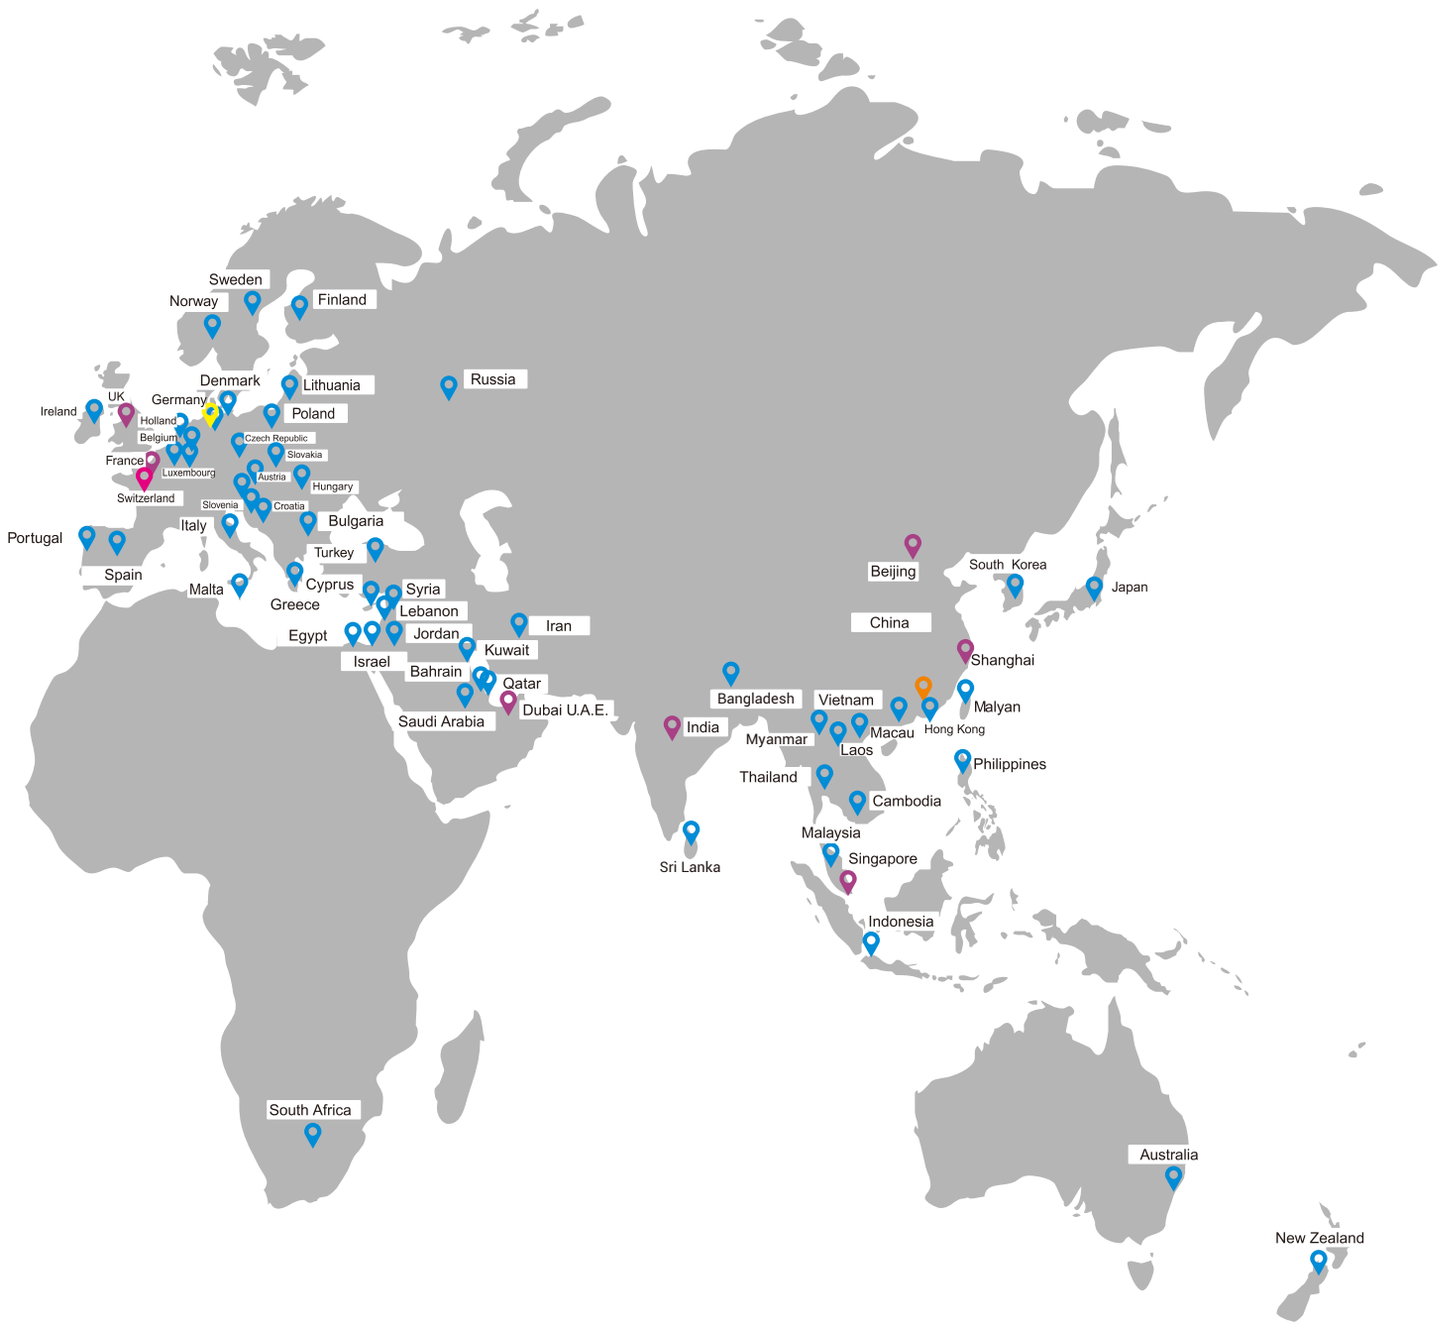
Sweden
Norway
Finland
Denmark
Lithuania
Russia
Ireland
UK
Germany
Holland
Poland
Belgium
Czech Republic
France
Slovakia
Luxembourg
Austria
Hungary
Switzerland
Slovenia
Croatia
Italy
Bulgaria
Portugal
Turkey
Spain
Malta
Cyprus
Greece
Syria
Lebanon
Egypt
Jordan
Iran
Israel
Kuwait
Bahrain
Qatar
Saudi Arabia
Dubai U.A.E.
Beijing
South Korea
Japan
China
Shanghai
Bangladesh
Vietnam
Malyan
India
Myanmar
Macau
Hong Kong
Laos
Philippines
Thailand
Cambodia
Malaysia
Singapore
Sri Lanka
Indonesia
South Africa
Australia
New Zealand

NEKO COLORS

Standard white & standard black of NEKO products

RAL 9016	TRAFFIC WHITE
RAL 9005	JET BLACK

Besides standard colors as mentioned in the catalogue, any individual RAL classic color can be custom made.

Details for your individual colors

Have the freedom of design a wide range of NEKO products, can now be ordered in any RAL classic color for indoor lighting

The individual color can be produced for you with a reasonable surcharge.

For this customized color the delivery times will be a bit longer.

Please ask our NEKO sales team to support you.



INDEX

MINUX Series



MINUX 38
■003



MINUX 44
■004



MINUX 57
■005

SENSE 45 Series



S45R1
■009



S45S1
■010

SENSE 55 Series



S55R1-G2
■011

SENSE 68 Series



S68R1-G2
■013-014



S68S1-G2
■015-016

SENSE 75 Series



S75R1-G2
■017

SENSE 100 Series



S100R1-G2
■019-020



S100S1-G2
■021-022



S100HR1-G2
■023



S100HS1-G2
■024



S100R7-G2
■025



S100HR7-G2
■026



S100R2-G2
■027



S100HR2-G2
■028




S100S2-G2
■029



S100HS2-G2
■030

SENSE 125 Series



S125R1-G2
■031



S125S1-G2
■032




S125R2-G2
■033



S125S2-G2
■034


SENSE 150 Series



S150R1-G2
■035



S150S1-G2
■036



S150R2-G2
■037



S150S2-G2
■038

SENSE New Wall Washer Series

! NEW



SENSE W75
■043



SENSE W100
■044

TAKEO Round Series



T75
■047



T100 Pro
■048-050



T150 Pro
■051-052



T200 Pro
■053-054



T150C Pro
■055


TAKEO Square Series



TS68
■057



TS100 Pro
■058



TS150 Pro
■059




TS200 Pro
■060

VISION Series



VISION V68
■063



VISION V68W
■064

PASSION Series

! NEW



PASSION 100
■067



PASSION 150
■068



PASSION 200
■069

NEKO Code Introduction

[Code_Prefix]-[Electrical-optical Info.]-[Color Info]-[Accessories]

******	-	*	**	**	**	*	-	*	*	-	*
SSR1G2	-	9	30	45	18	D	-	W	S	-	H
Acronym of Model		CRI	CCT	Beam Angle	Power	Lighting Control		Fixture Color	Reflector / Decoration Ring Color		Accessories

SSR1G2-9304518D-WS-H
- SENSE100-G2, Round Trim, Adjustable Version,
- CRI90, CCT3000K, Beam 45°, 18W, DALI Control,
- White Trim, Specular 2nd Reflector,
- with Honeycomb.


CLUB LED Module



M1
■073



M2
■074



M3
■075-076



M4
■077-078



M4 Pro
■079-082

CLUB Trim Series



TA5



TA6



TA7



TA8



TF5



TRF1-IP44



TA5-IP65



TSF1



TSA1



TSA2



TSA3



TSA1D
■083-090




TSA2D



TSA3D

SKYJACK Series



SKYJACK A68
■093-094



SKYJACK D
■095-096



SKYJACK F
■097



SKYJACK A145
■098

KENZO Series



K1X30
■101

K1X55
■102

K1X70
■103

FUSION Fixed



FUSION FF1
■107



FUSION FF2
■108



FUSION FF3
■109



FUSION FF4
■110



FUSION FF5
■111



FUSION FF10
■112

FUSION Fixed IP65

NEW



FUSION FF2-IP65
■113



FUSION FF3-IP65
■114



FUSION FF5-IP65
■115



FUSION FF10-IP65
■116

FUSION Adjustable



FUSION FA5
■117



FUSION FA10
■119

FUSION Fixed Trimless



FUSION FFT5
■111



FUSION FFT10
■112

FUSION Wall Washer



FUSION FW5
■120



FUSION FW10
■121

FUSION General Light



FUSION FG5
■123



FUSION FG10
■124

FUSION Adjustable Spotlight



FUSION FS1
■125



FUSION FS2
■126



FUSION FS3
■127



FUSION FS6
■128



FUSION FF3-FS1
■129



FUSION FF6-FS2
■130

FUSION G2 Fixed

NEW



FUSION G2 FF1
■131



FUSION G2 FF2
■132



FUSION G2 FF3
■133



FUSION G2 FF5
■134




FUSION G2 FF10
■135

FUSION G2 Trimless Fixed

NEW



FUSION G2 FFT5
■134




FUSION G2 FFT10
■135

FUSION G2 Adjustable

NEW




FUSION G2 FA5
■136




FUSION G2 FA10
■137

FUSION Linear System

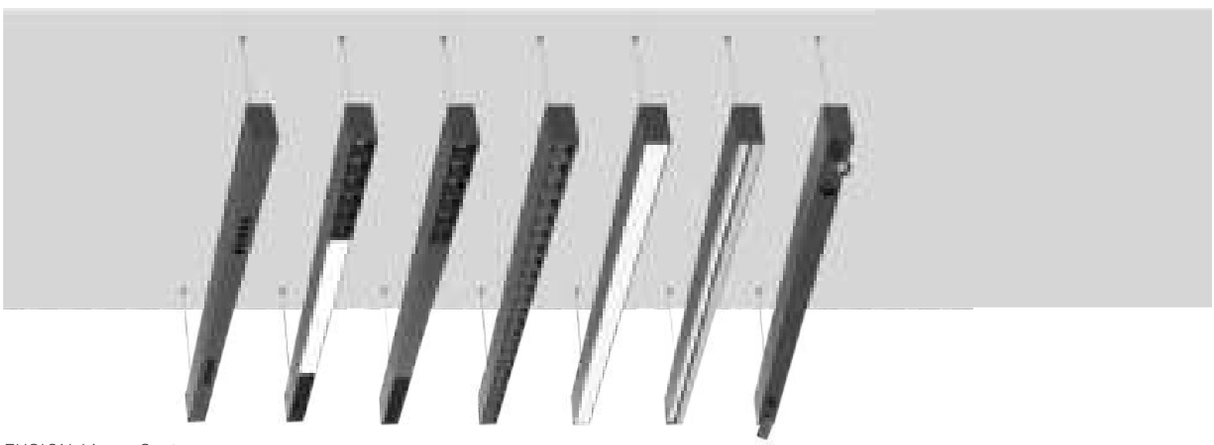

FUSION Linear System
■141-154

SPACE 60 Linear System

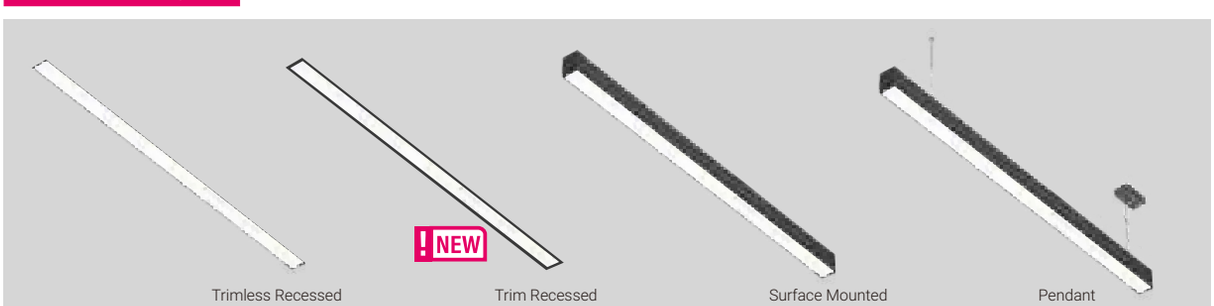

SPACE 60 Linear System
■157-162

DASH Smart Series

NEW




DSD26
■169



DSO26
■170



InTrack Driver
■171



DSC12
■173



DSP12
■174




DS1R12
■175



DSR625
■176

MODULINE 05 24V Linear System NEW

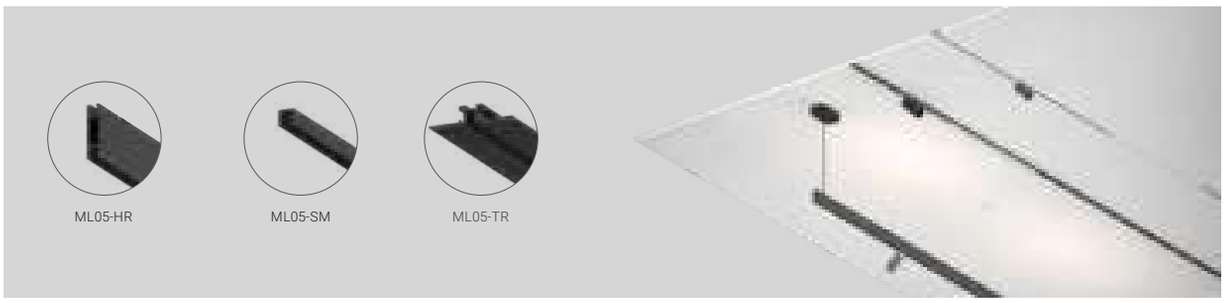

MODULINE 05 Linear System
■181-186

MODULINE 26 48V Linear System



MODULINE 26 Linear System
■191-254

GAME Ceiling Light Series



GAME
■257-262

SUGAR Ceiling Light Series



SUGAR
■263-266

GLAMOR Ceiling Light Series



GLAMOR
■269-272

MINT Ceiling Light Series



MINT 280
■275-277

MINT 420
■279-281

SKY Family Ceiling Light



SKYDRIVER SDRC
■285

SKYDRIVER SDSC
■286



SKYJOY Single SJSC
■287-288

SKYJOY Double SJDC
■289-290




SKYLINE SL5C
■291

MIU Series



MIU-C M
■297

MIU-C L
■298

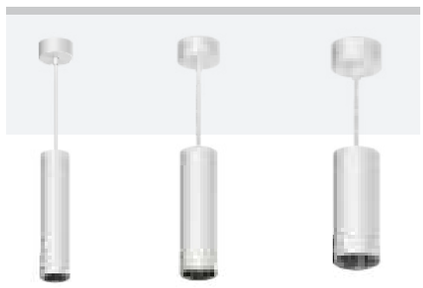

MIU-P S
■299

MIU-P M
■300

MIU-P L
■301

MIU Art Series

NEW



MIU Art-S
■305

MIU Art-M
■306

BREEZE Series




BREEZE Single
■309

BREEZE Double
■310

BREEZE Triple
■311

VIBES Series

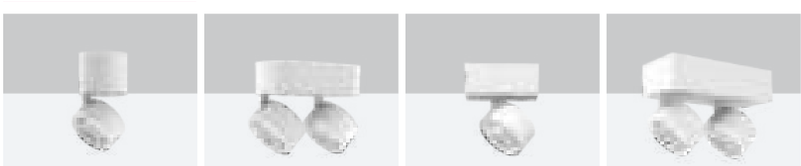

V1RC
■315

V2RC
■316

V1SC
■317

V2SC
■318



V1RR
■319

V2RR
■320

V1SR
■321

V2SR
■322

Ceiling Mounted PURE Series



PURE Art-C
■325



PURE S-C
■326

PURE Series Tracklight



PURE ART
■329

PURE S
■330-331

PURE M
■332-333

ROXY Series Tracklight



ROXY ART
■337-338

ROXY S
■339-340

ROXY K
■341-342

Zooming
ROXY Art-Z
■343

Zooming
ROXY S-Z
■344

INLINE Series Tracklight



INLINE ST
■347

INLINE SP
■348

INDEX

SEAPOINT Series



SEAPOINT
■355

LAKEPOINT Series



LAKEPOINT Fixed
■356



LAKEPOINT Adjustable
■357

CARMEL Series



SKYSURFER SSRC
■358



CARMEL Round
■359

CLIFTON Series



CLIFTON
■360

RIVA Series



RIVA Round
■361



RIVA Square
■362

CAMPSBAY Series



CAMPSBAY Single
■363



CAMPSBAY Double

LAGOON Series



LAGOON
■364

CRUZ D Series



CRUZ D
■365

CAPRI Series



CAPRI
■366

BAY Series




BAY
■367

NICE Series



NICE 250S & NICE 250D
■368



NICE 500S & NICE 500D
■369

St.Tropez Series



St.Tropez
■370

Capetown-Recessed Series




Capetown Round-Recessed
■371



Capetown Square-Recessed

Capetown-Surface Series




Capetown Round-Surface
■372




Capetown Square-Surface

CALIFORNIA Series

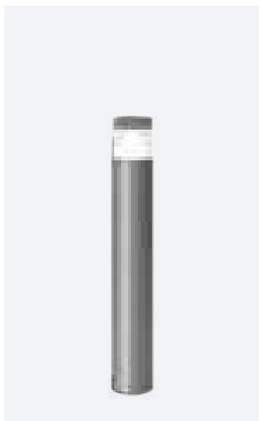

CALIFORNIA 12
■373

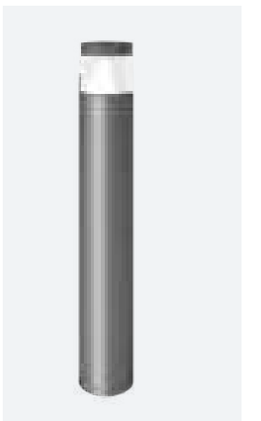


CALIFORNIA 16

DURBAN Series




DURBAN
■374

POSITANO Series

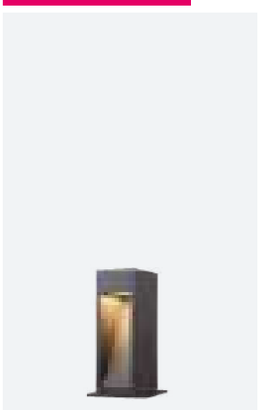


POSITANO 300
■375

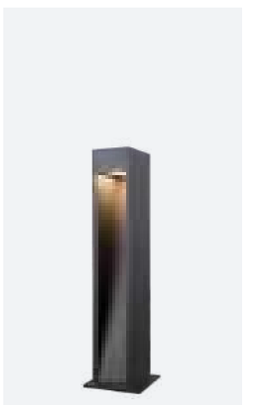


POSITANO 600

PORTOFINO Series



PORTOFINO S
■376



PORTOFINO L



PORTOFINO Adjustable
■377

AFTER7 Series



AFTER7 Mini
■378




AFTER7 Maxi
■379

NEPTUNE Series



NEPTUNE XSU CV
■380




NEPTUNE SU CV
■381



NEPTUNE MU CV
■382



NEPTUNE LU CV
■383



NEPTUNE SR CV
NEPTUNE SR HV
■385



NEPTUNE MR CV
NEPTUNE MR HV
■386



NEPTUNE LR CV
NEPTUNE LR HV
■387

TERARACE Series



TERARACE Micro
■388



TERARACE Nano
■389



TERARACE Mini
■390




TERARACE Maxi
■391


MINUX

The Slim Powerful Fixed Downlight




MINUX 38 – The Slim & Powerful Fixed Downlight Series

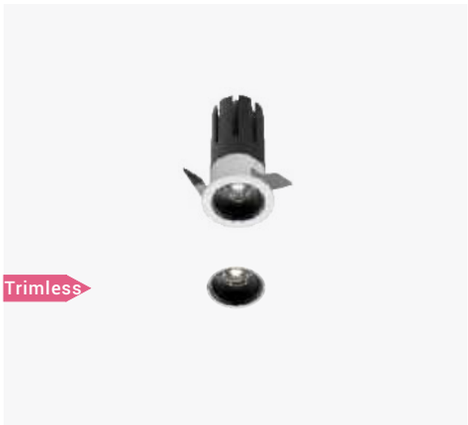

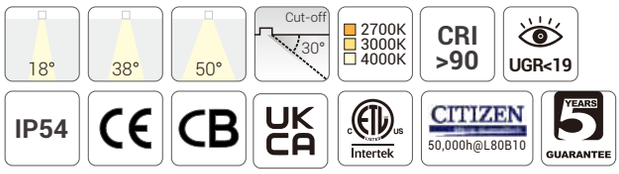


Quick Info

- Ceiling Cut-out: Ø38mm for Trim Version
- Trimless Version also available
- CITIZEN LED: 6W, CRI>90
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: 18°(UGR<19), 38°(UGR<19), 50°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

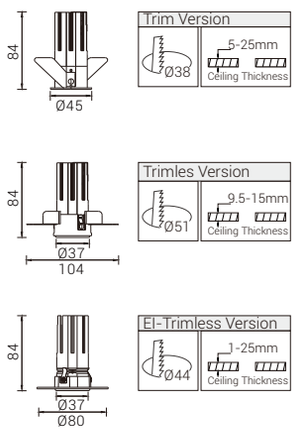

Light Distribution

■ **3000K**

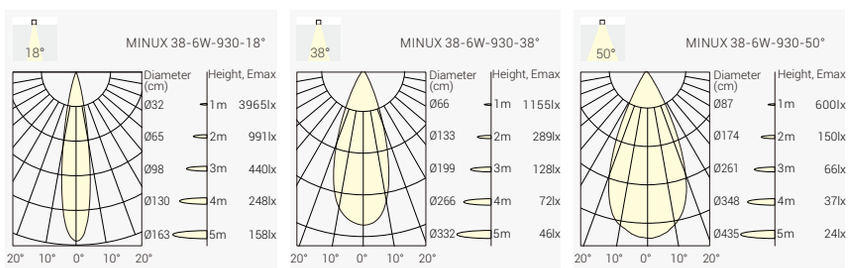

Order Info (MINUX 38 Trim Version in white Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	12 V	500 mA	90	2700K	18°	500lm	420lm	MIF3-9271806N-WC
						38°	500lm	420lm	MIF3-9273806N-WC
						50°	500lm	420lm	MIF3-9275006N-WC
					3000K	18°	550lm	450lm	MIF3-9301806N-WC
						38°	550lm	450lm	MIF3-9303806N-WC
						50°	550lm	450lm	MIF3-9305006N-WC
					4000K	18°	600lm	500lm	MIF3-9401806N-WC
						38°	600lm	500lm	MIF3-9403806N-WC
						50°	600lm	500lm	MIF3-9405006N-WC

No Driver	69,00 €
ON-OFF	79,00 €
Phase Dim	89,00 €
DALI Dim	99,00 €

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Trimless Version:
Trimless: +10,00€

Reflector Options



Dark Light Black Matt White Gold

Optional accessary



Honeycomb

Code for MIF3-9305006N-WM with Honeycomb
MIF3-9305006N-WM-H

Honeycomb: +9,00€



Soft Ceiling Protection Ring
* for Trim Version ONLY


Coding


MIF3 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
MIF3 MINUX 38 Trim Verssion	**927** CRI90/ 2700K	**18** 18°	**06** 6W	**N** No Driver	**W** White	**C** Dark Light	**H** Honeycomb
MIT3 MINUX 38 Trimless Version	**930** CRI90/ 3000K	**38** 38°		**F** On-Off	**B** Black	**B** Black	
MIE3 MINUX 38 EI-Trimless Version	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**M** Matt	
				A 1-10V Dim		**W** White	
				D DALI Dim		**G** Gold	

BACK

MINUX 44 – The Slim & Powerful Fixed Downlight Series

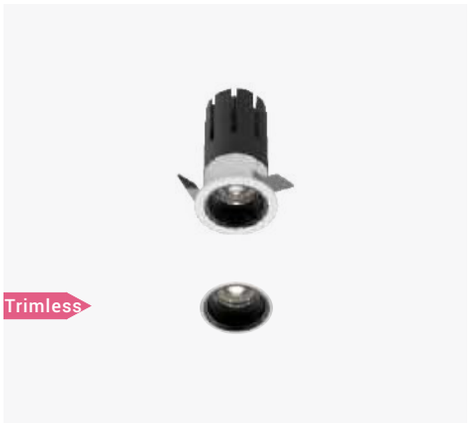

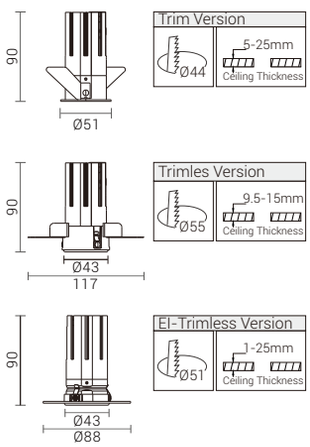

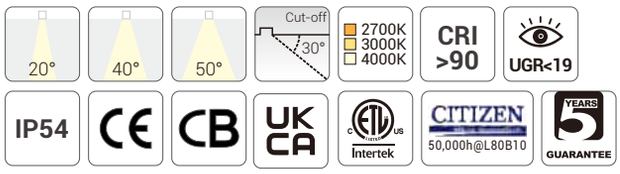


Quick Info

- Ceiling Cut-out: Ø44mm for Trim Version
- Trimless Version also available
- CITIZEN LED: 9W, CRI>90
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: 20°(UGR<19), 40°(UGR<19), 50°
- Lumen Output: Up to 900lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K

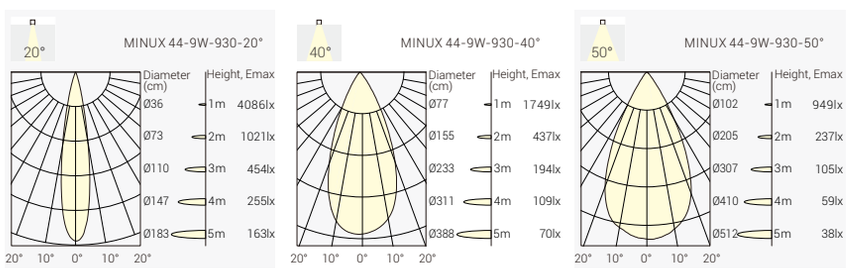

Order Info (MINUX 44 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	36 V	250 mA	90	2700K	20°	950lm	800lm	MIF4-9272009N-WC
						40°	950lm	800lm	MIF4-9274009N-WC
						50°	950lm	800lm	MIF4-9275009N-WC
					3000K	20°	1000lm	850lm	MIF4-9302009N-WC
						40°	1000lm	850lm	MIF4-9304009N-WC
						50°	1000lm	850lm	MIF4-9305009N-WC
					4000K	20°	1050lm	900lm	MIF4-9402009N-WC
						40°	1050lm	900lm	MIF4-9404009N-WC
						50°	1050lm	900lm	MIF4-9405009N-WC

No Driver	69,00 €
ON-OFF	79,00 €
Phase Dim	109,00 €
DALI Dim	129,00 €

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Trimless Version:
Trimless: +10,00€

Reflector Options



Matt Dark Light Black White Gold

Optional accessary



Honeycomb

Code for MIF4-9305009N-WM with Honeycomb
MIF4-9305009N-WM-H

Honeycomb: +9,00€




Soft Ceiling Protection Ring
* for Trim Version ONLY


Coding


MIF4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
MIF4 MINUX 44 Trim Verssion	**927** CRI90/ 2700K	**20** 20°	**09** 9W	**N** No Driver	**W** White	**C** Dark Light	**H** Honeycomb
MIT4 MINUX 44 Trimless Version	**930** CRI90/ 3000K	**40** 40°		**F** On-Off	**B** Black	**B** Black	
MIE4 MINUX 44 El-Trimless Version	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**M** Matt	
				A 1-10V Dim		**W** White	
				D DALI Dim		**G** Gold	

MINUX 57– The Slim & Powerful Fixed Downlight Series

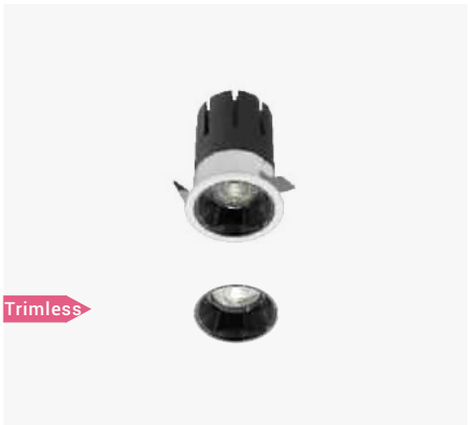

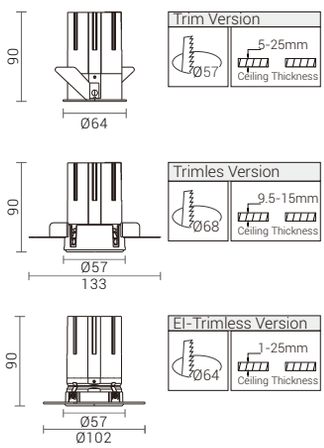

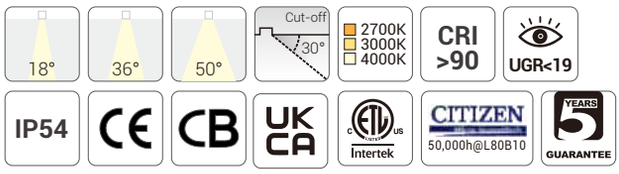


Quick Info

- Ceiling Cut-out: Ø57mm for Trim Version
- Trimless Version also available
- CITIZEN LED: 13W, CRI>90
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: 18°(UGR<19), 36°(UGR<19), 50°
- Lumen Output: Up to 1050lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

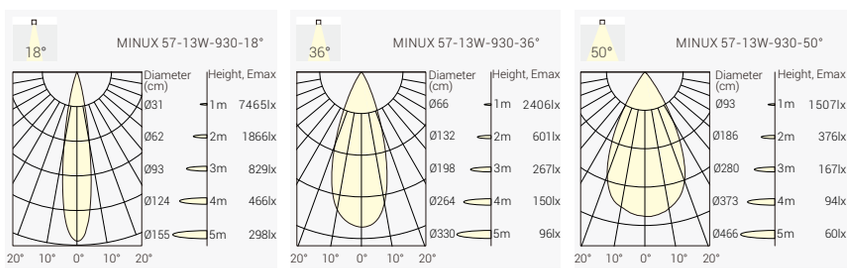

Order Info (MINUX 57 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13 W	15 W	36 V	350 mA	90	2700K	18°	1200lm	950lm	MIF5-9271813N-WC
						36°	1200lm	950lm	MIF5-9273613N-WC
						50°	1200lm	950lm	MIF5-9275013N-WC
					3000K	18°	1300lm	1000lm	MIF5-9301813N-WC
						36°	1300lm	1000lm	MIF5-9303613N-WC
						50°	1300lm	1000lm	MIF5-9305013N-WC
					4000K	18°	1400lm	1050lm	MIF5-9401813N-WC
						36°	1400lm	1050lm	MIF5-9403613N-WC
						50°	1400lm	1050lm	MIF5-9405013N-WC

No Driver	89,00 €
ON-OFF	99,00 €
Phase Dim	119,00 €
DALI Dim	129,00 €

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Trimless Version:
Trimless: +10,00€

Reflector Options



Matt Dark Light Black White Gold

Optional accessary



Honeycomb

Code for MIF5-9305013N-WM with Honeycomb
MIF5-9305013N-WM-H

Honeycomb: +9,00€



Soft Ceiling Protection Ring
* for Trim Version ONLY

Coding

MIF5 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
MIF5 MINUX 57 Trim Verssion	**927** CRI90/ 2700K	**18** 18°	**13** 13W	**N** No Driver	**W** White	**C** Dark Light	**H** Honeycomb
MIT5 MINUX 57 Trimless Version	**930** CRI90/ 3000K	**36** 36°		**F** On-Off	**B** Black	**B** Black	
MIE5 MINUX 57 EI-Trimless Version	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**M** Matt	
				A 1-10V Dim		**W** White	
				D DALI Dim		**G** Gold	

BACK


SENSE G2


The Upgraded SENSE Downlight Series
Modular Design Architectural Downlight System
Adjustable & Fixed
LED Engine Power from 4W to 38W
Round & Square, Trim & Trimless
Cutouts in 45mm, 55mm, 68mm, 75mm,
100mm, 125mm, 150mm



SENSE S45R1 – Modular Design Architectural Downlight





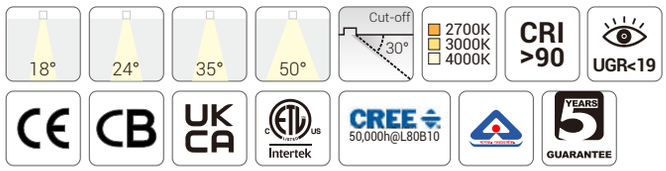


Quick Info

- Ceiling Cut-out: Ø45mm for Trim Version
- CREE LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: 18° , 24°, 35°, 50°
- Lumen Output: Up to 380lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K

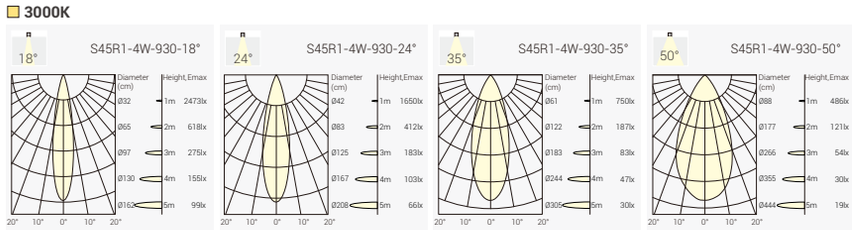

Order Info (SENSE S45 Trim Version in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	12V	350mA	90	2700K	18°	480lm	330lm	SUR1-9271804N-WM
						24°	480lm	330lm	SUR1-9272404N-WM
						35°	480lm	330lm	SUR1-9272504N-WM
						50°	480lm	330lm	SUR1-9275004N-WM
					3000K	18°	500lm	350lm	SUR1-9303804N-WM
						24°	500lm	350lm	SUR1-9302404N-WM
						35°	500lm	350lm	SUR1-9303504N-WM
						50°	500lm	350lm	SUR1-9305004N-WM
					4000K	18°	550lm	380lm	SUR1-9401804N-WM
						24°	550lm	380lm	SUR1-9402404N-WM
						35°	550lm	380lm	SUR1-9403504N-WM
						50°	550lm	380lm	SUR1-9405004N-WM

No Driver	79,00 €
ON-OFF	89,00 €
Phase Dim	99,00 €
DALI Dim	119,00 €

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Black White Matt

Optional accessary



Honeycomb

Code for SUR1-9305004N-WM with Honeycomb
SUR1-9305004N-WM-H

Honeycomb: +9,00€

Coding


SUR1 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SUR1 S45R1	927 CRI90/ 2700K	18 18°	04 4W	N No Driver	W White	B Black	H Honeycomb
	930 CRI90/ 3000K	24 24°		F On-Off	B Black	M Matt	
	940 CRI90/ 4000K	35 35°		P Phase Dim		W White	
		50 50°		A 1-10V Dim			
				D DALI Dim			

BACK

SENSE S45S1 – Modular Design Architectural Downlight





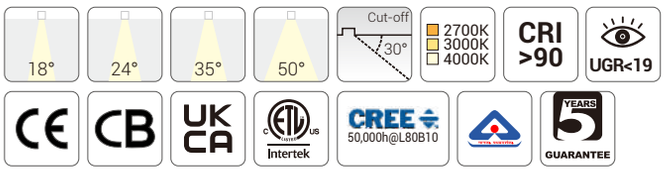


Quick Info

- Ceiling Cut-out: 45x45mm for Trim Version
- CREE LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: 18°, 24°, 35°, 50°
- Lumen Output: Up to 380lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K

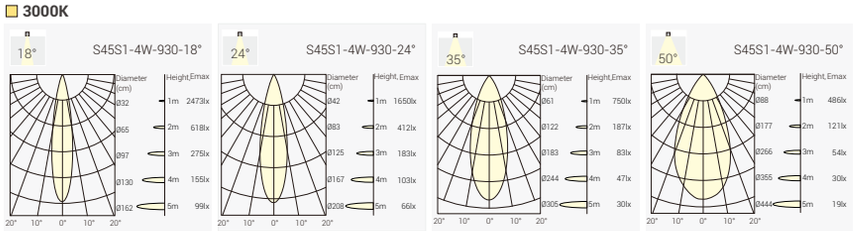

Order Info (SENSE S45 Trim Version in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	12V	350mA	90	2700K	18°	480lm	330lm	SUS1-9271804N-WM
						24°	480lm	330lm	SUS1-9272404N-WM
						35°	480lm	330lm	SUS1-9272504N-WM
						50°	480lm	330lm	SUS1-9275004N-WM
					3000K	18°	500lm	350lm	SUS1-9303804N-WM
						24°	500lm	350lm	SUS1-9302404N-WM
						35°	500lm	350lm	SUS1-9303504N-WM
						50°	500lm	350lm	SUS1-9305004N-WM
					4000K	18°	550lm	380lm	SUS1-9401804N-WM
						24°	550lm	380lm	SUS1-9402404N-WM
						35°	550lm	380lm	SUS1-9403504N-WM
						50°	550lm	380lm	SUS1-9405004N-WM

No Driver	79,00 €
ON-OFF	89,00 €
Phase Dim	99,00 €
DALI Dim	119,00 €

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Reflector Options



Black White Matt

Optional accessary



Honeycomb

Code for SUS1-9305004N-WM with Honeycomb
SUS1-9305004N-WM-H

Honeycomb: +9,00€


Coding


SUS1 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SUS1 S45S1	927 CRI90/ 2700K	18 18°	04 4W	N No Driver	W White	B Black	H Honeycomb
	930 CRI90/ 3000K	24 24°		F On-Off	B Black	M Matt	
	940 CRI90/ 4000K	35 35°		P Phase Dim		W White	
		50 50°		A 1-10V Dim			
				D DALI Dim			


SENSE S55R1-G2 – The Precise Cut-Off Lighting Performance Adjustable Downlight









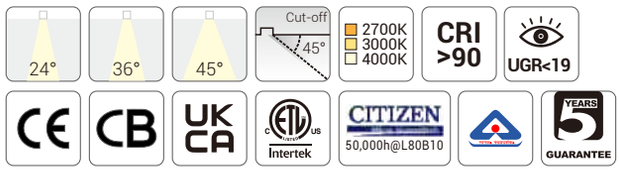


Quick Info

- The exceptionally precise cut-off lighting performance enhances the architectural lines on the wall, lending it a touch of elegance.
- Ceiling Cut-out: Ø55mm for Trim Version
- CITIZEN LED: 7W, CRI>90
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: 24°, 36°, 45°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

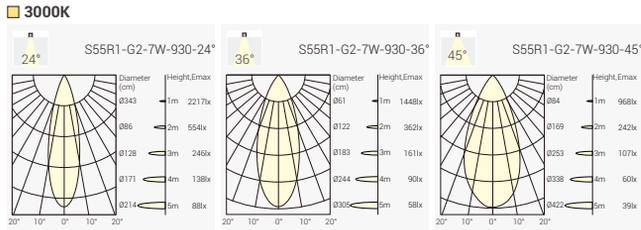

Order Info (SENSE S55R1-G2 Trim Version in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	8.5W	36V	200mA	90	2700K	24°	720lm	460lm	SXR1G2-9272407N-WB
						36°	720lm	520lm	SXR1G2-9273607N-WB
						45°	720lm	520lm	SXR1G2-9274507N-WB
					3000K	24°	750lm	480lm	SXR1G2-9302407N-WB
						36°	750lm	550lm	SXR1G2-9303607N-WB
						45°	750lm	550lm	SXR1G2-9304507N-WB
					4000K	24°	800lm	530lm	SXR1G2-9402407N-WB
						36°	800lm	600lm	SXR1G2-9403607N-WB
						45°	800lm	600lm	SXR1G2-9404507N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Trimless Version:

Trimless: +10,00€

No Driver	89,00 €
ON-OFF	99,00 €
Phase Dim	109,00 €
DALI DIM	129,00 €

Reflector Options



Black Matt White

Coding

SXR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SXRG2 SENSE S55R1 -G2 Trim Verion	**927** CRI90/ 2700K	**24** 24°	**07** 7W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
EXR1G2 SENSE S55R1 EI-G2 EI-Trimless Verion	**930** CRI90/ 3000K	**36** 36°		**F** On-Off	**B** Black	**M** Matt	
	940 CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 1-10V Dim			
				D DALI Dim			

Optional accessary



Honeycomb


Code for SXR1G2-9303607N-WB with Honeycomb SXR1G2-9303607N-WB-H


Honeycomb: +9,00€

BACK

SENSE S68R1-G2 – Modular Design Architectural Downlight



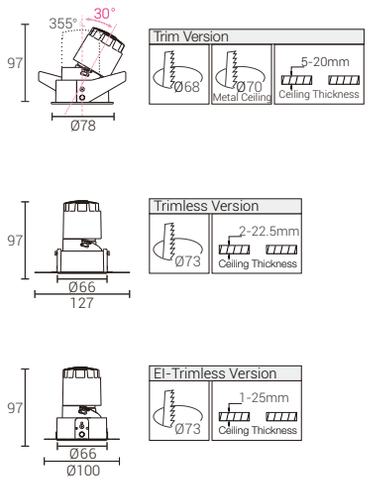

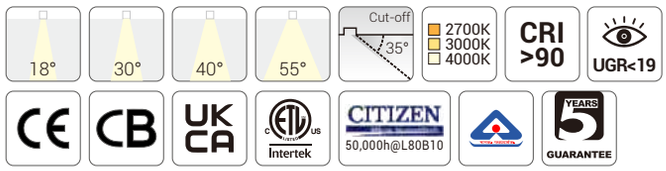


Quick Info

- Ceiling Cut-out: Ø68mm (Metal Ceiling: Ø70mm) for Trim Version
- Trimless Version also available
- CITIZEN LED: 7.5W, 11W, CRI>90
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: 18°, 30°, 40°, 55°
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

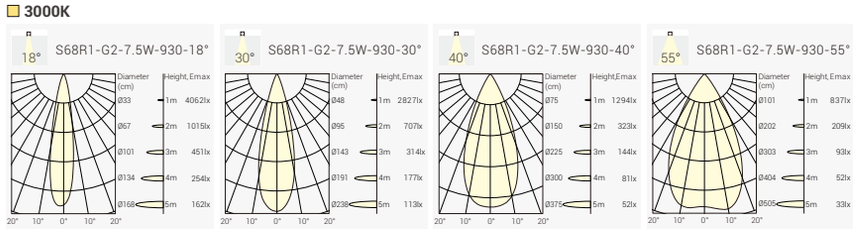

Order Info (SENSE 68-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5W	9W	31V	250mA	90	2700K	18°	850lm	620lm	STR1G2-9271808N-WC
						30°	850lm	620lm	STR1G2-9273008N-WC
						40°	850lm	620lm	STR1G2-9274008N-WC
						55°	850lm	620lm	STR1G2-9275508N-WC
					3000K	18°	900lm	650lm	STR1G2-9301808N-WC
						30°	900lm	650lm	STR1G2-9303008N-WC
						40°	900lm	650lm	STR1G2-9301408N-WC
						55°	900lm	650lm	STR1G2-9301558N-WC
					4000K	18°	1000lm	700lm	STR1G2-9401808N-WC
						30°	1000lm	700lm	STR1G2-9403008N-WC
						40°	1000lm	700lm	STR1G2-9404008N-WC
						55°	1000lm	700lm	STR1G2-9405508N-WC
11W	13W	31V	350mA	90	2700K	18°	1100lm	770lm	STR1G2-9271811N-WC
						30°	1100lm	770lm	STR1G2-9273011N-WC
						40°	1100lm	770lm	STR1G2-9274011N-WC
						55°	1100lm	770lm	STR1G2-9275511N-WC
					3000K	18°	1200lm	800lm	STR1G2-9301811N-WC
						30°	1200lm	800lm	STR1G2-9303011N-WC
						40°	1200lm	800lm	STR1G2-9301411N-WC
						55°	1200lm	800lm	STR1G2-9305511N-WC
					4000K	18°	1300lm	850lm	STR1G2-9401811N-WC
						30°	1300lm	850lm	STR1G2-9403011N-WC
						40°	1300lm	850lm	STR1G2-9404011N-WC
						55°	1300lm	850lm	STR1G2-9405511N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Trimless Version:
Trimless: +10,00€

No Driver	99,00 €
ON-OFF	109,00 €
Phase Dim	119,00 €
DALI DIM	139,00 €

Dim-to-warm	
No Driver	129,00 €
Phase Dim	149,00 €
DALI DIM	169,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Honeycomb

Code for STR1G2-9305511N-WM with Honeycomb
STR1G2-9305511N-WM-H

Honeycomb: +9,00€

Coding

STR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
STR1G2 S68R1-G2 Trim Version	**927** CRI90/ 2700K	**18** 18°	**08** 7.5W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
STR3G2 S68RT1-G2 Trimless Version	**930** CRI90/ 3000K	**30** 30°	**11** 11W	**F** On-Off	**B** Black	**M** Matt	
ETR1G2 S68RT1-EI-G2 EI-Trimless Version	**940** CRI90/ 4000K	**40** 40°		**P** Phase Dim		**W** White	
		55 55°		**A** 1-10V Dim		**C** Chrome Black	
				D DALI Dim		**G** Gold	
						S Specular	




Quick Info

- Ceiling Cut-out: Ø68mm (Metal Ceiling: Ø70mm) for Trim Version
- Trimless Version also Available
- CITIZEN LED: 7.5W, 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: **12°**
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K



No Driver	109,00 €
ON-OFF	119,00 €
Phase Dim	129,00 €
DALI DIM	149,00 €

Order Info (SENSE 68 -G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6W	8W	12V	500mA	90	2700K	12°	670lm	350m	STR1G2-9271206N-WC
					3000K	12°	700lm	400lm	STR1G2-9301206N-WC
					4000K	12°	750lm	450lm	STR1G2-9401206N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Coding


STR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
STR1G2 S68R1-G2 Trim Version	**927** CRI90/ 2700K	**12** 12°	**06** 6W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
STR3G2 S68RT1-G2 Trimless Version	**930** CRI90/ 3000K			**F** On-Off	**B** Black	**M** Matt	
ETR1G2 S68RT1-EI-G2 EI-Trimless Version	**940** CRI90/ 4000K			**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Chrome Black	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE S68S1-G2 – Modular Design Architectural Downlight



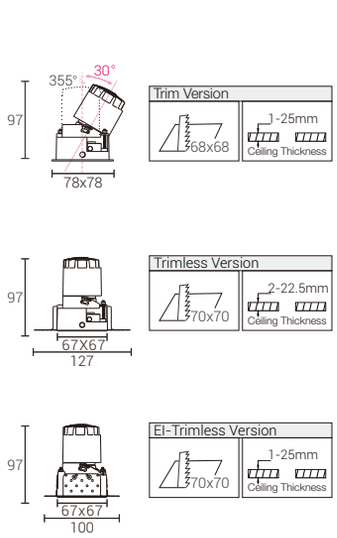

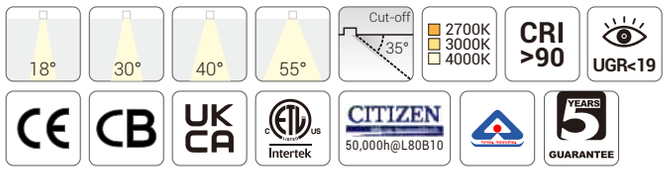


Quick Info

- Ceiling Cut-out: 68x68mm for Trim Version
- Trimless Version also available
- CITIZEN LED: 7.5W/ 11W, CRI>90
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: 18°, 30°, 40°, 55°
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

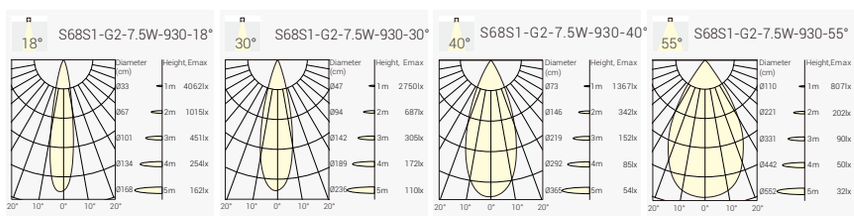

Order Info (SENSE 68-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5W	9W	31V	250mA	90	2700K	18°	850lm	620lm	STS1G2-9271808N-WC
						30°	850lm	620lm	STS1G2-9273008N-WC
						40°	850lm	620lm	STS1G2-9274008N-WC
						55°	850lm	620lm	STS1G2-9275508N-WC
					3000K	18°	900lm	650lm	STS1G2-9301808N-WC
						30°	900lm	650lm	STS1G2-9303008N-WC
						40°	900lm	650lm	STS1G2-9301408N-WC
						55°	900lm	650lm	STS1G2-9301558N-WC
					4000K	18°	1000lm	700lm	STS1G2-9401808N-WC
						30°	1000lm	700lm	STS1G2-9403008N-WC
						40°	1000lm	700lm	STS1G2-9404008N-WC
						55°	1000lm	700lm	STS1G2-9405508N-WC
11W	13W	31V	350mA	90	2700K	18°	1100lm	770lm	STS1G2-9271811N-WC
						30°	1100lm	770lm	STS1G2-9273011N-WC
						40°	1100lm	770lm	STS1G2-9274011N-WC
						55°	1100lm	770lm	STS1G2-9275511N-WC
					3000K	18°	1200lm	800lm	STS1G2-9301811N-WC
						30°	1200lm	800lm	STS1G2-9303011N-WC
						40°	1200lm	800lm	STS1G2-9301411N-WC
						55°	1200lm	800lm	STS1G2-9305511N-WC
					4000K	18°	1300lm	850lm	STS1G2-9401811N-WC
						30°	1300lm	850lm	STS1G2-9403011N-WC
						40°	1300lm	850lm	STS1G2-9404011N-WC
						55°	1300lm	850lm	STS1G2-9405511N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Trimless Version:
Trimless: +10,00€

No Driver	99,00 €
ON-OFF	109,00 €
Phase Dim	119,00 €
DALI DIM	139,00 €

Dim-to-warm	
No Driver	129,00 €
Phase Dim	149,00 €
DALI DIM	169,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Honeycomb

Code for STS1G2-9304004N-WM with Honeycomb
STS1G2-9304004N-WM-H

Honeycomb: +9,00€

Coding

STS1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
STS1G2 S68S1-G2 Trim Version	**927** CRI90/ 2700K	**18** 18°	**08** 7.5W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
STS3G2 S68ST1-G2 Trimless Version	**930** CRI90/ 3000K	**30** 30°	**11** 11W	**F** On-Off	**B** Black	**M** Matt	
ETS1G2 S68ST1-EI-G2 EI-Trimless Version	**940** CRI90/ 4000K	**40** 40°		**P** Phase Dim		**W** White	
		55 55°		**A** 1-10V Dim		**C** Chrome Black	
				D DALI Dim		**G** Gold	
						S Specular	

BACK






Quick Info

- Ceiling Cut-out: 68x68mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 7.5W/ 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: **12°**
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K



No Driver	109,00 €
ON-OFF	119,00 €
Phase Dim	129,00 €
DALI DIM	149,00 €

Order Info (SENSE 68-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6W	8W	12V	500mA	90	2700K	12°	670lm	350m	STS1G2-9271206N-WC
					3000K	12°	700lm	400lm	STS1G2-9301206N-WC
					4000K	12°	750lm	450lm	STS1G2-9401206N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Coding


STS1G2 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
STS1G2 S68S1-G2 Trim Version	**927** CRI90/ 2700K	**12** 12°	**06** 6W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
STS3G2 S68ST1-G2 Trimless Version	**930** CRI90/ 3000K			**F** On-Off	**B** Black	**M** Matt	
ETS1G2 S68ST1-EI-G2 EI-Trimless Version	**940** CRI90/ 4000K			**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Chrome Black	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S75R1-G2 – The Precise Cut-Off Lighting Performance Adjustable Downlight









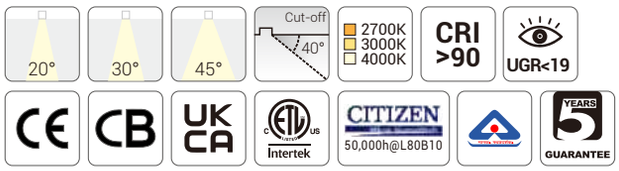


Quick Info

- The exceptionally precise cut-off lighting performance enhances the architectural lines on the wall, lending it a touch of elegance.
- Ceiling Cut-out: Ø75mm for Trim Version
- CITIZEN LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: 20°, 30°, 45°
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

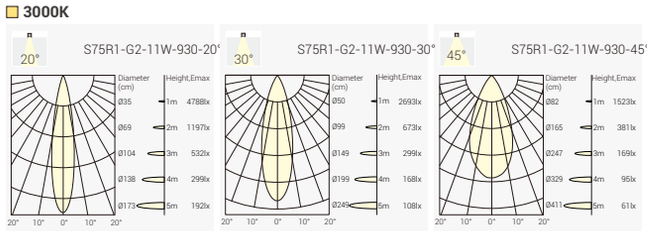

Order Info (SENSE S75R1-G2 Trim Version in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	31V	350mA	90	2700K	20°	900lm	770lm	SGR1G2-9272011N-WB
						30°	900lm	770lm	SGR1G2-9273011N-WB
						45°	900lm	770lm	SGR1G2-9274511N-WB
					3000K	20°	950lm	800lm	SGR1G2-9302011N-WB
						30°	950lm	800lm	SGR1G2-9303011N-WB
						45°	950lm	800lm	SGR1G2-9304511N-WB
					4000K	20°	1000lm	850lm	SGR1G2-9402011N-WB
						30°	1000lm	850lm	SGR1G2-9403011N-WB
						45°	1000lm	850lm	SGR1G2-9404511N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Trimless Version:

Trimless: +10,00€

No Driver	109,00 €
ON-OFF	119,00 €
Phase Dim	129,00 €
DALI DIM	149,00 €

Reflector Options



Black Matt White

Coding

SGR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SGR1G2 SENSE S75R1-G2 Trim Verion	**927** CRI90/ 2700K	**20** 20°	**11** 11W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
EGR1G2 SENSE S75R1 EI-G2 EI-Trimless Verion	**930** CRI90/ 3000K	**30** 30°		**F** On-Off	**B** Black	**M** Matt	
	940 CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 1-10V Dim			
				D DALI Dim			

Optional accessary



Honeycomb


Code for SGR1G2-9304511N-WB with Honeycomb SGR1G2-9304511N-WB-H


Honeycomb: +9,00€

BACK

SENSE S100R1-G2 –Modular Design Architectural Downlight



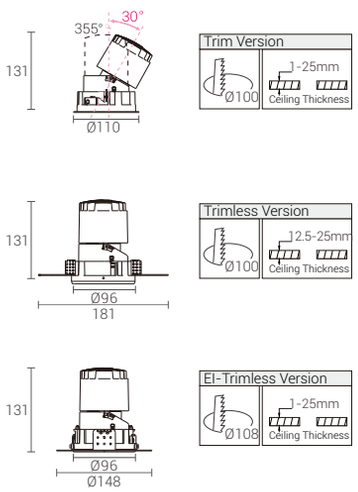

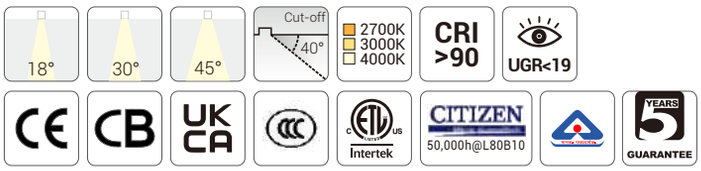


Quick Info

- Ceiling Cut-out: Ø100mm for Trim Version
- Trimless Version also available
- CITIZEN LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 1800lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

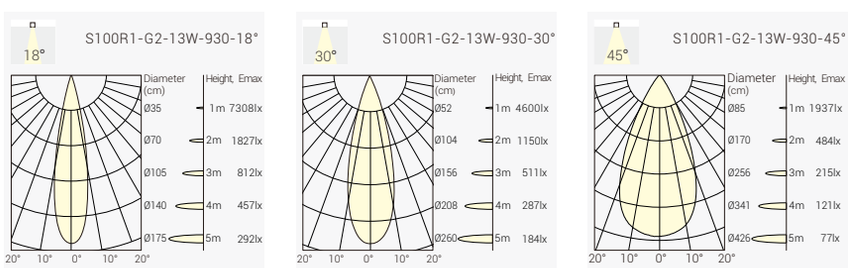

Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	18°	1500lm	1050lm	SSR1G2-9271813N-WC
						30°	1500lm	1100lm	SSR1G2-9273013N-WC
						45°	1500lm	1050lm	SSR1G2-9274513N-WC
					3000K	18°	1600lm	1150lm	SSR1G2-9301813N-WC
						30°	1600lm	1200lm	SSR1G2-9303013N-WC
						45°	1600lm	1150lm	SSR1G2-9304513N-WC
					4000K	18°	1700lm	1200lm	SSR1G2-9401813N-WC
						30°	1700lm	1300lm	SSR1G2-9403013N-WC
						45°	1700lm	1200lm	SSR1G2-9404513N-WC
18W	21W	36V	500mA	90	2700K	18°	1900lm	1400lm	SSR1G2-9271818N-WC
						30°	1900lm	1600lm	SSR1G2-9273018N-WC
						45°	1900lm	1400lm	SSR1G2-9274518N-WC
					3000K	18°	2000lm	1500lm	SSR1G2-9301818N-WC
						30°	2000lm	1700lm	SSR1G2-9303018N-WC
						45°	2000lm	1500lm	SSR1G2-9304518N-WC
					4000K	18°	2200lm	1700lm	SSR1G2-9401818N-WC
						30°	2200lm	1800lm	SSR1G2-9403018N-WC
						45°	2200lm	1700lm	SSR1G2-9404518N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



Trimless Version:
Trimless: +10,00€

White	Black
No Driver	149,00 €
ON-OFF	159,00 €
Phase Dim	179,00 €
DALI Dim	189,00 €

Tunable White	
DALI Dim	259,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Coding

SSR1G2	– ***	**	**	*	– *	*	– *
Model	**CRI/ CCT**	**Beam Angle**	**LED Power**	**Control**	**Trim Finish**	**Reflector Color**	**Accessory**
SSR1G2 SENSE 100-G2 Trim Verion	**927** CRI90/ 2700K	**18** 18°	**13** 13W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SSR4G2 SENSE 100-G2 Trimless Verion	**930** CRI90/ 3000K	**30** 36°	**18** 18W	**F** On-Off	**B** Black	**M** Matt	
ESR1G2 SENSE 100-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

Optional accessary




Honeycomb

Code for SSR1G2-9304018N-WM with Honeycomb
SSR1G2-9304018N-WM-H

Honeycomb: +9,00€



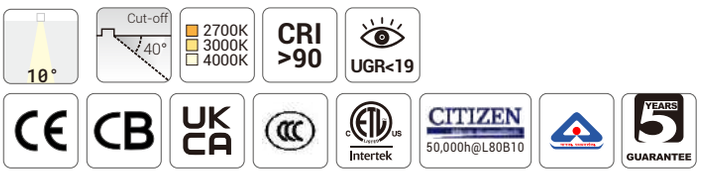


Quick Info

- Ceiling Cut-out: Ø100mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: **10°**
- Lumen Output: Up to 1800lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K



No Driver	149,00 €
ON-OFF	159,00 €
Phase Dim	179,00 €
DALI Dim	189,00 €

Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	36V	200mA	90	2700K	10°	600lm	480lm	SSR1G2-9271007N-WC
					3000K	10°	650lm	500lm	SSR1G2-9301007N-WC
					4000K	10°	700lm	550lm	SSR1G2-9401007N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Coding


SSR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SSR1G2 SENSE 100-G2 Trim Verion	**927** CRI90/ 2700K	**10** 10°	**07** 7W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SSR4G2 SENSE 100-G2 Trimless Verion	**930** CRI90/ 3000K			**F** On-Off	**B** Black	**M** Matt	
EXR1G2 SENSE 100-G2 EI-Trimless Verion	**940** CRI90/ 4000K			**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE S100S1-G2 –Modular Design Architectural Downlight



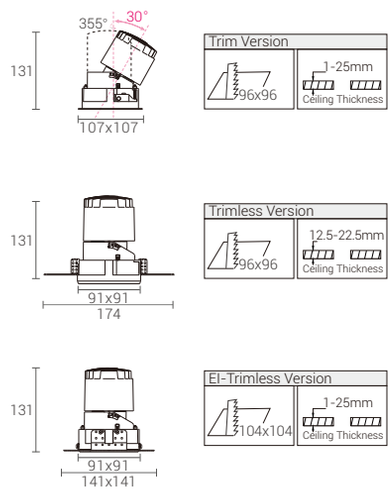

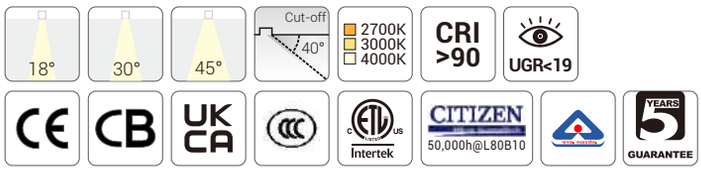


Quick Info

- Ceiling Cut-out: 96x96mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 1800lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

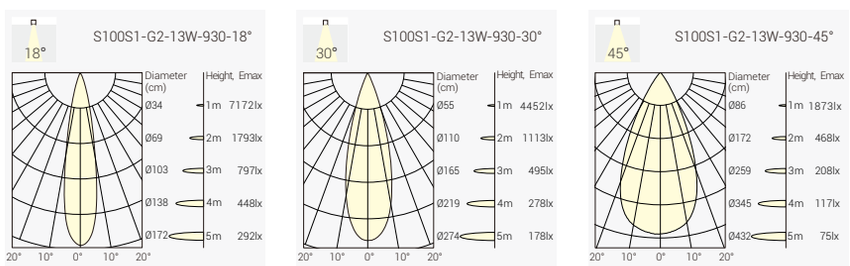

Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	18°	1500lm	1050lm	SSS1G2-9271813N-WC
						30°	1500lm	1150lm	SSS1G2-9273013N-WC
						45°	1500lm	1050lm	SSS1G2-9274513N-WC
					3000K	18°	1600lm	1150lm	SSS1G2-9301813N-WC
						30°	1600lm	1250lm	SSS1G2-9303013N-WC
						45°	1600lm	1150lm	SSS1G2-9304513N-WC
					4000K	18°	1700lm	1200lm	SSS1G2-9401813N-WC
						30°	1700lm	1300lm	SSS1G2-9403013N-WC
						45°	1700lm	1200lm	SSS1G2-9404513N-WC
18W	21W	36V	500mA	90	2700K	18°	1900lm	1450lm	SSS1G2-9271818N-WC
						30°	1900lm	1550lm	SSS1G2-9273018N-WC
						45°	1900lm	1450lm	SSS1G2-9274518N-WC
					3000K	18°	2000lm	1550lm	SSS1G2-9301818N-WC
						30°	2000lm	1650lm	SSS1G2-9303018N-WC
						45°	2000lm	1550lm	SSS1G2-9304518N-WC
					4000K	18°	2200lm	1600lm	SSS1G2-9401818N-WC
						30°	2200lm	1800lm	SSS1G2-9403018N-WC
						45°	2200lm	1600lm	SSS1G2-9404518N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



Trimless Version:
Trimless: +10,00€

	White	Black
No Driver	149,00 €	
ON-OFF	159,00 €	
Phase Dim	169,00 €	
Dali Dim	189,00 €	

Tunable White	
DALI Dim	259,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Honeycomb

Code for SSS1G2-9301813N-WM with Honeycomb
SSS1G2-9301813N-WM-H

Honeycomb: +9,00€


Coding

SSS1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SSS1G2 SENSE 100-G2 Trim Verion	**927** CRI90/ 2700K	**18** 18°	**13** 13W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SSS4G2 SENSE 100-G2 Trimless Verion	**930** CRI90/ 3000K	**30** 30°	**18** 18W	**F** On-Off	**B** Black	**M** Matt	
ESS1G2 SENSE 100-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

BACK



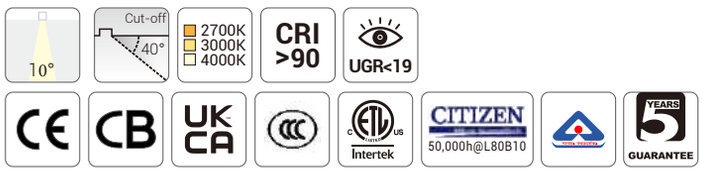


Quick Info

- Ceiling Cut-out: 96x96mm for Trim Version
- Trimless Version also available
- CITIZEN LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: **10°**
- Lumen Output: Up to 1800lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K



No Driver	149,00 €
ON-OFF	159,00 €
Phase Dim	169,00 €
DALI DIM	189,00 €

Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	36V	200mA	90	2700K	10°	600lm	480lm	SSS1G2-9271007N-WC
					3000K	10°	650lm	500lm	SSS1G2-9301007N-WC
					4000K	10°	700lm	550lm	SSS1G2-9401007N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Coding


SSS1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SSS1G2 SENSE 100-G2 Trim Verion	**927** CRI90/ 2700K	**10** 10°	**07** 7W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SSS4G2 SENSE 100-G2 Trimless Verion	**930** CRI90/ 3000K			**F** On-Off	**B** Black	**M** Matt	
ESS1G2 SENSE 100-G2 EI-Trimless Verion	**940** CRI90/ 4000K			**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE S100HR1-G2 –Modular Design Architectural Downlight



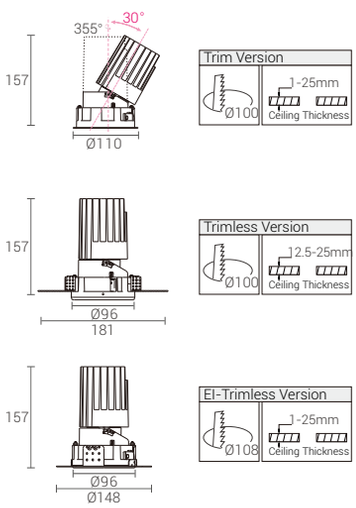

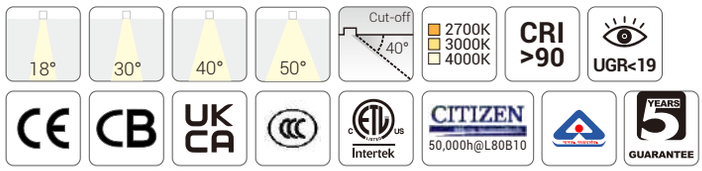


Quick Info

- Ceiling Cut-out: Ø100mm for Trim Version
- Trimless Version also available
- CITIZEN LED: 25W, CRI>90
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: 18°, 30°, 40°, 50°
- Lumen Output: Up to 2200lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

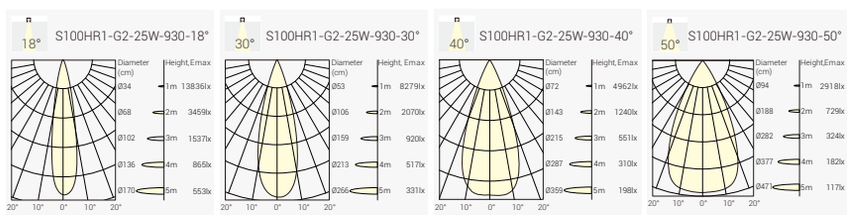

Order Info (SENSE 100H-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	18°	2400lm	1900lm	SHR1G2-9271825N-WC
						30°	2400lm	2000lm	SHR1G2-9273025N-WC
						40°	2400lm	2000lm	SHR1G2-9274025N-WC
						50°	2400lm	1800lm	SHR1G2-9275025N-WC
					3000K	18°	2600lm	2000lm	SHR1G2-9301825N-WC
						30°	2600lm	2100lm	SHR1G2-9303025N-WC
						40°	2600lm	2100lm	SHR1G2-9304025N-WC
						50°	2600lm	1900lm	SHR1G2-9305025N-WC
					4000K	18°	2800lm	2100lm	SHR1G2-9401825N-WC
						30°	2800lm	2200lm	SHR1G2-9403025N-WC
						40°	2800lm	2200lm	SHR1G2-9404025N-WC
						50°	2800lm	2000lm	SHR1G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Trimless Version:

Trimless: +10,00€

No Driver	189,00 €
ON-OFF	199,00 €
Phase Dim	219,00 €
DALI DIM	239,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Coding

SHR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SHR1G2 SENSE 100H-G2 Trim Verion	**927** CRI90/ 2700K	**18** 18°	**25** 25W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SHR4G2 SENSE 100H-G2 Trimless Verion	**930** CRI90/ 3000K	**30** 30°		**F** On-Off	**B** Black	**M** Matt	
EHR1G2 SENSE 100H-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**40** 40°		**P** Phase Dim		**W** White	
		50 50°		**A** 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

Optional accessary



Honeycomb


Code for SHR1G2-9304025N-WM with Honeycomb
SHR1G2-9304025N-WM-H

Honeycomb: +9,00€

BACK

SENSE S100HS1-G2 –Modular Design Architectural Downlight



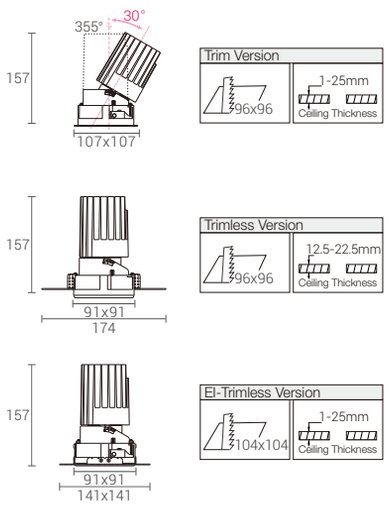

Trim Finsh



White Black

Trimless Version:

Trimless: +10,00€

No Driver	189,00 €
ON-OFF	199,00 €
Phase Dim	219,00 €
DALI DIM	239,00 €

Reflector Options



Specular Matt Black Dark Light White Gold


Optional accessary



Honeycomb

Code for SHS1G2-9301825N-WM with Honeycomb
SHS1G2-9301825N-WM-H

Honeycomb: +9,00€

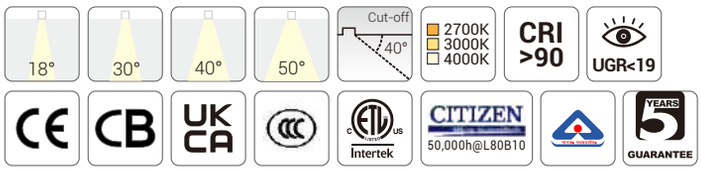


Quick Info

- Ceiling Cut-out: 96x96mm for Trim Version
- Trimless Version also available
- CITIZEN LED: 25W, CRI>90, CITIZEN
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: 18°, 30°, 40°, 50°
- Lumen Output: Up to 2000lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

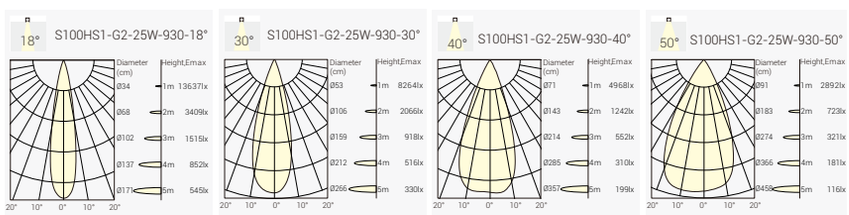

Order Info (SENSE 100H-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	18°	2400lm	1700lm	SHS1G2-9271825N-WC
						30°	2400lm	1800lm	SHS1G2-9273025N-WC
						40°	2400lm	1800lm	SHS1G2-9274025N-WC
						50°	2400lm	1700lm	SHS1G2-9275025N-WC
					3000K	18°	2600lm	1800lm	SHS1G2-9301825N-WC
						30°	2600lm	1900lm	SHS1G2-9303025N-WC
						40°	2600lm	1900lm	SHS1G2-9304025N-WC
						50°	2600lm	1800lm	SHS1G2-9305025N-WC
					4000K	18°	2800lm	1900lm	SHS1G2-9401825N-WC
						30°	2800lm	2000lm	SHS1G2-9403025N-WC
						40°	2800lm	2000lm	SHS1G2-9404025N-WC
						50°	2800lm	1900lm	SHS1G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Coding

SHS1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SHS1G2 SENSE 100H-G2 Trim Verion	**927** CRI90/ 2700K	**18** 18°	**25** 25W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SHS4G2 SENSE 100H-G2 Trimless Verion	**930** CRI90/ 3000K	**30** 30°		**F** On-Off	**B** Black	**M** Matt	
EHS1G2 SENSE 100H-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**40** 40°		**P** Phase Dim		**W** White	
		50 50°		**A** 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S100R7-G2 –Modular Design Architectural Downlight




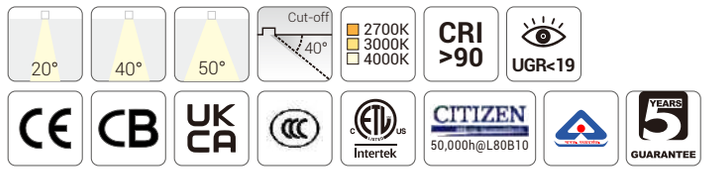


Quick Info

- Ceiling Cut-out: Ø100mm for Trim Version
- Trimless Version also available
- CITIZEN LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K available as Standard
- Beam Angle: 20°, 40°, 50°
- Lumen Output: Up to 1900lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim










Light Distribution

3000K







Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	20°	1500lm	1100lm	SSR7G2-9272013N-WC
						40°	1500lm	1200lm	SSR7G2-9274013N-WC
						50°	1500lm	850lm	SSR7G2-9275013N-WC
					3000K	20°	1600lm	1150lm	SSR7G2-9302013N-WC
						40°	1600lm	1300lm	SSR7G2-9304013N-WC
						50°	1600lm	900lm	SSR7G2-9305013N-WC
					4000K	20°	1700lm	1200lm	SSR7G2-9402013N-WC
						30°	1700lm	1350lm	SSR7G2-9404013N-WC
						50°	1700lm	1000lm	SSR7G2-9405013N-WC
18W	21W	36V	500mA	90	2700K	20°	1900lm	1500lm	SSR7G2-9272018N-WC
						40°	1900lm	1700lm	SSR7G2-9274018N-WC
						50°	1900lm	1250lm	SSR7G2-9275018N-WC
					3000K	20°	2000lm	1600lm	SSR7G2-9302018N-WC
						40°	2000lm	1800lm	SSR7G2-9304018N-WC
						50°	2000lm	1350lm	SSR7G2-9305018N-WC
					4000K	20°	2200lm	1700lm	SSR7G2-9402018N-WC
						40°	2200lm	1900lm	SSR7G2-9404018N-WC
						50°	2200lm	1450lm	SSR7G2-9405018N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Trimless Version:
Trimless: +10,00€

No Driver	149,00 €
ON-OFF	159,00 €
Phase Dim	179,00 €
Dali Dim	189,00 €

Tunable White	
DALI Dim	259,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Coding

SSR7G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SSR7G2 SENSE 100-G2 Trim Verion	**927** CRI90/ 2700K	**20** 20°	**13** 13W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SSR84G2 SENSE 100-G2 Trimless Verion	**930** CRI90/ 3000K	**40** 40°	**18** 18W	**F** On-Off	**B** Black	**M** Matt	
ESR7G2 SENSE 100-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

Optional accessary



Honeycomb


Code for SSR7G2-9304013N-WM with Honeycomb
SSR7G2-9304013N-WM-H


Honeycomb: +9,00€

BACK

SENSE S100HR7-G2 –Modular Design Architectural Downlight



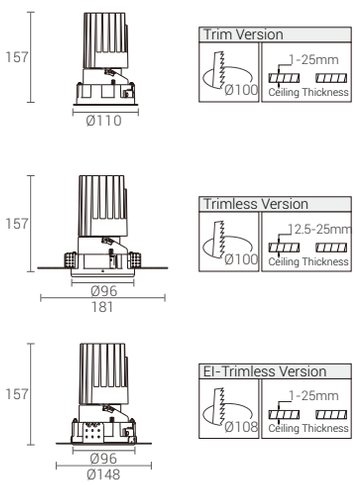

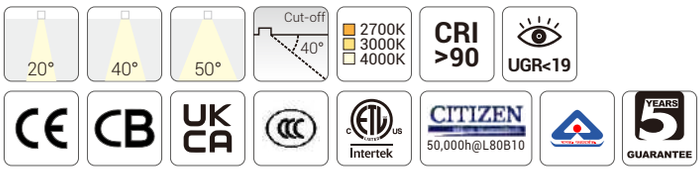


Quick Info

- Ceiling Cut-out: Ø100mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 25W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 30°, 40°, 50°
- Lumen Output: Up to 2200lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

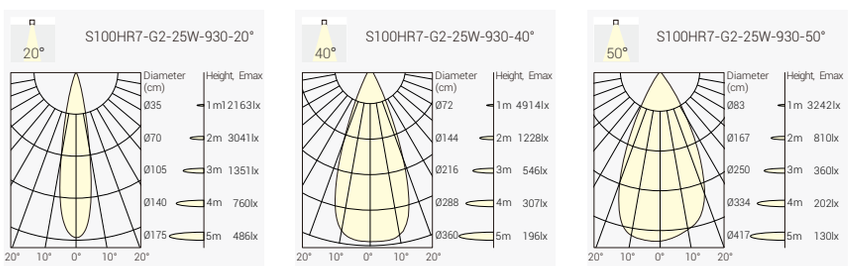

Order Info (SENSE 100H-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	20°	2400lm	1800lm	SHR7G2-9272025N-WC
						40°	2400lm	2000lm	SHR7G2-9274025N-WC
						50°	2400lm	1800lm	SHR7G2-9275025N-WC
					3000K	20°	2600lm	1900lm	SHR7G2-9302025N-WC
						40°	2600lm	2100lm	SHR7G2-9304025N-WC
						50°	2600lm	1900lm	SHR7G2-9305025N-WC
					4000K	20°	2800lm	2000lm	SHR7G2-9402025N-WC
						20°	2800lm	2200lm	SHR7G2-9402025N-WC
						30°	2800lm	2000lm	SHR7G2-9404025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



Trimless Version:
Trimless: +10,00€

	White	Black
No Driver	189,00 €	
ON-OFF	199,00 €	
Phase Dim	219,00 €	
DALI DIM	239,00 €	

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Honeycomb

Code for SHR1G2-9304025N-WM with Honeycomb
SHR1G2-9304025N-WM-H


Honeycomb: +9,00€


Coding

SHR7G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SHR7G2 SENSE 100H-G2 Trim Verion	**927** CRI90/ 2700K	**20** 20°	**25** 25W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SHR8G2 SENSE 100H-G2 Trimless Verion	**930** CRI90/ 3000K	**40** 40°		**F** On-Off	**B** Black	**M** Matt	
EHR7G2 SENSE 100H-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE S100R2-G2 –Modular Design Architectural Downlight

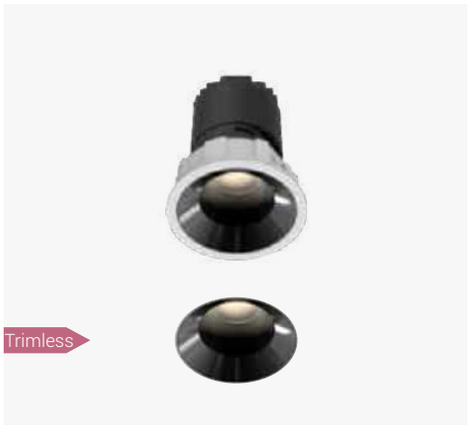

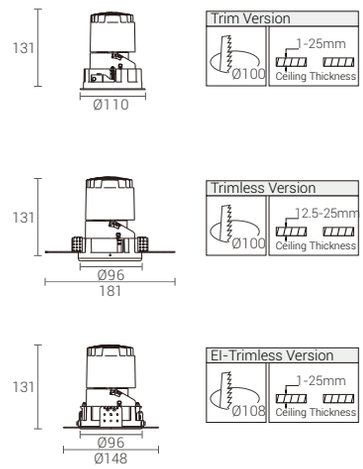

Trim Finsh



White Black

Trimless Version:
Trimless: +10,00€

No Driver	149,00 €
ON-OFF	159,00 €
Phase Dim	179,00 €
DALI DIM	189,00 €

Tunable White	
DALI DIM	259,00 €

Reflector Options



Specular Matt Black Dark Light White Gold


Optional accessary



Honeycomb

Code for SSR2G2-9303618N-WM with Honeycomb
SSR2G2-9303618N-WM-H

Honeycomb: +9,00€

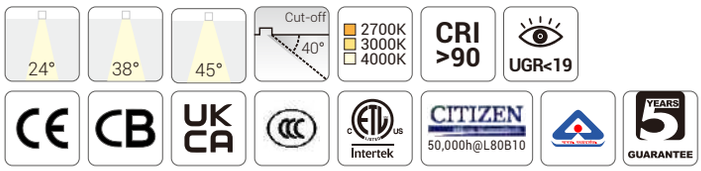



Quick Info


- Ceiling Cut-out: Ø100mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 38°, 45°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K







Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	24°	1500lm	950lm	SSR2G2-9272413N-WC
						38°	1500lm	1000lm	SSR2G2-9273813N-WC
						45°	1500lm	950lm	SSR2G2-9274513N-WC
					3000K	24°	1600lm	1000lm	SSR2G2-9302413N-WC
						38°	1600lm	1100lm	SSR2G2-9303813N-WC
						45°	1600lm	1000lm	SSR2G2-9304513N-WC
					4000K	24°	1700lm	1100lm	SSR2G2-9402413N-WC
						38°	1700lm	1200lm	SSR2G2-9403813N-WC
						45°	1700lm	1100lm	SSR2G2-9404513N-WC
18W	21W	36V	500mA	90	2700K	24°	1900lm	1350lm	SSR2G2-9272418N-WC
						38°	1900lm	1450lm	SSR2G2-9273818N-WC
						50°	1900lm	1350lm	SSR2G2-9274518N-WC
					3000K	24°	2000lm	1450lm	SSR2G2-9302418N-WC
						38°	2000lm	1550lm	SSR2G2-9303818N-WC
						45°	2000lm	1450lm	SSR2G2-9304518N-WC
					4000K	24°	2200lm	1550lm	SSR2G2-9402418N-WC
						38°	2200lm	1700lm	SSR2G2-9403818N-WC
						45°	2200lm	1550lm	SSR2G2-9404518N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Coding

SSR2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SSR2G2 SENSE 100-G2 Trim Verion	**927** CRI90/ 2700K	**24** 24°	**13** 13W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SSR54G2 SENSE 100-G2 Trimless Verion	**930** CRI90/ 3000K	**38** 38°	**18** 18W	**F** On-Off	**B** Black	**M** Matt	
ESR2G2 SENSE 100-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE S100HR2-G2 –Modular Design Architectural Downlight



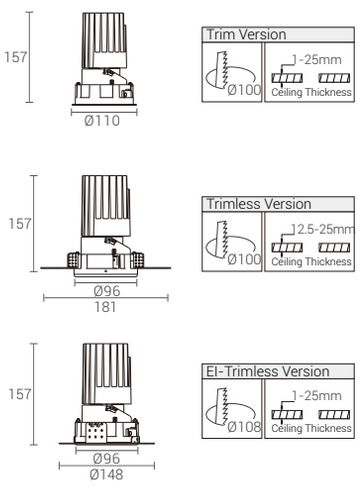

Trim Finsh



White Black

Trimless Version:

Trimless: +10,00€

No Driver	189,00 €
ON-OFF	199,00 €
Phase Dim	219,00 €
DALI DIM	239,00 €

Reflector Options



Specular Matt Black Dark Light White Gold


Optional accessary



Honeycomb

Code for SHR2G2-9305025N-WM with Honeycomb
SHR2G2-9305025N-WM-H

Honeycomb: +9,00€

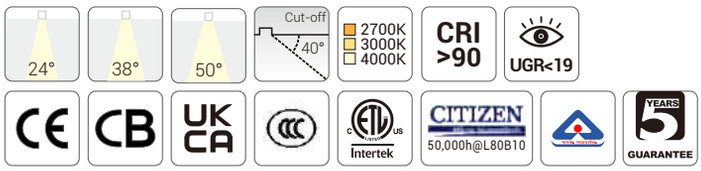


Quick Info

- Ceiling Cut-out: Ø100mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 25W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 38°, 50°
- Lumen Output: Up to 2000lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

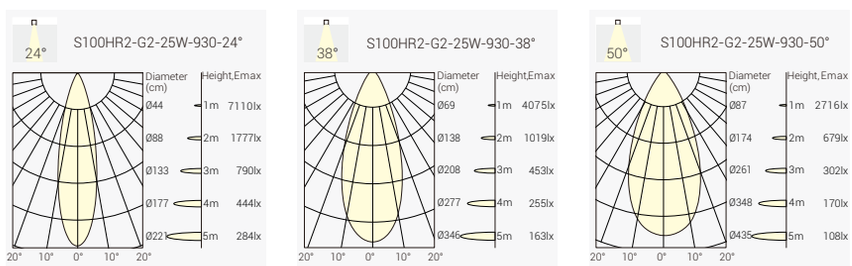

Order Info (SENSE 100H-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	24°	2400lm	1700lm	SHR2G2-9272425N-WC
						38°	2400lm	1800lm	SHR2G2-9273825N-WC
						50°	2400lm	1700lm	SHR2G2-9275025N-WC
					3000K	24°	2600lm	1800lm	SHR2G2-9302425N-WC
						38°	2600lm	1900lm	SHR2G2-9303825N-WC
						50°	2600lm	1800lm	SHR2G2-9305025N-WC
					4000K	24°	2800lm	1900lm	SHR2G2-9402425N-WC
						38°	2800lm	2000lm	SHR2G2-9403825N-WC
						50°	2800lm	1900lm	SHR2G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Coding


SHR2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SHR5G2 SENSE 100H-G2 Trim Verion	**927** CRI90/ 2700K	**24** 24°	**25** 25W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SHR5G2 SENSE 100H-G2 Trimless Verion	**930** CRI90/ 3000K	**38** 38°		**F** On-Off	**B** Black	**M** Matt	
EHR5G2 SENSE 100H-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE S100S2-G2 –Modular Design Architectural Downlight



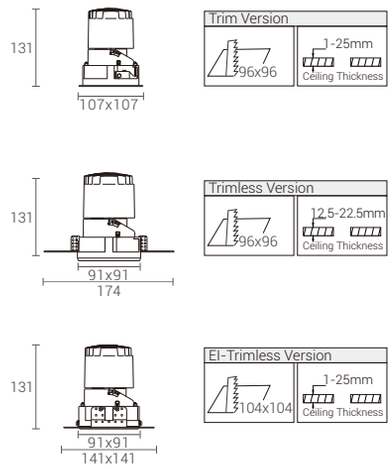

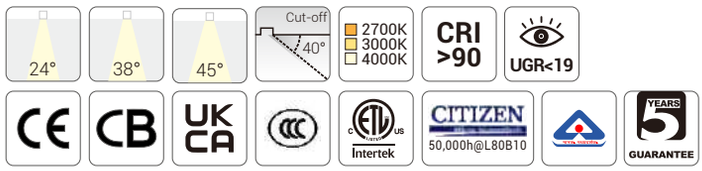


Quick Info

- Ceiling Cut-out: 96x96mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 38°, 45°
- Lumen Output: Up to 1600lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

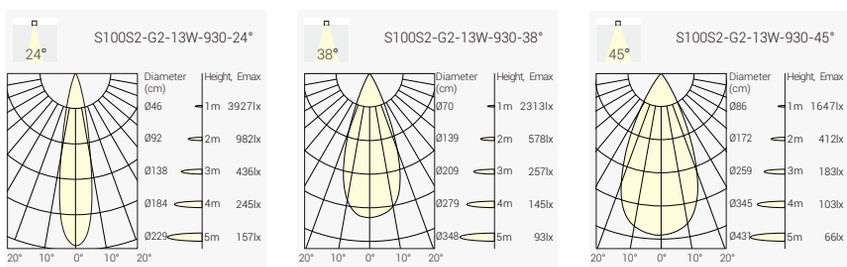

Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	24°	1500lm	900lm	SSS2G2-9272413N-WC
						38°	1500lm	950lm	SSS2G2-9273813N-WC
						45°	1500lm	900lm	SSS2G2-9274513N-WC
					3000K	24°	1600lm	950lm	SSS2G2-9302413N-WC
						38°	1600lm	1000lm	SSS2G2-9303813N-WC
						45°	1600lm	950lm	SSS2G2-9304513N-WC
					4000K	24°	1700lm	1100lm	SSS2G2-9402413N-WC
						38°	1700lm	1150lm	SSS2G2-9403813N-WC
						45°	1700lm	1100lm	SSS2G2-9404513N-WC
18W	21W	36V	500mA	90	2700K	24°	1900lm	1200lm	SSS2G2-9272418N-WC
						38°	1900lm	1350lm	SSS2G2-9273818N-WC
						50°	1900lm	1200lm	SSS2G2-9274518N-WC
					3000K	24°	2000lm	1300lm	SSS2G2-9302418N-WC
						38°	2000lm	1450lm	SSS2G2-9303818N-WC
						45°	2000lm	1300lm	SSS2G2-9304518N-WC
					4000K	24°	2200lm	1450lm	SSS2G2-9402418N-WC
						38°	2200lm	1600lm	SSS2G2-9403818N-WC
						45°	2200lm	1450lm	SSS2G2-9404518N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Trimless Version:
Trimless: +10,00€

No Driver	149,00 €
ON-OFF	159,00 €
Phase Dim	179,00 €
DALI DIM	189,00 €

Tunable White	
DALI DIM	259,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Coding

SSS2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SSS2G2 SENSE 100-G2 Trim Verion	**927** CRI90/ 2700K	**24** 24°	**13** 13W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SSS54G2 SENSE 100-G2 Trimless Verion	**930** CRI90/ 3000K	**38** 38°	**18** 18W	**F** On-Off	**B** Black	**M** Matt	
ESS2G2 SENSE 100-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

Optional accessary




Honeycomb


Code for SSS2G2-9302413N-WM with Honeycomb
SSS2G2-9302413N-WM-H

Honeycomb: +9,00€

SENSE S100HS2-G2 –Modular Design Architectural Downlight



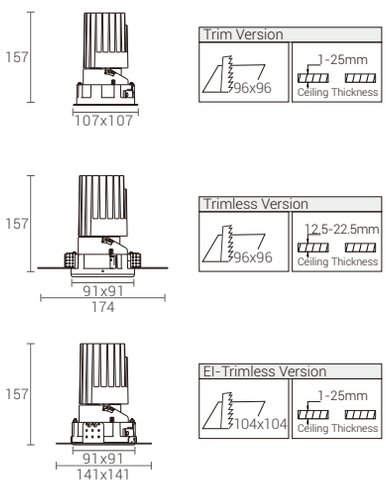

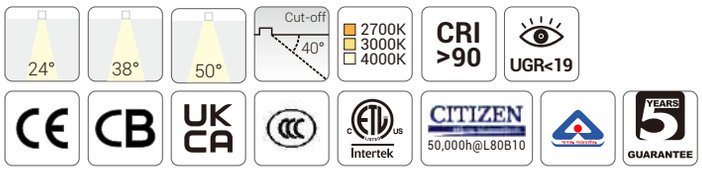


Quick Info

- Ceiling Cut-out: 96x96mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 25W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 38°, 50°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

■ 3000K

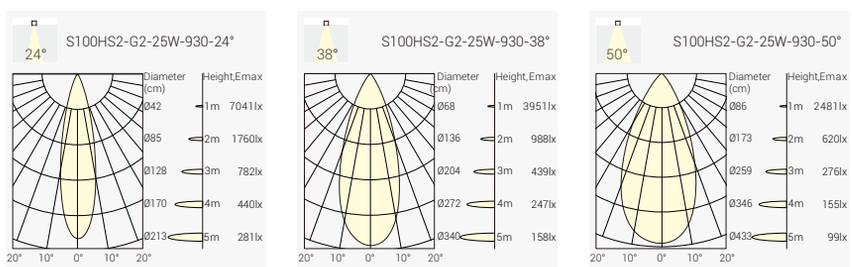

Order Info (SENSE 100H-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	24°	2400lm	1400lm	SHS2G2-9272425N-WC
						38°	2400lm	1500lm	SHS2G2-9273825N-WC
						50°	2400lm	1400lm	SHS2G2-9275025N-WC
					3000K	24°	2600lm	1500lm	SHS2G2-9302425N-WC
						38°	2600lm	1600lm	SHS2G2-9303825N-WC
						50°	2600lm	1500lm	SHS2G2-9305025N-WC
					4000K	24°	2800lm	1600lm	SHS2G2-9402425N-WC
						38°	2800lm	1700lm	SHS2G2-9403825N-WC
						50°	2800lm	1600lm	SHS2G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Trimless Version:
Trimless: +10,00€

No Driver	189,00 €
ON-OFF	199,00 €
Phase Dim	219,00 €
DALI DIM	239,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Coding

SHS2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SHS5G2 SENSE 100-G2H Trim Verion	**927** CRI90/ 2700K	**24** 24°	**25** 25W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SHS5G2 SENSE 100H -G2 Trimless Verion	**930** CRI90/ 3000K	**38** 38°		**F** On-Off	**B** Black	**M** Matt	
EHS5G2 SENSE 100H-G2 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

Optional accessary




Honeycomb

Code for SHS2G2-9302425N-WM with Honeycomb
SHS2G2-9302425N-WM-H

Honeycomb: +9,00€


SENSE S125R1-G2 –Modular Design Architectural Downlight System



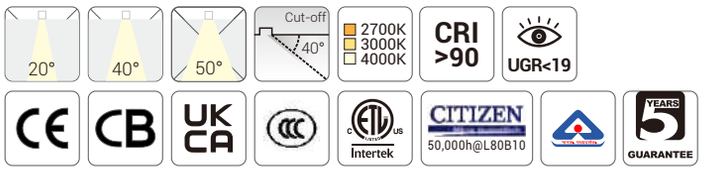


Quick Info

- Ceiling Cut-out: Ø125mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 18W, 25W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 40°, 50°
- Lumen Output: Up to 2600lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

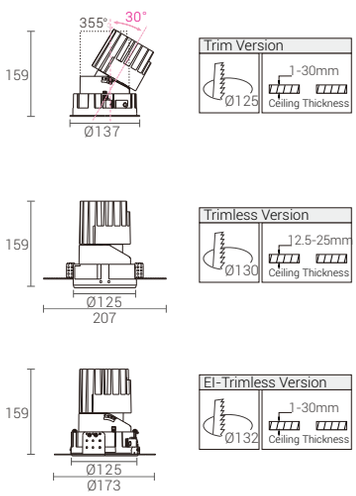

Light Distribution

3000K

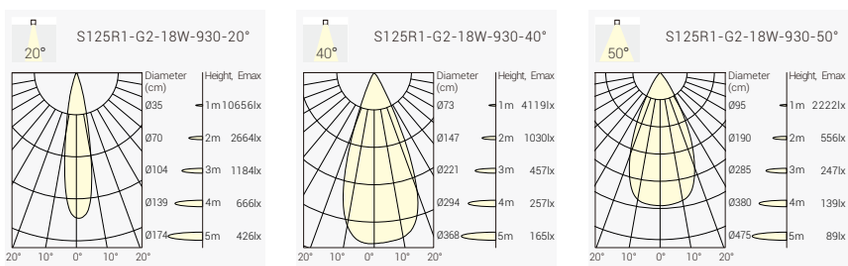

Order Info (SENSE 125-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	21W	36V	500mA	90	2700K	20°	2100lm	1600lm	SMR1G2-9272018N-WC
						40°	2100lm	1700lm	SMR1G2-9274018N-WC
						50°	2100lm	1500lm	SMR1G2-9275018N-WC
					3000K	20°	2300lm	1700lm	SMR1G2-9302018N-WC
						40°	2300lm	1800lm	SMR1G2-9304018N-WC
						50°	2300lm	1600lm	SMR1G2-9305018N-WC
					4000K	20°	2500lm	1800lm	SMR1G2-9402018N-WC
						40°	2500lm	1900lm	SMR1G2-9404018N-WC
						50°	2500lm	1700lm	SMR1G2-9405018N-WC
25W	28W	36V	700mA	90	2700K	20°	2900lm	2200lm	SMR1G2-9272025N-WC
						40°	2900lm	2400lm	SMR1G2-9274025N-WC
						50°	2900lm	2000lm	SMR1G2-9275025N-WC
					3000K	20°	3100lm	2300lm	SMR1G2-9302025N-WC
						40°	3100lm	2500lm	SMR1G2-9304025N-WC
						50°	3100lm	2100lm	SMR1G2-9305025N-WC
					4000K	20°	3300lm	2400lm	SMR1G2-9402025N-WC
						40°	3300lm	2600lm	SMR1G2-9404025N-WC
						50°	3300lm	2200lm	SMR1G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Trimless Version:
Trimless: +10,00€

No Driver	199,00 €
ON-OFF	209,00 €
Phase Dim	229,00 €
DALI DIM	239,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Honeycomb

Code for SMR1G2-9405025N-WM with Honeycomb
SMR1G2-9405025N-WM-H

Honeycomb: +9,00€

Product Code

SMR1G2 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SMR1G2 SENSE 125 Trim Verion	**927** CRI90/ 2700K	**20** 20°	**18** 18W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SMR4G2 SENSE 125 Trimless Verion	**930** CRI90/ 3000K	**40** 40°	**25** 25W	**F** On-Off	**B** Black	**M** Matt	
EMR1G2 SENSE 125 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE S125S1-G2 –Modular Design Architectural Downlight System




Quick Info

- Ceiling Cut-out: 122x122mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 18W, 25W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 40°, 50°
- Lumen Output: Up to 2600lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

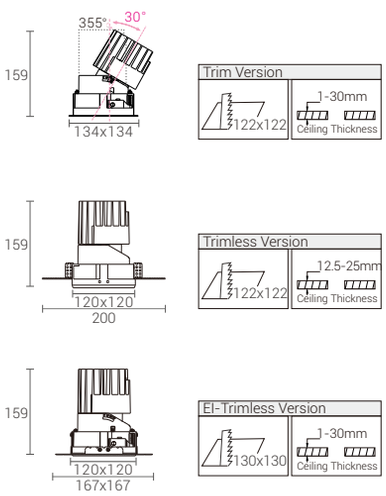

Light Distribution

3000K

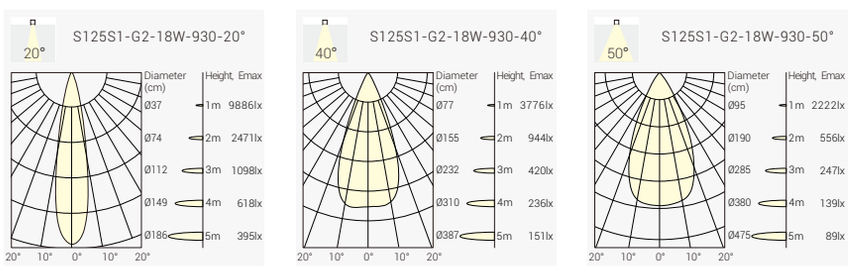

Order Info (SENSE 125-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	21W	36V	500mA	90	2700K	20°	2100lm	1500lm	SMS1G2-9272018N-WC
						40°	2100lm	1700lm	SMS1G2-9274018N-WC
						50°	2100lm	1500lm	SMS1G2-9275018N-WC
					3000K	20°	2300lm	1600lm	SMS1G2-9302018N-WC
						40°	2300lm	1800lm	SMS1G2-9304018N-WC
						20°	2300lm	1600lm	SMS1G2-9305018N-WC
					4000K	20°	2500lm	1700lm	SMS1G2-9402018N-WC
						04°	2500lm	1900lm	SMS1G2-9404018N-WC
						50°	2500lm	1700lm	SMS1G2-9405018N-WC
25W	28W	36V	700mA	90	2700K	20°	2900lm	2100lm	SMS1G2-9272025N-WC
						40°	2900lm	2300lm	SMS1G2-9274025N-WC
						50°	2900lm	2000lm	SMS1G2-9275025N-WC
					3000K	20°	3100lm	2200lm	SMS1G2-9302025N-WC
						40°	3100lm	2400lm	SMS1G2-9304025N-WC
						50°	3100lm	2100lm	SMS1G2-9305025N-WC
					4000K	20°	3300lm	2300lm	SMS1G2-9402025N-WC
						40°	3300lm	2600lm	SMS1G2-9404025N-WC
						50°	3300lm	2200lm	SMS1G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Trimless Version:
Trimless: +10,00€

No Driver	199,00 €
ON-OFF	209,00 €
Phase Dim	229,00 €
DALI DIM	239,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Honeycomb

Code for SMS1G2-9405025N-WM with Honeycomb
SMS1G2-9405025N-WM-H


Honeycomb: +9,00€


Product Code

SMS1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SMS1G2 SENSE 125 Trim Verion	**927** CRI90/ 2700K	**20** 20°	**18** 18W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SMS4G2 SENSE 125 Trimless Verion	**930** CRI90/ 3000K	**40** 40°	**25** 25W	**F** On-Off	**B** Black	**M** Matt	
EMS1G2 SENSE 125 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S125R2-G2 –Modular Design Architectural Downlight System

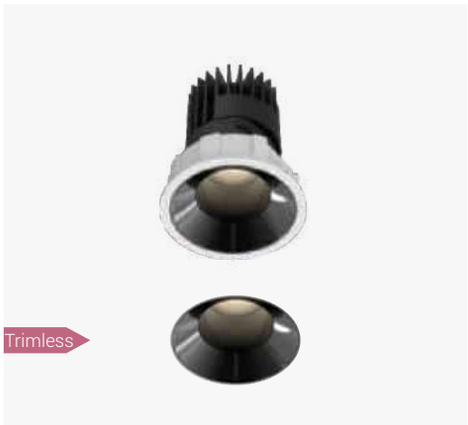

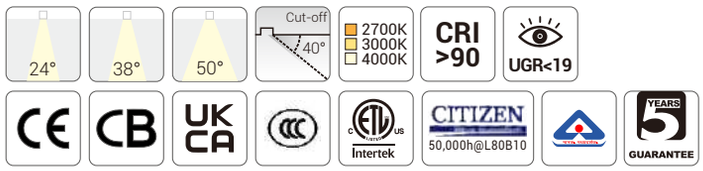


Quick Info

- Ceiling Cut-out: Ø125mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 18W, 25W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 38°, 50°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

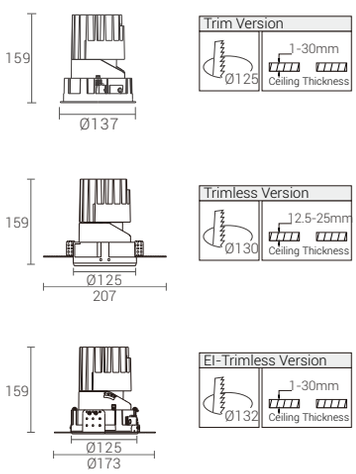

Light Distribution

3000K

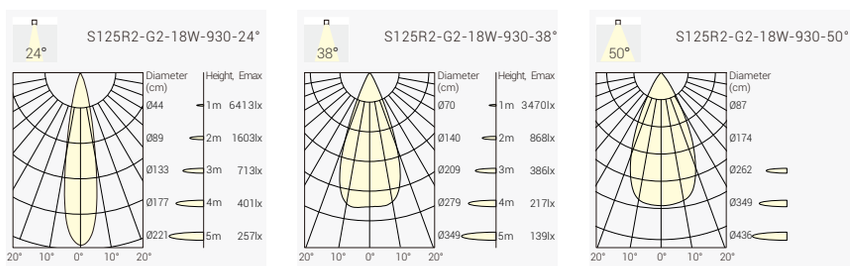

Order Info (SENSE 125-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	21W	36V	500mA	90	2700K	24°	2100lm	1500lm	SMR2G2-9272418 -WC
						38°	2100lm	1600lm	SMR2G2-9273818 -WC
						50°	2100lm	1400lm	SMR2G2-9275018 -WC
					3000K	24°	2300lm	1600lm	SMR2G2-9302418 -WC
						38°	2300lm	1700lm	SMR2G2-9303818 -WC
						20°	2300lm	1500lm	SMR2G2-9305018 -WC
					4000K	24°	2500lm	1700lm	SMR2G2-9404218 -WC
						38°	2500lm	1800lm	SMR2G2-9403818 -WC
						50°	2500lm	1600lm	SMR2G2-9405018 -WC
25W	28W	36V	700mA	90	2700K	24°	2900lm	2100lm	SMR2G2-9272425 -WC
						38°	2900lm	2200lm	SMR2G2-9273825 -WC
						50°	2900lm	1900lm	SMR2G2-9275025 -WC
					3000K	24°	3100lm	2200lm	SMR2G2-9302425 -WC
						38°	3100lm	2300lm	SMR2G2-9303825 -WC
						50°	3100lm	2000lm	SMR2G2-9305025 -WC
					4000K	24°	3300lm	2300lm	SMR2G2-9402425 -WC
						38°	3300lm	2400lm	SMR2G2-9403825 -WC
						50°	3300lm	2100lm	SMR2G2-9405025 -WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D

Trim Finsh



White Black

Trimless Version:
Trimless: +10,00€

No Driver	199,00 €
ON-OFF	209,00 €
Phase Dim	229,00 €
DALI DIM	239,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Honeycomb

Code for SMR2G2-9405025N-WM with Honeycomb
SMR2G2-9405025N-WM-H

Honeycomb: +9,00€


Product Code

SMR2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SMR2G2 SENSE 125 Trim Verion	**927** CRI90/ 2700K	**24** 24°	**18** 18W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SMR5G2 SENSE 125 Trimless Verion	**930** CRI90/ 3000K	**38** 38°	**25** 25W	**F** On-Off	**B** Black	**M** Matt	
EMR2G2 SENSE 125 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S125S2-G2 –Modular Design Architectural Downlight System



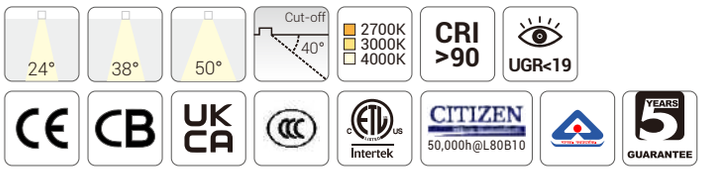


Quick Info

- Ceiling Cut-out: 122x122mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 18W, 25W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 38°, 50°
- Lumen Output: Up to 2300lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

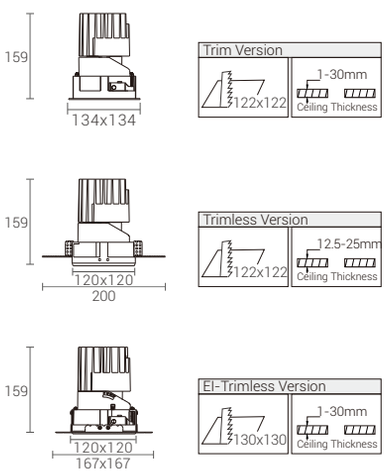

Light Distribution

3000K

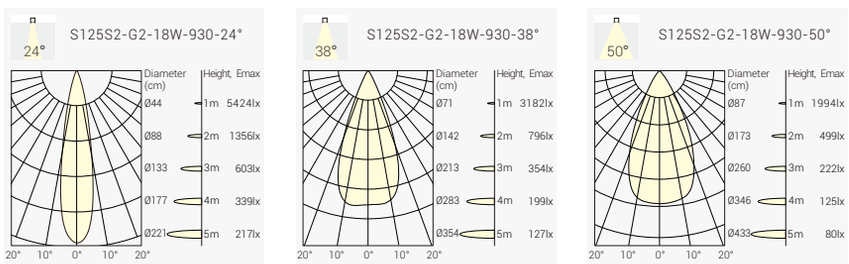

Order Info (SENSE 125-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	21W	36V	500mA	90	2700K	24°	2100lm	1300lm	SMS2G2-9272418N-WC
						38°	2100lm	1500lm	SMS2G2-9273818N-WC
						50°	2100lm	1200lm	SMS2G2-9275018N-WC
					3000K	24°	2300lm	1500lm	SMS2G2-9302418N-WC
						38°	2300lm	1600lm	SMS2G2-9303818N-WC
						20°	2300lm	1300lm	SMS2G2-9305018N-WC
					4000K	24°	2500lm	1500lm	SMS2G2-9404218N-WC
						38°	2500lm	1700lm	SMS2G2-9403818N-WC
						50°	2500lm	1400lm	SMS2G2-9405018N-WC
25W	28W	36V	700mA	90	2700K	24°	2900lm	1800lm	SMS2G2-9272425N-WC
						38°	2900lm	2000lm	SMS2G2-9273825N-WC
						50°	2900lm	1700lm	SMS2G2-9275025N-WC
					3000K	24°	3100lm	1900lm	SMS2G2-9302425N-WC
						38°	3100lm	2100lm	SMS2G2-9303825N-WC
						50°	3100lm	1800lm	SMS2G2-9305025N-WC
					4000K	24°	3300lm	2100lm	SMS2G2-9402425N-WC
						38°	3300lm	2300lm	SMS2G2-9403825N-WC
						50°	3300lm	2000lm	SMS2G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh




White Black

Trimless Version:
Trimless: +10,00€

No Driver	199,00 €
ON-OFF	209,00 €
Phase Dim	229,00 €
DALI DIM	239,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Honeycomb

Code for SMS2G2-9405025N-WM with Honeycomb
SMS2G2-9405025N-WM-H

Honeycomb: +9,00€


Product Code

SMS2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SMS2G2 SENSE 125 Trim Verion	**927** CRI90/ 2700K	**20** 20°	**18** 18W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SMS5G2 SENSE 125 Trimless Verion	**930** CRI90/ 3000K	**38** 38°	**25** 25W	**F** On-Off	**B** Black	**M** Matt	
EMS2G2 SENSE 125 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE S150R1-G2 – Modular Design Architectural Downlight System



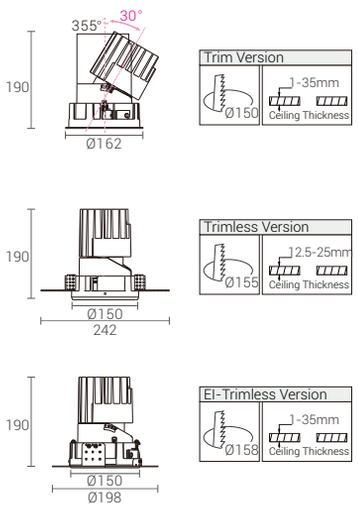

Trim Finsh



White Black

Trimless Version:
Trimless: +10,00€

No Driver	269,00 €
ON-OFF	279,00 €
Phase Dim	299,00 €
DALI DIM	319,00 €

Reflector Options



Specular Matt Black Dark Light White Gold


Optional accessary



Honeycomb

Code for SLR1G2-9404525N-WM with Honeycomb
SLR1G2-9404525N-WM-H

Honeycomb: +9,00€

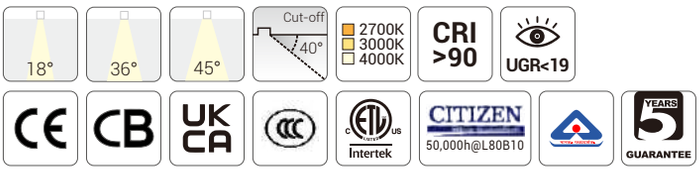



Quick Info


- Ceiling Cut-out: Ø150mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 25W, 38W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 36°, 45°
- Lumen Output: Up to 3900lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: No Driver, On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K







Order Info (SENSE 150-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	18°	3000lm	2300lm	SLR1G2-9271825N-WC
						36°	3000lm	2500lm	SLR1G2-9273625N-WC
						45°	3000lm	2000lm	SLR1G2-9274525N-WC
					3000K	18°	3200lm	2400lm	SLR1G2-9301825N-WC
						36°	3200lm	2600lm	SLR1G2-9303625N-WC
						45°	3200lm	2100lm	SLR1G2-9304525N-WC
					4000K	18°	3400lm	2500lm	SLR1G2-9401825N-WC
						36°	3400lm	2700lm	SLR1G2-9403625N-WC
						45°	3400lm	2200lm	SLR1G2-9404525N-WC
38W	42W	36V	1050mA	90	2700K	18°	4400lm	3300lm	SLR1G2-9271838N-WC
						36°	4400lm	3500lm	SLR1G2-9273638N-WC
						45°	4400lm	2800lm	SLR1G2-9274538N-WC
					3000K	18°	4600lm	3500lm	SLR1G2-9301838N-WC
						36°	4600lm	3700lm	SLR1G2-9303638N-WC
						45°	4600lm	3000lm	SLR1G2-9304538N-WC
					4000K	18°	4800lm	3700lm	SLR1G2-9401838N-WC
						36°	4800lm	3900lm	SLR1G2-9403638N-WC
						45°	4800lm	3200lm	SLR1G2-9404538N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Product Code

SLR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SLR1G2 SENSE 150 Trim Verion	**927** CRI90/ 2700K	**18** 18°	**18** 18W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SLR5G2 SENSE 150 Trimless Verion	**930** CRI90/ 3000K	**36** 36°	**25** 25W	**F** On-Off	**B** Black	**M** Matt	
ELR1G2 SENSE 150 EI-Trimless Verion	**940** CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE S150S1-G2 –Modular Design Architectural Downlight System



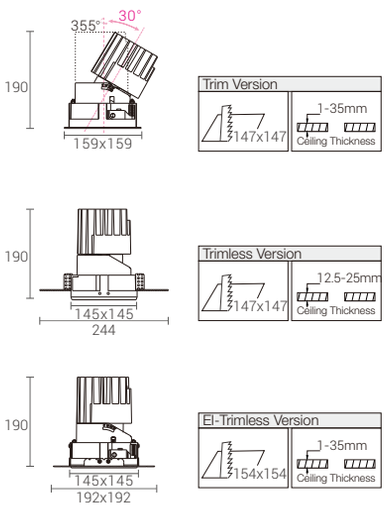

Trim Finsh



White Black

Trimless Version:

Trimless: +10,00€

No Driver	269,00 €
ON-OFF	279,00 €
Phase Dim	299,00 €
DALI DIM	319,00 €

Reflector Options



Specular Matt Black Dark Light White Gold


Optional accessary



Honeycomb

Code for SLS1G2-9404525N-WM with Honeycomb
SLS1G2-940525N-WM-H

Honeycomb: +9,00€

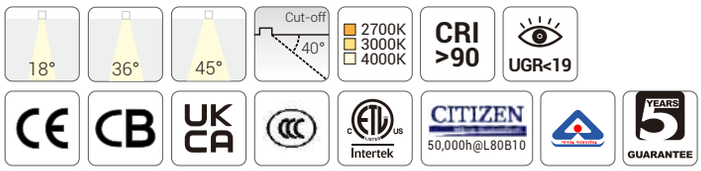


Quick Info

- Ceiling Cut-out: 147x147mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 25W, 38W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 36°, 45°
- Lumen Output: Up to 3600lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

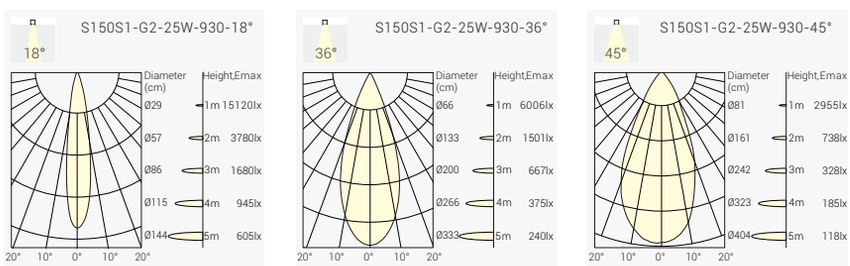

Order Info (SENSE 150-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	18°	3000lm	2000lm	SLS1G2-9271825N-WC
						36°	3000lm	2100lm	SLS1G2-9273625N-WC
						45°	3000lm	2000lm	SLS1G2-9274525N-WC
					3000K	18°	3200lm	2100lm	SLS1G2-9301825N-WC
						36°	3200lm	2200lm	SLS1G2-9303625N-WC
						45°	3200lm	2100lm	SLS1G2-9304525N-WC
					4000K	18°	3400lm	2200lm	SLS1G2-9401825N-WC
						36°	3400lm	2300lm	SLS1G2-9403625N-WC
						45°	3400lm	2200lm	SLS1G2-9404525N-WC
38W	42W	36V	1050mA	90	2700K	18°	4400lm	2900lm	SLS1G2-9271838N-WC
						36°	4400lm	3200lm	SLS1G2-9273638N-WC
						45°	4400lm	2900lm	SLS1G2-9274538N-WC
					3000K	18°	4600lm	3100lm	SLS1G2-9301838N-WC
						36°	4600lm	3400lm	SLS1G2-9303638N-WC
						45°	4600lm	3100lm	SLS1G2-9304538N-WC
					4000K	18°	4800lm	3300lm	SLS1G2-9401838N-WC
						36°	4800lm	3600lm	SLS1G2-9403638N-WC
						45°	4800lm	3300lm	SLS1G2-9404538N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


Product Code

SLS1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SLS1G2 SENSE 150 Trim Verion	**927** CRI90/ 2700K	**18** 18°	**18** 18W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SLS4G2 SENSE 150 Trimless Verion	**930** CRI90/ 3000K	**36** 38°	**25** 25W	**F** On-Off	**B** Black	**M** Matt	
ELS1G2 SENSE 150 EI-Trimless Verion	**940** CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S150R2-G2 –Modular Design Architectural Downlight System



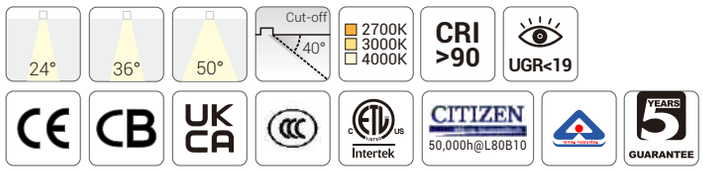


Quick Info

- Ceiling Cut-out: Ø150mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 25W, 38W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 36°, 50°
- Lumen Output: Up to 3400lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

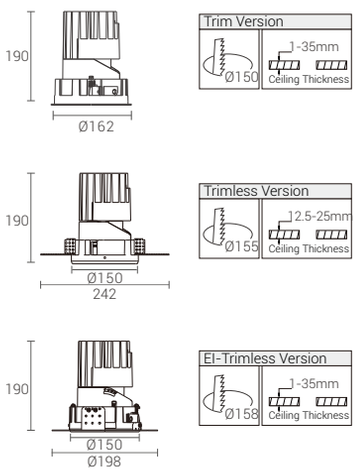

Light Distribution

3000K

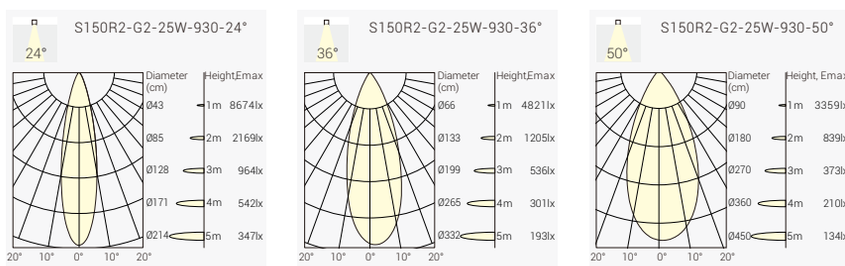

Order Info (SENSE 150-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	24°	3000lm	2100lm	SLR2G2-9272425N-WC
						36°	3000lm	2100lm	SLR2G2-9273625N-WC
						50°	3000lm	2100lm	SLR2G2-9275025N-WC
					3000K	24°	3200lm	2200lm	SLR2G2-9302425N-WC
						36°	3200lm	2200lm	SLR2G2-9303625N-WC
						50°	3200lm	2200lm	SLR2G2-9305025N-WC
					4000K	24°	3400lm	2300lm	SLR2G2-9402425N-WC
						36°	3400lm	2300lm	SLR2G2-9403625N-WC
						50°	3400lm	2300lm	SLR2G2-9405025N-WC
38W	42W	36V	1050mA	90	2700K	24°	4400lm	2900lm	SLR2G2-9272438N-WC
						36°	4400lm	3000lm	SLR2G2-9273638N-WC
						50°	4400lm	2900lm	SLR2G2-9275038N-WC
					3000K	24°	4600lm	3100lm	SLR2G2-9302438N-WC
						36°	4600lm	3200lm	SLR2G2-9303638N-WC
						50°	4600lm	3100lm	SLR2G2-9305038N-WC
					4000K	24°	4800lm	3300lm	SLR2G2-9402438N-WC
						36°	4800lm	3400lm	SLR2G2-9403638N-WC
						50°	4800lm	3300lm	SLR2G2-9405038N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Trimless Version:
Trimless: +10,00€

No Driver	269,00 €
ON-OFF	279,00 €
Phase Dim	299,00 €
DALI DIM	319,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Honeycomb

Code for SLR2G2-9405025N-WM with Honeycomb
SLR2G2-9405025N-WM-H

Honeycomb: +9,00€


Product Code

SLR2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SLR2G2 SENSE 150 Trim Verion	**927** CRI90/ 2700K	**24** 24°	**25** 25W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SLR6G2 SENSE 150 Trimless Verion	**930** CRI90/ 3000K	**36** 36°	**38** 38W	**F** On-Off	**B** Black	**M** Matt	
ELR2G2 SENSE 150 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S150S2-G2 –Modular Design Architectural Downlight System



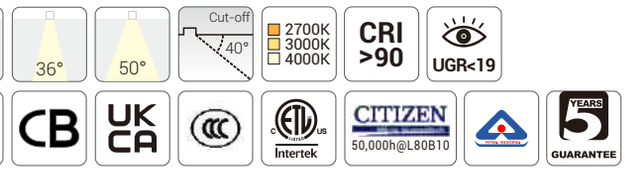


Quick Info

- Ceiling Cut-out: 147x147mm for Trim Version
- Trimless Version also Available
- CITIZEN LED: 25W, 38W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 36°, 50°
- Lumen Output: Up to 3100lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

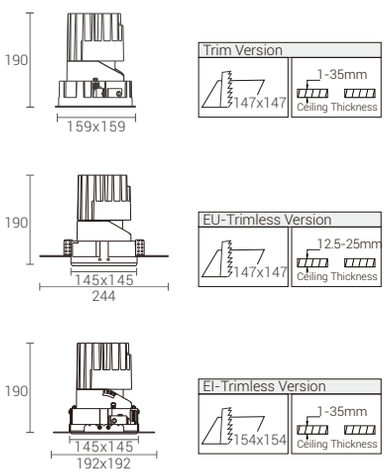

Light Distribution

3000K

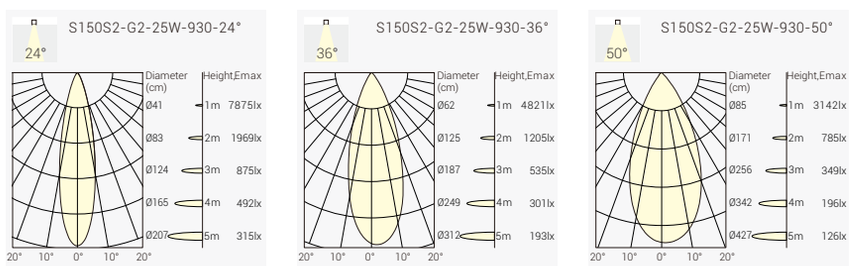

Order Info (SENSE 150-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	24°	3000lm	1800lm	SLS2G2-9272425N-WC
						36°	3000lm	2000lm	SLS2G2-9273625N-WC
						50°	3000lm	1900lm	SLS2G2-9275025N-WC
					3000K	24°	3200lm	1900lm	SLS2G2-9302425N-WC
						36°	3200lm	2100lm	SLS2G2-9303625N-WC
						50°	3200lm	2000lm	SLS2G2-9305025N-WC
					4000K	24°	3400lm	2000lm	SLS2G2-9402425N-WC
						36°	3400lm	2200lm	SLS2G2-9403625N-WC
						50°	3400lm	2100lm	SLS2G2-9405025N-WC
38W	42W	36V	1050mA	90	2700K	24°	4400lm	2500lm	SLS2G2-9272438N-WC
						36°	4400lm	2800lm	SLS2G2-9273638N-WC
						50°	4400lm	2700lm	SLS2G2-9275038N-WC
					3000K	24°	4600lm	2600lm	SLS2G2-9302438N-WC
						36°	4600lm	2900lm	SLS2G2-9303638N-WC
						50°	4600lm	2850lm	SLS2G2-9305038N-WC
					4000K	24°	4800lm	2700lm	SLS2G2-9402438N-WC
						36°	4800lm	3100lm	SLS2G2-9403638N-WC
						50°	4800lm	3000lm	SLS2G2-9405038N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh




White Black

Trimless Version:

Trimless: +10,00€

No Driver	269,00 €
ON-OFF	279,00 €
Phase Dim	299,00 €
DALI DIM	319,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessary



Honeycomb

Code for SLS2G2-9404525N-WM with Honeycomb
SLS2G2-940525N-WM-H

Honeycomb: +9,00€


Product Code

SLS2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SLS2G2 SENSE 150 Trim Verion	**927** CRI90/ 2700K	**24** 24°	**24** 24W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SLS6G2 SENSE 150 Trimless Verion	**930** CRI90/ 3000K	**36** 38°	**38** 38W	**F** On-Off	**B** Black	**M** Matt	
ELS2G2 SENSE 150 EI-Trimless Verion	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 1-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE
New Wall Washer


Excellent Glare Control
Uniform Illumination Across the Wall
Reflector Available with Specular

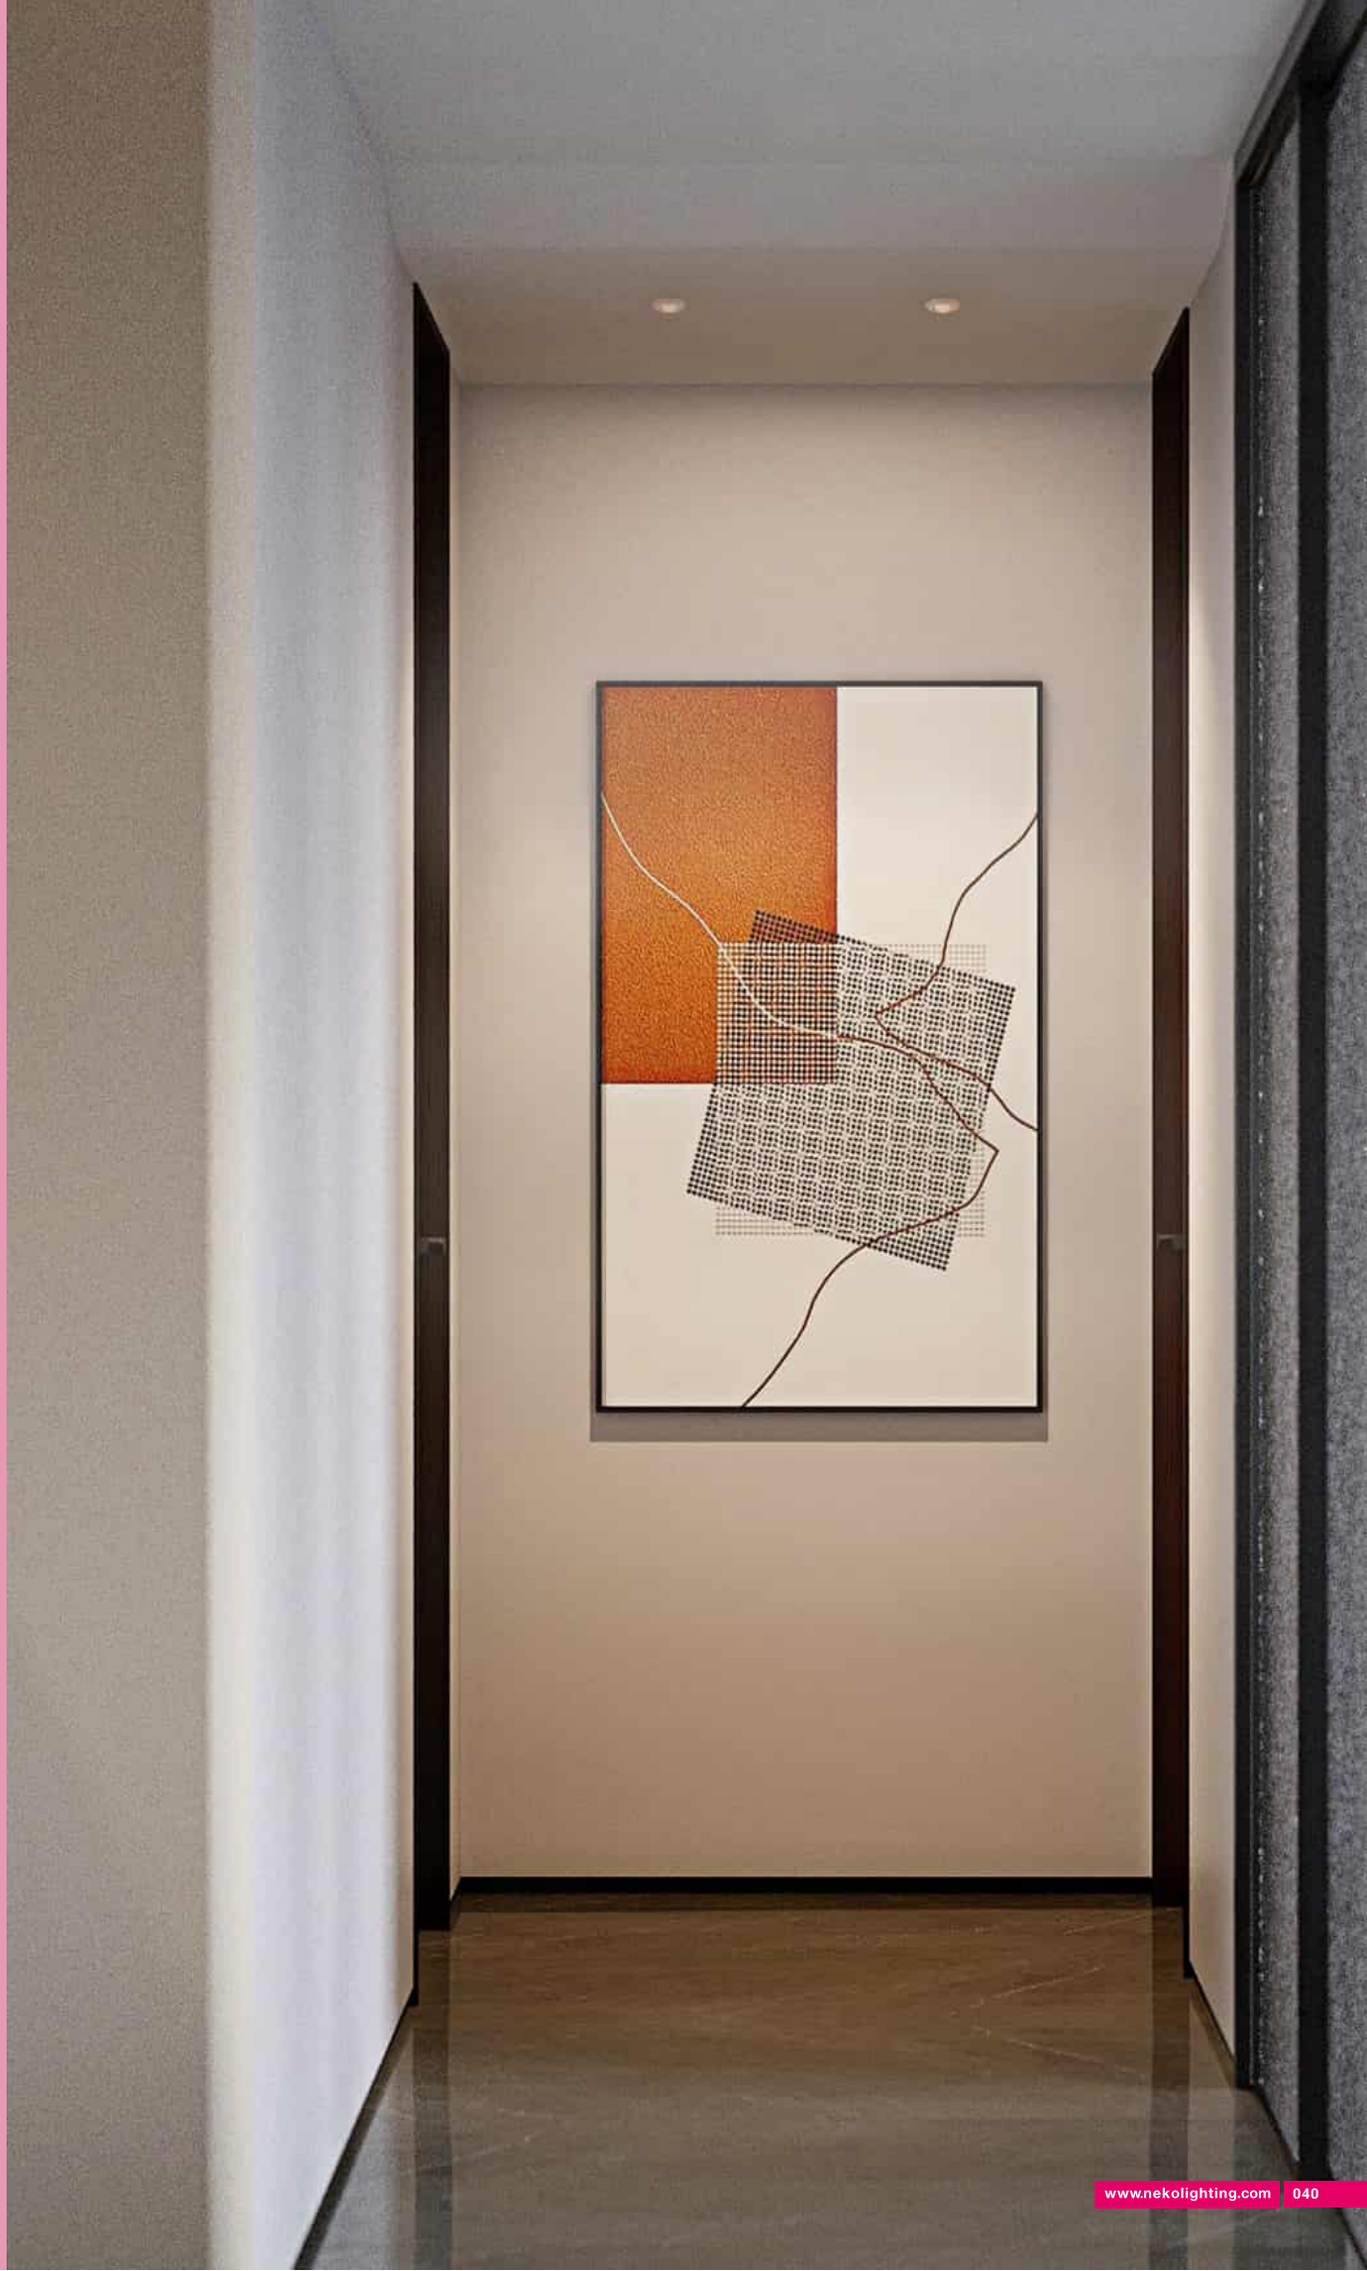

NEW

SENSE W75 & W100

The new technology of wall washer downlight is now part of the SENSE 2.0
Ceiling cutouts in both Ø75mm and Ø100mm sizes, offering different power and output options to meet diverse wall washing requirements across varying wall heights.
Excellent glare control and uniform illumination across the wall.
Reflector available in specular.

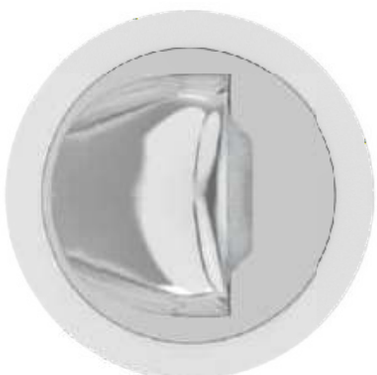



SENSE W75




SENSE W100

Wall Washer

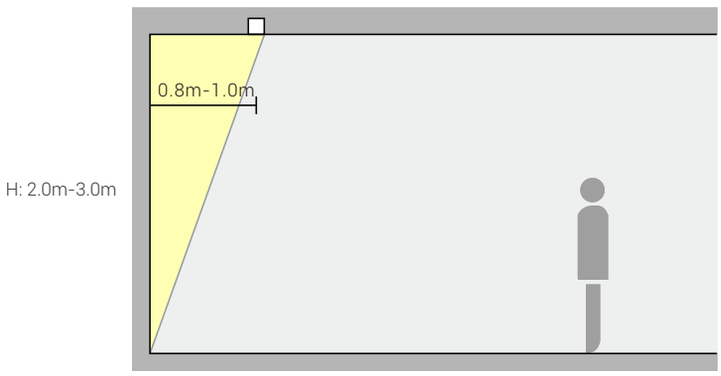

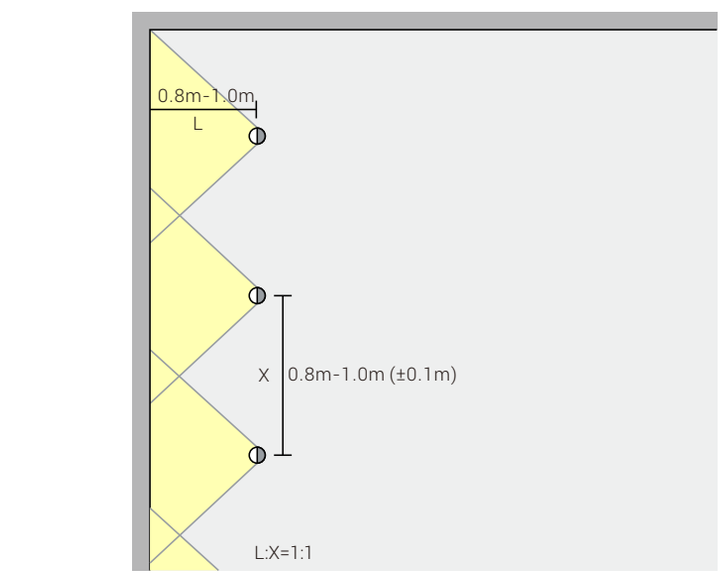


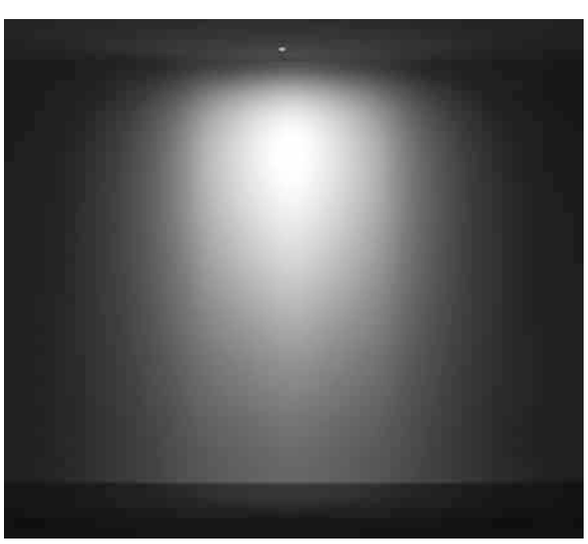


SENSE W75 – The New Technology of Wall Washer Downlight

NEW







No Direct Light into Eyes

Wall Washer | 2700K 3000K 4000K | CRI >90


CE CB UKCA ETL Intertek CITIZEN 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: Ø75mm
- CITIZEN LED: 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: Wall Washer
- Lumen Output: Up to 900lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K



Order Info (SENSE W75 in White Trim & Specular Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	Wall Washer	1200lm	800lm	S3RW-927WW13N-WS
					3000K	Wall Washer	1300lm	850lm	S3RW-930WW13N-WS
					4000K	Wall Washer	1400lm	900lm	S3RW-940WW13N-WS

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh


White


Black

Trimless Version:
Trimless: +10,00€

No Driver	119,00 €
ON-OFF	129,00 €
Phase Dim	139,00 €
DALI°DIM	159,00 €

Reflector Options


Specular



Coding

S3RW – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
S3RW SENSE W75	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	WW Wall Washer	13 13W	N No Driver F On-Off P Phase Dim A 1-10V Dim D DALI Dim	W White B Black	S Specular	

BACK

SENSE W100 – The New Technology of Wall Washer Downlight

NEW





Wall Washer | 2700K 3000K 4000K | CRI >90


CE CB UKCA ETL Intertek CITIZEN 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: Ø100mm
- CITIZEN LED: 17W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: Wall Washer
- Lumen Output: Up to 1450lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim








No Direct Light into Eyes

Light Distribution

3000K



Order Info (SENSE W100 in White Trim & Specular Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17W	20W	36V	500mA	90	2700K	Wall Washer	2300lm	1250lm	S4RW-927WW17N-WS
					3000K	Wall Washer	2400lm	1350lm	S4RW-930WW17N-WS
					4000K	Wall Washer	2600lm	1450lm	S4RW-940WW17N-WS

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

Trimless Version:
Trimless: +10,00€

No Driver	169,00 €
ON-OFF	179,00 €
Phase Dim	199,00 €
DALI°DIM	209,00 €

Reflector Options



Specular



Coding


S4RW – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
S4RW SENSE W100	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	WW Wall Washer	17 17W	N No Driver F On-Off P Phase Dim A 1-10V Dim D DALI Dim	W White B Black	S Specular	


BACK


TAKEO

The Interchangeable Design
Fixed Downlight Series
Round & Square
High Efficiency
UGR<19
IP54

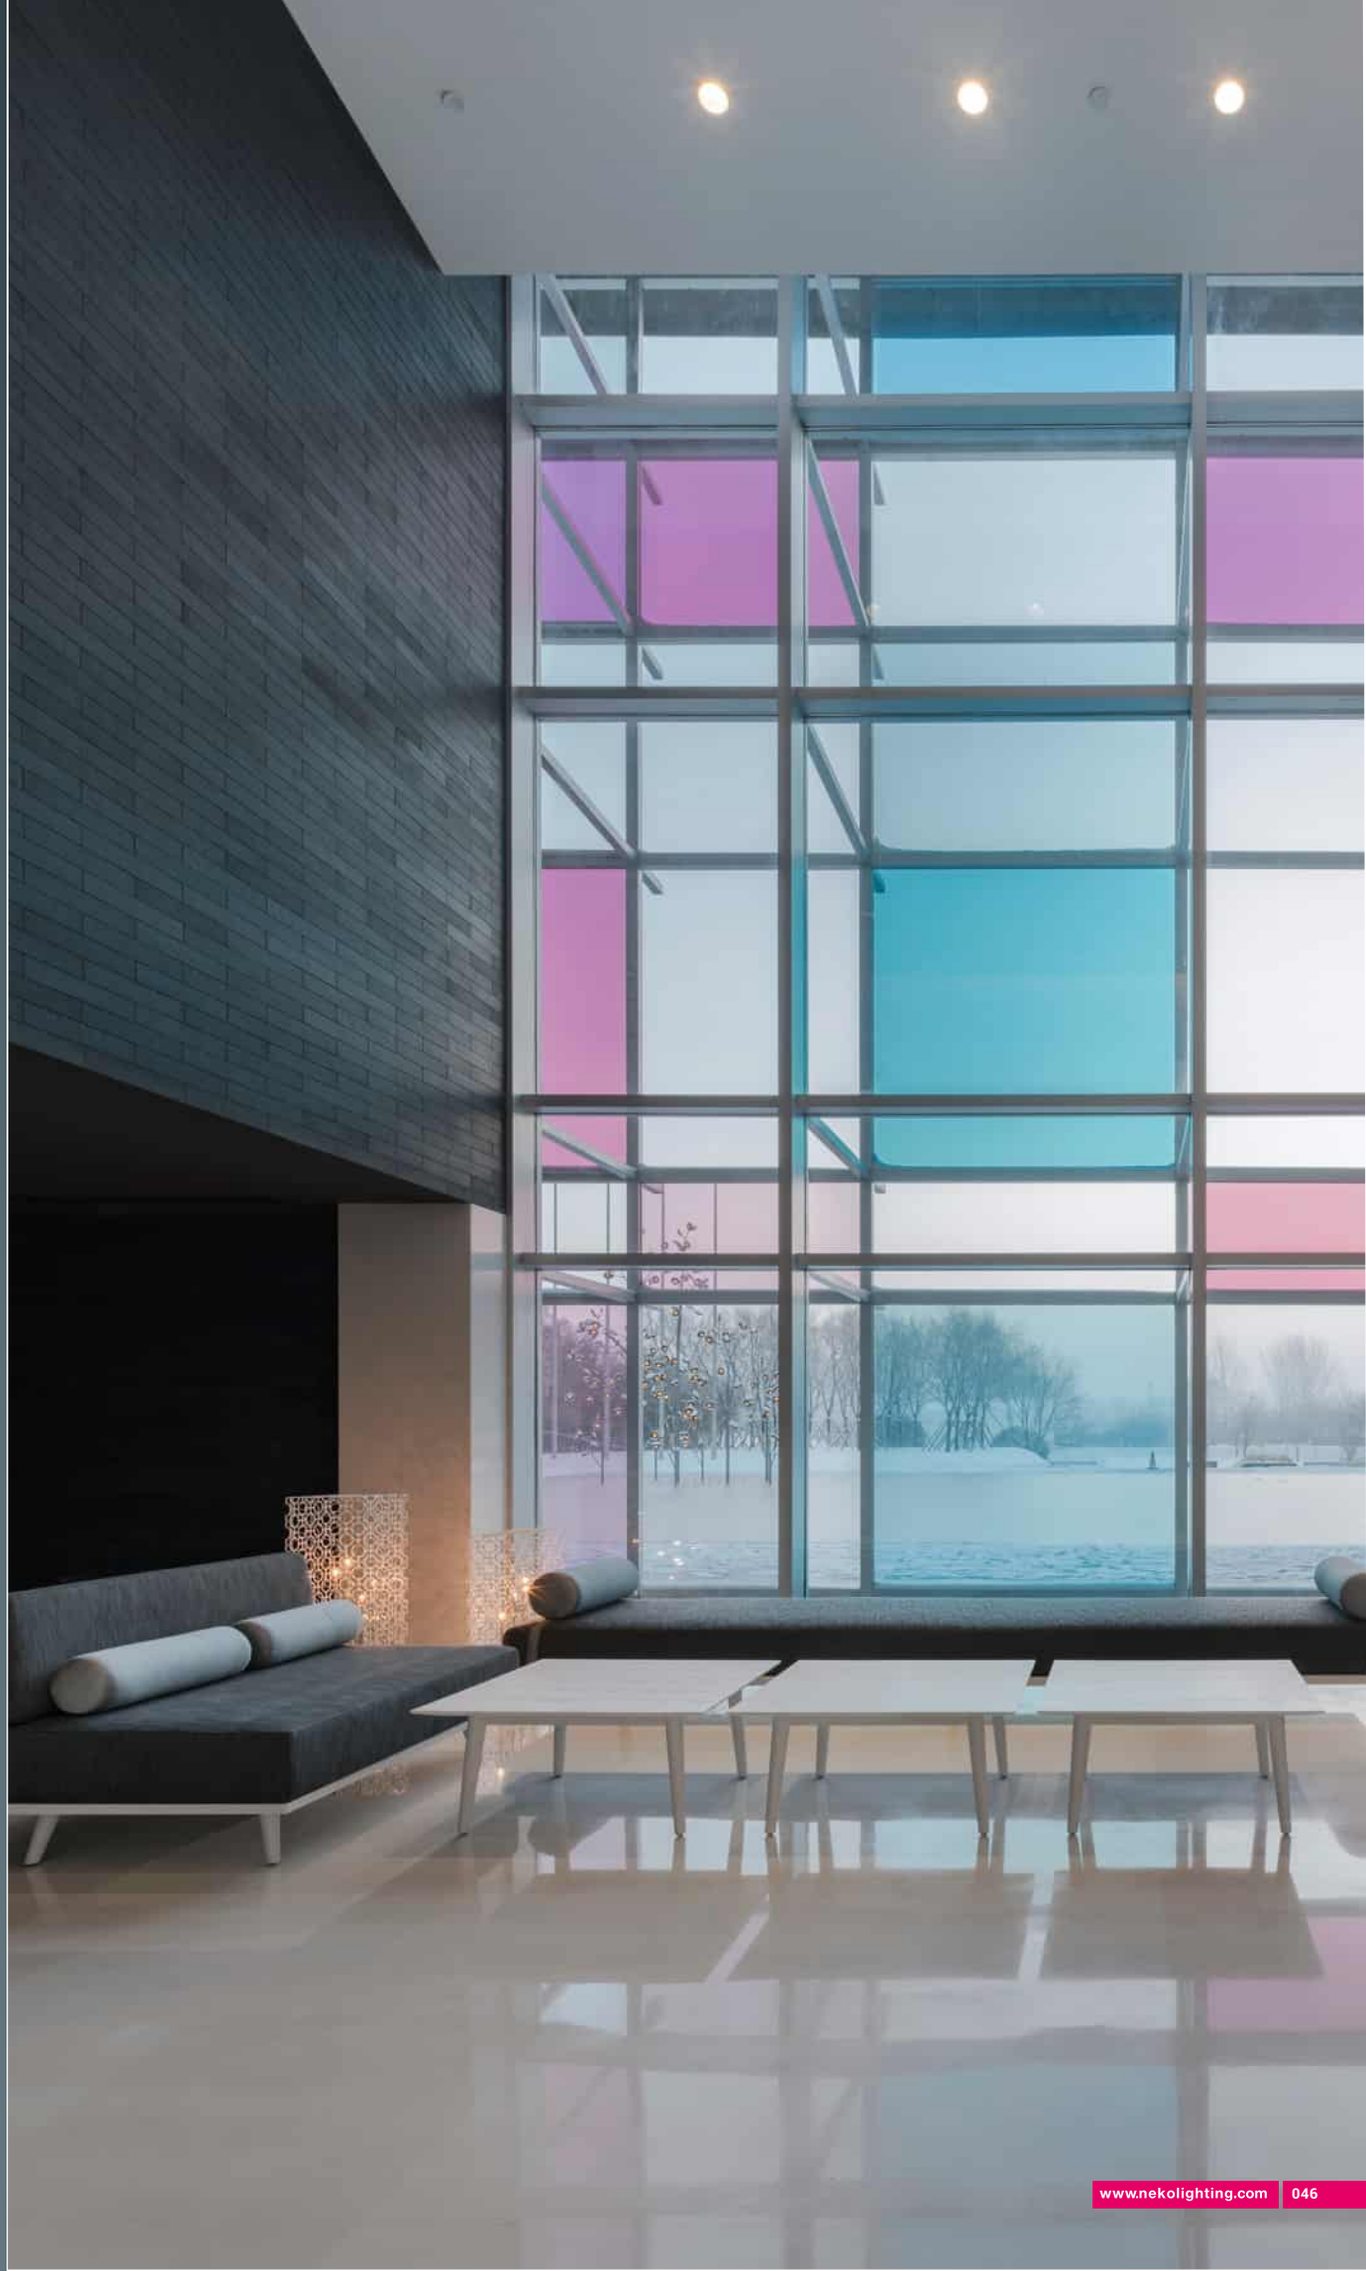

TAKEO T75 – High Efficiency Fixed Downlight

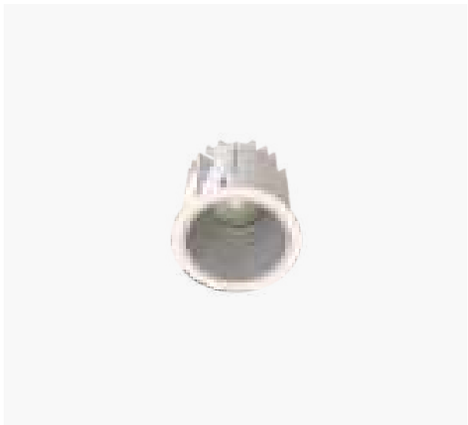




Quick Info

- Ceiling Cut-out: Ø75mm
- CITIZEN LED: 7.5W, 11W, CRI>90, CRI>80
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 25°, 50°
- Lumen Output: Up to 1050lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

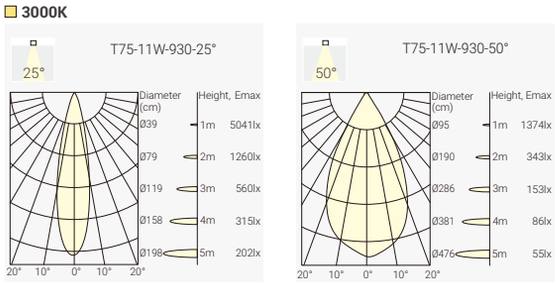

Trim Finsh



White Black


No Driver	49,00 €
ON-OFF	59,00 €
Phase Dim	69,00 €
DALI DIM	89,00 €

Order Info (TAKEO T75 in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5W	9W	31V	250mA	80	2700K	25°	1000lm	720lm	TT1-8272509N-WM
						50°	1000lm	720lm	TT1-8275009N-WM
					3000K	25°	1100lm	750lm	TT1-8302509N-WM
						50°	1100lm	750lm	TT1-8305009N-WM
					4000K	25°	1200lm	800lm	TT1-8402509N-WM
						50°	1200lm	800lm	TT1-8405009N-WM
11W	13W	31V	350mA	80	2700K	25°	1300lm	900lm	TT2-8272511N-WM
						50°	1300lm	900lm	TT2-8275011N-WM
					3000K	25°	1400lm	950lm	TT2-8302511N-WM
						50°	1400lm	950lm	TT2-8305011N-WM
					4000K	25°	1500lm	1050lm	TT2-8402511N-WM
						50°	1500lm	1050lm	TT2-8405011N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black


Coding


TT1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TT1 T75-7.5W	827 CRI>80/ 2700K	25 25°	08 7.5W	N No Driver	W White	B Black	
TT2 T75-11W	830 CRI>80/ 3000K	50 50°	11 11W	F On-Off	B Black	M Matt	
	840 CRI>80/ 4000K			P Phase Dim		W White	
	927 CRI>90/ 2700K			A 1-10V Dim			
	930 CRI>90/ 3000K			D DALI Dim			
	940 CRI>90/ 4000K						

TAKEO T100 Pro – High Efficiency Fixed Downlight









Quick Info

- Ceiling Cut-out: Ø100mm
- CITIZEN LED: 8.5W, 12W, 17W, CRI>90, CRI>80
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 30°, 50°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K





Order Info (TAKEO T100 Pro in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8.5W	10W	34V	250mA	80	2700K	30°	1300lm	1150lm	TS4-8272009N-WM
						50°	1300lm	1050lm	TS4-8274009N-WM
					3000K	30°	1400lm	1200lm	TS4-8302009N-WM
						50°	1400lm	1100lm	TS4-8305009N-WM
					4000K	30°	1500lm	1300lm	TS4-8402009N-WM
						50°	1500lm	1200lm	TS4-8404009N-WM
12W	14W	34V	350mA	80	2700K	30°	1800lm	1500lm	TS4-8272012N-WM
						50°	1800lm	1400lm	TS4-8274012N-WM
					3000K	30°	1900lm	1600lm	TS4-8302012N-WM
						50°	1900lm	1500lm	TS4-8304012N-WM
					4000K	30°	2050lm	1700lm	TS4-8402012N-WM
						50°	2050lm	1600lm	TS4-8404012N-WM
17W	20W	36V	500mA	80	2700K	30°	2500lm	2150lm	TS4-8272017N-WM
						50°	2500lm	1900lm	TS4-8274017N-WM
					3000K	30°	2600lm	2250lm	TS4-8302017N-WM
						50°	2600lm	2000lm	TS4-8304017N-WM
					4000K	30°	2800lm	2400lm	TS4-8402017N-WM
						50°	2800lm	2200lm	TS4-8404017N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

No Driver	79,00 €
ON-OFF	89,00 €
Phase Dim	109,00 €
DALI DIM	119,00 €

Reflector Options



White Matt Black

Coding

TS4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TS4 TAKEO T100 Pro	**827** CRI>80/ 2700K	**30** 30°	**08** 7.5W	**N** No Driver	**W** White	**B** Black	
	830 CRI>80/ 3000K	**50** 50°	**12** 12W	**F** On-Off	**B** Black	**M** Matt	
	840 CRI>80/ 4000K		**17** 17W	**P** Phase Dim		**W** White	
	927 CRI>90/ 2700K			**A** 1-10V Dim			
	930 CRI>90/ 3000K			**D** DALI Dim			
	940 CRI>90/ 4000K						


TAKEO T100-DW – High Efficiency Fixed Downlight






Quick Info


- Ceiling Cut-out: Ø100mm
- Bridgelux LED: 12W, CRI>95
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 50°
- Lumen Output: Up to Max.1000lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: Phase Dim, 1-10V Dim, DALI Dim , Casambi Wireless Dim





Light Distribution

3000K



Trim Finsh



White Black

Dim-to-warm	
No Driver	109,00 €
Phase Dim	129,00 €
DALI DIM	149,00 €

Order Info (TAKEO T100-DW in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
12W	14W	34V	350mA	95	1800K-3000K	50°	Max.1000lm	TS2-9D35012N-WM

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim

DIM to WARM 1800K 2700K 3000K



Reflector Options



White Matt Black


Coding

TS2	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	LED Power	Control		Trim Finish	Reflector Color		Accessory
TS2 TAKEO T100-DW		9D3 CRI>95 1800K-3000K	50 50°	12 12W	N No Driver P Phase Dim A 1-10V Dim D DALI Dim		W White B Black	B Black M Matt W White		

BACK

TAKEO T100-TW – High Efficiency Fixed Downlight







Quick Info

- Ceiling Cut-out: Ø100mm
- Bridgelux LED: 13W, CRI>90
- CCT: Tunable White 2700K-6500K
- Beam Angle: 50°
- Lumen Output: Up to 900lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: DALI DT8 Dim

Light Distribution

3000K





Trim Finsh



White Black

No Driver	169,00 €
DALI DIM	229,00 €

Order Info (TAKEO T100-TW in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
13W	15W	36V	350mA	90	2700K-6500k	50°	Max.900lm	TS2-9TW5013N-WM
					@2700K	50°	750lm	
					@3000K	50°	780lm	
					@4000K	50°	850lm	
					@5000K	50°	900lm	
					@6500K	50°	900lm	

Code Remark: N=N(No Driver) D=D(DALI DT8 Dim)

Reflector Options



White Matt Black

Coding

TS2	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	LED Power	Control		Trim Finish	Reflector Color		Accessory
TS2 TAKEO T100-TW		9TW CRI>90 2700K-6500K	50 50°	13 13W	N No Driver D DALI DT8 Dim		W White B Black	B Black M Matt W White		

TAKEO T150 Pro – High Efficiency Fixed Downlight





30° 65° Cut-off 30° 2700K 3000K 4000K CRI >80 CRI >90 UGR<19

IP54 CE CB UKCA ETL Intertek CITIZEN 50,000h@L80B10 5 YEARS GUARANTEE PEP eco PASS PORT®

Quick Info


- Ceiling Cut-out: Ø150mm
- CITIZEN LED: 17W, 24W, CRI>90, CRI>80
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 30°, 65°
- Lumen Output: Up to 3800lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

3000K





Trim Finsh



White Black

No Driver	129,00 €
ON-OFF	139,00 €
Phase Dim	159,00 €
DALI DIM	169,00 €

Order Info (TAKEO T150 Pro in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17W	19W	36V	500mA	80	2700K	30°	3000lm	2450lm	TM4-8273017N-WM
						65°	3000lm	2000lm	TM4-8276517N-WM
					3000K	30°	3200lm	2600lm	TM4-8303017N-WM
						65°	3200lm	2100lm	TM4-8306517N-WM
					4000K	30°	3500lm	2800lm	TM4-8403017N-WM
						65°	3500lm	2300lm	TM4-8406517N-WM
24W	26W	36V	700mA	80	2700K	30°	4000lm	3300lm	TM4-8273024N-WM
						65°	4000lm	2700lm	TM4-8276524N-WM
					3000K	30°	4200lm	3500lm	TM4-8303024N-WM
						65°	4200lm	2850lm	TM4-8306524N-WM
					4000K	30°	4500lm	3800lm	TM4-8403024N-WM
						65°	4500lm	3000lm	TM4-8406524N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black

Coding

TM4 – *** ** ** * – * * – *

MODEL	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TM4 TAKEO T150 Pro	827 CRI>80/ 2700K	30 30°	17 17W	N No Driver	W White	B Black	
	830 CRI>80/ 3000K	65 65°	24 24W	F On-Off	B Black	M Matt	
	840 CRI>80/ 4000K			P Phase Dim		W White	
	927 CRI>90/ 2700K			A 1-10V Dim			
	930 CRI>90/ 3000K			D DALI Dim			
	940 CRI>90/ 4000K						

BACK

TAKEO T150-TW – High Efficiency Fixed Downlight





60° | Cut-off 30° | 2700K 6500K Tunable White | CRI >90 | UGR<19

IP54 | CE | CB | UK CA | ETL Intertek | bridgelux 50,000h@L80B10 | 5 YEARS GUARANTEE | PEP eco PASS PORT®

Quick Info


- Ceiling Cut-out: Ø150mm
- Bridgelux LED: 18W, 25W, CRI>90
- CCT: Tunable White 2700K-6500K
- Beam Angle: 60°
- Lumen Output: Up to Max.1900lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: DALI DT8 Dim






Light Distribution

3000K





Trim Finsh



White Black

No Driver	219,00 €
DALI DIM	279,00 €

Order Info (TAKEO T150-TW in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
18W	21W	36V	500mA	90	2700K-6500k	60°	Max.1400lm	TM1-9TW6018N-WM
					@2700K	60°	1200lm	
					@3000K	60°	1250lm	
					@4000K	60°	1350lm	
					@5000K	60°	1400lm	
					@6500K	60°	1400lm	
25W	28W	36V	700mA	90	2700K-6500k	60°	Max.1900lm	TM2-9TW6025N-WM
					@2700K	60°	1700lm	
					@3000K	60°	1750lm	
					@4000K	60°	1850lm	
					@5000K	60°	1900lm	
					@6500K	60°	1900lm	

Code Remark: N=N(No Driver) D=D(DALI DT8 Dim)

Reflector Options



White Matt Black


Coding

TM1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TM1 TAKEO T150-18W	9TW CRI>90 2700K-6500K	60 60°	18 18W	N No Driver	W White	B Black	
TM2 TAKEO T150-25W			25 25W	D DALI DT8 Dim	B Black	M Matt	
						W White	


TAKEO T200 Pro – High Efficiency Fixed Downlight




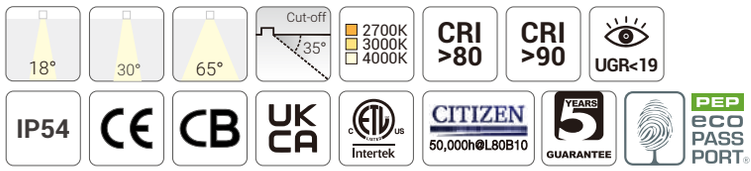

Quick Info


- Ceiling Cut-out: Ø200mm
- CITIZEN LED: 24W, 36W, CRI>90, CRI>80
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 65°
- Lumen Output: Up to 5300lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim







Light Distribution

3000K







Trim Finsh



White Black

No Driver	179,00 €
ON-OFF	199,00 €
Phase Dim	209,00 €
DALI DIM	229,00 €

Order Info (TAKEO T200 Pro in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24W	26W	34V	700mA	80	2700K	18°	4200lm	3200lm	TL4-8271824N-WM
						30°	4200lm	3300lm	TL4-8273024N-WM
						65°	4200lm	2700lm	TL4-8276524N-WM
					3000K	18°	4400lm	3400lm	TL4-8301824N-WM
						30°	4400lm	3500lm	TL4-8303024N-WM
						65°	4400lm	2900lm	TL4-8306524N-WM
					4000K	18°	4700lm	3750lm	TL4-8401824N-WM
						30°	4700lm	3800lm	TL4-8403024N-WM
						65°	4700lm	3100lm	TL4-8406524N-WM
36W	40W	34V	1050mA	80	2700K	18°	5600lm	4600lm	TL4-8271836N-WM
						30°	5600lm	4800lm	TL4-8273036N-WM
						65°	5600lm	4000lm	TL4-8276536N-WM
					3000K	18°	6000lm	4800lm	TL4-8301836N-WM
						30°	6000lm	5000lm	TL4-8303036N-WM
						65°	6000lm	4200lm	TL4-8306536N-WM
					4000K	18°	6500lm	5100lm	TL4-8401836N-WM
						30°	6500lm	5300lm	TL4-8403036N-WM
						65°	6500lm	4500lm	TL4-8406536N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black

Coding


TL4 – *** ** ** * – * * – *


MODEL	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TL4 TAKEO T200 Pro	827 CRI>80/ 2700K	18 18°	24 24W	N No Driver	W White	B Black	
	830 CRI>80/ 3000K	30 30°	36 36W	F On-Off	B Black	M Matt	
	840 CRI>80/ 4000K	65 65°		P Phase Dim		W White	
	927 CRI>90/ 2700K			A 1-10V Dim			
	930 CRI>90/ 3000K			D DALI Dim			
	940 CRI>90/ 4000K						

BACK

TAKEO T200-TW – High Efficiency Fixed Downlight









Quick Info

- Ceiling Cut-out: Ø200mm
- Bridgelux LED: 25W, CRI>90
- CCT: Tunable White 2700K-6500K
- Beam Angle: 60°
- Lumen Output: Up to Max.1900lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: DALI DT8 Dim

Light Distribution

3000K





Trim Finsh



White Black

No Driver	289,00 €
DALI DIM	329,00 €

Reflector Options



White Matt Black

Order Info (TAKEO T200-TW in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
25W	28W	36V	700mA	90	2700K-6500k	60°	Max.1900lm	TL1-9TW6025N-WM
					@2700K	60°	1700lm	
					@3000K	60°	1750lm	
					@4000K	60°	1850lm	
					@5000K	60°	1900lm	
					@6500K	60°	1900lm	

Code Remark: N=N(No Driver) D=D(DALI DT8 Dim)


Coding

TL1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TL1 TAKEO T200 TW	9TW CRI>90 2700K-6500K	60 60°	25 25W	N No Driver D DALI DT8 Dim	W White B Black	B Black M Matt W White	


TAKEO T150C Pro – High Efficiency Fixed Downlight



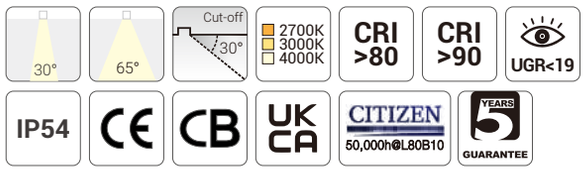


Quick Info


- CITIZEN LED: 17W, 24W, CRI>90, CRI>80
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 30° , 65°
- Lumen Output: Up to 3800lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K





Housing Finsh



White Black

No Driver	249,00 €
ON-OFF	269,00 €
Phase Dim	279,00 €
DALI DIM	299,00 €

Order Info (TAKEO T150C Pro in White Housing & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17W	19W	36V	500mA	80	2700K	30°	3000lm	2450lm	TMC4-8273017N-WM
						65°	3000lm	2000lm	TMC4-8276517N-WM
					3000K	30°	3200lm	2600lm	TMC4-8303017N-WM
						65°	3200lm	2100lm	TMC4-8306517N-WM
					4000K	30°	3500lm	2800lm	TMC4-8403017N-WM
						65°	3500lm	2300lm	TMC4-8406517N-WM
24W	26W	36V	700mA	80	2700K	30°	4000lm	3300lm	TMC4-8273024N-WM
						65°	4000lm	2700lm	TMC4-8276524N-WM
					3000K	30°	4200lm	3500lm	TMC4-8303024N-WM
						65°	4200lm	2850lm	TMC4-8306524N-WM
					4000K	30°	4500lm	3800lm	TMC4-8403024N-WM
						65°	4500lm	3000lm	TMC4-8406524N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black

Coding

TMC4 – *** ** ** * – * * – *

MODEL	CRI/ CCT	Beam Angle	LED Power	Control	Housing Finish	Reflector Color	Accessory
TMC4 TAKEO T150C Pro	827 CRI>80/ 2700K	30 30°	17 17W	N No Driver	W White	B Black	
	830 CRI>80/ 3000K	65 65°	24 24W	F On-Off	B Black	M Matt	
	840 CRI>80/ 4000K			P Phase Dim		W White	
	927 CRI>90/ 2700K			A 1-10V Dim			
	930 CRI>90/ 3000K			D DALI Dim			
	940 CRI>90/ 4000K						

BACK

TAKEO TS68 – High Efficiency Fixed Downlight





25° 60° Cut-off 40° 2700K 3000K 4000K CRI >80 CRI >90 UGR<19

IP54 CE CB UKCA ETL Intertek CITIZEN 50,000h@L80B10 5 YEARS GUARANTEE PEP eco PASS PORT

Quick Info


- Ceiling Cut-out: 68x68mm
- CITIZEN LED: 7.5W, 11W, CRI>90, CRI>80
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 25°,, 60°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

■ 3000K





Trim Finsh



White Black

No Driver	69,00 €
ON-OFF	79,00 €
Phase Dim	89,00 €
DALI DIM	109,00 €

Order Info (TAKEO TS68 in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5W	9W	31V	250mA	80	2700K	25°	1000lm	680lm	TTS1-8272508N-WM
						60°	1000lm	680lm	TTS1-8275008N-WM
					3000K	25°	1100lm	700lm	TTS1-8302508N-WM
						60°	1100lm	700lm	TTS1-8305008N-WM
					4000K	25°	1200lm	750lm	TTS1-8402508N-WM
						60°	1200lm	750lm	TTS1-8405008N-WM
11W	13W	31V	350mA	80	2700K	25°	1300lm	870lm	TTS2-8272511N-WM
						60°	1300lm	870lm	TTS2-8275011N-WM
					3000K	25°	1400lm	900lm	TTS2-8302511N-WM
						60°	1400lm	900lm	TTS2-8305011N-WM
					4000K	25°	1500lm	950lm	TTS2-8402511N-WM
						60°	1500lm	950lm	TTS2-8405011N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black

Coding

TTS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TTS1 TAKEO TS68-7.5W	827 CRI>80/ 2700K	25 25°	08 7.5W	N No Driver	W White	B Black	
TTS2 TAKEO TS68-11W	830 CRI>80/ 3000K	60 60°	11 11W	F On-Off	B Black	M Matt	
	840 CRI>80/ 4000K			P Phase Dim		W White	
	927 CRI>90/ 2700K			A 1-10V Dim			
	930 CRI>90/ 3000K			D DALI Dim			
	940 CRI>90/ 4000K						

BACK

TAKEO TS100 Pro – High Efficiency Fixed Downlight





60° | Cut-off 35° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19

IP54 | CE | CB | UK CA | Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE | PEP eco PASS PORT®

Quick Info


- Ceiling Cut-out: 100x100mm
- CITIZEN LED: 8.5W, 12W, CRI>90, CRI>80
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 60°
- Lumen Output: Up to 1500lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

3000K



Trim Finsh



White Black

Order Info (TAKEO TS100 Pro in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8.5W	10W	34V	250mA	80	2700K	60°	1300lm	950lm	TSS4-8276009N-WM
					3000K	60°	1400lm	1000lm	TSS4-8306009N-WM
					4000K	60°	1500lm	1100lm	TSS4-8406009N-WM
12W	14W	34V	350mA	80	2700K	60°	1800lm	1250lm	TSS4-9276012N-WM
					3000K	60°	1900lm	1350lm	TSS4-9306012N-WM
					4000K	60°	2050lm	1500lm	TSS4-9406012N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black

No Driver	99,00 €
ON-OFF	109,00 €
Phase Dim	119,00 €
DALI DIM	139,00 €

Coding

TSS4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TSS4 TAKEO TS100 Pro	827 CRI>80/ 2700K	60 60°	09 8.5W	N No Driver	W White	B Black	
	830 CRI>80/ 3000K		12 12W	F On-Off	B Black	M Matt	
	840 CRI>80/ 4000K			P Phase Dim		W White	
	927 CRI>90/ 2700K			A 1-10V Dim			
	930 CRI>90/ 3000K			D DALI Dim			
	940 CRI>90/ 4000K						

TAKEO TS150 Pro – High Efficiency Fixed Downlight





70° | Cut-off 30° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19

IP54 | CE | CB | UKCA | ETL Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE | PEP eco PASS PORT

Quick Info


- Ceiling Cut-out: 150x150mm
- CITIZEN LED: 17W, 24W, CRI>90, CRI>80
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 70°
- Lumen Output: Up to 3000lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim





Light Distribution

3000K



Trim Finsh



White Black

Order Info (TAKEO TS150 Pro in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17W	19W	36V	500mA	80	2700K	70°	3000lm	1900lm	TSM4-8277017N-WM
					3000K	70°	3200lm	2050lm	TSM4-8307017N-WM
					4000K	70°	3500lm	2200lm	TSM4-8407017N-WM
24W	26W	36V	700mA	80	2700K	70°	4000lm	2700lm	TSM4-8277024N-WM
					3000K	70°	4200lm	2800lm	TSM4-8307024N-WM
					4000K	70°	4500lm	3000lm	TSM4-8407024N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black

No Driver	169,00 €
ON-OFF	179,00 €
Phase Dim	199,00 €
DALI DIM	209,00 €

Coding

TSM4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TSSM4 TAKEO TS150 Pro	827 CRI>80/ 2700K	70 70°	17 17W	N No Driver	W White	B Black	
	830 CRI>80/ 3000K		24 24W	F On-Off	B Black	M Matt	
	840 CRI>80/ 4000K			P Phase Dim		W White	
	927 CRI>90/ 2700K			A 1-10V Dim			
	930 CRI>90/ 3000K			D DALI Dim			
	940 CRI>90/ 4000K						

BACK

TAKEO TS200 Pro – High Efficiency Fixed Downlight





70° | Cut-off 35° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19

IP54 | CE | CB | UKCA | Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE | PEP eco PASS PORT®

Quick Info


- Ceiling Cut-out: 200x200mm
- CITIZEN LED: 24W, 36W, CRI>90, CRI>80
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 70°
- Lumen Output: Up to 4200lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim





Light Distribution

3000K



Trim Finsh




White Black

Order Info (TAKEO TS200 Pro in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24W	26W	34V	700mA	80	2700K	70°	4200lm	2700lm	TSL4-8277024N-WM
					3000K	70°	4400lm	2800lm	TSL4-8307024N-WM
					4000K	70°	4700lm	3000lm	TSL4-8407024N-WM
36W	40W	34V	1050mA	80	2700K	70°	5600lm	3700lm	TSL4-8277036N-WM
					3000K	70°	6000lm	3900lm	TSL4-8307036N-WM
					4000K	70°	6500lm	4200lm	TSL4-8407036N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black

No Driver	229,00 €
ON-OFF	239,00 €
Phase Dim	259,00 €
DALI DIM	269,00 €


Coding


TSL4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TSL4 TAKEO TS200 Pro	827 CRI>80/ 2700K	70 70°	24 24W	N No Driver	W White	B Black	
	830 CRI>80/ 3000K		36 36W	F On-Off	B Black	M Matt	
	840 CRI>80/ 4000K			P Phase Dim		W White	
	927 CRI>90/ 2700K			A 1-10V Dim			
	930 CRI>90/ 3000K			D DALI Dim			
	940 CRI>90/ 4000K						

VISION


The Cut-Out 68
Powerful
Fixed Downlight
Wall Washer Downlight

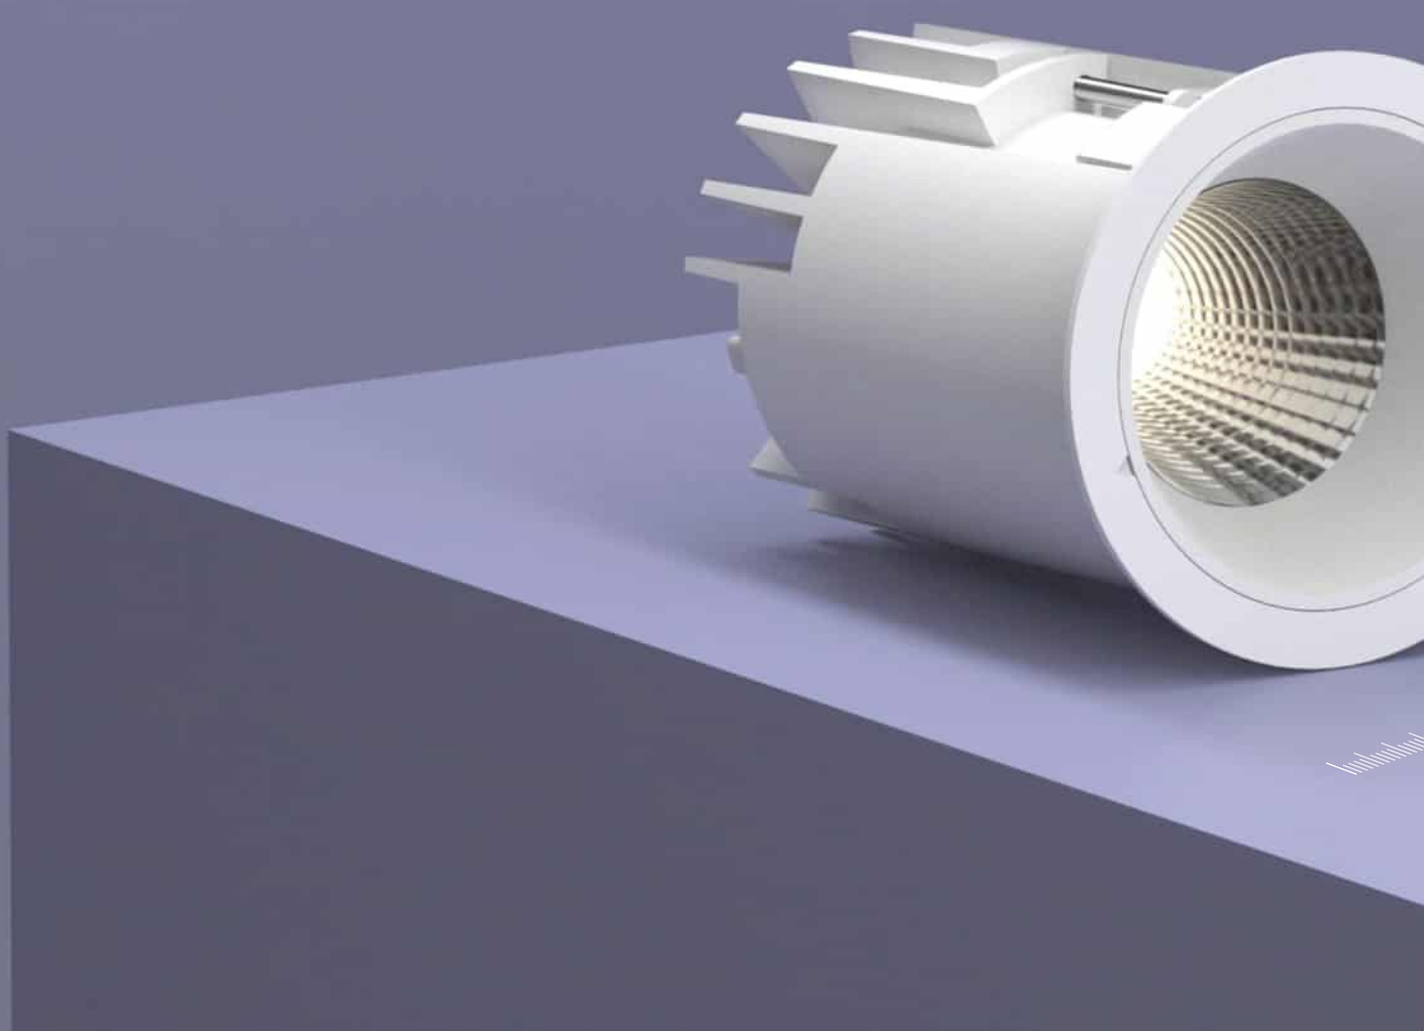


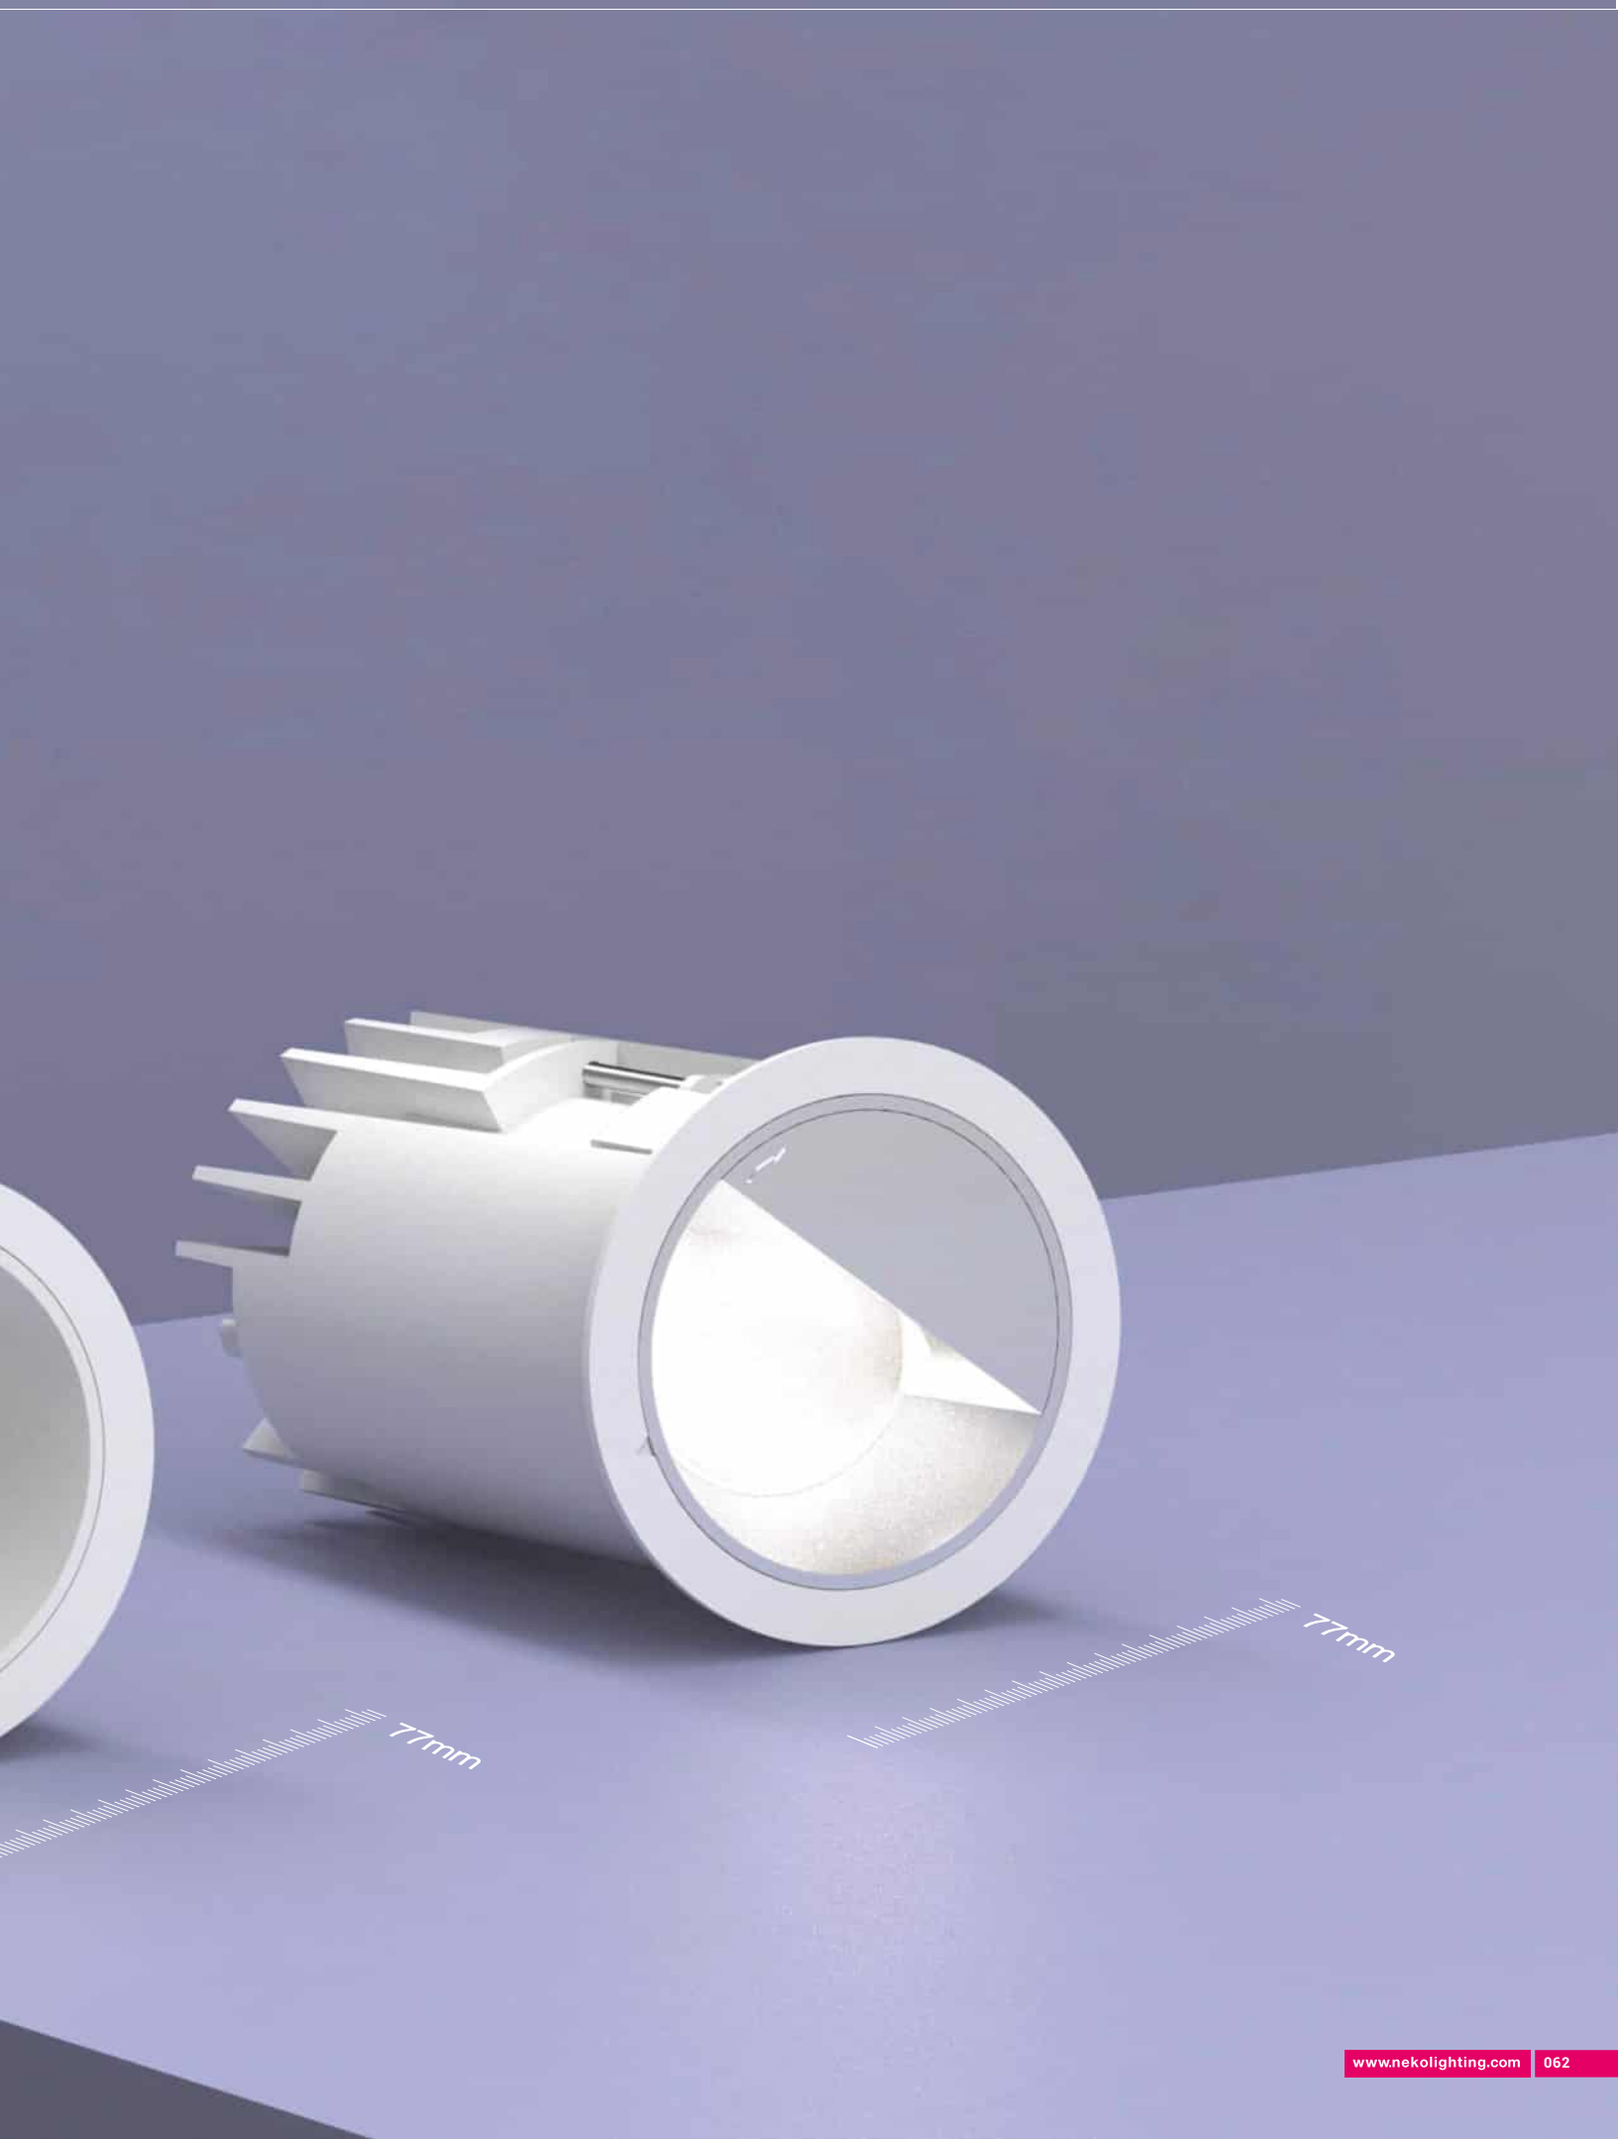
77mm
77mm

VISION V68 – The Cut-Out 68 Powerful Fixed Downlight











Quick Info

- Ceiling Cut-out: Ø68mm
- CITIZEN LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 40°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: IP20 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K





Order Info (VISION V68 in White Trim & Specual Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	18°	1400lm	1100lm	VF68-9271813N-WS
						40°	1400lm	1100lm	VF68-9274013N-WS
					3000K	18°	1500lm	1200lm	VF68-9301813N-WS
						40°	1500lm	1200lm	VF68-9304013N-WS
					4000K	18°	1600lm	1300lm	VF68-9401813N-WS
						40°	1600lm	1300lm	VF68-9404013N-WS
18W	21W	36V	500mA	90	2700K	18°	1900lm	1500lm	VF68-9271818N-WS
						40°	1900lm	1500lm	VF68-9274018N-WS
					3000K	18°	2000lm	1600lm	VF68-9301818N-WS
						40°	2000lm	1600lm	VF68-9304018N-WS
					4000K	18°	2200lm	1700lm	VF68-9401818N-WS
						40°	2200lm	1700lm	VF68-9404018N-WS

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trim Finsh



White Black

No Driver	89,00 €
ON-OFF	99,00 €
Phase Dim	119,00 €
DALI DIM	129,00 €

Reflector Options



Specular Matt Black Dark Light White Gold

Coding


VF68 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
VF68 VISION V68	927 CRI>90/ 2700K	18 18°	13 13W	N No Driver	W White	B Black	
	930 CRI>90/ 3000K	40 40°	18 18W	F On-Off	B Black	M Matt	
	940 CRI>90/ 4000K			P Phase Dim		W White	
				A 1-10V Dim		D Dark Light	
				D DALI Dim		S Specuculr	
						G Gold	

VISION V68W – The Cut-Out 68 Powerful Wall Washer Downlight







Wall Washer | 2700K 3000K 4000K | CRI >90


IP20 | CE | CB | UKCA | Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE | PEP eco PASS PORT


Quick Info

- Ceiling Cut-out: Ø68mm
- CITIZEN LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: Wall Washer
- Lumen Output: Up to 1170lm System Luminous Flux
- IP Class: IP20 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K





Trim Finsh


White


Black

No Driver	109,00 €
ON-OFF	129,00 €
Phase Dim	149,00 €
DALI DIM	159,00 €

Order Info (VISION V68W in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	Wall Washer	1400lm	780lm	VW68-927WW13N-WM
					3000K	Wall Washer	1500lm	820lm	VW68-930WW13N-WM
					4000K	Wall Washer	1600lm	870lm	VW68-940WW13N-WM
18W	21W	36V	500mA	90	2700K	Wall Washer	1900lm	1050lm	VW68-927WW18N-WM
					3000K	Wall Washer	2000lm	1100lm	VW68-930WW18N-WM
					4000K	Wall Washer	2200lm	1170lm	VW68-940WW18N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Reflector Options


Matt



Coding

VW68 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
VW68 VISION V68W	**927** CRI>90/ 2700K **930** CRI>90/ 3000K **940** CRI>90/ 4000K	**WW** Wall Washer	**13** 13W **18** 18W	**N** No Driver **F** On-Off **P** Phase Dim **A** 1-10V Dim **D** DALI Dim	**W** White **B** Black	**M** Matt	

PASSION


Excellent Balance Between Eye Comfort & High Efficiency

Light Source Deep Integrated for Glare Control (UGR<19) with a 30° Shielding Angle

Beam Angle in 60° with Opal Cover

Single CCT Version Available in 3000K or 4000K, for High Efficiency (up to 140lm/W) Switchable CCT
Swichtable CCT Version on Request:
In 3000K-3500K-4000K Switchable, Easier for Keeping Stock


IP54 Rating, Suitable for Indoor Environments with Moderate Moisture and Dust Levels. Product Finish in White-Specular(WS), White-Matt(WM), White-White(WW), Black-Black(BB)

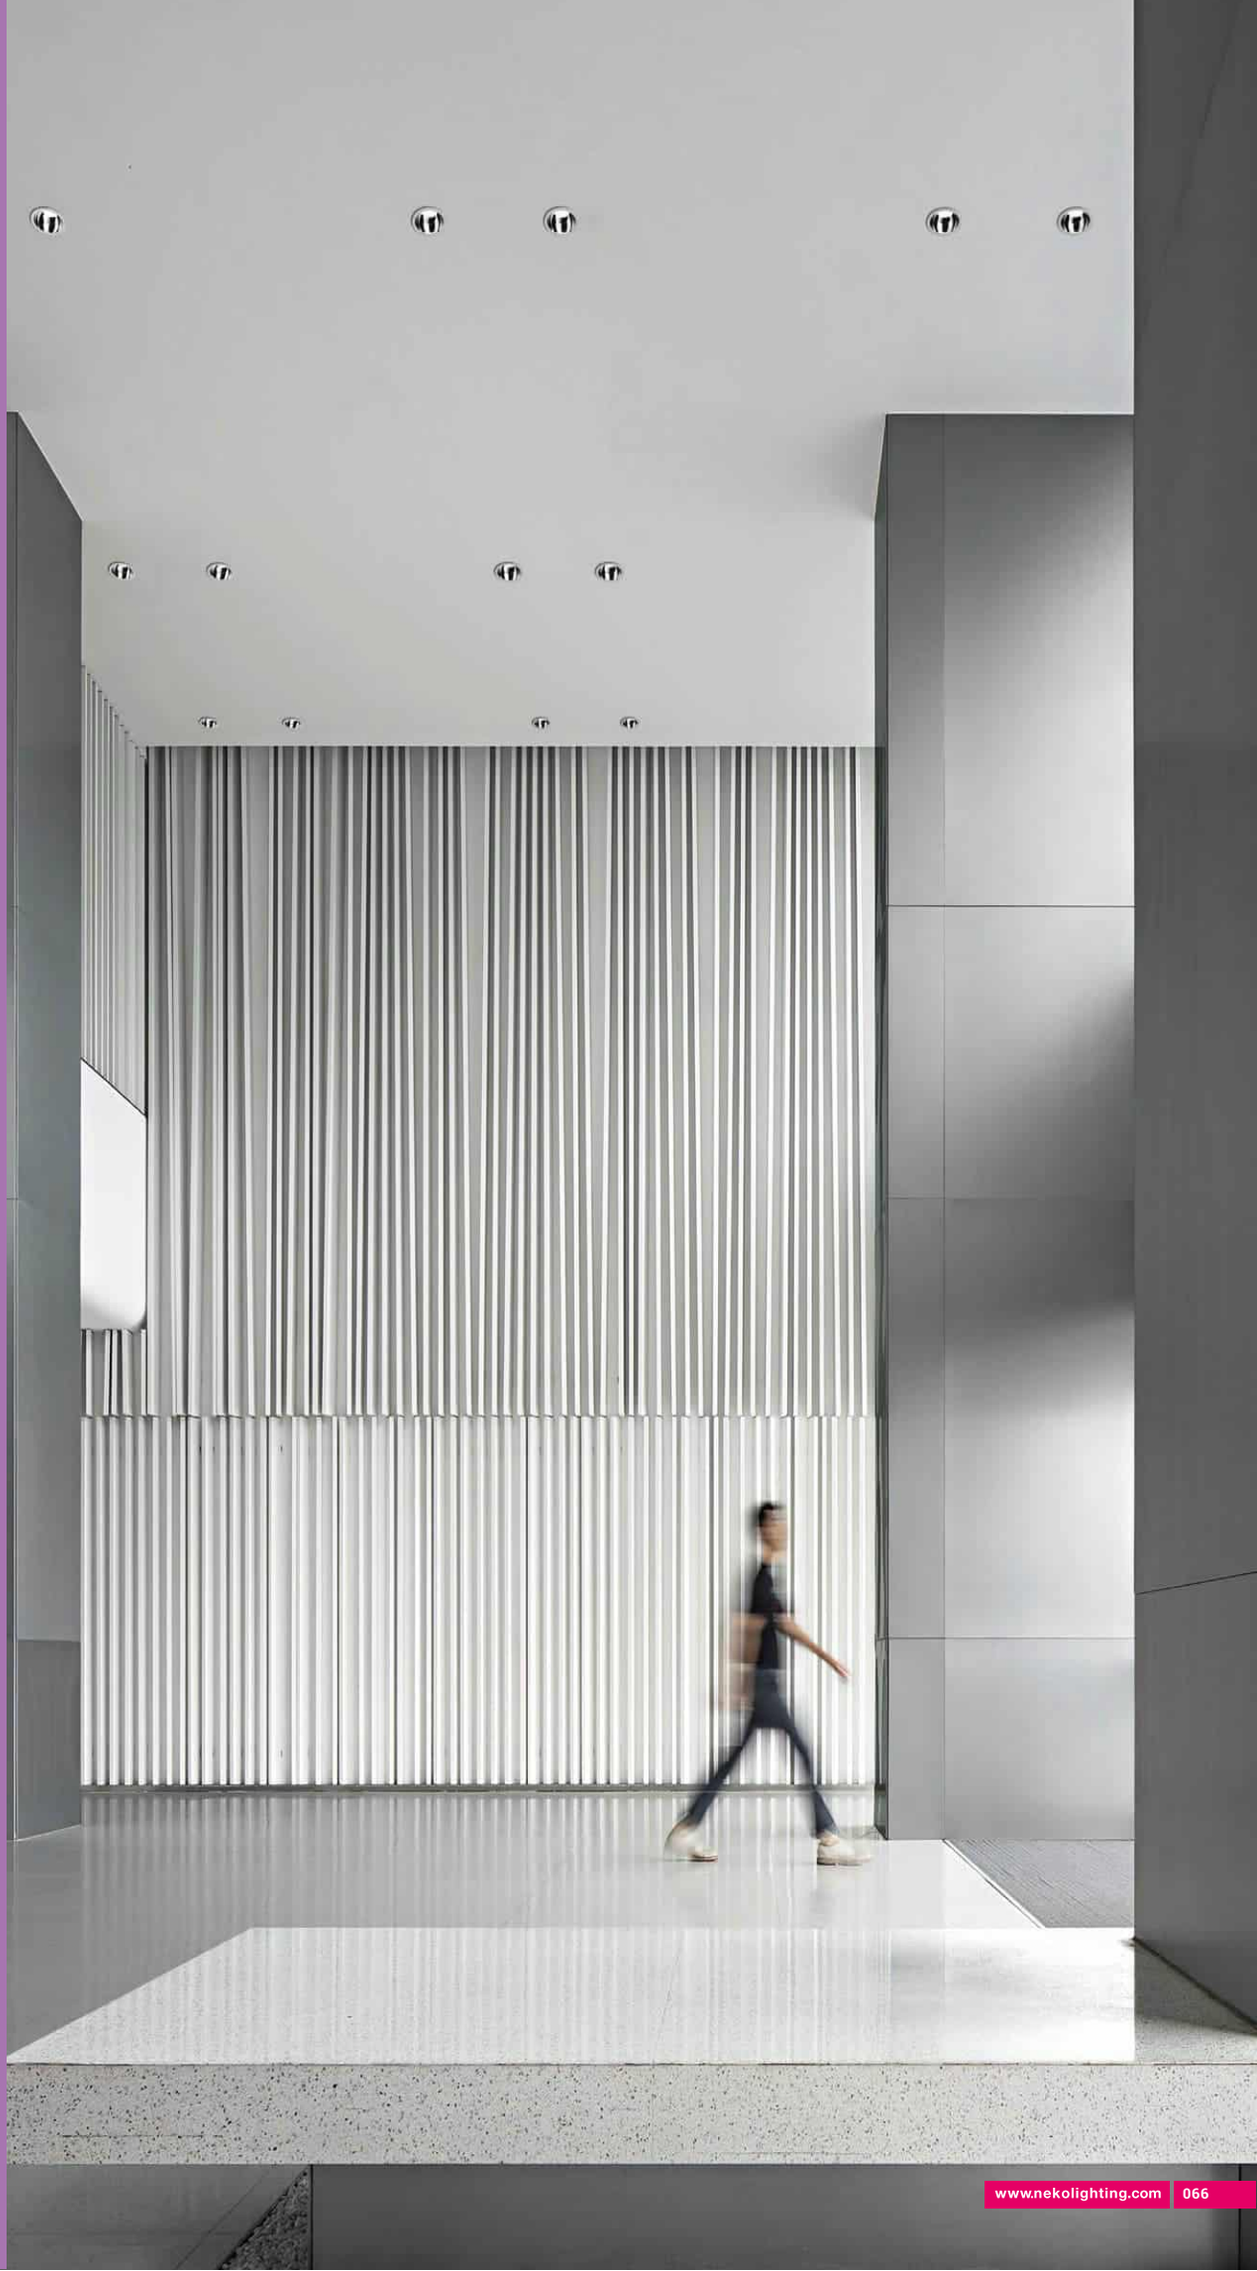



PASSION 100 – The High Efficiency Fixed Downlight

NEW







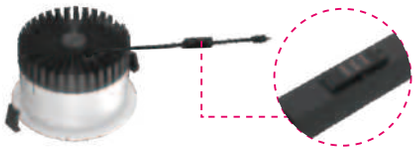

On Request: 3000K-3500K-4000K CCT Switchable Version

60° | Cut-off 30° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19


IP54 | CE | CB | UKCA | ETL Intertek | 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: Ø100mm
- LED: 8W, 12W, CRI>80, CRI>90
- CCT: Single 3000K, 4000K or 3000K-3500K-4000K CCT Switchable
- Beam Angle: 60° within Opal Cover
- Lumen Output: Up to 1750lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K



Finish



White-Specular | White-Matt | White-White | Black-Black

No Driver	69,00 €
ON-OFF	79,00 €
Phase Dim	89,00 €
DALI DIM	109,00 €

Order Info (PASSION 100 in White-Specular Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8W	10W	33V	250mA	80	3000K	60°	1500lm	1100lm	PAN4-8306008N-WS
					4000K	60°	1600lm	1200lm	PAN4-8406008N-WS
12W	14W	33V	350mA	80	3000K	60°	2100lm	1650lm	PAN4-8306012N-WS
					4000K	60°	2300lm	1750lm	PAN4-8406012N-WS

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Coding

PAN4 – *** ** ** * – ** – *


Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish-Reflector Color	Accessory
PAN4 PASSION 100	830 CRI>80/ 3000K	60 60°	08 8W	N No Driver	WS White-Specular	
	840 CRI>80/ 4000K		12 12W	F On-Off	WM White-Matt	
	8S3 CRI>80/ 3000K-3500K-4000K			P Phase Dim	WW White-White	
	930 CRI>90/ 3000K			A 1-10V Dim	BB Black-Black	
	940 CRI>90/ 4000K			D DALI Dim		
	9S3 CRI>90/ 3000K-3500K-4000K					


BACK

PASSION 150 – The High Efficiency Fixed Downlight

NEW





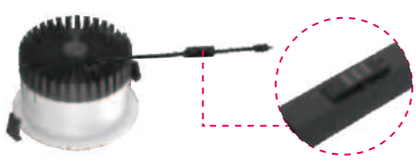

On Request: 3000K-3500K-4000K CCT Switchable Version

60° | Cut-off 30° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19


IP54 | CE | CB | UK CA | Intertek | 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: Ø150mm
- LED: 16W, 23W, CRI>80, CRI>90
- CCT: Single 3000K, 4000K or 3000K-3500K-4000K CCT Switchable
- Beam Angle: 60° within Opal Cover
- Lumen Output: Up to 3500lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K



Finish



White-Specular | White-Matt | White-White | Black-Black

No Driver	99,00 €
ON-OFF	119,00 €
Phase Dim	139,00 €
DALI DIM	159,00 €

Order Info (PASSION 150 in White-Specular Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16W	18W	33V	500mA	80	3000K	60°	3100lm	2450lm	PAN6-8306016N-WS
					4000K	60°	3400lm	2600lm	PAN6-8406016N-WS
23W	25W	33V	700mA	80	3000K	60°	3900lm	3350lm	PAN6-8306023N-WS
					4000K	60°	4200lm	3500lm	PAN6-8406023N-WS

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Coding

PAN6 – *** ** ** * – ** – *


Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish-Reflector Color	Accessory
PAN6 PASSION 150	830 CRI>80/ 3000K	60 60°	16 16W	N No Driver	WS White-Specular	
	840 CRI>80/ 4000K		23 23W	F On-Off	WM White-Matt	
	8S3 CRI>80/ 3000K-3500K-4000K			P Phase Dim	WW White-White	
	930 CRI>90/ 3000K			A 1-10V Dim	BB Black-Black	
	940 CRI>90/ 4000K			D DALI Dim		
	9S3 CRI>90/ 3000K-3500K-4000K					


BACK

PASSION 200 – The High Efficiency Fixed Downlight

NEW





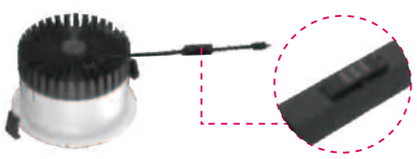

On Request: 3000K-3500K-4000K CCT Switchable Version

60° | Cut-off 30° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19


IP54 | CE | CB | UKCA | ETL Intertek | 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: Ø175mm-200mm
- LED: 23W, 30W, CRI>80, CRI>90
- CCT: Single 3000K, 4000K or 3000K-3500K-4000K CCT Switchable
- Beam Angle: 60° within Opal Cover
- Lumen Output: Up to 4600lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K



Finish



White-Specular | White-Matt | White-White | Black-Black

No Driver	119,00 €
ON-OFF	139,00 €
Phase Dim	149,00 €
DALI DIM	169,00 €

Order Info (PASSION 200 in White-Specular Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
23W	25W	33V	700mA	80	3000K	60°	3900lm	3500lm	PAN8-8306023N-WS
					4000K	60°	4200lm	3650lm	PAN8-8406023N-WS
30W	33W	33V	900mA	80	3000K	60°	5000lm	4350lm	PAN8-8306030N-WS
					4000K	60°	5300lm	4600lm	PAN8-8406030N-WS

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Coding

PAN8 – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish-Reflector Color	Accessory
PAN8 PASSION 200	**830** CRI>80/ 3000K	**60** 60°	**23** 23W	**N** No Driver	**WS** White-Specular	
	840 CRI>80/ 4000K		**30** 30W	**F** On-Off	**WM** White-Matt	
	8S3 CRI>80/ 3000K-3500K-4000K			**P** Phase Dim	**WW** White-White	
	930 CRI>90/ 3000K			**A** 1-10V Dim	**BB** Black-Black	
	940 CRI>90/ 4000K			**D** DALI Dim		
	9S3 CRI>90/ 3000K-3500K-4000K					

BACK

CLUB

Modular Downlight System
Power from 6W to 18W
Round & Square, Trim & Trimless
Various Trims for Different Applications


Project: Hotel Bellune, Paris, France



CLUB – M1 LED Module

NEW





15° 24° 36° 50°

2700K
3000K
4000K

CRI >90


CE CB UKCA bridgelux 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 6W, 9W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 36°, 50°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: Module IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

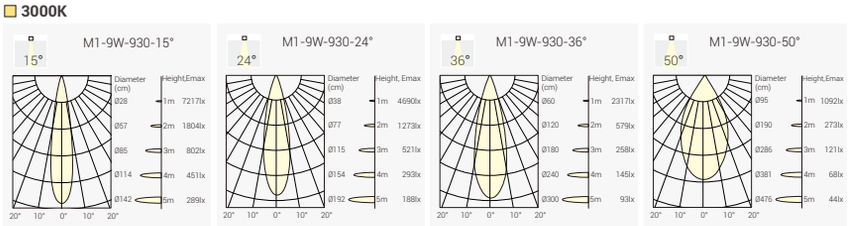

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	36V	250mA	90	2700K	15°	950lm	720lm	M1 -9271509N-NN
						24°	950lm	800lm	M1 -9272409N-NN
						36°	950lm	800lm	M1 -9273609N-NN
						50°	950lm	800lm	M1 -9275009N-NN
					3000K	15°	1050lm	750lm	M1 -9301509N-NN
						24°	1050lm	850lm	M1 -9302409N-NN
						36°	1050lm	850lm	M1 -9303609N-NN
						50°	1050lm	850lm	M1 -9305009N-NN
					4000K	15°	1150lm	800lm	M1 -9401509N-NN
						24°	1150lm	950lm	M1 -9402409N-NN
						36°	1150lm	950lm	M1 -9403609N-NN
						50°	1150lm	950lm	M1 -9405009N-NN
6W	8W	36V	180mA	90	2700K	15°	720lm	520lm	M1 -9271506N-NN
						24°	720lm	550lm	M1 -9272406N-NN
						36°	720lm	550lm	M1 -9273606N-NN
						50°	720lm	550lm	M1 -9275006N-NN
					3000K	15°	750lm	570lm	M1 -9301506N-NN
						24°	750lm	600lm	M1 -9302406N-NN
						36°	750lm	600lm	M1 -9303606N-NN
						50°	750lm	600lm	M1 -9305006N-NN
					4000K	15°	800lm	620lm	M1 -9401506N-NN
						24°	800lm	650lm	M1 -9402406N-NN
						36°	800lm	650lm	M1 -9403606N-NN
						50°	800lm	650lm	M1 -9405006N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


No Driver	29,00 €
ON-OFF	39,00 €
Phase Dim	49,00 €
DALI DIM	59,00 €

BACK

CLUB – M2 LED Module

NEW





15° 24° 36° 50° 2700K 3000K 4000K CRI >90


CE CB UK CA bridgelux 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 9W, 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 36°, 50°
- Lumen Output: Up to 1250lm System Luminous Flux
- IP Class: Module IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

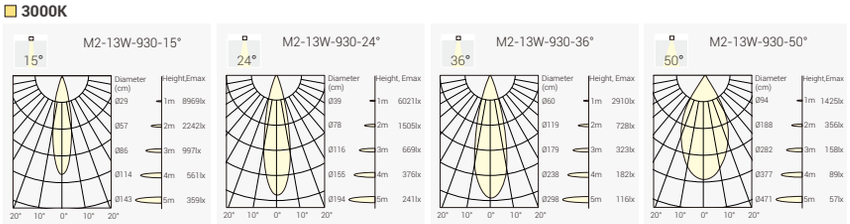

No Driver	39,00 €
ON-OFF	49,00 €
Phase Dim	59,00 €
DALI DIM	69,00 €


Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	15°	1300lm	900lm	M2 -9271513N-NN
						24°	1300lm	980lm	M2 -9272413N-NN
						36°	1300lm	980lm	M2 -9273613N-NN
						50°	1300lm	950lm	M2 -9275013N-NN
					3000K	15°	1450lm	950lm	M2 -9301513N-NN
						24°	1450lm	1150lm	M2 -9302413N-NN
						36°	1450lm	1150lm	M2 -9303613N-NN
						50°	1450lm	1100lm	M2 -9305013N-NN
					4000K	15°	1600lm	1100lm	M2 -9401513N-NN
						24°	1600lm	1250lm	M2 -9402413N-NN
						36°	1600lm	1250lm	M2 -9403613N-NN
						50°	1600lm	1200lm	M2 -9405013N-NN
9W	11W	36V	250mA	90	2700K	15°	950lm	720lm	M2 -9271509N-NN
						24°	950lm	800lm	M2 -9272409N-NN
						36°	950lm	800lm	M2 -9273609N-NN
						50°	950lm	780lm	M2 -9275009N-NN
					3000K	15°	1050lm	780lm	M2 -9301509N-NN
						24°	1050lm	850lm	M2 -9302409N-NN
						36°	1050lm	850lm	M2 -9303609N-NN
						50°	1050lm	800lm	M2 -9305009N-NN
					4000K	15°	1150lm	850lm	M2 -9401509N-NN
						24°	1150lm	950lm	M2 -9402409N-NN
						36°	1150lm	950lm	M2 -9403609N-NN
						50°	1150lm	900lm	M2 -9405009N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

CLUB – M3 LED Module





15° 25° 35° 60° | 2700K 3000K 4000K | CRI >90


IP54 | CE | CB | UK CA | CCC | ETL Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- Fit with CLUB Series Trims
- CITIZEN LED: 7.5W, 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 25°, 35°, 60°
- Lumen Output: Up to 1000lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

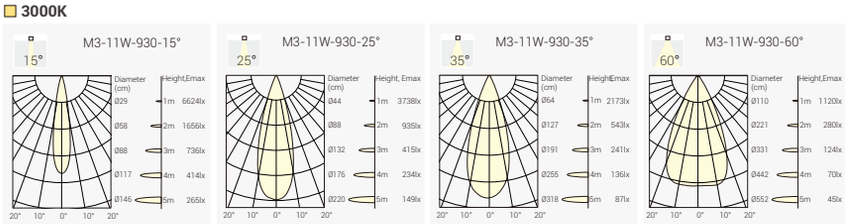

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	31V	350mA	90	2700K	15°	1000lm	900lm	M3 -9271511N-NN
						25°	1000lm	900lm	M3 -9272511N-NN
						35°	1000lm	900lm	M3 -9273511N-NN
						60°	1000lm	900lm	M3 -9276011N-NN
					3000K	15°	1100lm	950lm	M3 -9301511N-NN
						25°	1100lm	950lm	M3 -9302511N-NN
						35°	1100lm	950lm	M3 -9303511N-NN
						60°	1100lm	950lm	M3 -9306011N-NN
					4000K	15	1200lm	1000lm	M3 -9401511N-NN
						25°	1200lm	1000lm	M3 -9402511N-NN
						35°	1200lm	1000lm	M3 -9403511N-NN
						60°	1200lm	1000lm	M3 -9406011N-NN
7.5W	9W	31V	250mA	90	2700K	15°	850lm	650lm	M3 -9271508N-NN
						25°	850lm	650lm	M3 -9272508N-NN
						35°	850lm	650lm	M3 -9273508N-NN
						60°	850lm	650lm	M3 -9276008N-NN
					3000K	15°	900lm	700lm	M3 -9301508N-NN
						25°	900lm	700lm	M3 -9302508N-NN
						35°	900lm	700lm	M3 -9303508N-NN
						60°	900lm	700lm	M3 -9306008N-NN
					4000K	15°	950lm	750lm	M3 -9401508N-NN
						25°	950lm	750lm	M3 -9402508N-NN
						35°	950lm	750lm	M3 -9403508N-NN
						60°	950lm	750lm	M3 -9406008N-NN


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	39,00 €
ON-OFF	49,00 €
Phase Dim	59,00 €
DALI DIM	89,00 €

BACK

CLUB – M3 LED Module









Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 12W, CRI>95
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 35°, 60°
- Lumen Output: Up to Max.850lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K





No Driver	69,00 €
Phase Dim	89,00 €
DALI DIM	109,00 €

Order Info


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	14W	34V	350mA	95	1800K–3000K	35°	1100lm	Max.850lm	M3- 9D33512N-NN
						60°	1100lm	Max.850lm	M3- 9D36012N-NN

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



CLUB – M4 LED Module





20° 35° 60°

2700K
3000K
4000K

CRI >90


IP54 CE CB UKCA CCC ETL Intertek CITIZEN 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info


- Fit with CLUB Series Trims
- CITIZEN LED: 9W, 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 60°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K







LED power 9W / 13W

No Driver	59,00 €
ON-OFF	79,00 €
Phase Dim	89,00 €
DALI DIM	99,00 €

LED power 18W

No Driver	69,00 €
ON-OFF	89,00 €
Phase Dim	109,00 €
DALI DIM	119,00 €

Order Info


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	20°	1300lm	1100lm	M4 -9272013N-NN
						35°	1300lm	1100lm	M4 -9273513N-NN
						60°	1300lm	1100lm	M4 -9276013N-NN
					3000K	20°	1400lm	1200lm	M4 -9302013N-NN
						35°	1400lm	1200lm	M4 -9303513N-NN
						60°	1400lm	1200lm	M4 -9306013N-NN
					4000K	20	1500lm	1300lm	M4 -9402013N-NN
						35°	1500lm	1300lm	M4 -9403513N-NN
						60°	1500lm	1300lm	M4 -9406013N-NN
9W	11W	36V	250mA	90	2700K	20°	900lm	1100lm	M4 -9272009N-NN
						35°	900lm	1100lm	M4 -9273509N-NN
						60°	900lm	1100lm	M4 -9276009N-NN
					3000K	20°	1000lm	1200lm	M4 -9302009N-NN
						35°	1000lm	1200lm	M4 -9303509N-NN
						60°	1000lm	1200lm	M4 -9306009N-NN
					4000K	20°	1100lm	1300lm	M4 -9402009N-NN
						35°	1100lm	1300lm	M4 -9403509N-NN
						60°	1100lm	1300lm	M4 -9406009N-NN
18W	21W	36V	500mA	90	2700K	20°	1800lm	1500lm	M4 -9272018N-NN
						35°	1800lm	1500lm	M4 -9273518N-NN
						60°	1800lm	1500lm	M4 -9276018N-NN
					3000K	20°	1900lm	1600lm	M4 -9302018N-NN
						35°	1900lm	1600lm	M4 -9303518N-NN
						60°	1900lm	1600lm	M4 -9306018N-NN
					4000K	20°	2000lm	1700lm	M4 -9402018N-NN
						35°	2000lm	1700lm	M4 -9403518N-NN
						60°	2000lm	1700lm	M4 -9406018N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

BACK

CLUB – M4 LED Module







Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 12W, CRI>95
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 35°, 60°
- Lumen Output: Up to Max.850lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K





No Driver	89,00 €
Phase Dim	119,00 €
DALI DIM	129,00 €

Order Info


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	14W	34V	350mA	95	1800K–3000K	35°	1100lm	Max.850lm	M4- 9D33512N-NN
						60°	1100lm	Max.850lm	M4- 9D36012N-NN

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)



CLUB – M4 Pro Architectural LED Module





18° 30° 36° 50° | 2700K 3000K 3500K 4000K | CRI >97


IP54 | CE | CB | UKCA | CCC | ETL Intertek | bridgelux 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 13W, 18W, CRI>97
- CCT: 2700K, 3000K, 3500K, 4000K Available as Standard
- Beam Angle: 15°/18°, 25°/30° , 35°/36°, 50°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

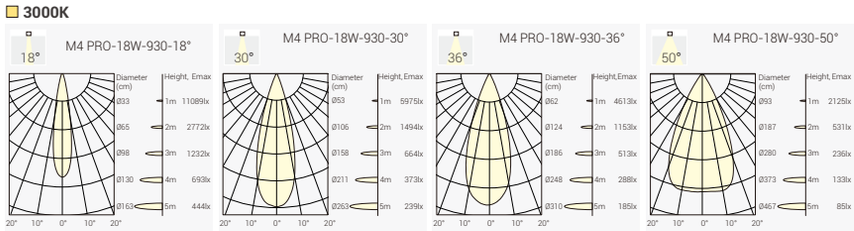

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	97	2700K	15°	1300lm	1050lm	M4P3 -0271513N-NN
						25°	1300lm	1050lm	M4P3 -0272513N-NN
						35°	1300lm	1050lm	M4P3 -0273513N-NN
						50°	1300lm	1000lm	M4P3 -0276013N-NN
					3000K	15°	1400lm	1100lm	M4P3 -0301513N-NN
						25°	1400lm	1100lm	M4P3 -0302513N-NN
						35°	1400lm	1100lm	M4P3 -0303513N-NN
						50°	1400lm	1050lm	M4P3 -0306013N-NN
					3500K	15°	1450lm	1150lm	M4P3 -0351513N-NN
						25°	1450lm	1150lm	M4P3 -0352513N-NN
						35°	1450lm	1150lm	M4P3 -0353513N-NN
						50°	1450lm	1100lm	M4P3 -0356013N-NN
					4000K	15	1500lm	1200lm	M4P3 -0401513N-NN
						25°	1500lm	1200lm	M4P3 -0402513N-NN
						35°	1500lm	1200lm	M4P3 -0403513N-NN
						50°	1500lm	1150lm	M4P3- 0406013N-NN
18W	21W	36V	500mA	97	2700K	18°	1900lm	1500lm	M4P4- 0271818N-NN
						30°	1900lm	1500lm	M4P4- 0273018N-NN
						36°	1900lm	1500lm	M4P4- 0273618N-NN
						50°	1900lm	1400lm	M4P4- 0275018N-NN
					3000K	18°	2000lm	1600lm	M4P4- 0301818N-NN
						30°	2000lm	1600lm	M4P4- 0303018N-NN
						36°	2000lm	1600lm	M4P4- 0303618N-NN
						50°	2000lm	1500lm	M4P4- 0305018N-NN
					3500K	18°	2150lm	1650lm	M4P4- 0351818N-NN
						30°	2150lm	1650lm	M4P4- 0353018N-NN
						36°	2150lm	1650lm	M4P4- 0353618N-NN
						50°	2150lm	1500lm	M4P4- 0355018N-NN
					4000K	18°	2200lm	1700lm	M4P4- 0401818N-NN
						30°	2200lm	1700lm	M4P4- 0403018N-NN
						36°	2200lm	1700lm	M4P4- 0403618N-NN
						50°	2200lm	1650lm	M4P4- 0405018N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


No Driver	79,00 €
ON-OFF	89,00 €
Phase Dim	99,00 €
DALI DIM	129,00 €

No Driver	79,00 €
ON-OFF	99,00 €
Phase Dim	119,00 €
DALI DIM	129,00 €

BACK

CLUB – M4 Pro Architectural LED Module





No Driver	79,00 €
ON-OFF	89,00 €
Phase Dim	99,00 €
DALI DIM	129,00 €




Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 7W, CRI>97
- CCT: 2700K, 3000K, 3500K, 4000K Available as Standard
- Beam Angle: 10°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K




Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	36V	200mA	97	2700K	10°	650lm	500lm	M4P1 -0271007N-NN
					3000K	10°	700lm	550lm	M4P1 -0301007N-NN
					3500K	10°	725lm	570lm	M4P1 -0351007N-NN
					4000K	10°	750lm	600lm	M4P1 -0401007N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)







Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 12W, CRI>90
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 38°, 50°
- Lumen Output: Up to 900lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

■ 3000K





No Driver	89,00 €
Phase Dim	109,00 €
DALI DIM	129,00 €


Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	14W	34V	350mA	90	1800K-3000K	38°	1100lm	Max. 900lm	M4P5-0D33812N-NN
						50°	1100lm	Max. 850lm	M4P5-0D35012N-NN

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)








No Driver	99,00 €
DALI DIM	169,00 €


Quick Info


- Fit with CLUB Series Trims
- Bridgelux LED: 9W, 13W, CRI>90,
- CCT: Tunable White 2700K-6500K
- Beam Angle: 20°, 35°, 50°
- Lumen Output: Up to 1100lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: DALI DT8 Dim

Light Distribution

3000K








Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
9W	11W	36V	250mA	90	2700K-6500K	20°	700lm-850lm	M4P6-9TW2009N-NN
						38°	700lm-850lm	M4P6-9TW3809N-NN
						50°	700lm-850lm	M4P6-9TW5009N-NN
					@2700K	38°	700lm	
					@3000K	38°	730lm	
					@4000K	38°	800lm	
					@5000K	38°	850lm	
					@6500K	38°	850lm	
13 W	15 W	36 V	350 mA	90	2700K-6500K	20°	900lm-1100lm	M4P6-9TW2013N-NN
						38°	900lm-1100lm	M4P6-9TW3813N-NN
						50°	850lm-1050lm	M4P6-9TW5013N-NN
					@2700K	38°	900lm	
					@3000K	38°	950lm	
					@4000K	38°	1000lm	
					@5000K	38°	1100lm	
					@6500K	38°	1100lm	

Code Remark: N=N(No Driver) D=D(DALI DT8 Dim)



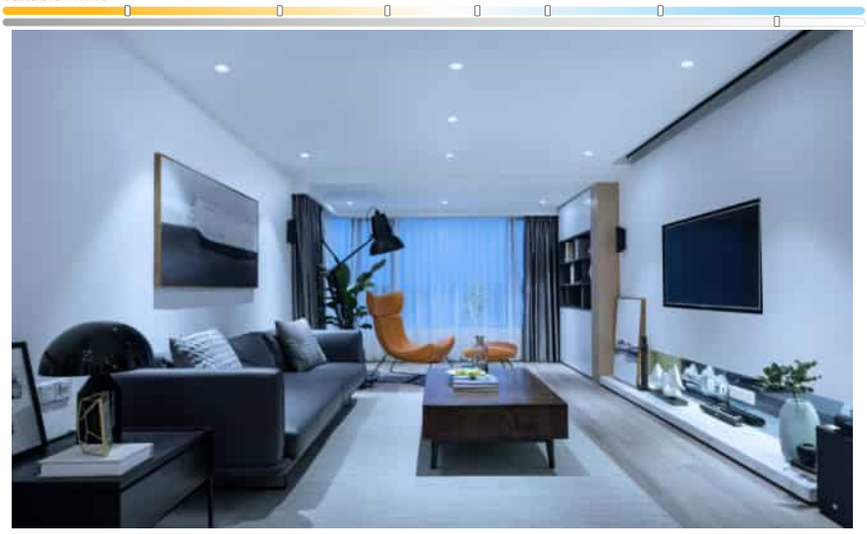

TA5 29,00 €





M3-TA5






M4-TA5





M4 PRO-TA5



TA6 29,00 €





M3-TA6






M4-TA6





M4 PRO-TA6




KA5-EI 49,00 €





M3-KA5-EI





M4-KA5-EI





M4 PRO-KA5-EI



KA6-EI 49,00 €





M3-KA6-EI





M4-KA6-EI





M4 PRO-KA6-EI



KA5 39,00 €





M3-KA5





M4-KA5





M4 PRO-KA5



KA6 39,00 €





M3-KA6





M4-KA6





M4 PRO-KA6



TA7 29,00 €





M3-TA7




M4-TA7




M4 PRO-TA7



TA8 29,00 €





M3-TA8




M4-TA8





M4 PRO-TA8



KA7-EI 49,00 €





M3-KA7-EI




M4-KA7-EI




M4 PRO-KA7-EI



KA8-EI 49,00 €





M3-KA8-EI




M4-KA8-EI




M4 PRO-KA8-EI



KA7 39,00 €




M3-KA7




M4-KA7




M4 PRO-KA7



KA8 49,00 €




M3-KA8




M4-KA8




M4 PRO-KA8




NEW

TF5 29,00 €




M3-TF5




M4-TF5




M4 PRO-TF5



TRF1/ TRF1-IP44 39,00 €




M3-TRF1-IP44




M4-TRF1-IP44




M4 PRO-TRF1-IP44



NEW

KF5-EI 39,00 €




M3-KF5-EI




M4-KF5-EI





M4 PRO-KF5-EI



KRF1-EI/ KRF1-EI-IP44 39,00 €




M3-KRF1-EI-IP44




M4-KRF1-EI-IP44




M4 PRO-KRF1-EI-IP44



NEW

KF5 39,00 €




M3-KF5




M4-KF5




M4 PRO-KF5




KRF1/ KRF1-IP44 39,00 €




M3-KRF1-IP44




M4-KRF1-IP44




M4 PRO-KRF1-IP44




BACK

TA5-IP65 39,00 €





M3-TA5-IP65





M4-TA5-IP65





M4 PRO-TA5-IP65



NEW

TSF1 39,00 €

75X75 | 355° | UK CA | CE




M3-TSF1




M4-TSF1




M4 PRO-TSF1



TSA1 39,00 €

75X75 | 355° | 30° | UK CA | CE




M3-TSA1




M4-TSA1




M4 PRO-TSA1



NEW

KSF1-EI 39,00 €

80X80 | 355° | UK CA | CE




M3-KSF1-EI




M4-KSF1-EI




M4 PRO-KSF1-EI



KSA1-EI 49,00 €

80X80 | 355° | 30° | UK CA | CE




M3-KSA1-EI




M4-KSA1-EI




M4 PRO-KSA1-EI



NEW

KSF1 39,00 €

75X75 | 355° | UK CA | CE




M3-KRF1




M4-KRF1




M4 PRO-KRF1



KSA1 49,00 €


75X75 | 355° | 30° | UK CA | CE




M3-KSA1




M4-KSA1




M4 PRO-KSA1



BACK

TSA2 39,00 €


75X75 | 355° | 30° | UK CA | CE




M3-TSA2




M4-TSA2




M4 PRO-TSA2




TSA3 29,00 €


75X75 | 355° | 30° | UK CA | CE




M3-TSA3




M4-TSA3




M4 PRO-TSA3



KSA2-EI 59,00 €

80x80 | 355° | 30° | UK CA | CE




M3-KSA2-EI




M4-KSA2-EI




M4 PRO-KSA2-EI




KSA3-EI 49,00 €


80x80 | 355° | 30° | UK CA | CE




M3-KSA3-EI




M4-KSA3-EI




M4 PRO-KSA3-EI




KSA2 49,00 €

75X75 | 355° | 30° | UK CA | CE




M3-KSA2




M4-KSA2




M4 PRO-KSA2




KSA3 49,00 €


75X75 | 355° | 30° | UK CA | CE




M3-KSA3




M4-KSA3





M4 PRO-KSA3



TSA1D 69,00 €

145X75 | 355° | 30° | UK CA | CE






TSA2D 89,00 €

145X75 | UK CA | CE






KSA1D-EI 89,00 €

145X80 | 355° | 30° | UK CA | CE




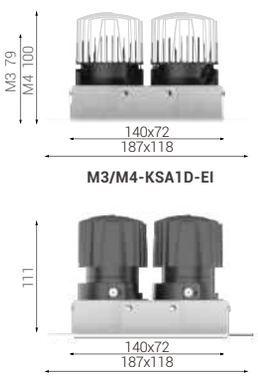

KSA2D-EI 99,00 €

145X80 | UK CA | CE




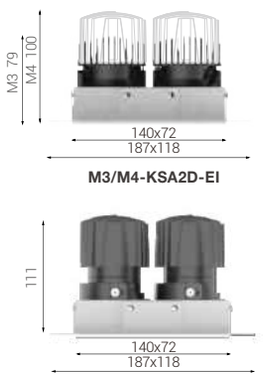

KSA1D 89,00 €

145X75 | 355° | 30° | UK CA | CE




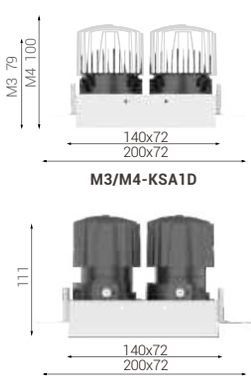

KSA2D 99,00 €

145X75 | UK CA | CE



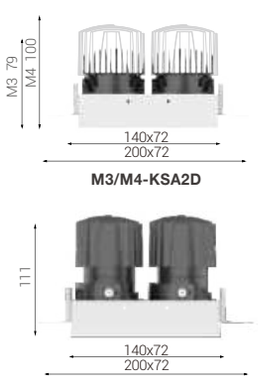


BACK

TSA3D 59,00 €

145X75 | 355° | 30° | UK CA | CE





M3/M4-TSA3D




M4 PRO-TSA3D

KSA2D-EI 99,00 €

145X80 | UK CA | CE





M3/M4-KSA2D-EI




M4 PRO-KSA3D-EI

KSA3D 69,00 €

145X75 | UK CA | CE





M3/M4-KSA3D



M4 PRO-KSA3D


SKYJACK

Incl. Phase Dim Driver & Fast Connection Box



SKYJACK A68 – Classic Tiltable Downlight






Quick Info


- Ceiling Cut-out: Ø68mm
- Bridgelux LED: 9W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 38°
- Lumen Output: Up to 750lm System Luminous Flux
- IP Class: IP44 from Front
- LED Driver: Phase Dim

Light Distribution

2700K



3000K



Trim Finsh



Black(BB)



White(WW)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K	38°	900lm	720lm	SJA1-9273809P-WW
							900lm	720lm	SJA1-9273809P-BB
					3000K	38°	950lm	750lm	SJA1-9303809P-WW
							950lm	750lm	SJA1-9303809P-BB


Code Remark: P=P(Phase Dim)

Phase Dim 69,00 €

BACK


SKYJACK A68 – Classic Tiltable Downlight



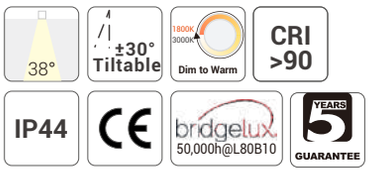


Quick Info

- Ceiling Cut-out: Ø68mm
- Bridgelux LED: 6W, CRI>90
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 38°
- Lumen Output: Up to Max.450lm System Luminous Flux
- IP Class: IP44 from Front
- LED Driver: Phase Dim



Light Distribution

3000K



Trim Finsh




Black(BB) White(WW)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	18 V	350 mA	90	1800K–3000k	38°	650lm	Max.450lm	SJA1-9D33806P-WW
							650lm	Max.450lm	SJA1-9D33806P-BB


Code Remark: P=P(Phase Dim)

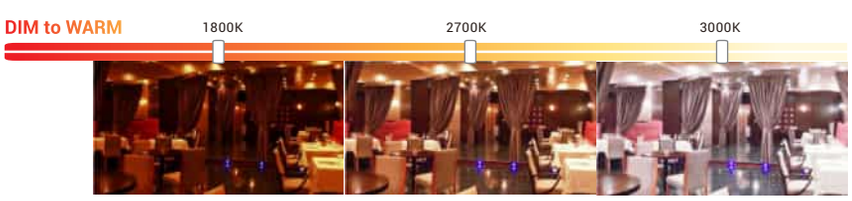

Phase Dim	89,00 €

SKYJACK D – Recessed Architectural Tiltable Downlight






Quick Info


- Ceiling Cut-out: Ø70mm
- Bridgelux LED: 9W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 38°
- Lumen Output: Up to 750lm System Luminous Flux
- IP Class: IP44 from Front
- LED Driver: Phase Dim

Light Distribution

2700K



3000K



Trim Finsh



Black(BB)



White(WW)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K	38°	900lm	700lm	SJD-9273809P-WW
							900lm	650lm	SJD-9273809P-BB
					3000K	38°	950lm	750lm	SJD-9303809P-WW
							950lm	700lm	SJD-9303809P-BB


Code Remark: P=P(Phase Dim)

Phase Dim 69,00 €

BACK

SKYJACK D-DW – Recessed Architectural Tiltable Downlight






38° | Cut-off 30° | ±30° Tiltable | 1800K 3000K Dim to Warm | CRI >90 | UGR<19 | IP44 | CE | bridgelux 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: Ø70mm
- Bridgelux LED: 6W, CRI>90, Bridgelux
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 38°
- Lumen Output: Up to Max.450lm System Luminous Flux
- IP Class: IP44 from Front
- LED Driver: Phase Dim

Light Distribution

3000K



Trim Finsh



Black(BB)




White(WW)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6 W	8 W	18 V	350 mA	90	1800K–3000k	38°	650lm	Max.450lm	SJD-9D33806P-WW
							650lm	Max.400lm	SJD-9D33806P-BB

Code Remark: P=P(Phase Dim)


DIM to WARM 1800K 2700K 3000K

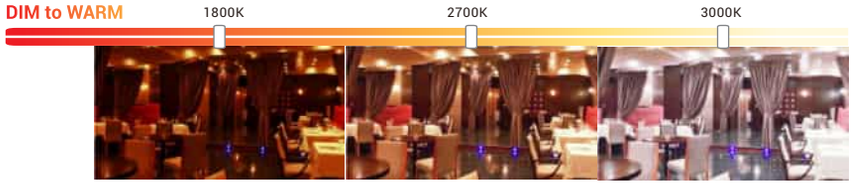

Phase Dim 89,00 €

SKYJACK F – IP65 Fixed Downlight






38° | 2700K 3000K | CRI >90 | IP65 | CE | bridgelux 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: Ø68mm
- Bridgelux LED: 9W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 38°
- Lumen Output: Up to 750lm System Luminous Flux
- IP Class: IP65 from Front
- LED Driver: Phase Dim

Light Distribution

2700K



3000K



Trim Finsh


Black(BB)


White(WW)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9 W	11 W	18 V	500 mA	90	2700K	38°	900lm	720lm	SJF-9273809P-WW
							900lm	720lm	SJF-9273809P-BB
					3000K	38°	950lm	750lm	SJF-9303809P-WW
							950lm	750lm	SJF-9303809P-BB

Code Remark: P=P(Phase Dim)

Phase Dim 79,00 €

BACK


SKYJACK 145 – Shop & Corridors Tiltable Downlight






Quick Info

- Ceiling Cut-out: Ø145mm
- Bridgelux LED: 25W, CRI>90, Bridgelux
- CCT: 3000K Available as Standard
- Beam Angle: 30°
- Lumen Output: Up to 2200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K



Trim Finsh



Black(BB)



White(WW)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	90	3000K	30°	2500lm	2200lm	SJA2-9303025N-WW SJA2-9303025N-BB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	109,00 €
ON-OFF	129,00 €
Phase Dim	139,00 €
DALI Dim	169,00 €

KENZO


Recessed Adjustable Spotlight
Powerful Light & Energy Efficient
Suitable for any Architectural Ambience



Project: NETO, Israel

KENZO K1X30 – Recessed Adjustable Spotlight







Quick Info


- Ceiling Cut-out: Ø46mm for Trim Version
- CREE LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 55°
- Lumen Output: Up to 350lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

2700K







Housing Finish


White


Black

No Driver	69,00 €
ON-OFF	79,00 €
Phase Dim	89,00 €
DALI Dim	109,00 €

Reflector Options


Black


Gold


White

Optional accessary


Honeycomb

Code for K1S-9405504N-WG with Honeycomb
K1S-9405504N-WG-H

Honeycomb: +9,00€

Order Info (KENZO K1X30 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	12V	350mA	90	2700K	15°	350lm	300lm	K1S-9271504N-WB
						30°	350lm	300lm	K1S-9273004N-WB
						55°	350lm	300lm	K1S-9275504N-WB
					3000K	15°	400lm	320lm	K1S-9301504N-WB
						30°	400lm	320lm	K1S-9303004N-WB
						55°	400lm	320lm	K1S-9305504N-WB
					4000K	15°	450lm	350lm	K1S-9401504N-WB
						30°	450lm	350lm	K1S-9403004N-WB
						55°	450lm	350lm	K1S-9405504N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim D=D(DALI Dim)

Coding

K1S – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
K1S KENZO K1X30	927 CRI>90/ 2700K	15 15°	04 4W	N No Driver	W White	B Black	H Honeycomb
	930 CRI>90/ 3000K	30 30°		F On-Off	B Black	W White	
	940 CRI>90/ 4000K	55 55°		P Phase Dim		G Gold	
				A 1-10V Dim			
				D DALI Dim			

BACK

KENZO K1X55– Recessed Adjustable Spotlight




18° 24° 36° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | CITIZEN 50,000h@L80B10 | 0-90° 350° | 5 YEARS GUARANTEE


Quick Info


- Ceiling Cut-out: Ø80mm for Trim Version
- CITIZEN LED: 9W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°
- Lumen Output: Up to 800lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

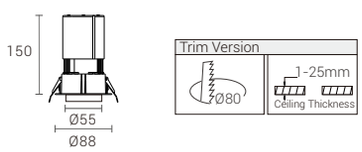


Light Distribution

3000K







Housing Finish



White



Black

No Driver	139,00 €
ON-OFF	149,00 €
Phase Dim	159,00 €
DALI Dim	179,00 €

Reflector Options



Black



Gold



White

Optional accessary



Honeycomb

Code for K1M-9402409N-WG with Honeycomb
K1M-9402409-WG-H

Honeycomb: +9,00€

Order Info (KENZO K1X55 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	36V	250mA	90	2700K	18°	850lm	700lm	K1M-9271809N-WB
						24°	850lm	700lm	K1M-9272409N-WB
						36°	850lm	700lm	K1M-9273609N-WB
					3000K	18°	950lm	720lm	K1M-9301809N-WB
						24°	950lm	720lm	K1M-9302409N-WB
						36°	950lm	720lm	K1M-9303609N-WB
					4000K	18°	1050lm	800lm	K1M-9401809N-WB
						24°	1050lm	800lm	K1M-9402409N-WB
						36°	1050lm	800lm	K1M-9403609N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim D=D(DALI Dim)


Coding

K1M – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
K1M KENZO K1X55	927 CRI>90/ 2700K	18 18°	09 9W	N No Driver	W White	B Black	H Honeycomb
	930 CRI>90/ 3000K	24 24°		F On-Off	B Black	W White	
	940 CRI>90/ 4000K	36 36°		P Phase Dim		G Gold	
				A 1-10V Dim			
				D DALI Dim			

KENZO K1X70 – Recessed Adjustable Spotlight



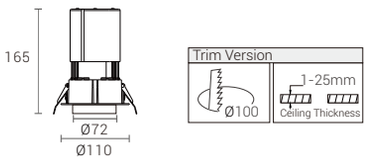


15° 25° 30°
2700K
3000K
4000K
CRI >90
UGR<19
IP20
CE
CB
UK CA
CITIZEN
50,000h@L80B10
0-90° 350°
5 YEARS GUARANTEE


Quick Info


- Ceiling Cut-out: Ø100mm for Trim Version
- CITIZEN LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 25°, 30°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

2700K







Housing Finish


White


Black

No Driver	179,00 €
ON-OFF	189,00 €
Phase Dim	199,00 €
DALI Dim	209,00 €

Reflector Options


Black


Gold


White

Optional accessary


Honeycomb

Code for K1L2-9403018N-WG with Honeycomb
K1L2-9403018N-WG-H

Honeycomb: +9,00€

Order Info (KENZO K1X70 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	15°	1400lm	1100lm	K1L1-9271513N-WB
						25°	1400lm	1100lm	K1L1-9272513N-WB
						30°	1400lm	1100lm	K1L1-9273013N-WB
					3000K	15°	1500lm	1200lm	K1L1-9301513N-WB
						25°	1500lm	1200lm	K1L1-9302513N-WB
						30°	1500lm	1200lm	K1L1-9303013N-WB
					4000K	15°	1600lm	1300lm	K1L1-9401513N-WB
						25°	1600lm	1300lm	K1L1-9402513N-WB
						30°	1600lm	1300lm	K1L1-9403013N-WB
18W	21W	36V	500mA	90	2700K	15°	1800lm	1500lm	K1L2-9271518N-WB
						25°	1800lm	1500lm	K1L2-9272518N-WB
						30°	1800lm	1500lm	K1L2-9273018N-WB
					3000K	15°	2000lm	1600lm	K1L2-9301518N-WB
						25°	2000lm	1600lm	K1L2-9302518N-WB
						30°	2000lm	1600lm	K1L2-9303018N-WB
					4000K	15°	2200lm	1700lm	K1L2-9401518N-WB
						25°	2200lm	1700lm	K1L2-9402518N-WB
						30°	2200lm	1700lm	K1L2-9403018N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim D=D(DALI Dim)

Coding

K1L1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
K1L1 K1X70-13W	927 CRI>90/ 2700K	15 15°	13 13W	N No Driver	W White	B Black	H Honeycomb
K1L2 K1X70-18W	930 CRI>90/ 3000K	25 25°	18 18W	F On-Off	B Black	W White	
	940 CRI>90/ 4000K	30 30°		P Phase Dim		G Gold	
				A 1-10V Dim			
				D DALI Dim			

BACK

FUSION


The Narrow Linear Downlight Series
Featuring Fixed Downlights,
Adjustable Downlights,
Spotlights,
Wall Washer Downlights,
General Light Downlights.



Project: Eggen Restaurant, Norway

FUSION FF1 – Fixed LED Downlight









Quick Info

- Ceiling Cut-out: 37x37mm
- OSRAM LED: 2W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 160lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K





Finish



White Black

Order Info (FUSION FF1 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2W	3 W	3 V	700mA	90	2700K	24°	200lm	130lm	FF1-9272402N-WB
						40°	200lm	130lm	FF1-9274002N-WB
					3000K	24°	210lm	140lm	FF1-9302402N-WB
						40°	210lm	140lm	FF1-9304002N-WB
					4000K	24°	230lm	155lm	FF1-9402402N-WB
						40°	230lm	155lm	FF1-9404002N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	39,00 €
ON-OFF	49,00 €
DALI Dim	69,00 €

Coding

FF1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF1 FUSION FF1	**927** CRI>90/ 2700K	**24** 24°	**02** 2W	**N** No Driver	**W** White	**B** Black	
	930 CRI>90/ 3000K	**40** 40°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

BACK


FUSION FF2 – Fixed LED Spotlight






Quick Info


- Ceiling Cut-out: 68x37mm
- OSRAM LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 330lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim






Light Distribution

3000K





Finish



White Black

Order Info (FUSION FF2 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	6 V	700mA	90	2700K	24°	400lm	290lm	FF2-9272404N-WB
						40°	400lm	290lm	FF2-9274004N-WB
					3000K	24°	450lm	300lm	FF2-9302404N-WB
						40°	450lm	300lm	FF2-9304004N-WB
					4000K	24°	500lm	330lm	FF2-9402404N-WB
						40°	500lm	330lm	FF2-9404004N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	49,00 €
ON-OFF	59,00 €
Phase Dim	79,00 €
DALI Dim	89,00 €


Coding

FF2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF2 FUSION FF2	927 CRI>90/ 2700K	24 24°	04 4W	N No Driver	W White	B Black	
	930 CRI>90/ 3000K	40 40°		F On-Off	B Black		
	940 CRI>90/ 4000K			P Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

FUSION FF3 – Fixed LED Spotlight







Quick Info

- Ceiling Cut-out: 90x37mm
- OSRAM LED: 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K





Finish



White Black

Reflector Options



Black Specular

Order Info (FUSION FF3 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9 W	9V	700mA	90	2700K	24°	600lm	420lm	FF3-9272407N-WB
						40°	600lm	420lm	FF3-9274007N-WB
					3000K	24°	650lm	450lm	FF3-9302407N-WB
						40°	650lm	450lm	FF3-9304007N-WB
					4000K	24°	700lm	500lm	FF3-9402407N-WB
						40°	700lm	500lm	FF3-9404007N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	69,00 €
ON-OFF	79,00 €
Phase Dim	89,00 €
DALI Dim	109,00 €

Coding


FF3 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF3 FUSION FF3	**927** CRI>90/ 2700K	**24** 24°	**07** 7W	**N** No Driver	**W** White	**B** Black	
	930 CRI>90/ 3000K	**40** 40°		**F** On-Off	**B** Black	**S** Specualr	
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

BACK


FUSION FF4 – Fixed LED Spotlight






Quick Info


- Ceiling Cut-out: 65x65mm
- OSRAM LED: 9W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 650lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K





Finish



White Black

Reflector Options



Black Specular

Order Info (FUSION FX4 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	12V	700mA	90	2700K	24°	750lm	550lm	FX4-9272409N-WB
						40°	750lm	550lm	FX4-9274009N-WB
					3000K	24°	800lm	600lm	FX4-9302409N-WB
						40°	800lm	600lm	FX4-9304009N-WB
					4000K	24°	900lm	650lm	FX4-9402409N-WB
						40°	900lm	650lm	FX4-9404009N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	79,00 €
ON-OFF	89,00 €
Phase Dim	99,00 €
DALI Dim	109,00 €

Coding

FF4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FX4 FUSION FX4	927 CRI>90/ 2700K	24 24°	09 9W	N No Driver	W White	B Black	
	930 CRI>90/ 3000K	40 40°		F On-Off	B Black	S Specualr	
	940 CRI>90/ 4000K			P Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

FUSION FF5 – Fixed LED Spotlight





24° 40° Cut-off 50° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA ETL Intertek OSRAM 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 144x37mm for Trim Version
- OSRAM LED: 11W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 750lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

3000K





Finish



White Black

Order Info (FUSION FF5 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	15V	700mA	90	2700K	24°	950lm	650lm	FF5-9272411N-WB
						40°	950lm	650lm	FF5-9274011N-WB
					3000K	24°	1050lm	700lm	FF5-9302411N-WB
						40°	1050lm	700lm	FF5-9304011N-WB
					4000K	24°	1150lm	750lm	FF5-9402411N-WB
						40°	1150lm	750lm	FF5-9404011N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Reflector Options



Black Specular

Trimless version

No Driver	89,00 €	No Driver	179,00 €
ON-OFF	99,00 €	ON-OFF	189,00 €
Phase Dim	109,00 €	Phase Dim	199,00 €
DALI Dim	129,00 €	DALI Dim	209,00 €

Coding


FF5 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF5 FUSION FF5	**927** CRI>90/ 2700K	**24** 24°	**11** 11W	**N** No Driver	**W** White	**B** Black	
FFT5 FUSION FFT5	**930** CRI>90/ 3000K	**40** 40°		**F** On-Off	**B** Black	**S** Specualr	
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

Trimless Version




FFT5




BACK

FUSION FF10 – Fixed LED Spotlight







Finish



White



Black

Reflector Options




Specualr




Black

Trimless Version



FFT10







Quick Info

- Ceiling Cut-out: 282x37mm for Trim Version
- OSRAM LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 1650lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K





Order Info (FUSION FF10 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	90	2700K	24°	1900lm	1400lm	FF10-9272422N-WB
						40°	1900lm	1400lm	FF10-9274022N-WB
					3000K	24°	2050lm	1500lm	FF10-9302422N-WB
						40°	2050lm	1500lm	FF10-9304022N-WB
					4000K	24°	2200lm	1650lm	FF10-9402422N-WB
						40°	2200lm	1650lm	FF10-9404022N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	139,00 €
ON-OFF	159,00 €
Phase Dim	179,00 €
DALI Dim	189,00 €

Trimless version

No Driver	339,00 €
ON-OFF	359,00 €
Phase Dim	379,00 €
DALI Dim	389,00 €

Coding

FF10 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF10 FUSION FF10	**927** CRI>90/ 2700K	**24** 24°	**22** 22W	**N** No Driver	**W** White	**B** Black	
FFTA FUSION FFT10	**930** CRI>90/ 3000K	**40** 40°		**F** On-Off	**B** Black	**S** Specualr	
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

FUSION FF2-IP65 – Surface IP65 FUSION Downlight

NEW





35° 45° 2700K 3000K 4000K CRI >90 UGR<19

IP65 CE CB UKCA Intertek OSRAM 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 66x37mm
- OSRAM LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 35°, 45°
- Lumen Output: Up to 270lm System Luminous Flux
- IP Class: IP65 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim






Light Distribution

3000K





Finish



White Black

Order Info (FUSION FF2-IP65 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	6V	700mA	90	2700K	35°	400lm	240lm	FF2-9273504N-WB-IP
						45°	400lm	205lm	FF2-9274504N-WB-IP
					3000K	35°	450lm	250lm	FF2-9303504N-WB-IP
						45°	450lm	215lm	FF2-9304504N-WB-IP
					4000K	35°	500lm	270lm	FF2-9403504N-WB-IP
						45°	500lm	230lm	FF2-9404504N-WB-IP

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	109,00 €
ON-OFF	129,00 €
Phase Dim	149,00 €
DALI°Dim	159,00 €

Coding

FF2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF2 FF2-IP65	927 CRI>90/ 2700K	35 35°	04 4W	N No Driver	W White	B Black	IP IP65
	930 CRI>90/ 3000K	45 45°		F On-Off	B Black		
	940 CRI>90/ 4000K			P Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

BACK

FUSION FF3-IP65 – Surface IP65 FUSION Downlight

NEW





35° 45° 2700K 3000K 4000K CRI >90 UGR<19

IP65 CE CB UKCA Intertek OSRAM 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 90x37mm
- OSRAM LED: 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 35°, 45°
- Lumen Output: Up to 410lm System Luminous Flux
- IP Class: IP65 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim






Light Distribution

3000K





Finish



White



Black

Order Info (FUSION FF3-IP65 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	9V	700mA	90	2700K	35°	600lm	360lm	FF3-9273507N-WB-IP
						45°	600lm	315lm	FF3-9274507N-WB-IP
					3000K	35°	650lm	385lm	FF3-9303507N-WB-IP
						45°	650lm	335lm	FF3-9304507N-WB-IP
					4000K	35°	700lm	410lm	FF3-9403507N-WB-IP
						45°	700lm	350lm	FF3-9404507N-WB-IP

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	149,00 €
ON-OFF	159,00 €
Phase Dim	169,00 €
DALI˚Dim	189,00 €

Coding

FF3 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF3 FF3-IP65	**927** CRI>90/ 2700K	**35°** 35°	**07** 7W	**N** No Driver	**W** White	**B** Black	**IP** IP65
	930 CRI>90/ 3000K	**45** 45°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

FUSION FF5-IP65 – Surface IP65 FUSION Downlight

NEW





35° 45° 2700K 3000K 4000K CRI >90 UGR<19

IP65 CE CB UKCA ETL Intertek OSRAM 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 148x37mm
- OSRAM LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 35°, 45°
- Lumen Output: Up to 840lm System Luminous Flux
- IP Class: IP65 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

3000K





Finish



White



Black

Order Info (FUSION FF5-IP65 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13 W	15V	700mA	90	2700K	35°	950lm	745lm	FF5-9273511N-WB-IP
						45°	950lm	620lm	FF5-9274511N-WB-IP
					3000K	35°	1050lm	785lm	FF5-9303511N-WB-IP
						45°	1050lm	650lm	FF5-9304511N-WB-IP
					4000K	35°	1150lm	840lm	FF5-9403511N-WB-IP
						45°	1150lm	700lm	FF5-9404511N-WB-IP

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim

No Driver	179,00 €
ON-OFF	189,00 €
Phase Dim	209,00 €
DALI°Dim	219,00 €

Coding


FF5 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF5 FF5-IP65	**927** CRI>90/ 2700K	**35** 35°	**11** 11W	**N** No Driver	**W** White	**B** Black	**IP** IP65
	930 CRI>90/ 3000K	**45** 45°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

BACK

FUSION FF10-IP65– Surface IP65 FUSION Downlight

NEW

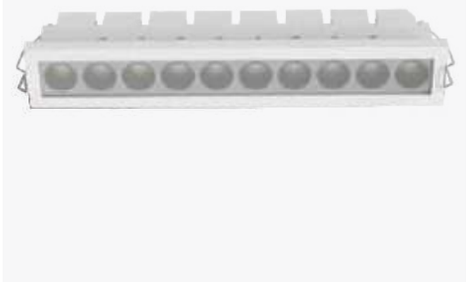



35° 45° 2700K 3000K 4000K CRI >90 UGR<19

IP65 CE CB UKCA Intertek OSRAM 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 286x37mm
- OSRAM LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 35°, 40°
- Lumen Output: Up to 1400lm System Luminous Flux
- IP Class: IP65 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

3000K





Finish



White



Black

Order Info (FUSION FF10-IP65 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	24W	30V	700mA	90	2700K	35°	1900lm	1250lm	FF10-9272422N-WB-IP
						45°	1900lm	1200lm	FF10-9274022N-WB-IP
					3000K	35°	2050lm	1300lm	FF10-9302422N-WB-IP
						45°	2050lm	1250lm	FF10-9304022N-WB-IP
					4000K	35°	2200lm	1400lm	FF10-9402422N-WB-IP
						45°	2200lm	1300lm	FF10-9404022N-WB-IP

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	289,00 €
ON-OFF	309,00 €
Phase Dim	329,00 €
DALI Dim	339,00 €

Coding

FF10 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF10 FF10-IP65	**927** CRI>90/ 2700K	**35** 35°	**22** 22W	**N** No Driver	**W** White	**B** Black	**IP** IP65
	930 CRI>90/ 3000K	**45** 45°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			


BACK


FUSION FA5 – Adjustable LED Downlight




Quick Info

- Ceiling Cut-out: 160x53mm for Trim Version
- OSRAM LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 750lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim









Shielding Angle:50°

Light Distribution

3000K





Finish



White



Black

Order Info (FUSION FA5 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13 W	15V	700mA	90	2700K	24°	950lm	650lm	FA5-9272411N-WB
						40°	950lm	650lm	FA5-9274011N-WB
					3000K	24°	1050lm	700lm	FA5-9302411N-WB
						40°	1050lm	700lm	FA5-9304011N-WB
					4000K	24°	1150lm	750lm	FA5-9402411N-WB
						40°	1150lm	750lm	FA5-9404011N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	149,00 €
ON-OFF	159,00 €
Phase Dim	169,00 €
DALI Dim	189,00 €

Reflector Options



Black




Specular

Coding

FA5 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FA5 FUSION FA5	927 CRI>90/ 2700K	24 24°	11 11W	N No Driver	W White	B Black	
	930 CRI>90/ 3000K	40 40°		F On-Off	B Black	S Specular	
	940 CRI>90/ 4000K			P Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

BACK

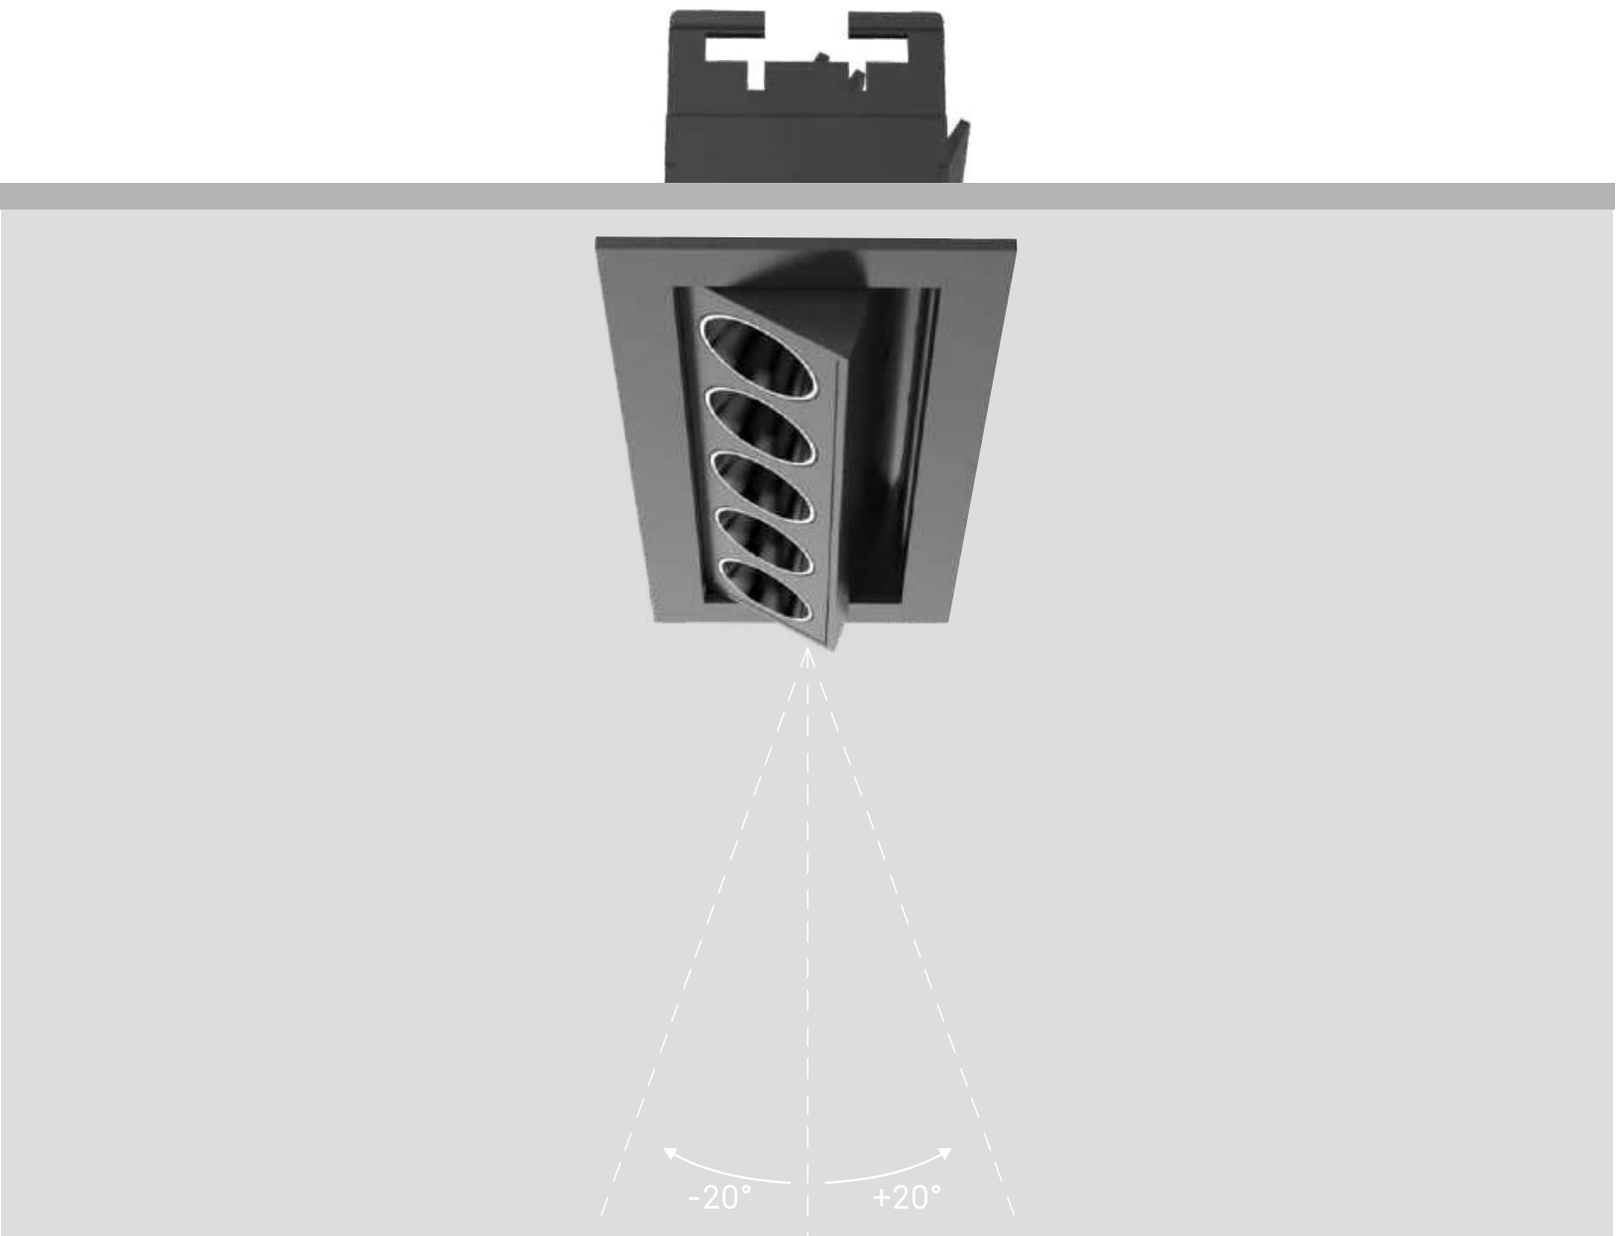
-20°
+20°

FUSION FA10 – Adjustable LED Downlight





24° 40° Cut-off 50° 2700K 3000K 4000K CRI >90 UGR<19


IP20 CE CB UKCA ETL Intertek OSRAM 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: 198x53mm for Trim Version
- OSRAM LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 1650lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim









Shielding Angle:50°

Light Distribution

3000K





Finish



White



Black

Order Info (FUSION FFA10 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	24W	30V	700mA	90	2700K	24°	1900lm	1400lm	FA10-9272422N-WB
						40°	1900lm	1400lm	FA10-9274022N-WB
					3000K	24°	2050lm	1500lm	FA10-9302422N-WB
						40°	2050lm	1500lm	FA10-9304022N-WB
					4000K	24°	2200lm	1650lm	FA10-9402422N-WB
						40°	2200lm	1650lm	FA10-9404022N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	249,00 €
ON-OFF	259,00 €
Phase Dim	289,00 €
DALI Dim	299,00 €

Reflector Options



Black



Specular

Coding

FA10 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FA10 FUSION FA10	927 CRI>90/ 2700K	24 24°	22 22W	N No Driver	W White	B Black	
	930 CRI>90/ 3000K	40 40°		F On-Off	B Black	S Specular	
	940 CRI>90/ 4000K			P Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

BACK

FUSION FW5 – Wall Washer LED Downlight





Wall Washer | 2700K 3000K 4000K | CRI >90

IP20 | CE | CB | UKCA | Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 144x37mm for Trim Version
- OSRAM LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: Wall Washer
- Lumen Output: Up to 550lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim





Light Distribution

3000K



Finish



White Black

Order Info (FUSION FW5 in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	15V	700mA	90	2700K	WW	900lm	450lm	FW5-927WW11N-WM
					3000K	WW	950lm	500lm	FW5-930WW11N-WM
					4000K	WW	1050lm	550lm	FW5-940WW11N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	129,00 €
ON-OFF	139,00 €
Phase Dim	159,00 €
DALI Dim	169,00 €


Trimless version


No Driver	209,00 €
ON-OFF	219,00 €
Phase Dim	229,00 €
DALI Dim	249,00 €

Trimless Version



FWT5





Coding

FW5 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FW5 FUSION FW5	**927** CRI>90/ 2700K	**WW** Wall Washer	**11** 11W	**N** No Driver	**W** White	**M** Matt	
FWT5 FUSION FWT5	**930** CRI>90/ 3000K			**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

FUSION FW10 – Wall Washer LED Downlight





Wall Washer | 2700K 3000K 4000K | CRI >90

IP20 | CE | CB | UKCA | ETL Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 282x37mm for Trim Version
- OSRAM LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: Wall Washer
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim





Light Distribution

3000K



Finish



White



Black

Order Info (FUSION FW10 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	24W	30V	700mA	90	2700K	WW	2000lm	1000lm	FW10-927WW22N-WM
					3000K	WW	2200lm	1100lm	FW10-930WW22N-WM
					4000K	WW	2400lm	1200lm	FW10-940WW22N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	219,00 €
ON-OFF	229,00 €
Phase Dim	249,00 €
DALI Dim	259,00 €


Trimless version


No Driver	369,00 €
ON-OFF	389,00 €
Phase Dim	409,00 €
DALI Dim	419,00 €

Trimless Version



FWT10






Coding


FW10 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FW10 FUSION FW10	**927** CRI>90/ 2700K	**WW** Wall Washer	**22** 22W	**N** No Driver	**W** White	**M** Matt	
FWTA FUSION FWT10	**930** CRI>90/ 3000K			**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			


BACK

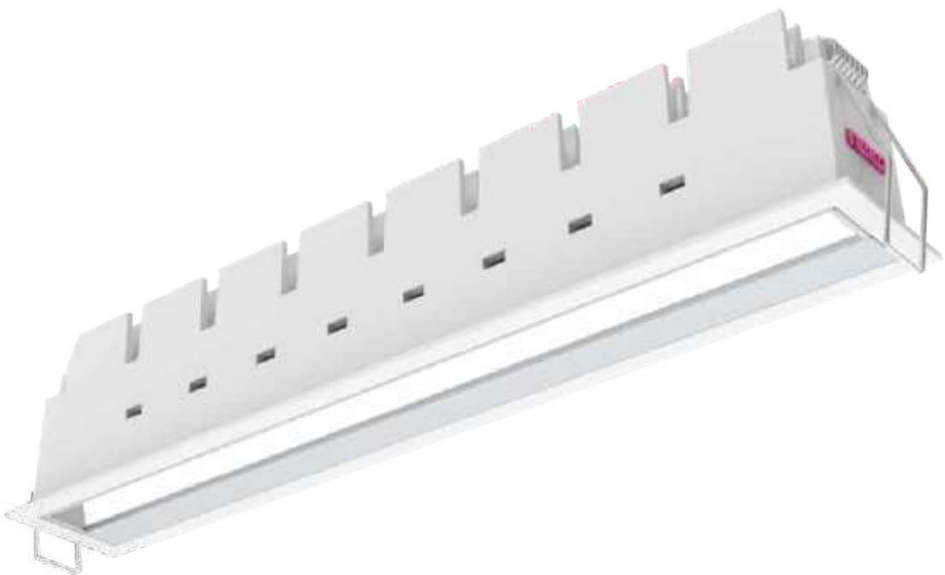





High quality wall washer illumination

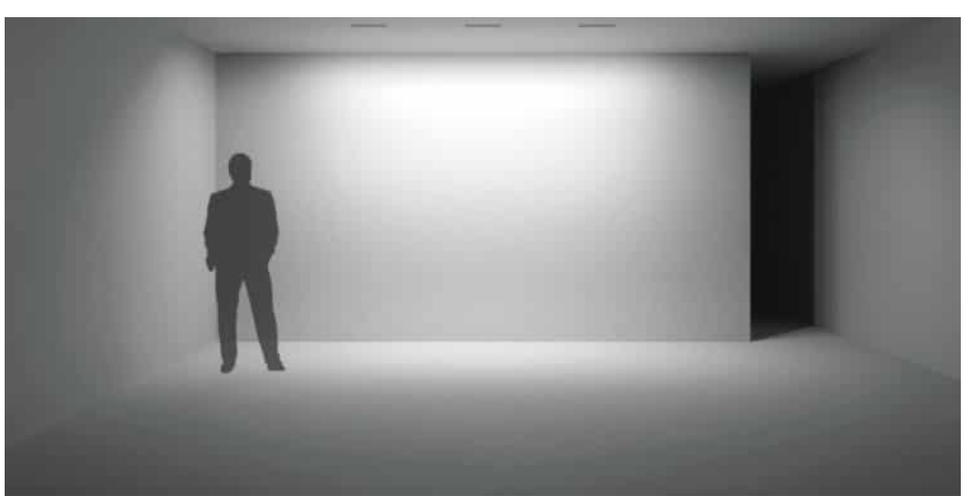


FUSION FG5 – General LED Downlight




75° | 2700K 3000K 4000K | CRI >90 | IP20 | CE | CB | UKCA | ETL Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 144x37mm for Trim Version
- OSRAM LED: 11W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 75°
- Lumen Output: Up to 400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim





Light Distribution

3000K



Finish



White



Black

Order Info (FUSION FG5 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	15V	700mA	90	2700K	75°	900lm	330lm	FG5-9277511N-WB
					3000K	75°	950lm	350lm	FG5-9277511N-WB
					4000K	75°	1050lm	400lm	FG5-9307511N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	109,00 €
ON-OFF	119,00 €
Phase Dim	129,00 €
DALI Dim	149,00 €


Trimless version


No Driver	169,00 €
ON-OFF	179,00 €
Phase Dim	189,00 €
DALI Dim	199,00 €

Trimless Version



FGT5





Coding

FG5 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FG5 FUSION FG5	**927** CRI>90/ 2700K	**75** 75°	**11** 11W	**N** No Driver	**W** White	**B** Black	
FGT5 FUSION FGT5	**930** CRI>90/ 3000K			**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

BACK


FUSION FG10 – General LED Downlight




75° | 2700K 3000K 4000K | CRI >90 | IP20 | CE | CB | UKCA | Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: Ø55mm for Trim Version
- OSRAM LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 75°
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim





Light Distribution

3000K



Finish



White



Black

Order Info (FUSION FG10 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	24W	30V	700mA	90	2700K	75°	2000lm	750lm	FG10-9277522N-WB
					3000K	75°	2200lm	800lm	FG10-9307522N-WB
					4000K	75°	2400lm	850lm	FG10-9407522N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	189,00 €
ON-OFF	199,00 €
Phase Dim	219,00 €
DALI Dim	229,00 €


Trimless version


No Driver	289,00 €
ON-OFF	309,00 €
Phase Dim	329,00 €
DALI Dim	339,00 €

Trimless Version



FGT10





Coding


FG10 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FG10 FUSION FG10	927 CRI>90/ 2700K	75 75°	22 22W	N No Driver	W White	B Black	
FGTA FUSION FGT10	930 CRI>90/ 3000K			F On-Off	B Black		
	940 CRI>90/ 4000K			P Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

BACK

FUSION FS1 – Adjustable Spotlight







15° 30° 2700K 3000K 4000K CRI >90 UGR<19


IP20 CE CB UKCA Intertek OSRAM 50,000h@L80B10 bridgelux. 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: 62x37mm
- OSRAM LED: 2W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°
- Lumen Output: Up to 160lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, No-Off, 1-10V Dim, DALI Dim

Light Distribution

3000K





Finish


White


Black

Order Info (FUSION FS1 in White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2W	3W	3V	700mA	90	2700K	15°	200lm	130lm	FS1-9271502N-WN
						30°	200lm	130lm	FS1-9273002N-WN
					3000K	15°	210lm	140lm	FS1-9301502N-WN
						30°	210lm	140lm	FS1-9303002N-WN
					4000K	15°	230lm	160lm	FS1-9401502N-WN
						30°	230lm	160lm	FS1-9403002N-WN

Code Remark: N=N(No Driver) F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	79,00 €
ON-OFF	89,00 €
DALI Dim	119,00 €

Coding

FS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FS1 FUSION FS1	927 CRI>90/ 2700K	15 15°	02 2W	N No Driver	W White	N None	
	930 CRI>90/ 3000K	30 30°		F On-Off	B Black		
	940 CRI>90/ 4000K			A 1-10V Dim			
*In same BRIDGELUX LED chip as FUSION G2 series is optional.				D DALI Dim			

BACK

FUSION FS2– Adjustable Spotlight





15° 30° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA Intertek OSRAM 50,000h@L80B10 bridgelux 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 90x37mm
- OSRAM LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°
- Lumen Output: Up to 330lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim






Light Distribution

3000K





Finish



White Black

Order Info (FUSION FS2 in White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	6V	700mA	90	2700K	15°	400lm	280lm	FS2-9271504N-WN
						30°	400lm	280lm	FS2-9273004N-WN
					3000K	15°	450lm	300lm	FS2-9301504N-WN
						30°	450lm	300lm	FS2-9303004N-WN
					4000K	15°	500lm	330lm	FS2-9401504N-WN
						30°	500lm	330lm	FS2-9403004N-WN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	129,00 €
ON-OFF	149,00 €
Phase Dim	159,00 €
DALI Dim	169,00 €

Coding

FS2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FS2 FUSION FS2	**927** CRI>90/ 2700K	**15** 15°	**04** 4W	**N** No Driver	**W** White	**N** None	
	930 CRI>90/ 3000K	**30** 30°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

*In same BRIDGELUX LED chip as FUSION G2 series is optional.

FUSION FS3 – Adjustable Spotlight





15° 30° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA Intertek OSRAM 50,000h@L80B10 bridgelux. 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 144x37mm for Trim Version
- OSRAM LED: 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim






Light Distribution

3000K





Finish



White Black

Order Info (FUSION FS3 in White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	9 V	700mA	90	2700K	15°	600lm	420lm	FS3-9271507N-WN
						30°	600lm	420lm	FS3-9273007N-WN
					3000K	15°	650lm	450lm	FS3-9301507N-WN
						30°	650lm	450lm	FS3-9303007N-WN
					4000K	15°	700lm	500lm	FS3-9401507N-WN
						30°	700lm	500lm	FS3-9403007N-WN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	189,00 €
ON-OFF	199,00 €
Phase Dim	209,00 €
DALI Dim	229,00 €


Trimless version


No Driver	279,00 €
ON-OFF	289,00 €
Phase Dim	299,00 €
DALI Dim	309,00 €

Trimless Version



FST3





Coding

FS3 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FS3 FUSION FS3	927 CRI>90/ 2700K	15 15°	07 7W	N No Driver	W White	N None	
FST3 FUSION FST3	930 CRI>90/ 3000K	30 30°		F On-Off	B Black		
	940 CRI>90/ 4000K			P Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

*In same BRIDGELUX LED chip as FUSION G2 series is optional.

BACK

FUSION FS6 – Adjustable Spotlight





15° 30° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA Intertek OSRAM 50,000h@L80B10 bridgelux 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 282x37mm for Trim Version
- OSRAM LED: 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°
- Lumen Output: Up to 900lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

3000K






Finish



Black



White

Order Info (FUSION FS6 in White Finish as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	18V	700mA	90	2700K	15°	1200lm	800lm	FS6-9271513N-WN
						30°	1200lm	800lm	FS6-9273013N-WN
					3000K	15°	1300lm	850lm	FS6-9301513N-WN
						30°	1300lm	850lm	FS6-9303013N-WN
					4000K	15°	1400lm	900lm	FS6-9401513N-WN
						30°	1400lm	900lm	FS6-9403013N-WN


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version



FST6





	Trimless version	
No Driver	349,00 €	489,00 €
ON-OFF	359,00 €	499,00 €
Phase Dim	379,00 €	509,00 €
DALI Dim	389,00 €	519,00 €

Coding

FS6 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FS6 FUSION FS6	**927** CRI>90/ 2700K	**15** 15°	**22** 22W	**N** No Driver	**W** White	**N** None	
FST6 FUSION FST6	**930** CRI>90/ 3000K	**30** 30°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

*In same BRIDGELUX LED chip as FUSION G2 series is optional.

FUSION FF3-FS3 – Adjustable Spotlight





24° 40° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA Intertek OSRAM 50,000h@L80B10 bridgelux. 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 144x37mm for Trim Version
- OSRAM LED: 9W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

3000K





Finish



White



Black

Order Info (FUSION FFS1 in White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	12 V	700mA	90	2700K	24°	750lm	500lm	FFS1-9272409N-WB
						40°	750lm	500lm	FFS1-9274009N-WB
					3000K	24°	800lm	550lm	FFS1-9302409N-WB
						40°	800lm	550lm	FFS1-9304009N-WB
					4000K	24°	900lm	600lm	FFS1-9402409N-WB
						40°	900lm	600lm	FFS1-9404009N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	139,00 €
ON-OFF	149,00 €
Phase Dim	159,00 €
DALI Dim	179,00 €


Trimless version


No Driver	219,00 €
ON-OFF	229,00 €
Phase Dim	239,00 €
DALI Dim	259,00 €

Trimless Version



FFT3-FST1





Coding

FFS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FFS1 FUSION FFS1	**927** CRI>90/ 2700K	**24** 24°	**09** 9W	**N** No Driver	**W** White	**N** None	
FFS3 FUSION FFT3-FST1	**930** CRI>90/ 3000K	**40** 40°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

*In same BRIDGELUX LED chip as FUSION G2 series is optional.

BACK

FUSION FF6-FS2 – Adjustable Spotlight





24° 40° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA Intertek OSRAM 50,000h@L80B10 bridgelux 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 282x37mm for Trim Version
- OSRAM LED: 17W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

3000K





Finish



White





Black

Trimless Version



FFT6-FST2





Order Info (FUSION FFS2 in White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17W	19W	24	700mA	90	2700K	24°	1500lm	1050lm	FFS2-9272417N-WB
						40°	1500lm	1050lm	FFS2-9274017N-WB
					3000K	24°	1600lm	1100lm	FFS2-9302417N-WB
						40°	1600lm	1100lm	FFS2-9304017N-WB
					4000K	24°	1800lm	1200lm	FFS2-9402417N-WB
						40°	1800lm	1200lm	FFS2-9404017N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	229,00 €
ON-OFF	239,00 €
Phase Dim	249,00 €
DALI Dim	269,00 €

Trimless version

No Driver	369,00 €
ON-OFF	379,00 €
Phase Dim	399,00 €
DALI Dim	409,00 €

Coding

FFS2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FFS2 FUSION FFS2	**927** CRI>90/ 2700K	**24** 24°	**17** 17W	**N** No Driver	**W** White	**N** None	
FFS4 FUSION FFT6-FST2	**930** CRI>90/ 3000K	**40** 40°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

*In same BRIDGELUX LED chip as FUSION G2 series is optional.

FUSION G2 FF1 – Fixed LED Downlight

NEW





15° 24° 48° 60° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19


IP20 CE CB UKCA ETL Intertek bridgelux 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: 37x37mm
- Bridgelux LED: 2W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 220lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim








Light Distribution

3000K

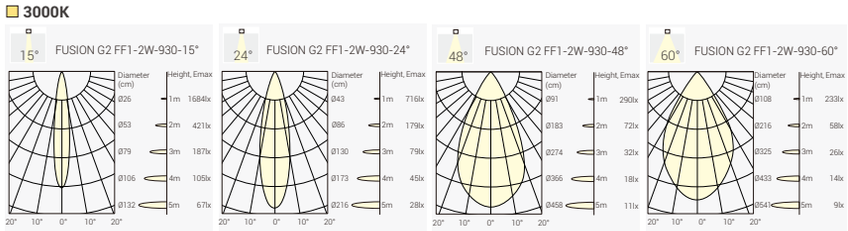

Finish



White



Black

Order Info (FUSION G2 FF1 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2W	3W	3V	700mA	90	2700K	15°	230lm	190lm	FF1G2-9271502N-WB
						24°	230lm	180lm	FF1G2-9272402N-WB
						48°	230lm	180lm	FF1G2-9274802N-WB
						60°	230lm	180lm	FF1G2-9276002N-WB
					3000K	15°	240lm	200lm	FF1G2-9301502N-WB
						24°	240lm	190lm	FF1G2-9302402N-WB
						48°	240lm	190lm	FF1G2-9304802N-WB
						60°	240lm	190lm	FF1G2-9306002N-WB
					4000K	15°	260lm	220lm	FF1G2-9401502N-WB
						24°	260lm	200lm	FF1G2-9402402N-WB
						48°	260lm	200lm	FF1G2-9404802N-WB
						60°	260lm	200lm	FF1G2-9406002N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	39,00 €
ON-OFF	49,00 €
Phase Dim	69,00 €
DALI Dim	79,00 €

Coding

FF1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF1G2 FUSION G2 FF1	927 CRI>90/ 2700K	15 15°	02 2W	N No Driver	W White	B Black	
	930 CRI>90/ 3000K	24 24°		F On-Off	B Black		
	940 CRI>90/ 4000K	48 48°		P Phase Dim			
		60 60°		A 1-10V Dim			
				D DALI Dim			

BACK

FUSION G2 FF2 – Fixed LED Downlight

NEW





15° 24° 48° 60° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19


IP20 CE CB UKCA Intertek bridgelux 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: 68x37mm
- Bridgelux LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 420lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim








Light Distribution

3000K

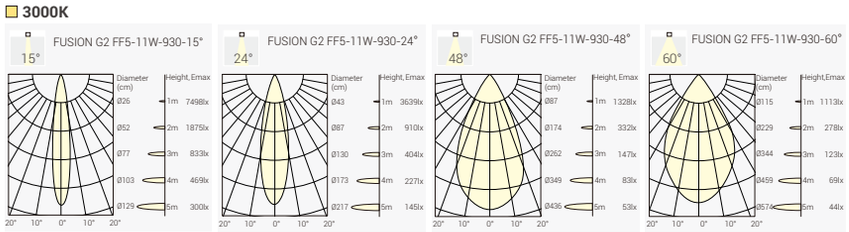

Finish



White Black

Order Info (FUSION G2 FF2 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	6V	700mA	90	2700K	15°	460lm	380lm	FF2G2-8271510N-WB
						24°	460lm	350lm	FF2G2-8272410N-WB
						48°	460lm	350lm	FF2G2-8274810N-WB
						60°	460lm	350lm	FF2G2-8276010N-WB
					3000K	15°	480lm	400lm	FF2G2-8301510N-WB
						24°	480lm	360lm	FF2G2-8302410N-WB
						48°	480lm	360lm	FF2G2-8304810N-WB
						60°	480lm	360lm	FF2G2-8306010N-WB
					4000K	15°	510lm	420lm	FF2G2-8401510N-WB
						24°	510lm	380lm	FF2G2-8402410N-WB
						48°	510lm	380lm	FF2G2-8404810N-WB
						60°	510lm	380lm	FF2G2-8406010N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	49,00 €
ON-OFF	59,00 €
Phase Dim	79,00 €
DALI Dim	89,00 €

Coding

FF2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF2G2 FUSION G2 FF2	927 CRI>90/ 2700K	15 15°	04 4W	N No Driver	W White	B Black	
	930 CRI>90/ 3000K	24 24°		F On-Off	B Black		
	940 CRI>90/ 4000K	48 48°		P Phase Dim			
		60 60°		A 1-10V Dim			
				D DALI Dim			

BACK

FUSION G2 FF3 – Fixed LED Downlight

NEW





15° 24° 48° 60° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19


IP20 CE CB UKCA ETL Intertek bridgelux 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: 90x37mm
- Bridgelux LED: 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim








Light Distribution

3000K

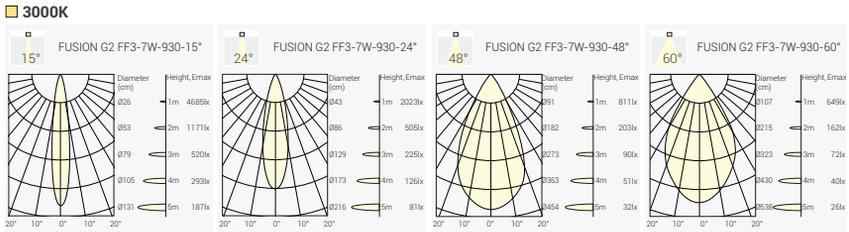

Finish



White Black

Order Info (FUSION G2 FF3 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	9V	700mA	80	2700K	15°	700lm	560lm	FF3G2-9271507N-WB
						24°	700lm	500lm	FF3G2-9272407N-WB
						48°	700lm	500lm	FF3G2-9274807N-WB
						60°	700lm	500lm	FF3G2-9276007N-WB
					3000K	15°	720lm	580lm	FF3G2-9301507N-WB
						24°	720lm	520lm	FF3G2-9302407N-WB
						48°	720lm	520lm	FF3G2-9304807N-WB
						60°	720lm	520lm	FF3G2-9306007N-WB
					4000K	15°	780lm	600lm	FF3G2-9401507N-WB
						24°	780lm	550lm	FF3G2-9402407N-WB
						48°	780lm	550lm	FF3G2-9404807N-WB
						60°	780lm	550lm	FF3G2-9406007N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	79,00 €
ON-OFF	89,00 €
Phase Dim	99,00 €
DALI Dim	109,00 €

Coding

FF3G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF3G2 FUSION G2 FF3	927 CRI>90/ 2700K	15 15°	07 7W	N No Driver	W White	B Black	
	930 CRI>90/ 3000K	24 24°		F On-Off	B Black		
	940 CRI>90/ 4000K	48 48°		P Phase Dim			
		60 60°		A 1-10V Dim			
				D DALI Dim			

BACK

FUSION G2 FF5 – Fixed LED Downlight

NEW





15° 24° 48° 60° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA Intertek bridgelux 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 144x37mm for Trim Version
- Bridgelux LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim





Light Distribution

3000K

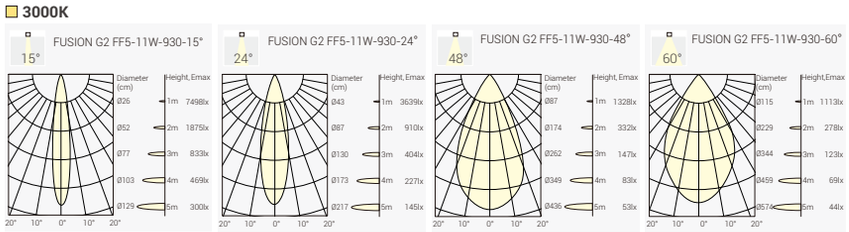

Finish



White Black

Order Info (FUSION G2 FF5 in White Trim & Black Reflector as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	15V	700mA	90	2700K	15°	1150lm	870lm	FF5G2-9271511N-WB
						24°	1150lm	830lm	FF5G2-9272411N-WB
						48°	1150lm	830lm	FF5G2-9274811N-WB
						60°	1150lm	830lm	FF5G2-9276011N-WB
					3000K	15°	1200lm	900lm	FF5G2-9301511N-WB
						24°	1200lm	850lm	FF5G2-9302411N-WB
						48°	1200lm	850lm	FF5G2-9304811N-WB
						60°	1200lm	850lm	FF5G2-9306011N-WB
					4000K	15°	1300lm	950lm	FF5G2-9401511N-WB
						24°	1300lm	900lm	FF5G2-9402411N-WB
						48°	1300lm	900lm	FF5G2-9404811N-WB
						60°	1300lm	900lm	FF5G2-9406011N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version



FUSION G2 FFT5



Trimless version

No Driver	89,00 €
ON-OFF	99,00 €
Phase Dim	109,00 €
DALI Dim	129,00 €

No Driver	169,00 €
ON-OFF	179,00 €
Phase Dim	189,00 €
DALI Dim	209,00 €

Coding

FF5G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF5G2 FUSION G2 FF5	**927** CRI>90/ 2700K	**15** 15°	**11** 11W	**N** No Driver	**W** White	**B** Black	
FFT5G2 FUSION G2 FFT5	**930** CRI>90/ 3000K	**24** 24°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K	**48** 48°		**P** Phase Dim			
		60 60°		**A** 1-10V Dim			
				D DALI Dim			

BACK

FUSION G2 FF10 – Fixed LED Downlight

NEW





15° 24° 48° 60° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19


IP20 CE CB UKCA Intertek bridgelux 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: 282x37mm for Trim Version
- Bridgelux LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 2000lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim








Light Distribution

3000K

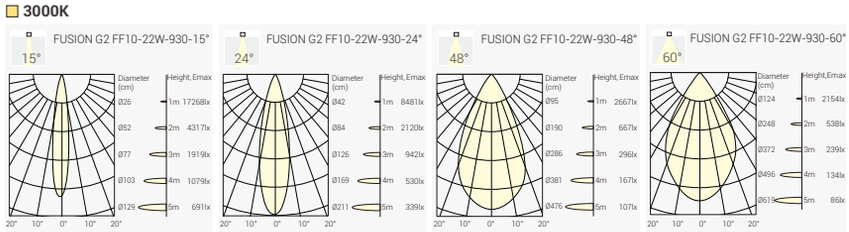

Finish



White



Black

Order Info (FUSION G2 FF10 in White Trim & Black Reflector as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	24W	30V	700mA	90	2700K	15°	2300lm	1850lm	FF10G2-9271522N-WB
						24°	2300lm	1800lm	FF10G2-9272422N-WB
						48°	2300lm	1800lm	FF10G2-9274822N-WB
						60°	2300lm	1850lm	FF10G2-9276022N-WB
					3000K	15°	2450lm	1900lm	FF10G2-9301522N-WB
						24°	2450lm	1850lm	FF10G2-9302422N-WB
						48°	2450lm	1850lm	FF10G2-9304822N-WB
						60°	2450lm	1900lm	FF10G2-9306022N-WB
					4000K	15°	2600lm	2000lm	FF10G2-9401522N-WB
						24°	2600lm	1950lm	FF10G2-9402422N-WB
						48°	2600lm	1950lm	FF10G2-9404822N-WB
						60°	2600lm	2000lm	FF10G2-9406022N-WB


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Trimless Version



FUSION G2 FFT10





Trimless version

No Driver	139,00 €	No Driver	329,00 €
ON-OFF	159,00 €	ON-OFF	339,00 €
Phase Dim	179,00 €	Phase Dim	359,00 €
DALI Dim	189,00 €	DALI Dim	369,00 €

Coding

FF10G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF10G2 FUSION G2 FF10	927 CRI>90/ 2700K	15 15°	22 22W	N No Driver	W White	B Black	
FFT10G2 FUSION G2 FFT10	930 CRI>90/ 3000K	24 24°		F On-Off	B Black		
	940 CRI>90/ 4000K	48 48°		P Phase Dim			
		60 60°		A 1-10V Dim			
				D DALI Dim			

BACK

FUSION G2 FA5 – Adjustable LED Downliht

NEW





15° 24° 48° 60° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19


IP20 CE CB UKCA ETL Intertek bridgelux 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: 160x53mm for Trim Version
- Bridgelux LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim








Light Distribution

3000K

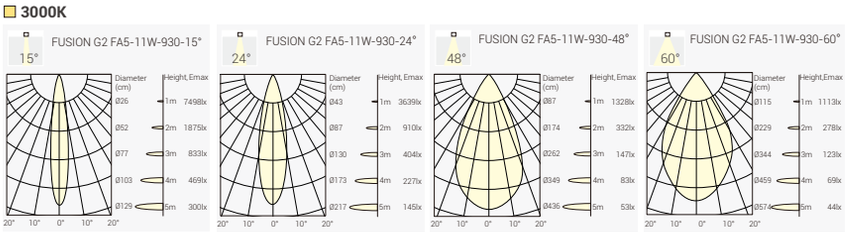

Finish



White Black

Order Info (FUSION G2 FA5 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	15V	700mA	90	2700K	15°	1150lm	870lm	FA5G2-9271511N-WB
						24°	1150lm	830lm	FA5G2-9272411N-WB
						48°	1150lm	830lm	FA5G2-9274811N-WB
						60°	1150lm	830lm	FA5G2-9276011N-WB
					3000K	15°	1200lm	900lm	FA5G2-9301511N-WB
						24°	1200lm	850lm	FA5G2-9302411N-WB
						48°	1200lm	850lm	FA5G2-9304811N-WB
						60°	1200lm	850lm	FA5G2-9306011N-WB
					4000K	15°	1300lm	950lm	FA5G2-9401511N-WB
						24°	1300lm	900lm	FA5G2-9402411N-WB
						48°	1300lm	900lm	FA5G2-9404811N-WB
						60°	1300lm	900lm	FA5G2-9406011N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	149,00 €
ON-OFF	159,00 €
Phase Dim	169,00 €
DALI Dim	189,00 €

Coding

FA5G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FA5G2 FUSION G2 FA5	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	15 15° 24 24° 48 48° 60 60°	11 11W	N No Driver F On-Off P Phase Dim A 1-10V Dim D DALI Dim	W White B Black	B Black	

BACK

FUSION G2 FA10 – Adjustable LED Downliht

NEW





15° 24° 48° 60° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19


IP20 CE CB UKCA ETL Intertek bridgelux 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: 198x53mm for Trim Version
- Bridgelux LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 2000lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim, Casambi Wireless Dim








Light Distribution

3000K

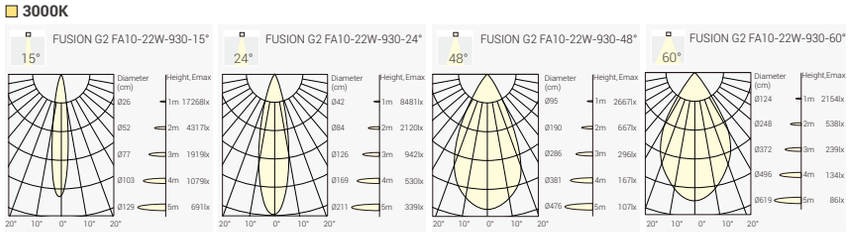

Order Info (FUSION G2 FA10 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	24W	30V	700mA	90	2700K	15°	2300lm	1850lm	FA10G2-9271522N-WB
						24°	2300lm	1800lm	FA10G2-9272422N-WB
						48°	2300lm	1800lm	FA10G2-9274822N-WB
						60°	2300lm	1850lm	FA10G2-9276022N-WB
					3000K	15°	2450lm	1900lm	FA10G2-9301522N-WB
						24°	2450lm	1850lm	FA10G2-9302422N-WB
						48°	2450lm	1850lm	FA10G2-9304822N-WB
						60°	2450lm	1900lm	FA10G2-9306022N-WB
					4000K	15°	2600lm	2000lm	FA10G2-9401522N-WB
						24°	2600lm	1950lm	FA10G2-9402422N-WB
						48°	2600lm	1950lm	FA10G2-9404822N-WB
						60°	2600lm	2000lm	FA10G2-9406022N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

No Driver	249,00 €
ON-OFF	259,00 €
Phase Dim	279,00 €
DALI Dim	289,00 €

Finish



White



Black

Coding

FA10G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FA10G2 FUSION G2 FA10	927 CRI>90/ 2700K	15 15°	22 22W	N No Driver	W White	B Black	
	930 CRI>90/ 3000K	24 24°		F On-Off	B Black		
	940 CRI>90/ 4000K	48 48°		P Phase Dim			
		60 60°		A 1-10V Dim			
				D DALI Dim			

BACK

FUSION
Linear System

Modular Design Flexible Linear Profile System

Light Line with 50mm Profile Width, Customized Lengths

Pendant, Surface, Trimless Recessed, Trim Recessed

Opal, Accent Light, Spotlight, Wall Washer Optics

Can also Put FUSlON Downlights into Profile

On-Off, Phase Dim, 1-10V Dim, DALI Dim


4
3
2
1
G


FUSION Linear System – Modular Design Flexible Linear Profile System

Channels



Profil: 59,00 € / lfm

Inserts



FUSION Module
(FF/ FW/ FS/ FG)



Accent Light Module
(300mm)



General Light Module
(600mm)



Wall Washer Module
(1200mm/1800mm)



Spot Light Module
(300mm)



Uplight Module
(1070mm/ 1605mm)

Covers



Blind Cover
25,00 € / lfm

Opal Cover
19,00 € / lfm




Flexible Opal Cover
19,00 € / lfm

Mounting Kits



Recessed Mounting Kit
(2pcs/ Set)
45,00 €




Surface Mounted Kit
(2pcs/ Set)
25,00 €




Pendant Kit
(Ceiling Box in White/ Black)
49,00 €

BACK

Corner Modules and Linear Connector

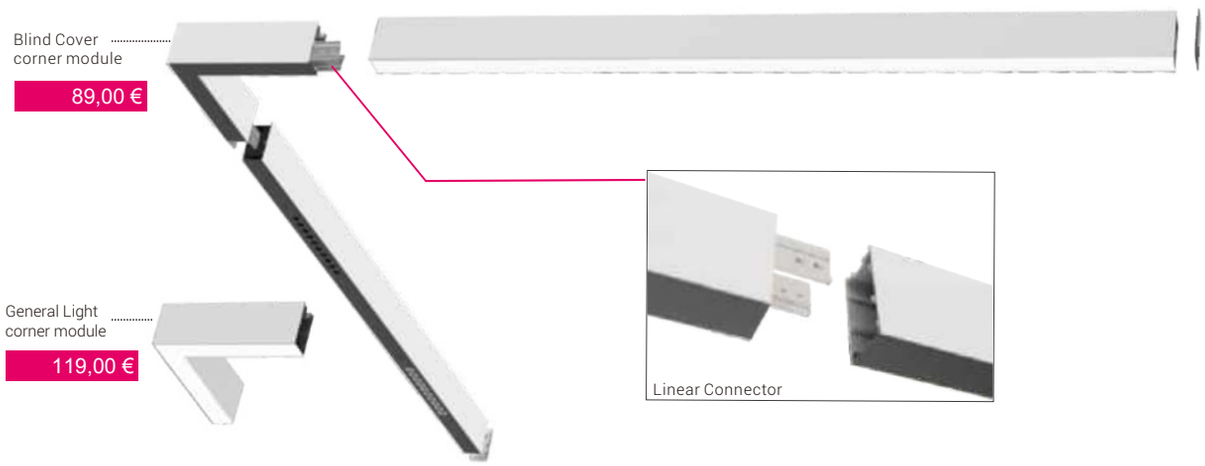

System details

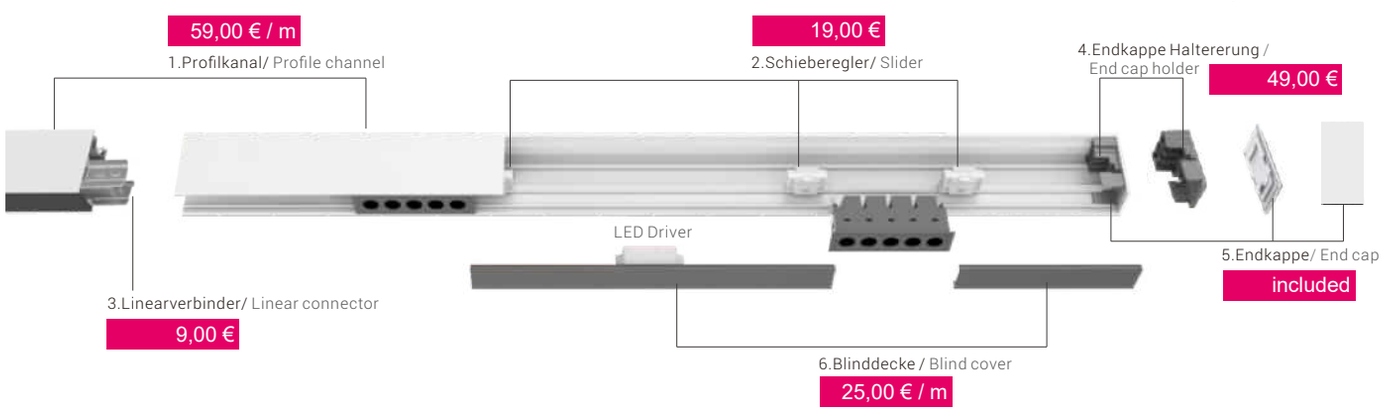



Intelligentes Linear-Profildesign
Einfachste Installation der FUSION Einbauleuchte in den Profilkanal

Smart linear profile design
Easy to install FUSION downlight into profile channel


FUSION Linear System – General Light Module




105°
2700K
3000K
4000K
CRI >80
CRI >90
CE
CB
SAMSUNG 50,000h@L80B10
5 YEARS GUARANTEE

Quick Info


- Linkable General Light Module
- General Light Version also Available
- SAMSUNG LED: 11W, 16W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 105°
- Lumen Output: Up to 1900lm System Luminous Flux
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim





Light Distribution

3000K



Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	12W	46V	250mA	80	2700K	105°	1600lm	1200lm	GL600-11W-827-105°N
					3000K	105°	1700lm	1300lm	GL600-11W-830-105°N
					4000K	105°	1800lm	1400lm	GL600-11W-840-105°N
				90	2700K	105°	1500lm	1100lm	GL600-11W-927-105°N
					3000K	105°	1600lm	1200lm	GL600-11W-930-105°N
					4000K	105°	1700lm	1300lm	GL600-11W-940-105°N
16W	18W	46V	300mA	80	2700K	105°	2100lm	1700lm	GL600-16W-827-105°N
					3000K	105°	2200lm	1800lm	GL600-16W-830-105°N
					4000K	105°	2400lm	1900lm	GL600-16W-840-105°N
				90	2700K	105°	1900lm	1600lm	GL600-16W-927-105°N
					3000K	105°	2000lm	1700lm	GL600-16W-930-105°N
					4000K	105°	2200lm	1900lm	GL600-16W-940-105°N


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)


No Driver 79,00 €

BACK

FUSION Linear System – Wall Washer Light Module








Wall Washer | 2700K 3000K 4000K | CRI >80 | CRI >90 | CE | CB | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- Wall Wash Light Module
- SAMSUNG LED: 22W, 32W, 48W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: Wall washer
- Lumen Output: Up to 3700lm System Luminous Flux
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K




Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	26W	46V	500mA	80	2700K	WW	3200lm	1700lm	WW1200-22W-827N
					3000K	WW	3400lm	1800lm	WW1200-22W-830N
					4000K	WW	3600lm	1900lm	WW1200-22W-840N
No Driver	129,00 €			90	2700K	WW	3000lm	1500lm	WW1200-22W-927N
					3000K	WW	3200lm	1600lm	WW1200-22W-930N
					4000K	WW	3400lm	1700lm	WW1200-22W-940N
32W	36W	46V	700mA	80	2700K	WW	4600lm	2300lm	WW1200-32W-827N
					3000K	WW	4800lm	2500lm	WW1200-32W-830N
					4000K	WW	5000lm	2700lm	WW1200-32W-840N
No Driver	129,00 €			90	2700K	WW	4000lm	2000lm	WW1200-32W-927N
					3000K	WW	4200lm	2200lm	WW1200-32W-930N
					4000K	WW	4400lm	2400lm	WW1200-32W-940N
32W	36W	46V	700mA	80	2700K	WW	4600lm	2500lm	WW1800-32W-827N
					3000K	WW	4800lm	2700lm	WW1800-32W-830N
					4000K	WW	5000lm	2900lm	WW1800-32W-840N
No Driver	179,00 €			90	2700K	WW	4000lm	2100lm	WW1800-32W-927N
					3000K	WW	4200lm	2300lm	WW1800-32W-930N
					4000K	WW	4400lm	2500lm	WW1800-32W-940N
48W	52W	46V	700+350mA	80	2700K	WW	6200lm	3300lm	WW1800-48W-827N
					3000K	WW	6400lm	3500lm	WW1800-48W-830N
					4000K	WW	6600lm	3700lm	WW1800-48W-840N
No Driver	179,00 €			90	2700K	WW	5500lm	2900lm	WW1800-48W-927N
					3000K	WW	5700lm	3100lm	WW1800-48W-930N
					4000K	WW	5900lm	3300lm	WW1800-48W-940N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

FUSION Linear System – SL300-1S-4W Adjustable Spotlight Module






15° 30° 55° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP40 | CE | CB | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- Adjustable Spotlight Module
- CREE LED: 4W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 55°
- Lumen Output: Up to 420lm System Luminous Flux
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K







Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	12 V	350mA	80	2700K	15°	470lm	350lm	SL300-1S-4W-827-15°
						30°	470lm	350lm	SL300-1S-4W-827-30°
						55°	470lm	350lm	SL300-1S-4W-827-55°
No Driver	99,00 €				3000K	15°	500lm	380lm	SL300-1S-4W-830-15°
						30°	500lm	380lm	SL300-1S-4W-830-30°
						55°	500lm	380lm	SL300-1S-4W-830-55°
					4000K	15°	550lm	420lm	SL300-1S-4W-840-15°
						30°	550lm	420lm	SL300-1S-4W-840-30°
						55°	550lm	420lm	SL300-1S-4W-840-55°

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim

BACK

FUSION Linear System – SL300-2S-8W Adjustable Spotlight Module




15° 30° 55° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19

IP40 | CE | CB | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- Adjustable Spotlight Module
- CREE LED: 8W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 55°
- Lumen Output: Up to 750lm System Luminous Flux
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim




Light Distribution

3000K







Order Info


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8W	10W	24 V	350mA	80	2700K	15°	850lm	650lm	SL300-2S-8W-827-15°N
						30°	850lm	650lm	SL300-2S-8W-827-30°N
						55°	850lm	650lm	SL300-2S-8W-827-55°N
No Driver	159,00 €				3000K	15°	900lm	700lm	SL300-2S-8W-830-15°N
						30°	900lm	700lm	SL300-2S-8W-830-30°N
						55°	900lm	700lm	SL300-2S-8W-830-55°N
					4000K	15°	950lm	750lm	SL300-2S-8W-840-15°N
						30°	950lm	750lm	SL300-2S-8W-840-30°N
						55°	950lm	750lm	SL300-2S-8W-840-55°N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

BACK

FUSION Linear System – SL450-3S-13W Adjustable Spotlight Module





15° 30° 55°

2700K
3000K
4000K

CRI >80

CRI >90

UGR<19

IP40

CE

CB

CREE 50,000h@L80B10


5 YEARS GUARANTEE


Quick Info


- Adjustable Spotlight Module
- CREE LED: 13W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 55°
- Lumen Output: Up to 1100lm System Luminous Flux
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K Per Single Spot:







Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36 V	350mA	80	2700K	15°	1200lm	950lm	SL450-3S-13W-827-15°N
						30°	1200lm	950lm	SL450-3S-13W-827-30°N
						55°	1200lm	950lm	SL450-3S-13W-827-55°N
					3000K	15°	1300lm	1000lm	SL450-3S-13W-830-15°N
						30°	1300lm	1000lm	SL450-3S-13W-830-30°N
						55°	1300lm	1000lm	SL450-3S-13W-830-55°N
					4000K	15°	1400lm	1100lm	SL450-3S-13W-840-15°N
						30°	1400lm	1100lm	SL450-3S-13W-840-30°N
						55°	1400lm	1100lm	SL450-3S-13W-840-55°N

No Driver 219,00 €

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

BACK

FUSION Linear System – AL300-13W Accent Light Module





15° 30° 40° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19

CE CB OSRAM 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Accent Light Module
- OSRAM LED: 13W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 40°
- Lumen Output: Up to 1300lm System Luminous Flux
- LED Driver: No Driver, ON-OFF, Phase Dim, 1-10V Dim, DALI Dim







Light Distribution

3000K







Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	18 V	700mA	80	2700K	15°	1300lm	1000lm	AL300-13W-827-15°N
						30°	1300lm	1000lm	AL300-13W-827-30°N
						40°	1300lm	1100lm	AL300-13W-827-40°N
					3000K	15°	1400lm	1100lm	AL300-13W-830-15°N
						30°	1400lm	1100lm	AL300-13W-830-30°N
						40°	1400lm	1200lm	AL300-13W-830-40°N
					4000K	15°	1500lm	1200lm	AL300-13W-840-15°N
						30°	1500lm	1200lm	AL300-13W-840-30°N
						40°	1500lm	1300lm	AL300-13W-840-40°N


No Driver 99,00 €


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

BACK

FUSION Linear System – UL1200-11W/ UL1800-16W Uplight Module







110°

2700K
3000K
4000K

CRI >80

CRI >90

CE

CB

SAMSUNG
50,000h@L80B10


5 YEARS GUARANTEE

Quick Info

- Uplight Module
- SAMSUNG LED: 11W, 16W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 110°
- Lumen Output: Up to 2400lm System Luminous Flux
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K Per Single Spot:




Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	46 V	250mA	80	2700K	110°	1700lm	1500lm	UL1200-11W-827-110°
No Driver		39,00 €			3000K	110°	1800lm	1600lm	UL1200-11W-830-110°
					4000K	110°	1900lm	1700lm	UL1200-11W-840-110°
16W	18W	46 V	350mA	80	2700K	110°	2300lm	2000lm	UL1800-16W-827-110°
No Driver		59,00 €			3000K	110°	2500lm	2200lm	UL1800-16W-830-110°
					4000K	110°	2700lm	2400lm	UL1800-16W-840-110°

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim

BACK


FUSION Linear System – Linear Downlight Profile System

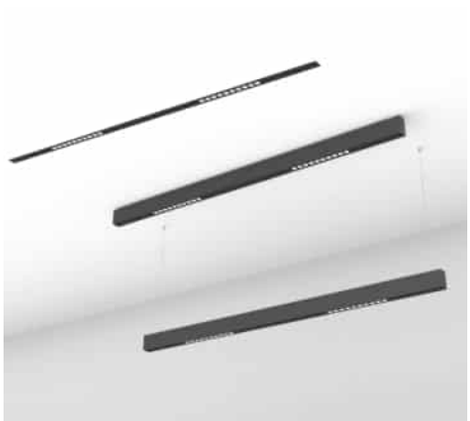




Quick Info


- Linear Accent Light Profile System
- OSRAM LED: 44W, 22W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40° (FUSION G2 in 15°, 24°, 48°, 60°)
- Lumen Output: Up to 3800lm System Luminous Flux
- Mounting Type: Pendant, Surface mounted, Trimless Recessed, Trim Recessed
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K





Order Info (in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Code
44W	48W	31+31V	700mA	80	2700K	24°	5000lm	3400lm	1500mm	FL1500(X)-2*FF10-48W-82724F-BB
						40°	5000lm	3400lm	1500mm	FL1500(X)-2*FF10-48W-82740F-BB
					3000K	24°	5200lm	3600lm	1500mm	FL1500(X)-2*FF10-48W-83024F-BB
						40°	5200lm	3600lm	1500mm	FL1500(X)-2*FF10-48W-83040F-BB
					4000K	24°	5600lm	3800lm	1500mm	FL1500(X)-2*FF10-48W-84024F-BB
						40°	5600lm	3800lm	1500mm	FL1500(X)-2*FF10-48W-84040F-BB
22W	26W	16+16V	700mA	80	2700K	24°	2400lm	1700lm	1200mm	FL1200(X)-2*FF5-26W-82724F-BB
						40°	2400lm	1700lm	1200mm	FL1200(X)-2*FF5-26W-82740F-BB
					3000K	24°	2600lm	1800lm	1200mm	FL1200(X)-2*FF5-26W-83024F-BB
						40°	2600lm	1800lm	1200mm	FL1200(X)-2*FF5-26W-83040F-BB
					4000K	24°	2800lm	1900lm	1200mm	FL1200(X)-2*FF5-26W-84024F-BB
						40°	2800lm	1900lm	1200mm	FL1200(X)-2*FF5-26W-84040F-BB


Code Remark: (X)=P (Pendant) (X)= S (Surface mounted) (X)= T (Trimless Recessed) (X)= F (Trim Recessed)


Code Remark: F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Model	ON-OFF	DALI Dim
FL1500-2*FF10 - Surface mounted	999,00 €	1159,00 €
FL1500-2*FF10 - Pendant	1009,00 €	1169,00 €
FL1200-2*FF5 - Surface mounted	669,00 €	829,00 €
FL1200-2*FF5 - Pendant	689,00 €	849,00 €

**NOTE: Recessed profile on request*


FUSION Linear System – Linear General Light Profile System

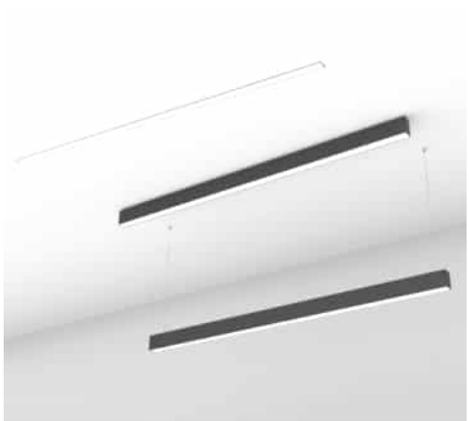

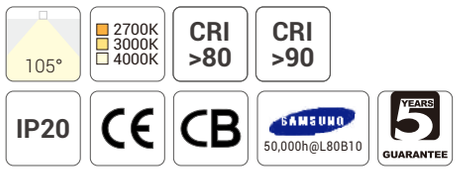


Quick Info

- Linear General Light Profile System
- SAMSUNG LED: 22W, 32W, 48W, CRI>80, CRI>90,
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 105°
- Lumen Output: Up to 5500lm System Luminous Flux
- Mounting Type: Pendant, Surface mounted, Trimless Recessed, Trim Recessed
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K



Model	ON-OFF	DALI Dim
FL1200-GL1200 - Surface mounted	509,00 €	619,00 €
FL1200-GL1200 - Pendant mounted	529,00 €	649,00 €
FL1800-GL1800 - Surface mounted	679,00 €	789,00 €
FL1800-GL1800 - Pendant mounted	689,00 €	799,00 €

**NOTE: Recessed profile on request*

Order Info (in Black Housing as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Code
32W	36W	46V	700mA	80	2700K	105°	4600lm	3400lm	1800mm	FL1800(X)-GL1800-36W-827A1F-BN
					3000K	105°	4800lm	3600lm	1800mm	FL1800(X)-GL1800-36W-830A1F-BN
					4000K	105°	5000lm	3800lm	1800mm	FL1800(X)-GL1800-36W-840A1F-BN
48W	52W	46V	700+350mA	80	2700K	105°	6200lm	5000lm	1800mm	FL1800(X)-GL1800-52W-827A1F-BN
					3000K	105°	6400lm	5200lm	1800mm	FL1800(X)-GL1800-52W-830A1F-BN
					4000K	105°	7000lm	5500lm	1800mm	FL1800(X)-GL1800-52W-840A1F-BN
22W	26W	46V	500mA	80	2700K	105°	3200lm	2300lm	1200mm	FL1200(X)-GL1200-26W-827A1F-BN
					3000K	105°	3400lm	2700lm	1200mm	FL1200(X)-GL1200-26W-830A1F-BN
					4000K	105°	3600lm	2900lm	1200mm	FL1200(X)-GL1200-26W-840A1F-BN
32W	36W	46V	700mA	80	2700K	105°	4200lm	3400lm	1200mm	FL1200(X)-GL1200-36W-827A1F-BN
					3000K	105°	4400lm	3600lm	1200mm	FL1200(X)-GL1200-36W-830A1F-BN
					4000K	105°	4800lm	3800lm	1200mm	FL1200(X)-GL1200-36W-840A1F-BN


Code Remark: (X)=P (Pendant) (X)= S (Surface mounted) (X)= T (Trimless Recessed) (X)= F (Trim Recessed)

Code Remark: F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

BACK


FUSION Linear System – Linear Wall Washer Light Profile System

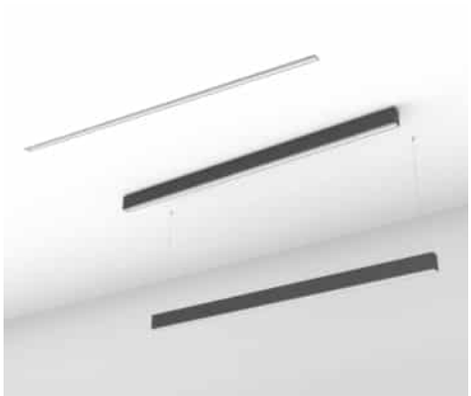

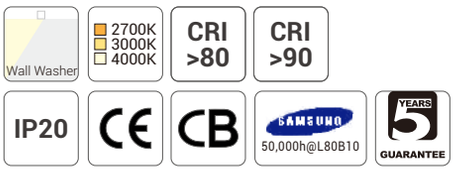


Quick Info

- Linear Wall Washer Light Profile System
- SAMSUNG LED: 22W, 32W, 48W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: Wall washer
- Lumen Output: Up to 3700lm System Luminous Flux
- Mounting Type: Pendant, Surface mounted, Trimless Recessed, Trim Recessed
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K



Order Info (in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Code
32W	36W	46V	700mA	80	2700K	WW	4600lm	2500lm	1800mm	FL1800(X)-WW1800-36W-827WWF-BN
					3000K	WW	4800lm	2700lm	1800mm	FL1800(X)-WW1800-36W-830WWF-BN
					4000K	WW	5000lm	2900lm	1800mm	FL1800(X)-WW1800-36W-840WWF-BN
48W	52W	46V	700+350mA	80	2700K	WW	6200lm	3300lm	1800mm	FL1800(X)-WW1800-52W-827WWF-BN
					3000K	WW	6400lm	3500lm	1800mm	FL1800(X)-WW1800-52W-830WWF-BN
					4000K	WW	6600lm	3700lm	1800mm	FL1800(X)-WW1800-52W-840WWF-BN
22W	26W	46V	500mA	80	2700K	WW	3200lm	1700lm	1200mm	FL1200(X)-WW1200-26W-827WWF-BN
					3000K	WW	3400lm	1800lm	1200mm	FL1200(X)-WW1200-26W-830WWF-BN
					4000K	WW	3600lm	1900lm	1200mm	FL1200(X)-WW1200-26W-840WWF-BN
32W	36W	46V	700mA	80	2700K	WW	4200lm	2300lm	1200mm	FL1200(X)-WW1200-36W-827WWF-BN
					3000K	WW	4400lm	2500lm	1200mm	FL1200(X)-WW1200-36W-830WWF-BN
					4000K	WW	5000lm	2700lm	1200mm	FL1200(X)-WW1200-36W-840WWF-BN


Code Remark: (X)=P(Pendant) (X)= S(Surface mounted) (X)= T(Trimless Recessed) (X)= F(Trim Recessed)


Code Remark: F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Model	ON-OFF	DALI Dim
FL1800-WW1800 - Surface mounted	619,00 €	729,00 €
FL1800-WW1800 - Pendant	629,00 €	749,00 €
FL1200-WW1200 - Surface mounted	479,00 €	599,00 €
FL1200-WW1200 - Pendant	509,00 €	619,00 €

**NOTE: Recessed profile on request*

FUSION Linear System – Linear Accent Light Profile System

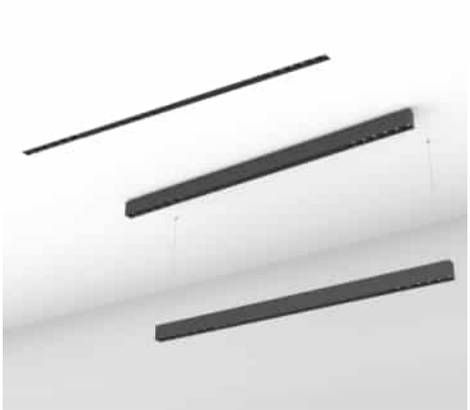



15° 30° 40° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19


IP20 | CE | CB | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- Linear Accent Light Profile System
- OSRAM LED: 26W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 40°
- Lumen Output: Up to 2600lm System Luminous Flux
- Mounting Type: Pendant, Surface mounted, Trimless Recessed, Trim Recessed
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K







Model	ON-OFF	DALI Dim
FL1500-2*AL300 - Surface mounted	629,00 €	749,00 €
FL1500-2*AL300 - Pendant	639,00 €	759,00 €
FL1200-2*AL300 - Surface mounted	549,00 €	659,00 €
FL1200-2*AL300 - Pendant	569,00 €	679,00 €

**NOTE: Recessed profile on request*

Order Info (in Black Housing as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Code
26W	30W	36V	700mA	80	2700K	15°	2800lm	2000lm	1200mm	FL1200(X)-2*AL300-30W-82715F-BB
						30°	2800lm	2000lm	1200mm	FL1200(X)-2*AL300-30W-82730F-BB
						40°	2800lm	2200lm	1200mm	FL1200(X)-2*AL300-30W-82740F-BB
					3000K	15°	3000lm	2200lm	1200mm	FL1200(X)-2*AL300-30W-83015F-BB
						30°	3000lm	2200lm	1200mm	FL1200(X)-2*AL300-30W-83030F-BB
						40°	3000lm	2400lm	1200mm	FL1200(X)-2*AL300-30W-83040F-BB
					4000K	15°	3400lm	2400lm	1200mm	FL1200(X)-2*AL300-30W-84015F-BB
						30°	3400lm	2400lm	1200mm	FL1200(X)-2*AL300-30W-84030F-BB
						40°	3400lm	2600lm	1200mm	FL1200(X)-2*AL300-30W-84040F-BB
26W	30W	36V	700mA	80	2700K	15°	2800lm	2000lm	1500mm	FL1500(X)-2*AL300-30W-82715F-BB
						30°	2800lm	2000lm	1500mm	FL1500(X)-2*AL300-30W-82730F-BB
						40°	2800lm	2200lm	1500mm	FL1500(X)-2*AL300-30W-82740F-BB
					3000K	15°	3000lm	2200lm	1500mm	FL1500(X)-2*AL300-30W-83015F-BB
						30°	3000lm	2200lm	1500mm	FL1500(X)-2*AL300-30W-83030F-BB
						40°	3000lm	2400lm	1500mm	FL1500(X)-2*AL300-30W-83040F-BB
					4000K	15°	3400lm	2400lm	1500mm	FL1500(X)-2*AL300-30W-84015F-BB
						30°	3400lm	2400lm	1500mm	FL1500(X)-2*AL300-30W-84030F-BB
						40°	3400lm	2600lm	1500mm	FL1500(X)-2*AL300-30W-84040F-BB


Code Remark: (X)=P (Pendant) (X)= S (Surface mounted) (X)= T (Trimless Recessed) (X)= F (Trim Recessed)

Code Remark: F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

BACK

FUSION Linear System – Linear General Light & Accent Light Profile System

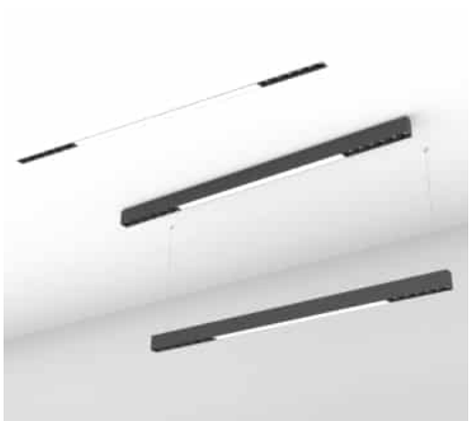




Quick Info

- Linear General Light & Accent Light Profile System
- SAMSUNG LED, OSRAM LED: 37W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°+105°, 30°+105°, 40°+105°
- Lumen Output: Up to 3300lm-4000lm System Luminous Flux
- Mounting Type: Pendant, Surface mounted, Trimless Recessed, Trim Recessed
- LED Driver: ON-OFF, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K

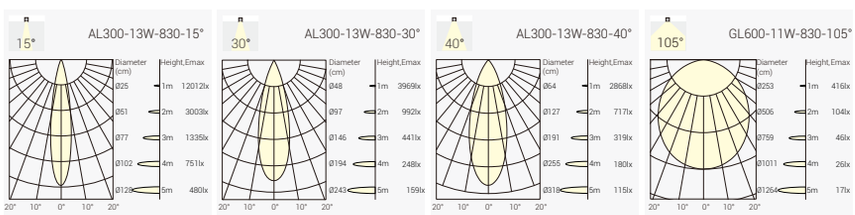

Order Info (in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
37W	41W	47 V	700mA	80	2700K	15°+105°	4500lm	3300lm	FL1200(X)-2*AL300+GL600-41W-82715F-BB
						30°+105°	4500lm	3300lm	FL1200(X)-2*AL300+GL600-41W-82730F-BB
						40°+105°	4500lm	3500lm	FL1200(X)-2*AL300+GL600-41W-82740F-BB
					3000K	15°+105°	4700lm	3500lm	FL1200(X)-2*AL300+GL600-41W-83015F-BB
						30°+105°	4700lm	3500lm	FL1200(X)-2*AL300+GL600-41W-83030F-BB
						40°+105°	4700lm	3700lm	FL1200(X)-2*AL300+GL600-41W-83040F-BB
					4000K	15°+105°	5100lm	3800lm	FL1200(X)-2*AL300+GL600-41W-84015F-BB
						30°+105°	5100lm	3800lm	FL1200(X)-2*AL300+GL600-41W-84030F-BB
						40°+105°	5100lm	4000lm	FL1200(X)-2*AL300+GL600-41W-84040F-BB

Code Remark: (X)=P (Pendant) (X)= S (Surface mounted) (X)= T (Trimless Recessed) (X)= F (Trim Recessed)

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Model	ON-OFF	DALI Dim
FL1200-2*AL300+GL600 - Surface mounted	629,00 €	739,00 €
FL1200-2*AL300+GL600 - Pendant	649,00 €	769,00 €

**NOTE: Recessed profile on request*

SPACE 60

Ideal Profile System for Office Lighting
Profile-Based Basic Lighting




SPACE 60 – Pendant Direct & Indirect



105° 80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UK CA | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- General Lighting, Pendant Direct & Indirect
- SAMSUNG LED: 21W, 31W, 38W, 47W, 56W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓ 105° ↑
- Lumen Output: Up to 6400lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

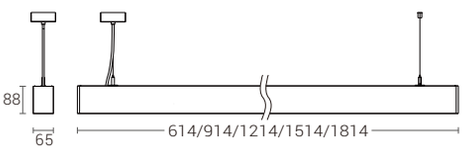

Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
19W	21W	33V	600mA	614mm	White	80	4000K	80° ↓ 105° ↑	1250lm ↓ 950lm ↑	SE6M-8408021F-WN-U
29W	31W	33V	900mA	914mm	White	80	4000K	80° ↓ 105° ↑	2050lm ↓ 1150lm ↑	SE9M-8408031F-WN-U
35W	38W	33V	1050mA	1214mm	White	80	4000K	80° ↓ 105° ↑	2500lm ↓ 1700lm ↑	SEAP-8408038F-WN-U
43W	47W	33V	1300mA	1514mm	White	80	4000K	80° ↓ 105° ↑	3300lm ↓ 2300lm ↑	SEBP-8408047F-WN-U
52W	56W	33V	1600mA	1814mm	White	80	4000K	80° ↓ 105° ↑	3800lm ↓ 2600lm ↑	SECP-8408056F-WN-U

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SEAP – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SE6M 600mm Module	830 CRI80/ 3000K	80 80° ↓	21 21W	F On-Off	w White	N None	U Uplight
SE9M 900mm Module	840 CRI80/ 4000K	80 80° ↓ 105° ↑	31 21W	A 1-10V Dim	B Black		
SEAP Pendant 1200mm	930 CRI90/ 3000K		38 38W	D DALI Dim			
SEBP Pendant 1500mm	940 CRI90/ 4000K		47 47W				
SECP Pendant 1800mm			56 56W				

Driver	614mm	914mm	1214mm	1514mm	1814mm
ON-OFF	279,00 €	369,00 €	429,00 €	549,00 €	619,00 €
DALI Dim	339,00 €	429,00 €	579,00 €	629,00 €	759,00 €

BACK

SPACE 60 – Pendant Direct



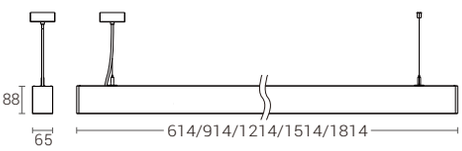



Quick Info

- General Light Version also Available
- SAMSUNG LED: 13W, 21W, 26W, 34W, 39W,
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80°↓
- Lumen Output: Up to 3900lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
11W	13W	33V	350mA	614mm	White	80	4000K	80° ↓	1250lm	SE6M-8408013F-WN
19W	21W	33V	600mA	914mm	White	80	4000K	80° ↓	2050lm	SE9M-8408021F-WN
23W	26W	33V	700mA	1214mm	White	80	4000K	80° ↓	2600lm	SEAP-8408026F-WN
30W	34W	33V	900mA	1514mm	White	80	4000K	80° ↓	3400lm	SEBP-8408034F-WN
35W	39W	33V	1050mA	1814mm	White	80	4000K	80° ↓	3900lm	SECP-8408039F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding


SEAM	–	***	**	**	*	–	*	*	–	*

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SE6M 600mm Module	830 CRI80/ 3000K	80 80°↓	13 13W	F On-Off	w White	N None	
SE9M 900mm Module	840 CRI80/ 4000K		21 21W	A 1-10V Dim	B Black		
SEAP Pendant 1200mm	930 CRI90/ 3000K		26 26W	D DALI Dim			
SEBP Pendant 1500mm	940 CRI90/ 4000K		34 34W				
SECP Pendant 1800mm			39 39W				

Driver	614mm	914mm	1214mm	1514mm	1814mm
ON-OFF	239,00 €	319,00 €	359,00 €	449,00 €	509,00 €
DALI Dim	309,00 €	379,00 €	429,00 €	559,00 €	589,00 €

SPACE 60 – Surface Mounted






80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- General Light Version also Available
- SAMSUNG LED: 13W, 21W, 26W, 34W, 39W,
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80°↓
- Lumen Output: Up to 3900lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
11W	13W	33V	350mA	614mm	White	80	4000K	80° ↓	1250lm	SE6M-8408013F-WN
19W	21W	33V	600mA	914mm	White	80	4000K	80° ↓	2050lm	SE9M-8408021F-WN
23W	26W	33V	700mA	1214mm	White	80	4000K	80° ↓	2600lm	SEAC-8408026F-WN
30W	34W	33V	900mA	1514mm	White	80	4000K	80° ↓	3400lm	SEBC-8408034F-WN
35W	39W	33V	1050mA	1814mm	White	80	4000K	80° ↓	3900lm	SECC-8408039F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding


SEAC – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SE6M 600mm Module	830 CRI80/ 3000K	80 80°↓	13 13W	F On-Off	w White	N None	
SE9M 900mm Module	840 CRI80/ 4000K		21 21W	A 1-10V Dim	B Black		
SEAC Surface Mounted 1200mm	930 CRI90/ 3000K		26 26W	D DALI Dim			
SEBC Surface Mounted 1500mm	940 CRI90/ 4000K		34 34W				
SECC Surface Mounted 1800mm			39 39W				

Driver	614mm	914mm	1214mm	1514mm	1814mm
ON-OFF	239,00 €	319,00 €	339,00 €	419,00 €	539,00 €
DALI Dim	309,00 €	379,00 €	409,00 €	529,00 €	619,00 €

BACK


SPACE 60 – Trim Recessed

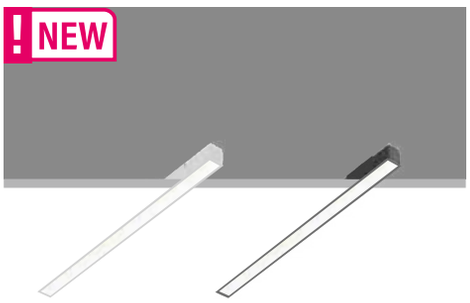

80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- General Light Version also Available
- SAMSUNG LED: 13W, 21W, 26W, 34W, 39W,
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80°↓
- Lumen Output: Up to 3900lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim



Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
11W	13W	33V	350mA	614mm	White	80	4000K	80° ↓	1250lm	SE6F-8408013F-WN
19W	21W	33V	600mA	914mm	White	80	4000K	80° ↓	2050lm	SE9F-8408021F-WN
23W	26W	33V	700mA	1214mm	White	80	4000K	80° ↓	2600lm	SEAF-8408026F-WN
30W	34W	33V	900mA	1514mm	White	80	4000K	80° ↓	3400lm	SEBF-8408034F-WN
35W	39W	33V	1050mA	1814mm	White	80	4000K	80° ↓	3900lm	SECF-8408039F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)


Coding

SEAF – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SE6F Trim Recessed 600mm	**830** CRI80/ 3000K	**80** 80°↓	**13** 13W	**F** On-Off	**w** White	**N** None	
SE9F Trim Recessed 900mm	**840** CRI80/ 4000K		**21** 21W	**A** 1-10V Dim	**B** Black		
SEAF Trim Recessed 1200mm	**930** CRI90/ 3000K		**26** 26W	**D** DALI Dim			
SEBF Trim Recessed 1500mm	**940** CRI90/ 4000K		**34** 34W				
SECF Trim Recessed 1800mm			**39** 39W				

Driver	614mm	914mm	1214mm	1514mm	1814mm
ON-OFF	239,00 €	319,00 €	369,00 €	469,00 €	539,00 €
DALI Dim	309,00 €	379,00 €	439,00 €	569,00 €	619,00 €


SPACE 60 – Trimless Recessed

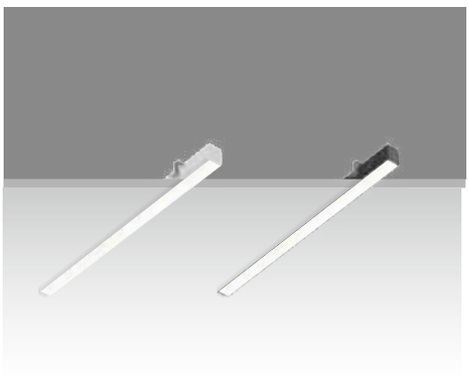

80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- General Light Version also Available
- SAMSUNG LED: 13W, 21W, 26W, 34W, 39W,
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80°↓
- Lumen Output: Up to 3900lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim



Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
11W	13W	33V	350mA	614mm	White	80	4000K	80° ↓	1250lm	SE6M-8408013F-WN
19W	21W	33V	600mA	914mm	White	80	4000K	80° ↓	2050lm	SE9M-8408021F-WN
23W	26W	33V	700mA	1214mm	White	80	4000K	80° ↓	2600lm	SEAT-8408026F-WN
30W	34W	33V	900mA	1514mm	White	80	4000K	80° ↓	3400lm	SEBT-8408034F-WN
35W	39W	33V	1050mA	1814mm	White	80	4000K	80° ↓	3900lm	SECT-8408039F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SEAT – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SE6M 600mm Module	**830** CRI80/ 3000K	**80** 80°↓	**13** 13W	**F** On-Off	**w** White	**N** None	
SE9M 900mm Module	**840** CRI80/ 4000K		**21** 21W	**A** 1-10V Dim	**B** Black		
SEAT Trimless Recessed 1200mm	**930** CRI90/ 3000K		**26** 26W	**D** DALI Dim			
SEBT Trimless Recessed 1500mm	**940** CRI90/ 4000K		**34** 34W				
SECT Trimless Recessed 1800mm			**39** 39W				

Driver	614mm	914mm	1214mm	1514mm	1814mm
ON-OFF	239,00 €	319,00 €	339,00 €	429,00 €	489,00 €
DALI Dim	309,00 €	379,00 €	409,00 €	529,00 €	569,00 €

BACK

DASH Smart

The Fexible Lighting System for Office, Administration & Retail Applications

Sustainable, Replaceable & Repairable LEDlight Sources with GR6d Socket in Accordance with IEC63356-1 / ZHAGA Book 14 for Reuse in Luminaires.

Designed for Use in 3-Phase Track Systems & Aluminum Profiles, Available in Fixed Lengths or as Continuous Light Strips.



Project: Office Project in Hunxe, Germany

NEW



3-Phase Track System

Global
Stucchi
Powergear




Linear Accent Light

80° beam angle, UGR<19
Uniform illumination and visual comfort
Reflector in Chrome Black or Specular
Housing color in Black or White
Lumen efficiency up to 140lm/W

Linear General Light

Within microprismatic cover,
to ensure homogeneous lighting
Housing color in Black or White
Lumen efficiency up to 120lm/W





In-Track LED Driver and Lamp Holder

DASH Smart 50W in-Track LED Driver (ON-OFF or DALI Dim)

· Dimension: 672mm x 13.8mm (31mm) x 31.5mm
· Maximum Secondary Power: 50.4W
· Output Voltage Range: 24-48V; Maximum Output Voltage: 60V
· Input Voltage: 220-240V~50/60Hz; Overvoltage Resistance: 320V, 1h
· Inrush current: 20A, 280μs
· Automatic Circuit Breaker: 22pcs on B16A, 37pcs on C16A

① Adjustable Output Current between 350-1050mA via DIP Switch
② L1, L2 and L3 phase switchable
③ Lamp Holder within GR6d Retaining Element for 3-phase Power Rails with Locking Mechanism



DASH SMART – The Modular Design 3-Phase Linear Tracklight

NEW






Project: Office Project in Hunxe, Germany

DASH SMART – GR6d 3-Phase Linear Tracklight








Quick Info

- The Modular Design 3-phase Linear Tracklight
- Length 864 mm/1164 mm/1464mm available,1764mm on request
- Housing color in White or Black
- Reflector color in Chrome-black or Specular
- 80° beam angle and UGR<19
- Uniform illumination and visual comfort
- CCT: 3000K, 4000K Available as Standard
- Lumen output adjustable via dip switch on LED driver
- Lumen efficiency up to 140lm/W
- LED Driver: ON-OFF or DALI Dim

Light Distribution

3000K



Color Options



Black-Chrome Black | Black-Specular | White-Specular

Driver	864mm	1164mm	1464mm
No Driver	59,00 €	69,00 €	89,00 €

Order Info (DSD26 in black housing & chrome-black reflector as an example)

Length	Code	LED Current	System Power	CRI	CCT	Beam	System Output
864mm	DSD26-L090-83080N-BC	@350 mA	17 W	80	3000K	80°	2350lm
					4000K	80°	2500lm
		@500 mA	24 W	80	3000K	80°	3300lm
					4000K	80°	3600lm
1164mm	DSD26-L120-83080N-BC	@350 mA	17 W	80	3000K	80°	2350lm
					4000K	80°	2500lm
		@500 mA	24 W	80	3000K	80°	3300lm
					4000K	80°	3600lm
		@700 mA	34 W	80	3000K	80°	4500lm
					4000K	80°	4900lm
1464mm	DSD26-L150-83080N-BC	@350 mA	17 W	80	3000K	80°	2350lm
					4000K	80°	2500lm
		@500 mA	24 W	80	3000K	80°	3300lm
					4000K	80°	3600lm
		@700 mA	34 W	80	3000K	80°	4500lm
					4000K	80°	4900lm
		@1050 mA	50 W	80	3000K	80°	7250lm
					4000K	80°	7500lm

Code Remark: N=N(No Driver) F=F(ON-OFF) D=D(DALI Dim)

Coding

DSD26-L*** – *** ** * – * *

Model	CRI/ CCT	Beam Angle	Control	Housing Finish	Reflector Color
DSD26-L090 DSD26 864mm	**830** CRI80/ 3000K	**80** 80°	**N** No Driver	**W** White	**C** Chrome Black
DSD26-L120 DSD26 1164mm	**840** CRI80/ 4000K		**F** On-Off	**B** Black	**S** Specular
DSD26-L150 DSD26 1464mm			**D** DALI Dim		

BACK


DASH SMART – DSO26 3-Phase Linear Tracklight



90° | 3000K 4000K | CRI >80 | IP20 | CE | 5 YEARS GUARANTEE


Quick Info

- The Modular Design 3-phase Linear Tracklight
- Length 864 mm/1164 mm/1464mm available,1764mm on request
- Housing color in White or Black
- General Light in Microprismatic Cover
- 90° beam angle, homogeneous lighting
- CCT: 3000K, 4000K Available as Standard
- Lumen output adjustable via dip switch on LED driver
- Lumen efficiency up to 120lm/W
- LED Driver: ON-OFF or DALI Dim



Light Distribution

3000K




Order Info (DSO26 in black housing as an example)

Length	Code	LED Current	System Power	CRI	CCT	Beam	System Output
864mm	DSO26-L090-83090N-BN	@350 mA	17 W	80	3000K	90°	2000lm
					4000K	90°	2200lm
		@500 mA	24 W	80	3000K	90°	2750lm
					4000K	90°	3000lm
1164mm	DSO26-L120-83090N-BN	@350 mA	17 W	80	3000K	90°	2000lm
					4000K	90°	2200lm
		@500 mA	24 W	80	3000K	90°	2750lm
					4000K	90°	3000lm
		@700 mA	34 W	80	3000K	90°	3600lm
					4000K	90°	3900lm
1464mm	DSO26-L150-83090N-BN	@350 mA	17 W	80	3000K	90°	2000lm
					4000K	90°	2200lm
		@500 mA	24 W	80	3000K	90°	2750lm
					4000K	90°	3000lm
		@700 mA	34 W	80	3000K	90°	3600lm
					4000K	90°	3900lm
		@1050 mA	50 W	80	3000K	90°	5000lm
					4000K	90°	5500lm

Code Remark: N=N(No Driver) F=F(ON-OFF) D=D(DALI Dim)

Color Options



Black White

Driver	864mm	1164mm	1464mm
No Driver	59,00 €	79,00 €	89,00 €

Coding

DSO26-L***	–***	**	*	–	*	*
Model	CRI/ CCT	Beam Angle	Control		Trim Finish	Reflector Color
DSO26-L090 DSO26 864mm	830 CRI80/ 3000K	90 90°	N No Driver		W White	N None
DSO26-L120 DSO26 1164mm	840 CRI80/ 4000K		F On-Off		B Black	
DSO26-L150 DSO26 1464mm			D DALI Dim			


DASH SMART – In Track Driver



IP20 | CE | 5 YEARS GUARANTEE

Quick Info

- In Track track driver for DASH Smart GR6d & DSO26 tracklight
- Adaptation of the housing not only for Eurtac but also for Global 3-phase tracks (13.8 mm width)
- DALI-2 version for Global 3-phase tracks and other brands
- Phase selection without dismounting required
- Power adjustment via dip-switch without dismounting
- Driver color in black or white
- Operating current in 350-1050mA
- System output 50.4W
- Driver: ON-OFF or DALI Dim




Order Info (DSD26 in black housing & chrome-black reflector as an example)

Length	Code	LED Current	System Power
672mm	DS-B-GR6D-50W-350-1050-F	@350-1050 mA	50.4W
672mm	DS-W-GR6D-50W-350-1050-F	@350-1050 mA	50.4W
672mm	DS-B-GR6D-50W-350-1050-D	@350-1050 mA	50.4W
672mm	DS-W-GR6D-50W-350-1050-D	@350-1050 mA	50.4W

Code Remark: B=Black W=White F=F(ON-OFF) D=D(DALI Dim)

ON-OFF	90,00 €
DALI Dim	120,00 €

Color Options



Black-Chrome Black White-Specular



BACK



DASH SMART – Surface Light


NEW



80° | 3000K 4000K | CRI >80 | UGR<19 | IP20 | CE | 5 YEARS GUARANTEE


Quick Info

- Linear Surface tracklight made by aluminum
- Length 1182mm/1482mm available
- Housing color in White or Black
- Reflector color in Chrome-black or Specular
- 80° beam angle and UGR<19
- Uniform illumination and visual comfort
- CCT: 3000K, 4000K Available as Standard
- Lumen output adjustable via dip switch on LED driver
- Lumen efficiency up to 128lm/W
- LED Driver: ON-OFF or DALI Dim

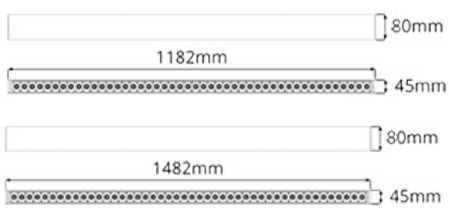


Light Distribution

3000K



Color Options



Black-Chrome Black | Black-Specular | White-Specular

Driver	1182mm	1482mm
ON-OFF	349,00 €	379,00 €
DALI Dim	369,00 €	399,00 €

Order Info (DSD26 in black housing & chrome-black reflector as an example)

Length	Code	LED Current	System Power	CRI	CCT	Beam	System Output
1182mm	DSC12-83080F-BC	@300-800 mA	40W Max.	80	3000K	80°	4646lm Max.
	DSC12-84080F-BC	@300-800 mA	40W Max.	80	4000K	80°	4887lm Max.
1482mm	DSC15-83080F-BC	@300-1050 mA	54W Max	80	3000K	80°	6537lm Max.
	DSC15-84080F-BC	@300-1050 mA	54W Max	80	4000K	80°	6876lm Max.

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

DSC1***	–***	**	*	–	*	*
Model	CRI/ CCT	Beam Angle	Control		Housing Finish	Reflector Color
DSC12 DSC12 1182mm	830 CRI80/ 3000K	80 80°	F On-Off		W White	C Chrome Black
DSC15 DSC12 1482mm	840 CRI80/ 4000K		D DALI Dim		B Black	S Specular

From April, it will be possible to order special lengths in freely configurable options with blind panels

BACK


DASH SMART – Pendant Light






Quick Info

- Linear Pendant tracklight made by aluminum
- Direct lighting with extra indirect lighting configuration available
- Length 1182mm/1482mm available
- Housing color in White or Black
- Reflector color in Chrome-black or Specular
- 80° beam angle and UGR<19
- Uniform illumination and visual comfort
- CCT: 3000K, 4000K Available as Standard
- Lumen output adjustable via dip switch on LED driver
- Lumen efficiency up to 136lm/W
- LED Driver: ON-OFF or DALI Dim

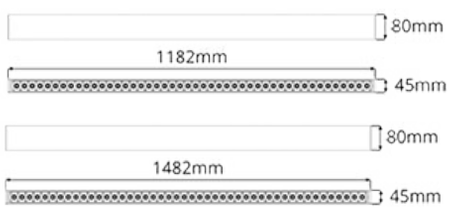

Light Distribution

3000K

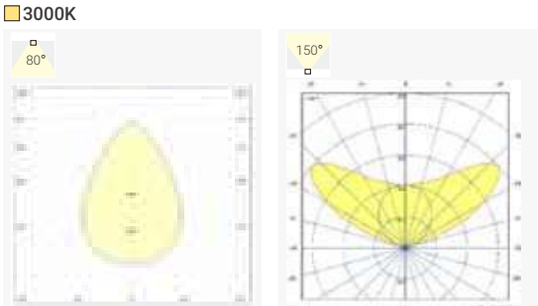

Color Options



Black-Chrome Black | Black-Specular | White-Specular

Order Info (DSO26 in black housing as an example)

Length	Code	LED Current	System Power	CRI	CCT	Beam	System Output
1182mm	DSP12-83080F-BC	@300-800 mA	40W Max.	80	3000K	80°	4646lm Max.
	DSP12-83080F-BC-U	@350-600 mA	60W Max.	80	4000K	80°/150°	7526lm Max.
	DSP12-84080F-BC	@300-800 mA	40W Max.	80	3000K	80°	4887lm Max.
	DSP12-84080F-BC-U	@350-600 mA	60W Max.	80	4000K	80°/150°	7916lm Max.
1482mm	DSP15-83080F-BC	@300-1050 mA	54W Max.	80	3000K	80°	6537lm Max.
	DSP15-83080F-BC-U	@350-600 mA	60W Max.	80	4000K	80°/150°	7761lm Max.
	DSP15-84080F-BC	@300-1050 mA	54W Max.	80	3000K	80°	6876lm Max.
	DSP15-84080F-BC-U	@350-600 mA	60W Max.	80	4000K	80°/150°	8146lm Max.

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Direct:

Driver	1182mm	1482mm
ON-OFF	399,00 €	439,00 €
DALI Dim	419,00 €	459,00 €

Direct/Indirect:

Driver	1182mm	1482mm
ON-OFF	459,00 €	499,00 €
DALI Dim	499,00 €	539,00 €

Coding

DSP1*	–***	**	*	–	*	*
Model	CRI/ CCT	Beam Angle	Control		Trim Finish	Reflector Color
DSP12 DSP12 1182mm	830 CRI80/ 3000K	80 80°	F On-Off		W White	N None
DSP12 DSP12 1482mm	840 CRI80/ 4000K		D DALI Dim		B Black	

and for example, presence and daylight sensors - Please contact our sales team!

DASH SMART – 100 Recessed Light


NEW



80° | 3000K 4000K | CRI >80 | UGR<19 | IP20 | CE | 5 YEARS GUARANTEE


Quick Info

- Linear recessed light with external dimension 1196mm x 84mm/1496mm x 84mm
- Required cut-out in size 1185mm x 74mm/1485mmmm x 74mm
- Made by sheet steel, housing color in white
- Reflector color in Specular
- 80° beam angle and UGR<19
- Uniform illumination and visual comfort
- CCT: 3000K, 4000K Available as Standard
- Lumen output adjustable via dip switch on LED driver
- Lumen efficiency up to 142lm/W
- LED Driver: ON-OFF or DALI Dim

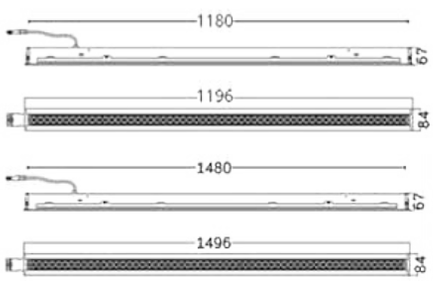

Light Distribution

3000K



Color Options



White-Specular

Driver	1196mm	1496mm
ON-OFF	349,00 €	419,00 €
DALI Dim	369,00 €	439,00 €

Order Info (DSD26 in black housing & chrome-black reflector as an example)

Length	Code	LED Current	System Power	CRI	CCT	Beam	System Output
1196mm	DS1R12-83080F-WS	@300-800 mA	40W Max.	80	3000K	80°	5162lm Max.
	DS1R12-84080F-WS	@300-800 mA	40W Max.	80	4000K	80°	4887lm Max.
1496mm	DS1R15-83080F-BC	@300-1050 mA	54W Max	80	3000K	80°	7263lm Max.
	DS1R15-84080F-BC	@300-1050 mA	54W Max	80	4000K	80°	7640lm Max.

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

DS1R1*	–***	**	*	–	*	*
Model	CRI/ CCT	Beam Angle	Control		Housing Finish	Reflector Color
DS1R12 DS1R12 1196mm	830 CRI80/ 3000K	80 80°	F On-Off		W White	S Specular
DS1R15 DS1R15 1496mm	840 CRI80/ 4000K		D DALI Dim			

BACK

DASH SMART – 625 Recessed Light


NEW



80° | 3000K | 4000K | CRI >80 | IP20 | CE | 5 YEARS GUARANTEE


Quick Info

- Recessed Panel light made by sheet steel
- Housing color in White, could be used for ceiling with T-profile support
- Cut-out size: 604mm x 604mm, 48mm depth.
- Reflector color in Specular
- 80° beam angle and UGR<19
- Uniform illumination and visual comfort
- CCT: 3000K, 4000K available as Standard
- Lumen output adjustable via dip switch on LED driver
- Lumen efficiency up to 137lm/W
- LED Driver: ON-OFF or DALI Dim




Light Distribution

3000K



Color Options



White-Specular

ON-OFF	199,00 €
DALI Dim	239,00 €

Accessories:

Surface frame	50,00 €
Installation Kit, 4pcs	10,00 €

Order Info (DSO26 in black housing as an example)

Length	Code	LED Current	System Power	CRI	CCT	Beam	System Output
625mm	DSR625-83080F-WS	@300-800 mA	40W Max.	80	3000K	80°	5150lm Max.
	DSR625-83080F-WS	@300-800 mA	40W Max.	80	4000K	80°	5450lm Max.

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

DSR625*	–***	**	*	–	*	*
Model	CRI/ CCT	Beam Angle	Control		Trim Finish	Reflector Color
DSR625 DSR625 625mm	830 CRI80/ 3000K 840 CRI80/ 4000K	80 80°	F On-Off D DALI Dim		W White B Black	S Specular


BACK

MODULINE 05

The Ultra-Slim 24V Modular Linear System.


Epitomizing Minimalist Elegance, Boasting an Ultra-Slim Track with a 5mm Width Aperture.


Its Seamless Integration into any Environment Ensures a Natural & Effortless Aesthetic, Ideal for Residential, Retail, or any Setting where Sleek Design Reigns Supreme.

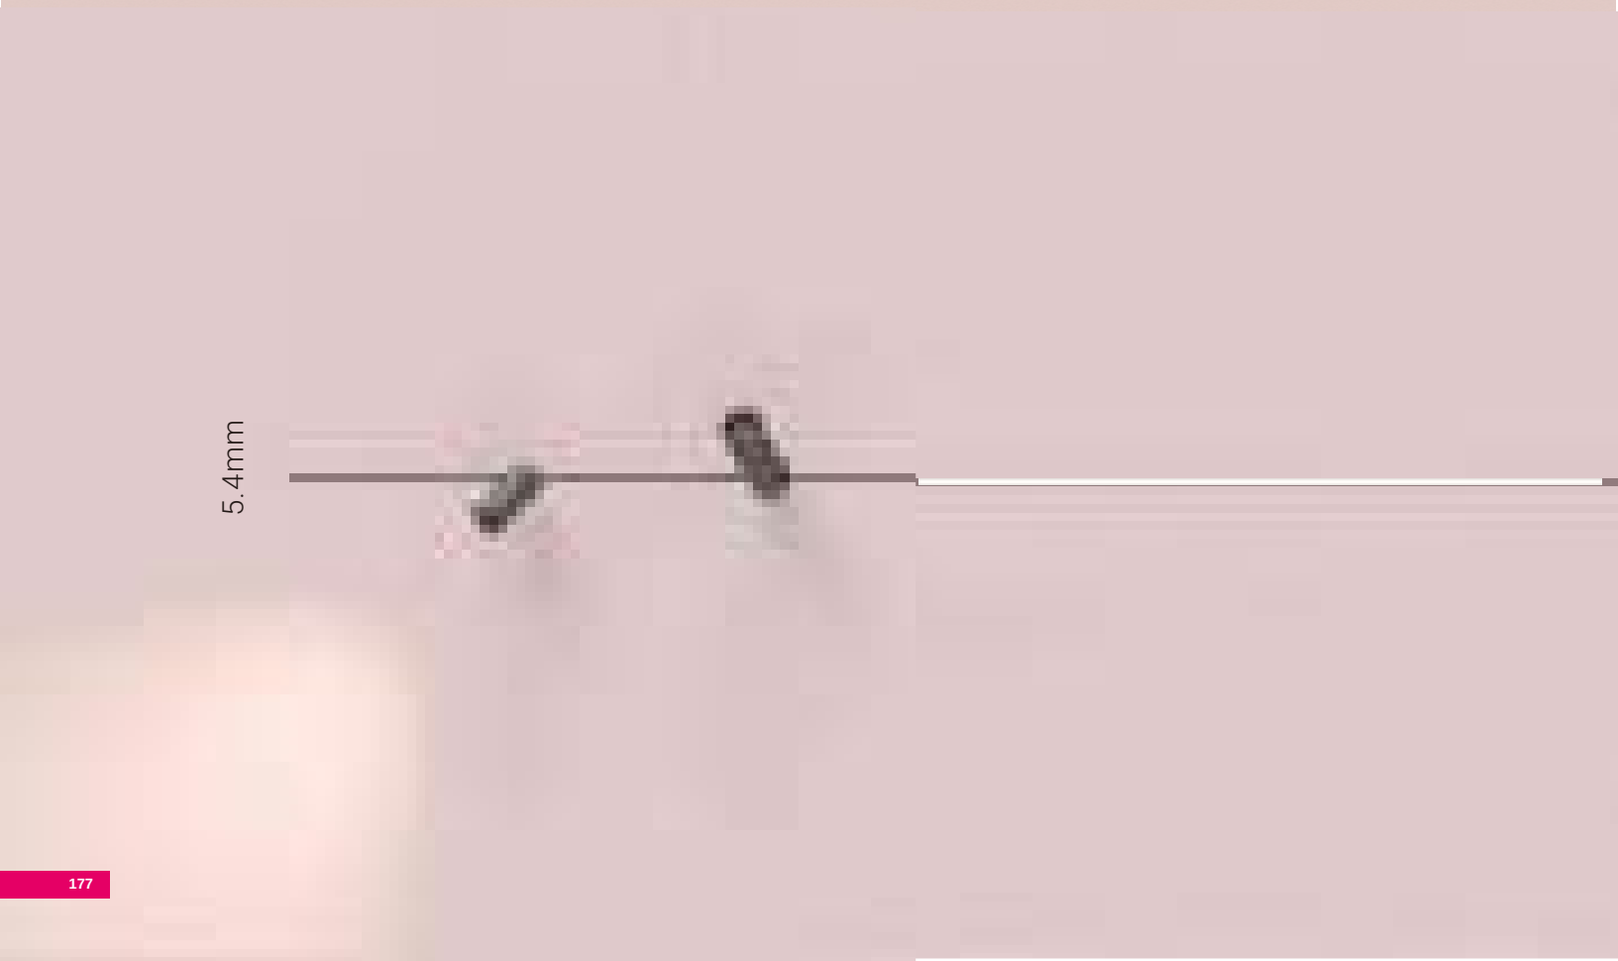




NEW

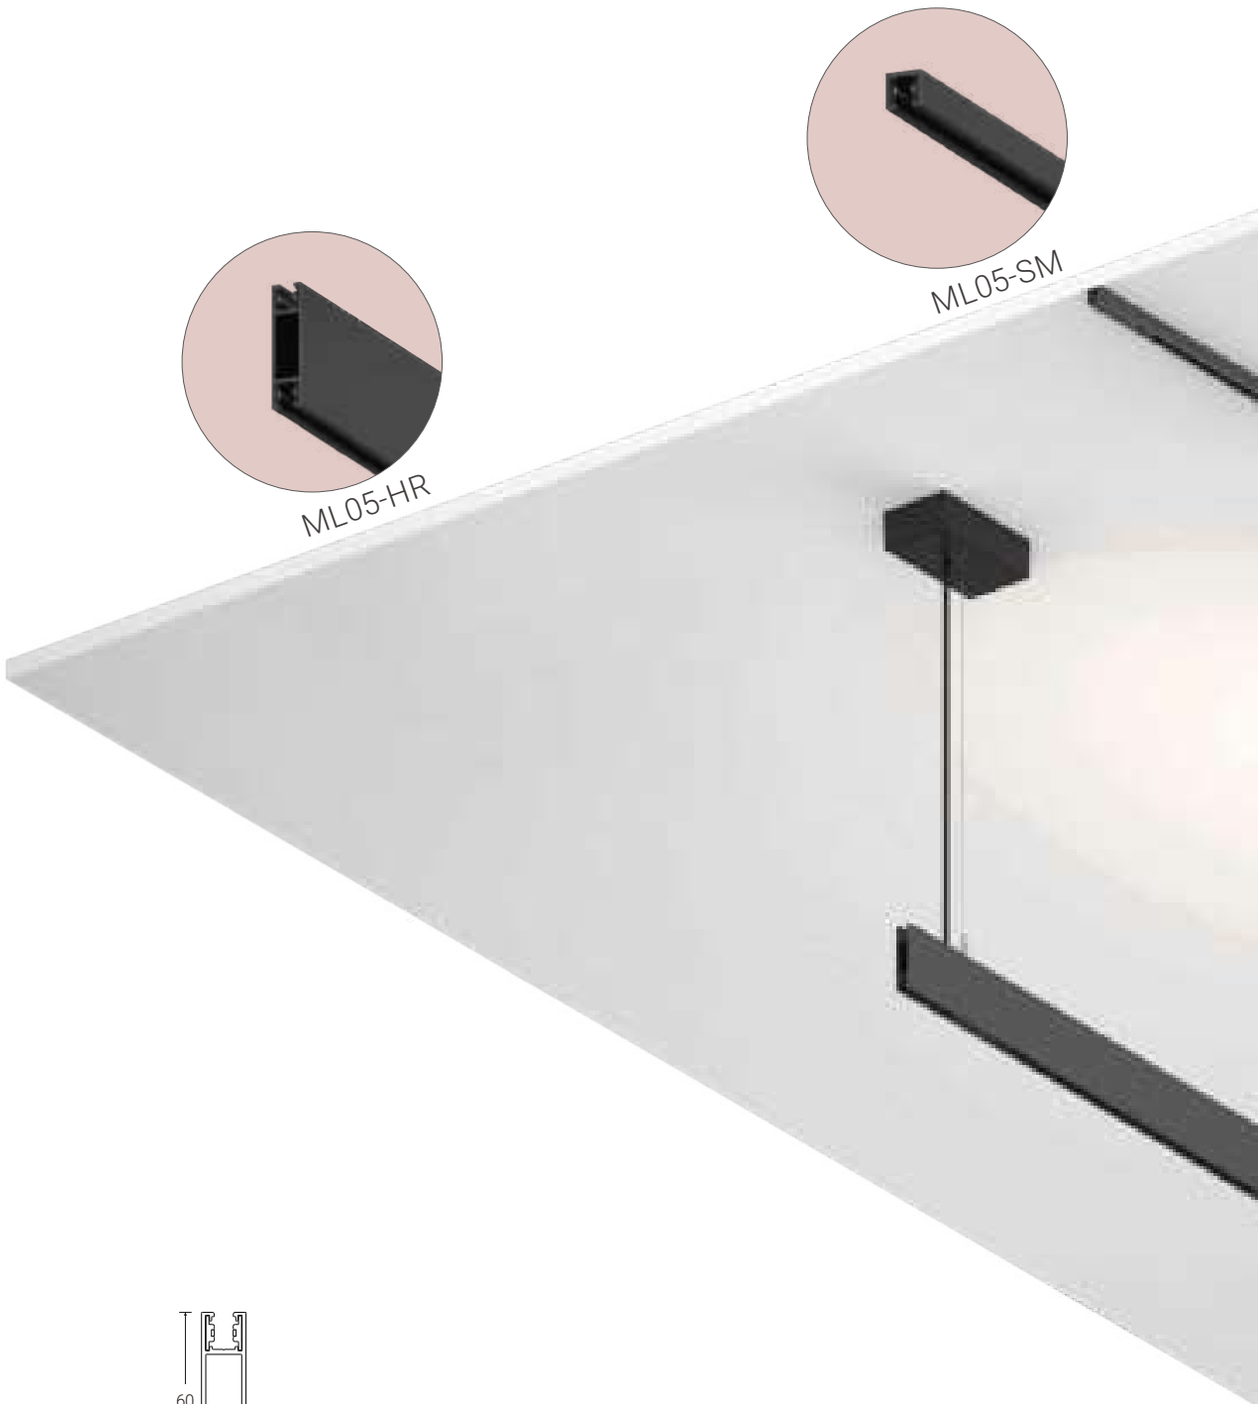





ML05-HR



ML05-SM




ML05-TR



ML05-TR

NEW





Surface-Mounted Track

Order Info

Length	Description	Code/ Model (Black)	Code/ Model (White)	
1000mm	Surface Mounted Track Rail	ML05-SM1000-B	ML05-SM1000-W	39,00 €
2000mm	Surface Mounted Track Rail	ML05-SM2000-B	ML05-SM2000-W	79,00 €
3000mm	Surface Mounted Track Rail	ML05-SM3000-B	ML05-SM3000-W	109,00 €

Accessories



Track Rail Cover
ML05-RC1000/ 2000/ 3000
9,00 €



Power Feeder Unit
ML05-PF-B/W
39,00 €



Flexible Continuous Kit
ML05-CKF-B/W
19,00 €



L Shape Horizontal Connector
ML05-SMLHC-B/W
69,00 €





L Shape Vertical Connector
ML05-SMLVC-B/W
69,00 €



Endcap Kits
ML05-SMEK-B/W
5,00 €

NEW

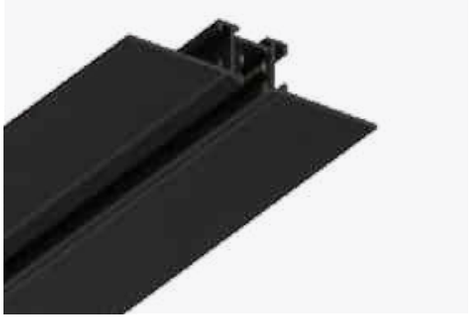



Trimless-recessed Track

Order Info

Length	Description	Code/ Model (Black)	Code/ Model (White)	
1000mm	Trimless-recessed Track Rail	ML05-TR1000-B	ML05-TR1000-W	59,00 €
2000mm	Trimless-recessed Track Rail	ML05-TR2000-B	ML05-TR2000-W	109,00 €
3000mm	Trimless-recessed Track Rail	ML05-TR3000-B	ML05-TR3000-W	159,00 €

Accessories



Track Rail Cover
ML05-RC1000/ 2000/ 3000
9,00 €



Power Feeder Unit
ML05-PF-B/W
19,00 €



Flexible Continuous Kit
ML05-CKF-B/W
19,00 €



L Shape Horizontal Connector
ML05-TRELHC-B/W
89,00 €



L Shape Vertical Connector
ML05-TRELVC-B/W
89,00 €



Endcap Kits
LX05-TREEK-B/W
9,00 €


BACK



Pendant H Track

Order Info

	Length	Description	Code/ Model (Black)	Code/ Model (White)
69,00 €	1000mm	Pendant H Track Rail	ML05-HR1000-B	ML05-HR1000-W
129,00 €	2000mm	Pendant H Track Rail	ML05-HR2000-B	ML05-HR2000-W
189,00 €	3000mm	Pendant H Track Rail	ML05-HR3000-B	ML05-HR3000-W



Accessories



Track Rail Cover
ML05-RC1000/ 2000/ 3000
9,00 €



Power Feeder Unit
ML05-PF-P-B/W
39,00 €



Flexible Continuous Kit
ML05-CKF-B/W
19,00 €



Flexible Continuous Kit
ML05-UCKF-B/W
39,00 €



L Shape Horizontal Connector
ML05-HRLHC-B/W
99,00 €



Mechanical Linear Connector
ML05-HRLC
19,00 €



Endcap Kits
LX05-HREK-B/W
9,00 €



Pendant H Track Pendant Kits
ML05-PK-H-B/W
79,00 €



Pendant H Track Pendant Wire Kits
ML05-PWK-H
59,00 €

NEW




18° 24° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 24V DC

IP20 | CE | CB | UK CA | ETL Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to 280lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K

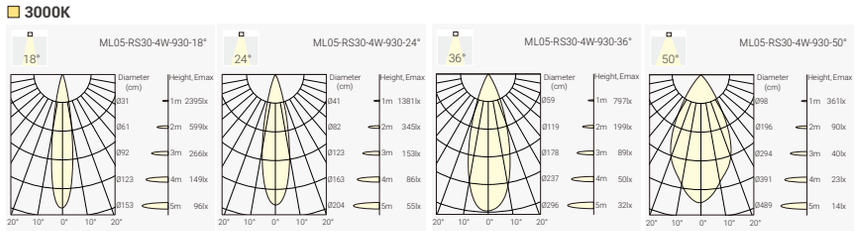

Finish



White



Black

Order Info (ML05-RS30 in Black Hosing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
3.5W	4W	24V	90	2700K	18°	370lm	250lm	MSR1-9271804N-BB
					24°	370lm	250lm	MSR1-9272404N-BB
					36°	370lm	250lm	MSR1-9273604N-BB
					50°	370lm	250lm	MSR1-9275004N-BB
				3000K	18°	400lm	260lm	MSR1-9301804N-BB
					24°	400lm	260lm	MSR1-9302404N-BB
					36°	400lm	260lm	MSR1-9303604N-BB
					50°	400lm	260lm	MSR1-9305004N-BB
				4000K	18°	440lm	280lm	MSR1-9401804N-BB
					24°	440lm	280lm	MSR1-9402404N-BB
					36°	440lm	280lm	MSR1-9403604N-BB
					50°	440lm	280lm	MSR1-9405004N-BB

No Driver 99,00 €

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for MSR1-9301804F with **H**oneycomb
MSR1-9301804F-**H**

Honeycomb: +9,00€

Coding

MSR1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MSR1 ML05-RS30 Single Spot	**927** CRI>90/ 2700K	**18** 18°	**04** 3.5W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
	930 CRI>90/ 3000K	**24** 24°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K	**36** 36°		**P** Phase Dim			
		50 50°		**A** 1-10V Dim			
				D DALI Dim			

BACK

NEW




18° 24° 36° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 24V DC

IP20 | CE | CB | UKCA | Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 8W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim



Light Distribution

3000K

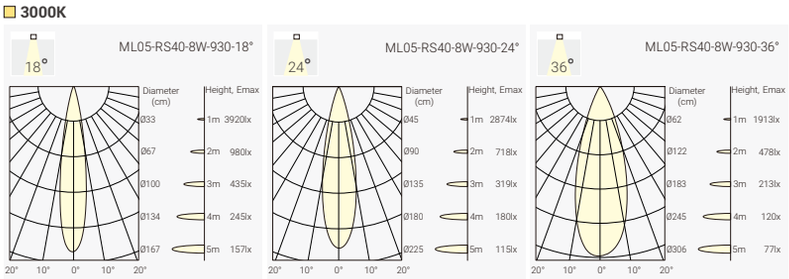

Finish



White



Black

Order Info (ML05-RS40 in Black Hosing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
7W	8W	24V	90	2700K	18°	900lm	520lm	MSR2-9271808F-BB
	No Driver	109,00 €			24°	900lm	520lm	MSR2-9271824F-BB
					36°	900lm	520lm	MSR2-9271836F-BB
				3000K	18°	950lm	550lm	MSR2-9301808F-BB
					24°	950lm	550lm	MSR2-9302408F-BB
					36°	950lm	550lm	MSR2-9303608F-BB
				4000K	18°	1000lm	600lm	MSR2-9401808F-BB
					24°	1000lm	600lm	MSR2-9402408F-BB
					36°	1000lm	600lm	MSR2-9403608F-BB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for MSR2-9301808F with **H**oneycomb
MSR2-9301808F-**H**

Honeycomb: +9,00€

Coding

MSR2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MSR2 ML05-RS40 Single Spot	**927** CRI>90/ 2700K	**18** 18°	**08** 8W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
	930 CRI>90/ 3000K	**24** 24°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K	**36** 36°		**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			


NEW



110° | 2700K 3000K 4000K | CRI >90 | 24V DC | IP20 | CE | CB | UKCA | ETL Intertek | 5 YEARS GUARANTEE

Quick Info


- System: 6W, 12W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 110°
- Lumen Output: Up to 1000lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim




ML05-GL1250: 1250mm
ML05-GL2500: 2500mm

Light Distribution

3000K





Order Info (ML05-GL1250 in Black Adapter as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
5W	6W	24V	90	2700K	110°	650lm	230lm	MSG1-927A106N-BN
				3000K	110°	700lm	250lm	MSG1-930A106N-BN
				4000K	110°	750lm	275lm	MSG1-940A106N-BN
11W	12W	24V	90	2700K	110°	1300lm	460lm	MSG2-927A112N-BN
				3000K	110°	1400lm	500lm	MSG2-930A112N-BN
				4000K	110°	1500lm	550lm	MSG2-940A112N-BN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

6W

No Driver	109,00 €

12W

No Driver	199,00 €

Coding

MSG1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Adaoter Finish	Reflector Color	Accessory
MSG1 ML05-GL1250	**927** CRI>90/ 2700K	**A1** 110°	**06** 6W	**N** No Driver	**W** White	**N** None	
MSG2 ML05-GL2500	**930** CRI>90/ 3000K		**12** 12W	**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 1-10V Dim			
				D DALI Dim			

BACK


MODULINE 26

48V Low Voltage Minimalist Modular Linear Track System
Trim & Trimless Recessed, Surface Mounted, Pendant, Pendant H Track
Various Light Insets for Different Applications



EXPERTS
ANTI-AGING

MODULINE 26 – 48V Low Voltage Modular Linear System


1 H Track




2 Standard Track




3 Slim Track




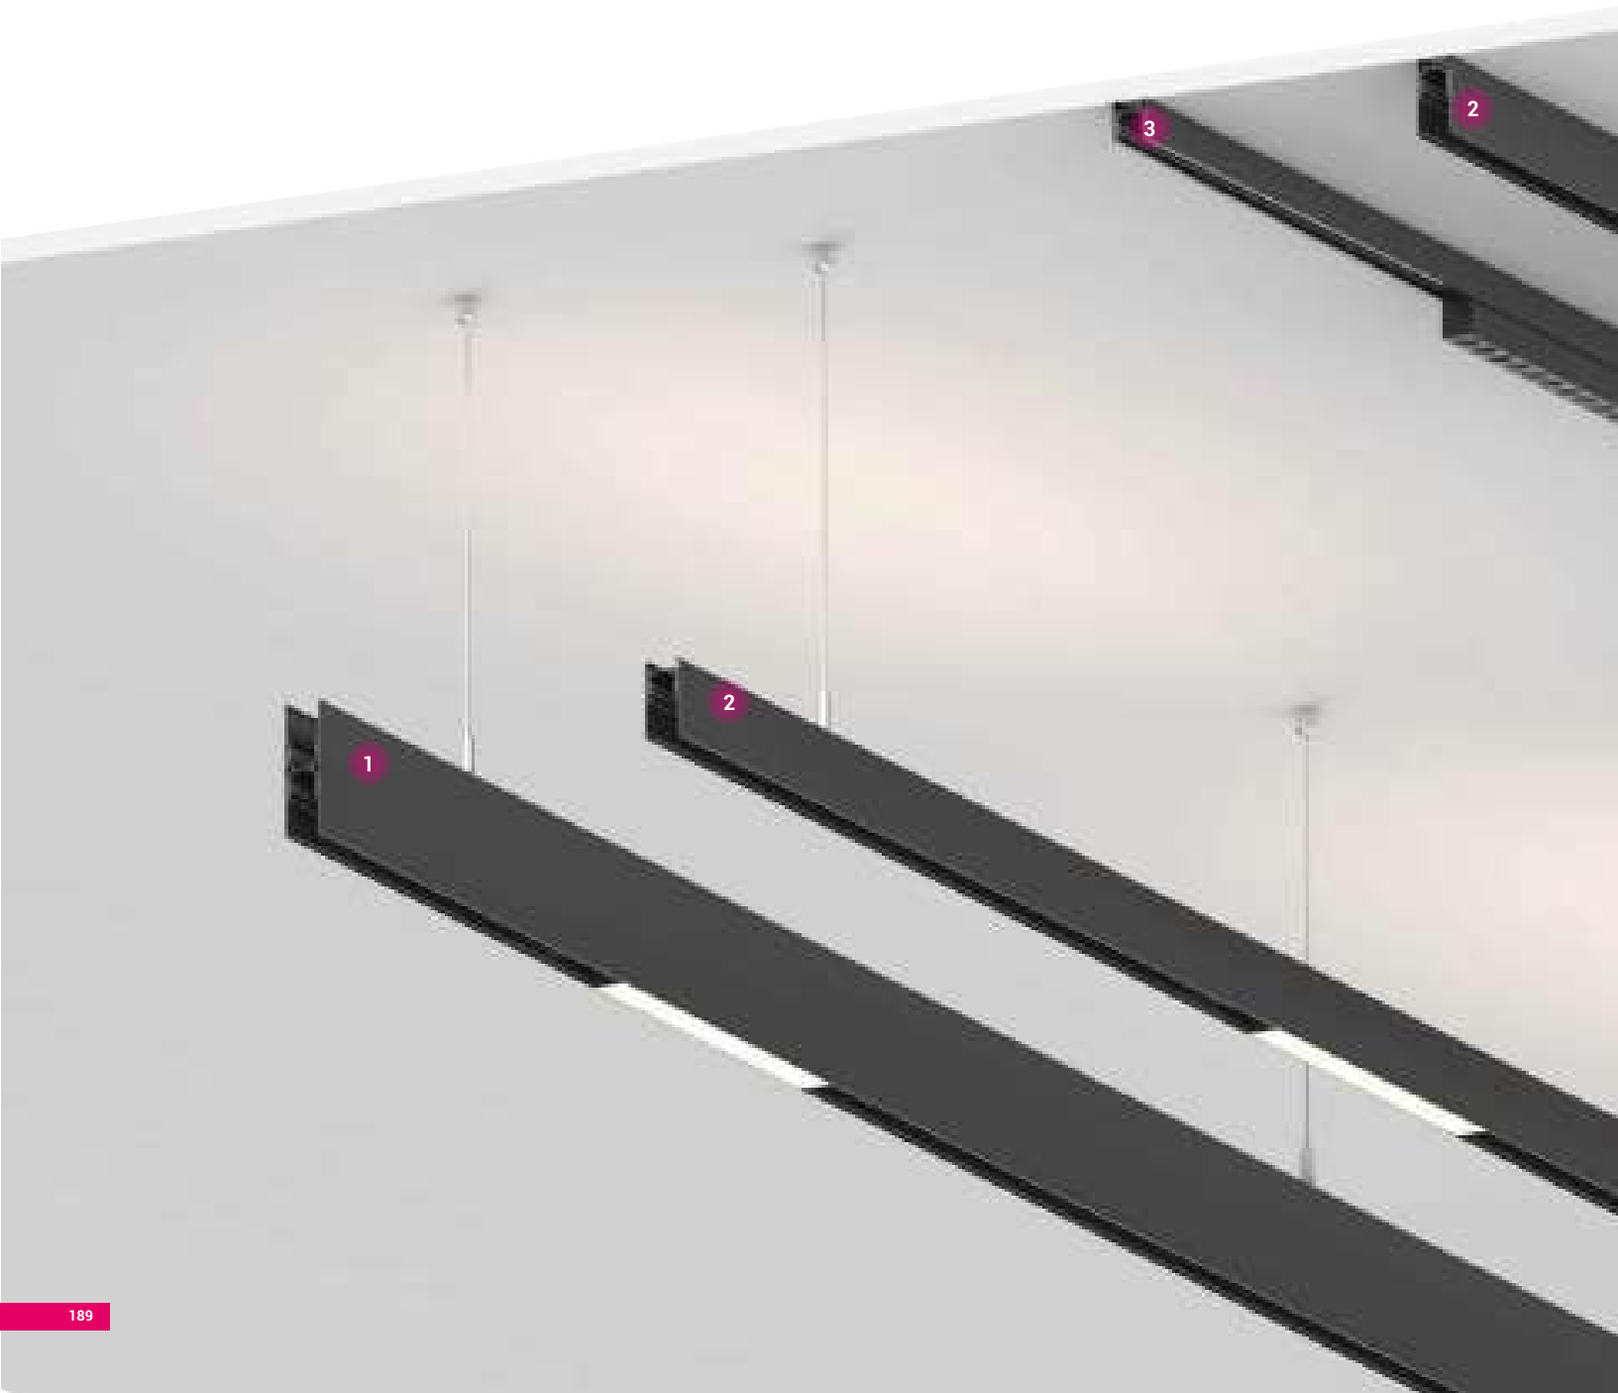

4 Trim Recessed Track




5 Trimless Recessed Track-EI



6 Trimless Recessed Track



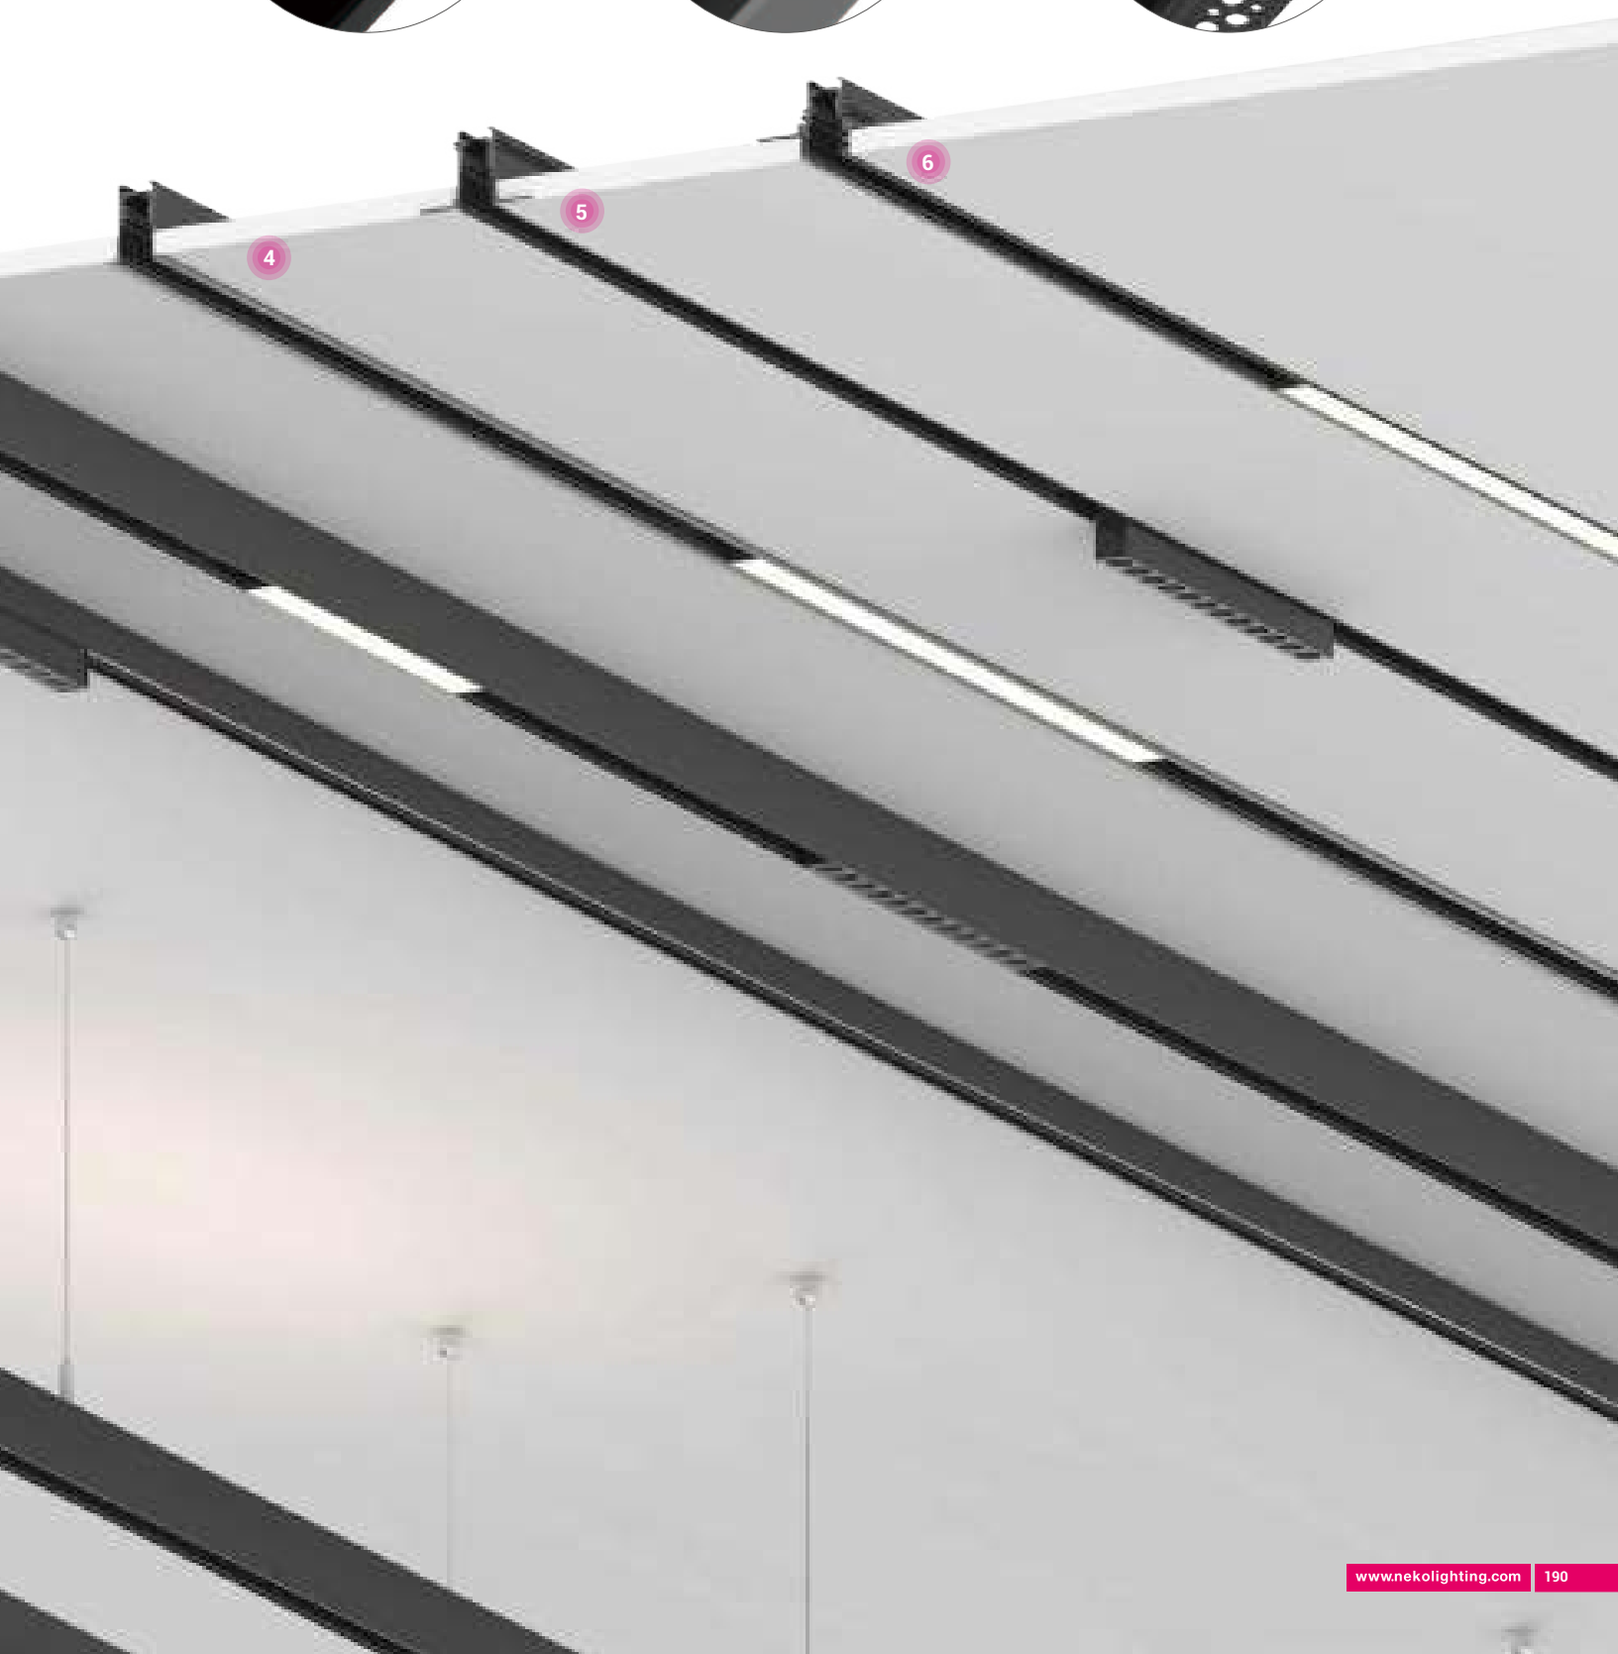

Spotlight Inset




ML26-RS25-3W



ML26-RS25-5W



ML26-RS40-8W



ML26-RS40-16W



ML26-RS40-12W



ML26-RS40-24W



NEW

ML26-RS55-14W




ML26-RT55-10W



ML26-RS72-19W
ML26-RS72-26W



ML26-FRS72-10W



ML26-FRS72-20W



ML26-RS96-9W



NEW

ML26-RB120-5W
ML26-RB150-7W



NEW

ML26-FRD80-10W




NEW

ML26-FSD80-10W



NEW

ML26-FRDH80-10W



NEW

ML26-FSDH80-10W

BACK

Accent Light Inset



ML26-AL190-3W
ML26-AL190-7W



ML26-AL280-9W
ML26-AL280-13W



NEW
ML26-AL560-26W



ML26-SA280-13W

General Light Inset



NEW
ML26-CL280-7W/ 10W
ML26-CL560-13W/ 19W
ML26-CL840-19W/ 26W
ML26-CL1120-26W



ML26-GL280-7W/ 10W
ML26-GL560-13W/ 19W
ML26-GL840-19W/ 26W
ML26-GL1120-26W



ML26-SG280-7W/ 10W



ML26-WW280-7W
ML26-WW560-13W

Pendant Light Inset



ML26-PS60-5W



ML26-PB120-5W
ML26-PB150-7W



ML26-PS40-12W



NEW
ML26-PS55-10W



NEW
ML26-NHP10-14W



NEW
ML26-NHU12-19W



NEW
ML26-NVP12-19W

MODULINE 26 – 48V Low Voltage Modular Linear System

Surface Mounted/ Pendant Version



ML26-RS25-5W ML26-RS40-16W ML26-RS40-24W ML26-RS40-8W ML26-RS40-12W ML26-RT55-10W


ML26-PS40-12W



ML26-RS25-5W ML26-RS40-16W ML26-RS40-24W ML26-RS40-8W ML26-RS40-12W ML26-RT55-10W

ML26-PS40-12W

BACK

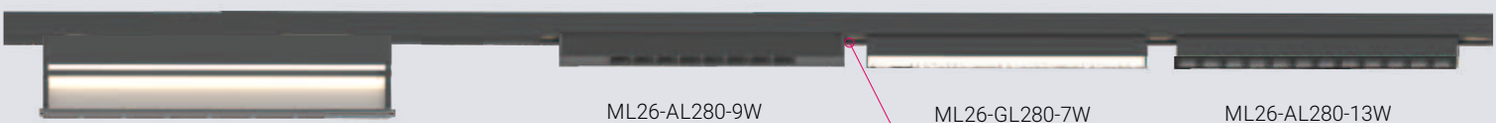


ML26-WW280-7W

ML26-AL280-9W


ML26-GL280-7W

ML26-AL280-13W

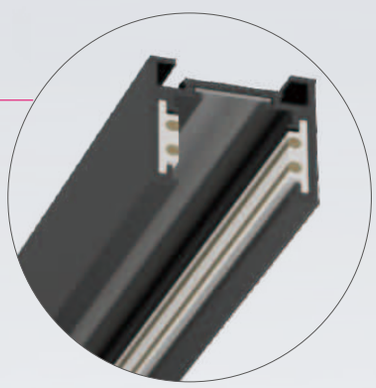

Slim Track



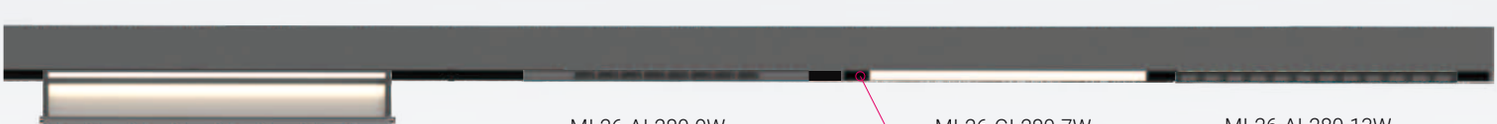


ML26-WW280-7W


ML26-AL280-9W

ML26-GL280-7W

ML26-AL280-13W

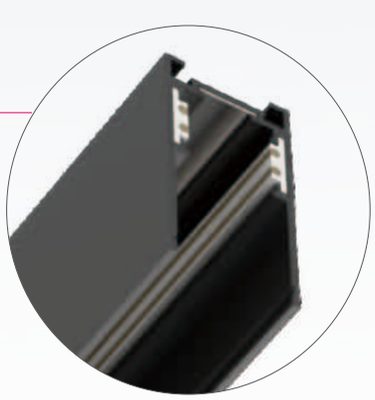

Standard Track



MODULINE 26 – 48V Low Voltage Modular Linear System

Recessed Version



ML26-RS25-5W ML26-RS40-16W ML26-RS40-24W ML26-RS40-8W ML26-RS40-12W ML26-RT55-10W


ML26-PS40-12W



ML26-RS25-5W ML26-RS40-16W ML26-RS40-24W ML26-RS40-8W ML26-RS40-12W ML26-RT55-10W

ML26-PS40-12W

BACK




ML26-AL280-9W


ML26-GL280-7W

ML26-AL280-13W

ML26-WW280-7W

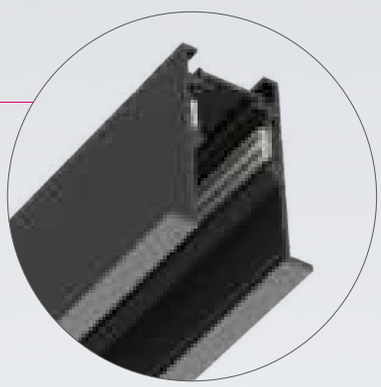

Trim Recessed Track






ML26-AL280-9W


ML26-GL280-7W


ML26-AL280-13W

ML26-WW280-7W

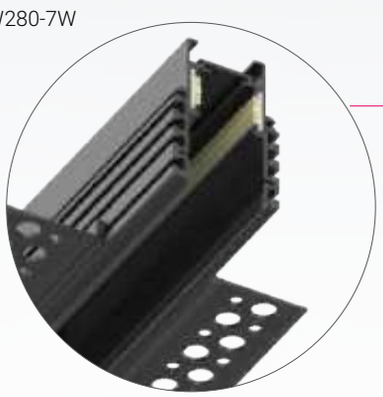


Trimless Recessed Track

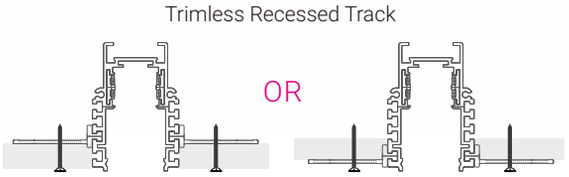

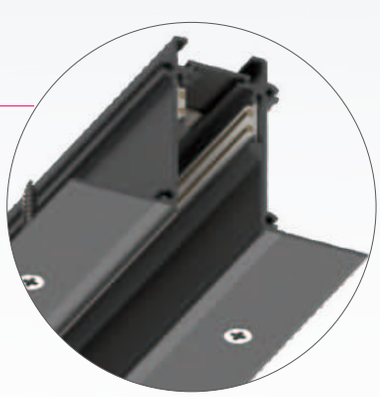


Trimless Recessed Track-EI



MODULINE 26 – 48V Low Voltage Modular Linear System

Pendant Version-H Track

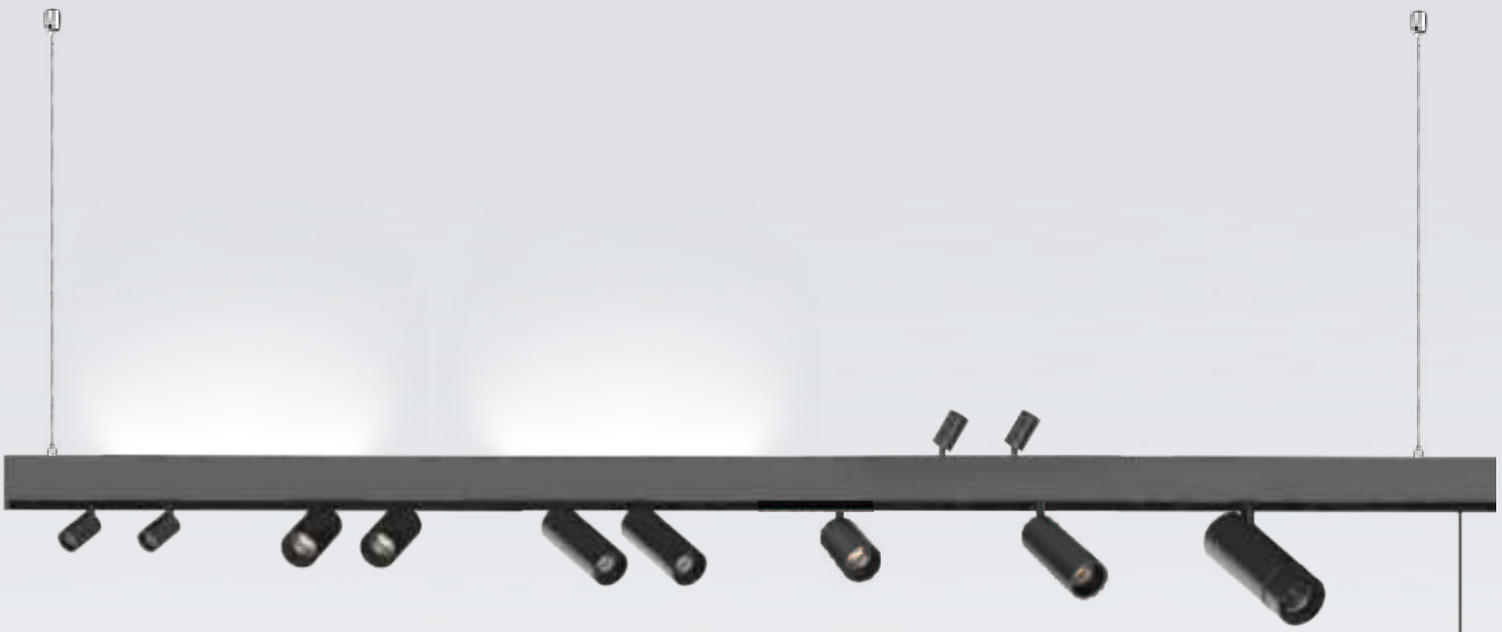


ML26-RS25-5W ML26-RS40-16W ML26-RS40-24W ML26-RS40-8W ML26-RS40-12W ML26-RT55-10W



ML26-PS40-12W

BACK

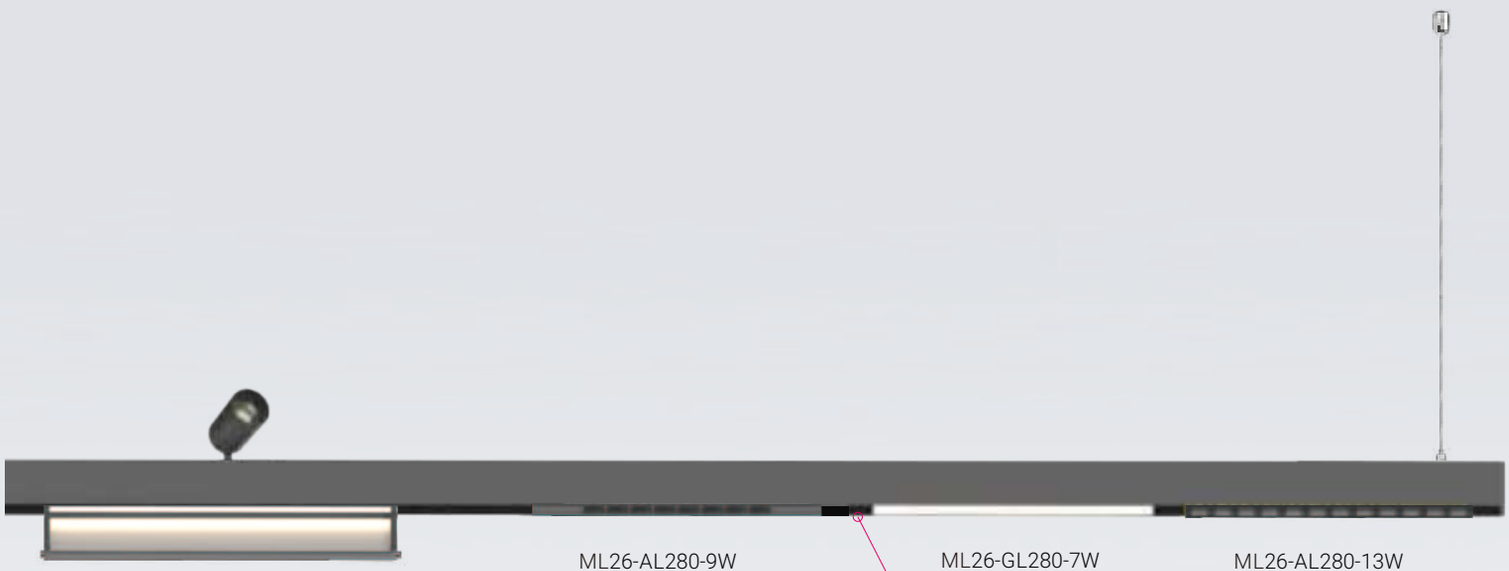


ML26-WW280-7W


ML26-AL280-9W

ML26-GL280-7W

ML26-AL280-13W

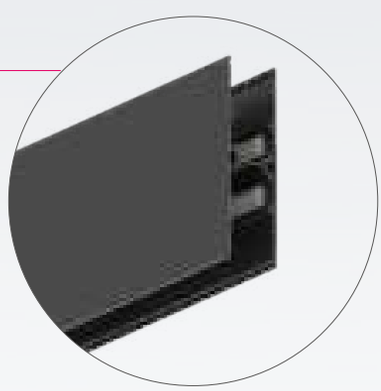


H Track




MODULINE 26 – 48V Low Voltage Modular Linear System

Slim Track Configuration

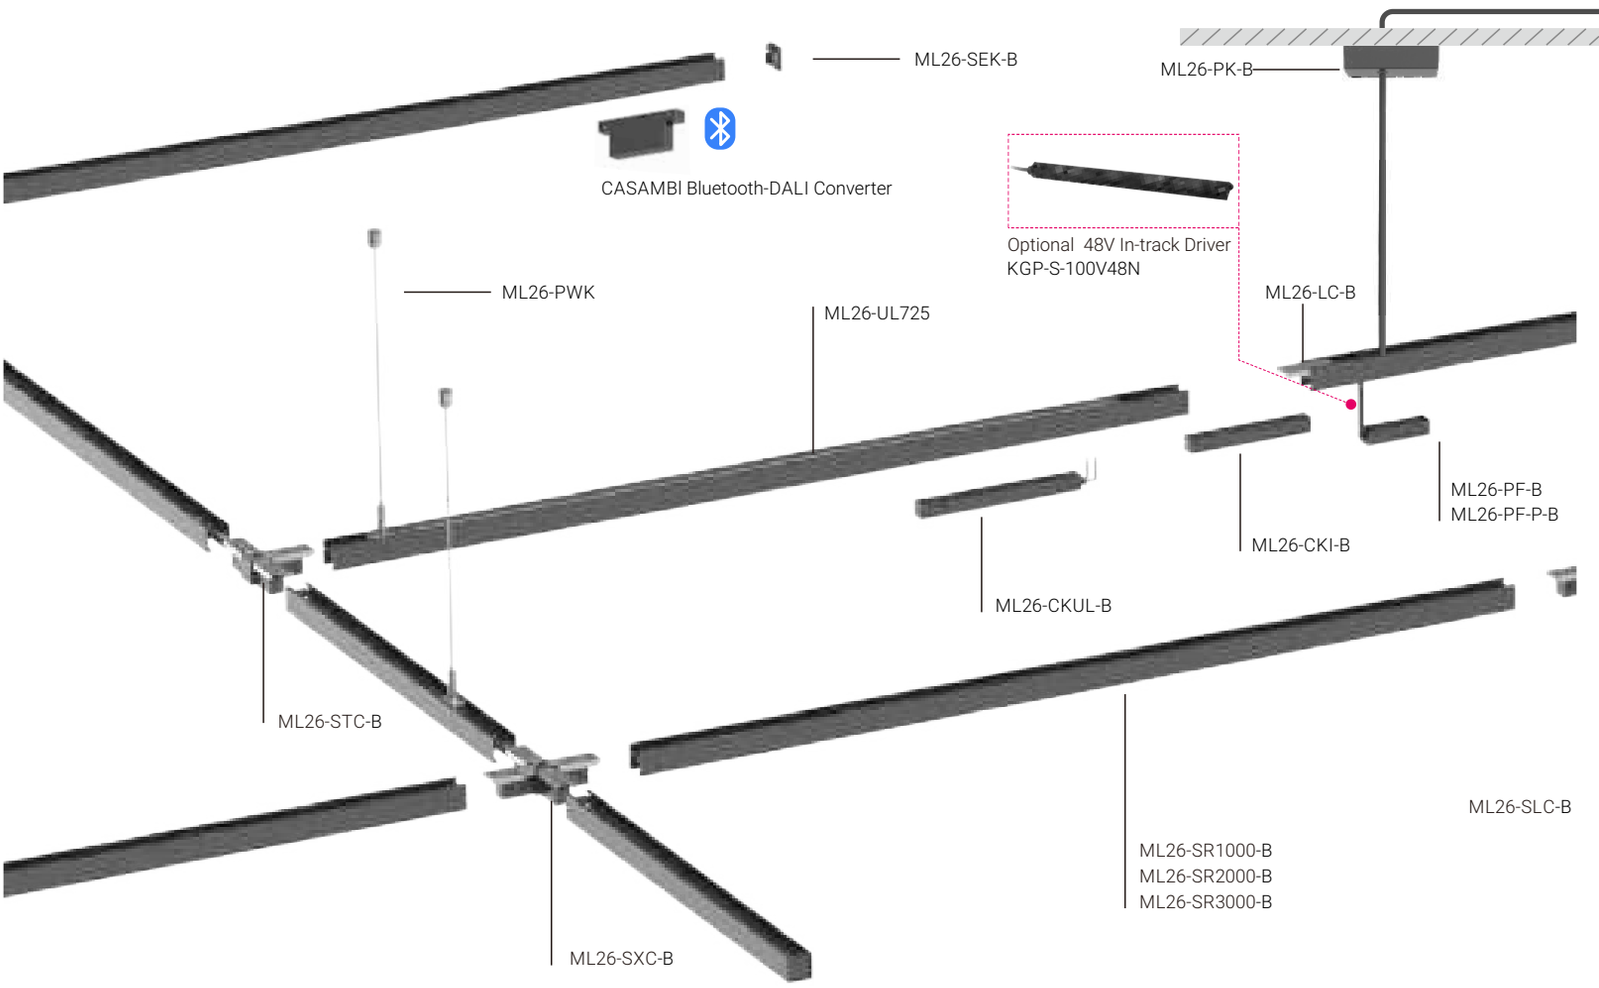

Moduline 26 Slim Track System
Please order installation track rail, light insets and mounting accessories separately.



Slim Track System Installation Track Rail | for surface or pendant mounting

L x W x H : 1000 x 26 x 27mm	ML26-SR1000-B	ML26-SR1000-W	59,00 €
L x W x H : 2000 x 26 x 27mm	ML26-SR2000-B	ML26-SR2000-W	99,00 €
L x W x H : 3000 x 26 x 27mm	ML26-SR3000-B	ML26-SR3000-W	159,00 €

*Track Rail including endcaps.


Accessories of Slim Track System

Vertical 'L' Shape Corner Module-Inner, 80 x 80mm	ML26-SCM-V-B	ML26-SCM-V-W	109,00 €
Vertical 'L' Shape Corner Module-Outer, 80 x 80mm	ML26-SCM-V-O-B	ML26-SCM-V-O-W	109,00 €
'L' Shape Connector Set, 26 x 26mm	ML26-SLC-B	ML26-SLC-W	89,00 €
'T' Shape Connector Set, 26 x 26mm	ML26-STC-B	ML26-STC-W	99,00 €
'X' Shape Connector Set, 26 x 26mm	ML26-SXC-B	ML26-SXC-W	99,00 €
Endcap Kit (2pcs/ set) of Slim Track Rail	ML26-SEK-B	ML26-SEK-W	5,00 €
Power Feeder Unit with feeder cables 500mm for surface mounted	ML26-PF-B	ML26-PF-W	19,00 €
Power Feeder Unit with feeder cables 2000mm for pendant	ML26-PF-P-B	ML26-PF-P-W	39,00 €
Linear Connector with screws	ML26-LC-B	ML26-LC-W	9,00 €
Straight Continuous Kit*, Electrical	ML26-CKI-B	ML26-CKI-W	49,00 €
Flexible Continuous Kit*, Electrical	ML26-CKF-C-B	ML26-CKF-C-W	49,00 €
Surface mounted installation kit, 1set for 1000mm track	ML26-SMK	ML26-SMK	5,00 €
Moduline 26 Pendant Installation Kits, with 1pcs Ceiling Box & 2pcs Pendant Wire (2000mm) Kits	ML26-PK-B	ML26-PK-W	49,00 €
Pendant Wire Kit, Wire in 2000mm Length, 2pcs/ set for 1000mm Track	ML26-PWK	ML26-PWK	19,00 €
48V In-track Driver, 3000mm supply line incl. DALI, KGP48V Constant Voltage 100W LED Driver, Black/White	KGP-100V48N		89,00 €
48V In-track Driver, 3000mm supply line incl. DALI, KGP48V Constant Voltage 250W LED Driver, Black/White	KGP-250V48N		109,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	ELG-100-48-3Y		129,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	ELG-150-48-3Y		129,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	ELG-240-48-3Y		169,00 €
CASAMBI Bluetooth-DALI Converter, Black/White	ML26-CBDC-B		499,00 €

*Continuous Kit needs to be used together with Linear Connector as a set.

BACK

Remote 48V LED Driver (Max. 300W each circuit)
HLG-100H-48A/ HLG-150H-48A/ HLG-240H-48A

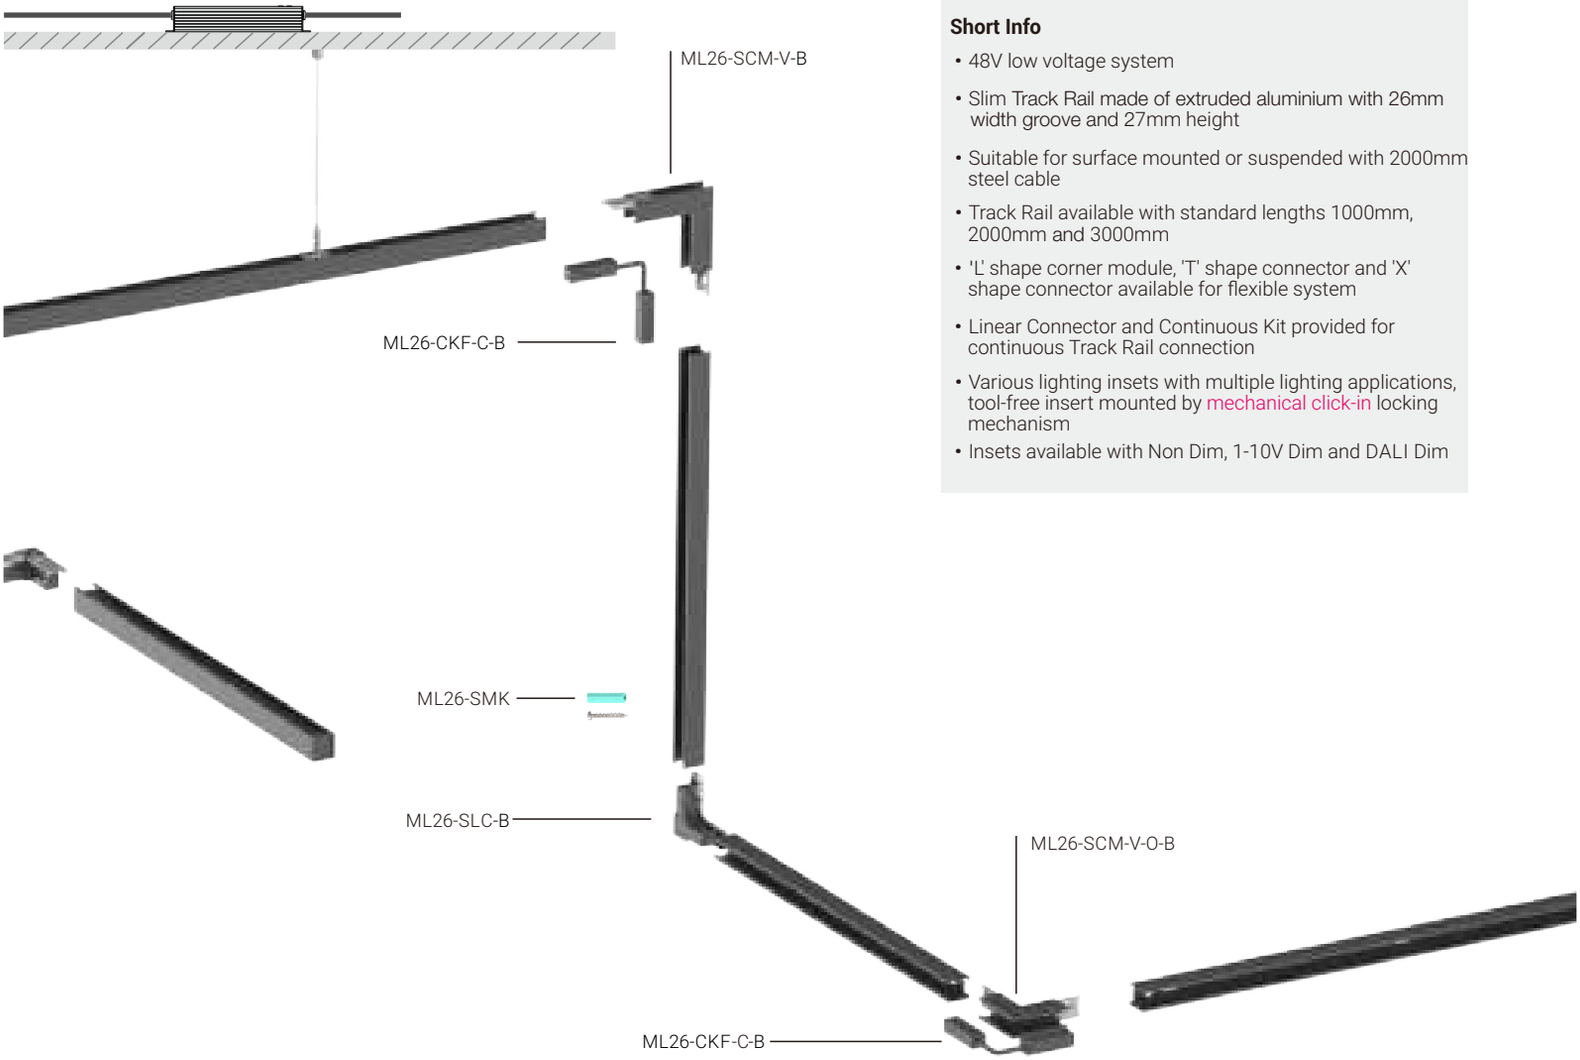

Short Info

- 48V low voltage system
- Slim Track Rail made of extruded aluminium with 26mm width groove and 27mm height
- Suitable for surface mounted or suspended with 2000mm steel cable
- Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
- 'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, tool-free insert mounted by mechanical click-in locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets

Spotlight



Accent Light



General Light



Wall Wash Light




Pendant Spotlight




* Check details of light insets at following pages

MODULINE 26 – 48V Low Voltage Modular Linear System

Standard Track Configuration

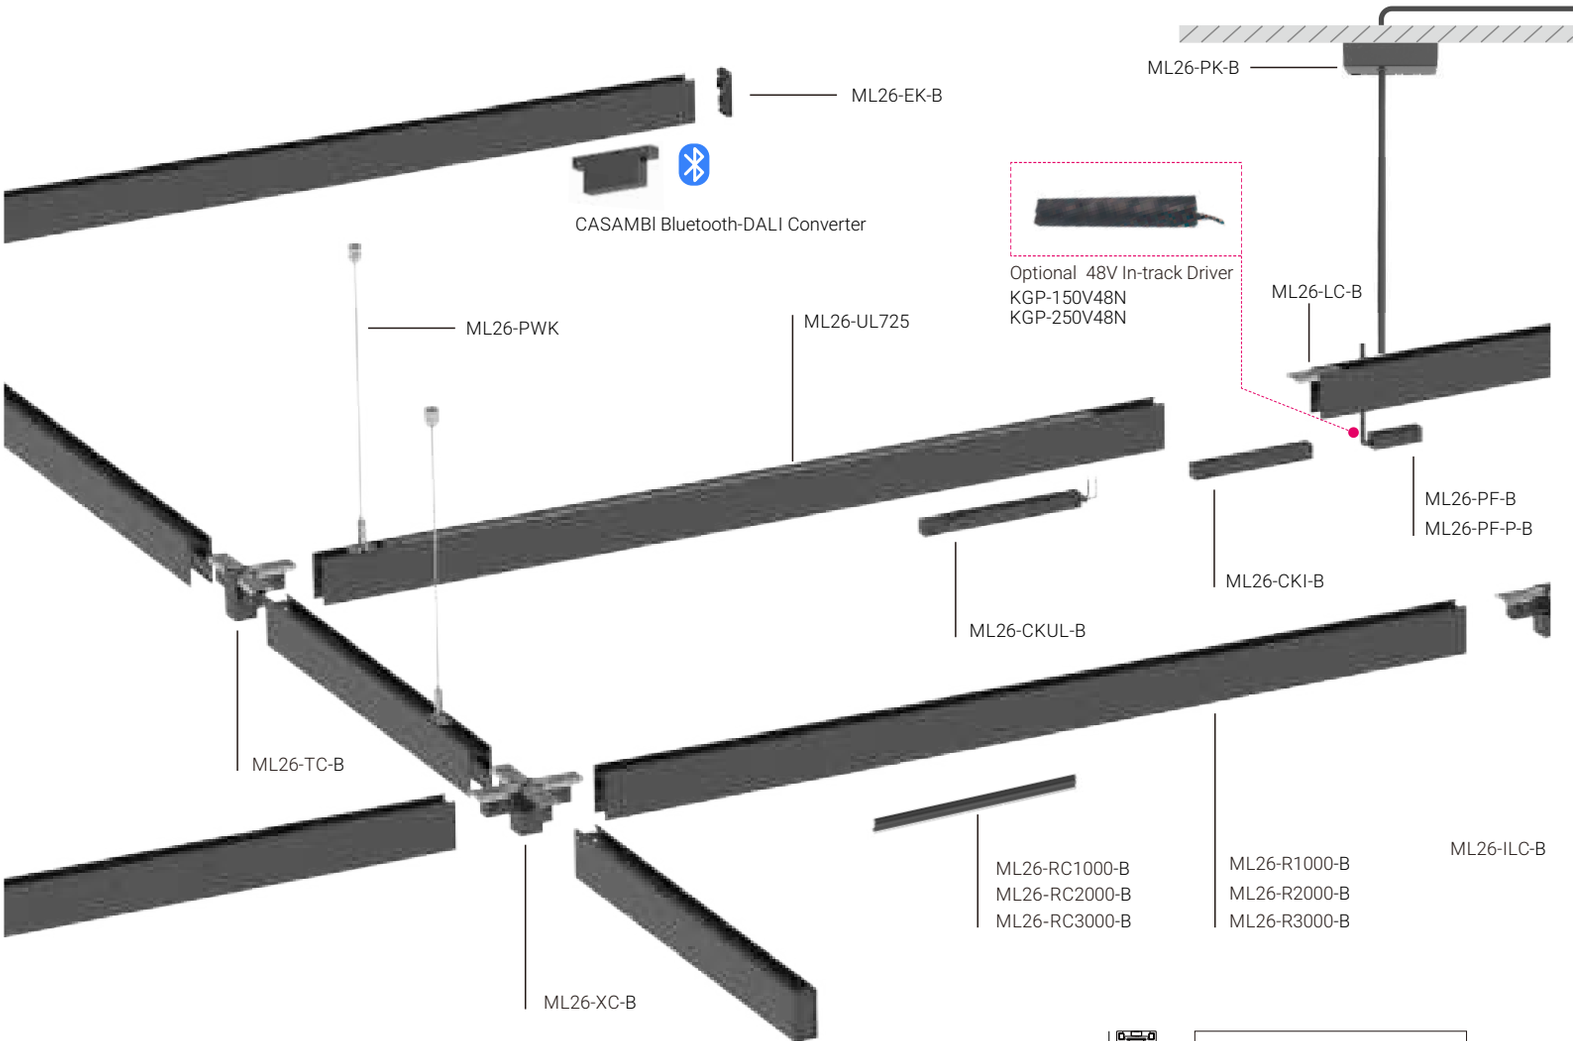

Moduline 26 Standard Track System
Please order installation track rail, light insets and mounting accessories separately.



Standard Track System Installation Track Rail | for surface or pendant mounting

Tracks can be shortened on site	Code/ Model (Black-Standard)	Code/ Model (White-Option)	
L x W x H : 1000 x 26 x 52mm	ML26-R1000-B	ML26-R1000-W	59,00 €
L x W x H : 2000 x 26 x 52mm	ML26-R2000-B	ML26-R2000-W	109,00 €
L x W x H : 3000 x 26 x 52mm	ML26-R3000-B	ML26-R3000-W	119,00 €

*Track Rail including endcaps.


Accessories of Standard Track System

Vertical 'L' Shape Corner Module-Inner, 80 x 80mm	ML26-CM-V-B	ML26-CM-V-W	119,00 €
Vertical 'L' Shape Corner Module-Outer, 80 x 80mm	ML26-CM-V-O-B	ML26-CM-V-O-W	119,00 €
'L' Shape Connector Set, 26 x 26mm	ML26-ILC-B	ML26-ILC-W	89,00 €
'T' Shape Connector Set, 26 x 26mm	ML26-TC-B	ML26-TC-W	99,00 €
'X' Shape Connector Set, 26 x 26mm	ML26-XC-B	ML26-XC-W	99,00 €
Endcap Kit (2pcs/ set) of Slim Track Rail	ML26-EK-B	ML26-EK-W	5,00 €
Power Feeder Unit with feeder cables 500mm for surface mounted	ML26-PF-B	ML26-PF-W	19,00 €
Power Feeder Unit with feeder cables 2000mm for pendant	ML26-PF-P-B	ML26-PF-P-W	39,00 €
Linear Connector with screws	ML26-LC-B	ML26-LC-W	9,00 €
Straight Continuous Kit*, Electrical	ML26-CKI-B	ML26-CKI-W	49,00 €
Flexible Continuous Kit*, Electrical	ML26-CKF-C-B	ML26-CKF-C-W	49,00 €
Surface mounted installation kit, 1set for 1000mm track	ML26-SMK	ML26-SMK	5,00 €
Moduline 26 Pendant Installation Kits, with 1pcs Ceiling Box & 2pcs Pendant Wire (2000mm) Kits	ML26-PK-B	ML26-PK-W	49,00 €
Pendant Wire Kit, Wire in 2000mm Length, 2pcs/ set for 1000mm Track	ML26-PWK	ML26-PWK	19,00 €
Track Rail Cover 1000mm/2000mm/3000mm, can be shortened at site	ML26-RC1000-B	ML26-RC1000-W	19,00 €
48V In-Track Driver, 3000mm supply line incl. DALI, KGP48V Constant Voltage 100W LED Driver, Black/White	KGP-100V48N		89,00 €
48V In-Track Driver, 3000mm supply line incl. DALI, KGP48V Constant Voltage 250W LED Driver, Black/White	KGP-250V48N		109,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	ELG-100-48-3Y		129,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	ELG-150-48-3Y		129,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	ELG-240-48-3Y		169,00 €
CASAMBI Bluetooth-DALI Converter, Black/White	ML26-CBDC-B		499,00 €

*Continuous Kit needs to be used together with Linear Connector as a set.

BACK

Remote 48V LED Driver (Max. 300W each circuit)
HLG-100H-48A/ HLG-150H-48A/ HLG-240H-48A

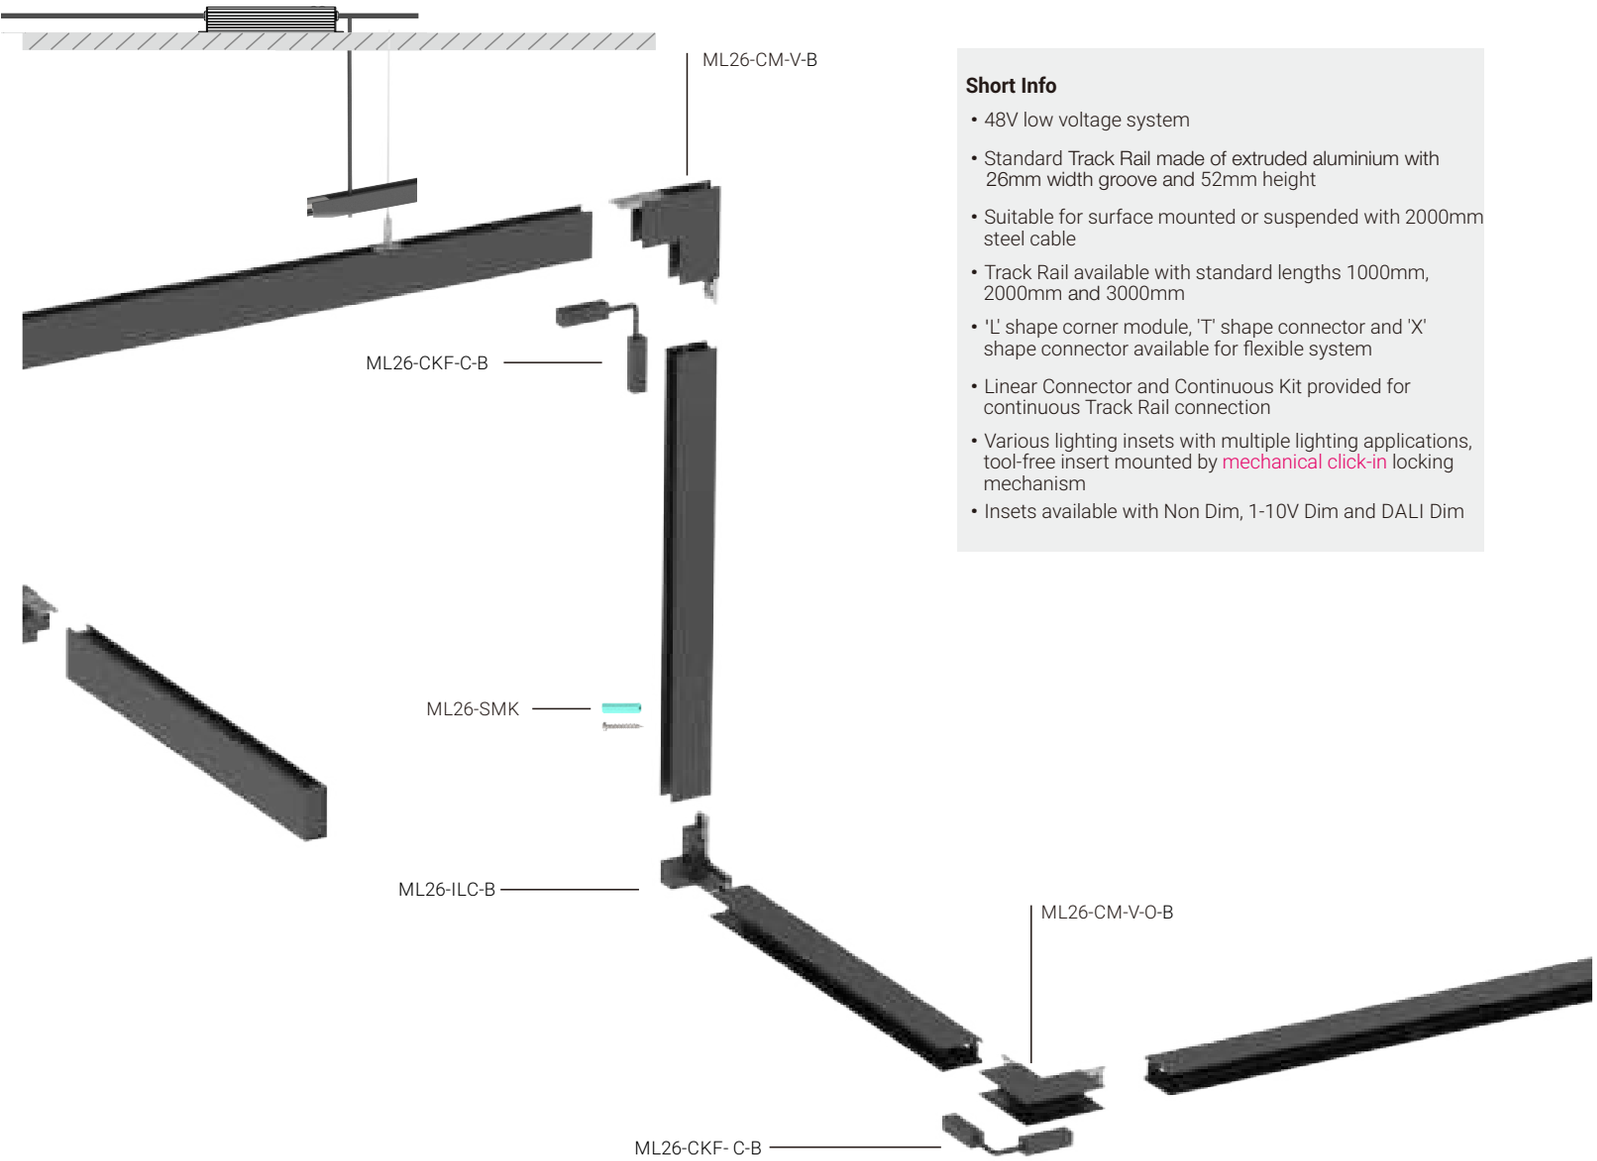

Short Info

- 48V low voltage system
- Standard Track Rail made of extruded aluminium with 26mm width groove and 52mm height
- Suitable for surface mounted or suspended with 2000mm steel cable
- Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
- 'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, tool-free insert mounted by mechanical click-in locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets

Spotlight



Accent Light



General Light



Wall Wash Light




Pendant Spotlight




* Check details of light insets at following pages

MODULINE 26 – 48V Low Voltage Modular Linear System

H Track Configuration

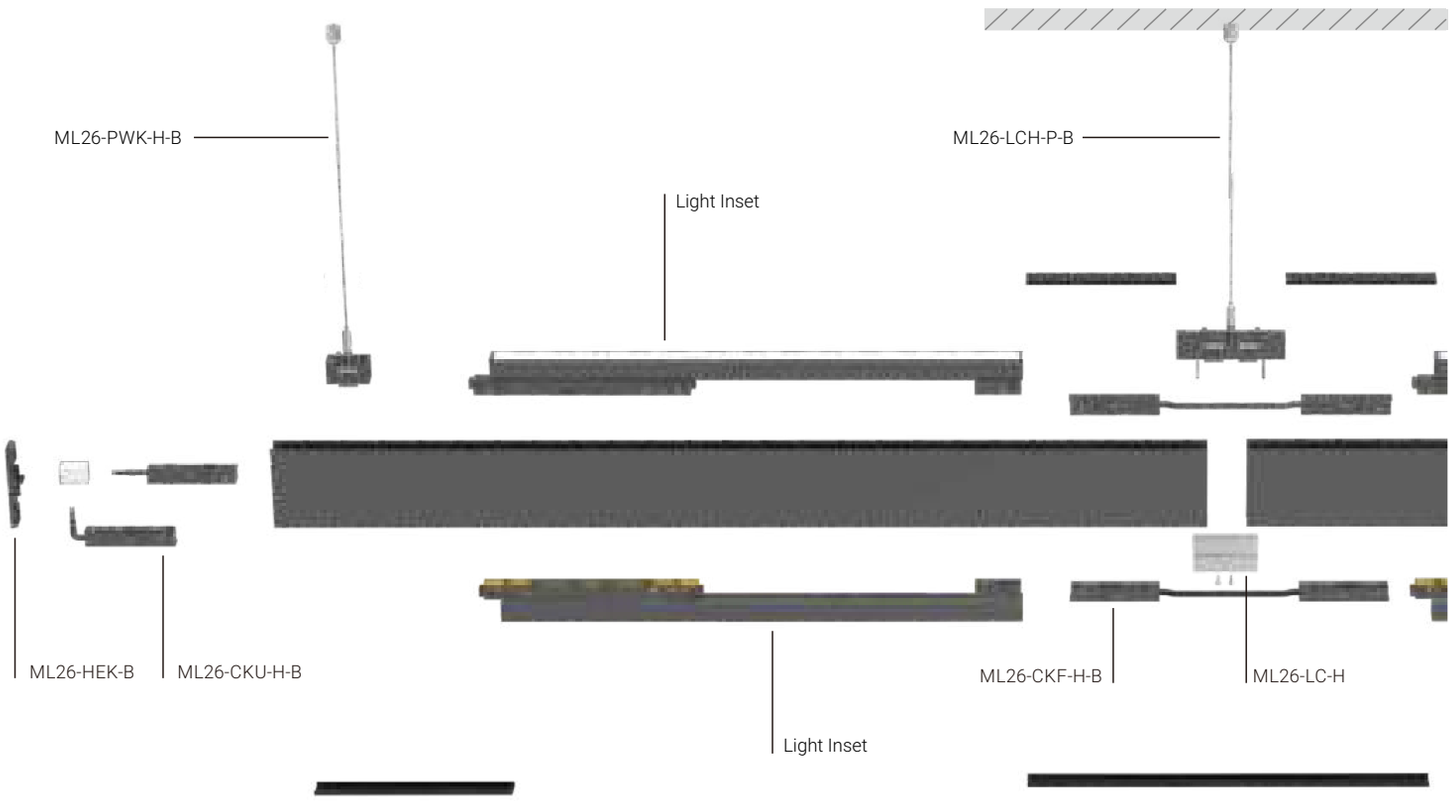

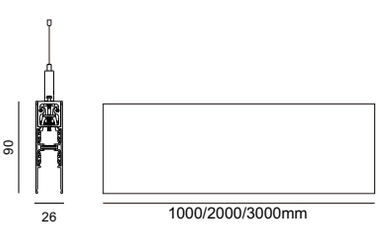

Moduline 26 H Track System

Please order installation track rail, light insets and mounting accessories separately.

H Track System Installation Track Rail | for surface or pendant mounting

Tracks can be shortened on site	Code/ Model (Black-Standard)	Code/ Model (White-Option)	
L x W x H : 1000 x 26 x 90mm	ML26-HR1000-B	ML26-HR1000-W	109,00 €
L x W x H : 2000 x 26 x 90mm	ML26-HR2000-B	ML26-HR2000-W	209,00 €
L x W x H : 3000 x 26 x 90mm	ML26-HR3000-B	ML26-HR3000-W	319,00 €


*Track Rail including endcaps.

Accessories of H Track System

Endcap Kit (2pcs/ set) of H Track Rail	ML26-HEK-B	ML26-HEK-W	9,00 €
Power Feeder Unit with feeder cables 2000mm for pendant	ML26-PF-P-B	ML26-PF-P-W	39,00 €
Flexible Continuous Kit, Electrical, for Up Track and Down Track connection	ML26-CKU-H-B	ML26-CKU-H-W	79,00 €
Flexible Continuous Kit, Electrical, for straight connection	ML26-CKF-H-B	ML26-CKF-H-W	59,00 €
Linear Connector with Pendant Kit of H Track System	ML26-LCH-P-B	ML26-LCH-P-W	129,00 €
Linear Connector Kit of H Track System*	ML26-LC-H	ML26-LC-H	9,00 €
Moduline 26 Pendant Installation Kits, with 1pcs Ceiling Box & 1pcs H Track Pendant Wire (2000mm) Kits	ML26-PK-H-B	ML26-PK-H-W	69,00 €
H Track Pendant Wire Kit, Wire in 2000mm Length, 2pcs/ set for 1000mm Track	ML26-PWK-H-B	ML26-PWK-H-W	79,00 €
Track Rail Cover 1000mm/2000mm/3000mm, can be shortened at site	ML26-RC1000-B	ML26-RC1000-W	19,00 €
48V In-Track Driver, 3000 mm supply line incl. DALI, KGP48V Constant Voltage 100W LED Driver, Black/White	KGP-100V48N		89,00 €
48V In-Track Driver, 3000 mm supply line incl. DALI, KGP48V Constant Voltage 250W LED Driver, Black/White	KGP-250V48N		109,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	ELG-100-48-3Y		129,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	ELG-150-48-3Y		129,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	ELG-240-48-3Y		169,00 €
CASAMBI Bluetooth-DALI Converter, Black/White	ML26-CBDC-B		499,00 €

*Linear Connector Kit needs to be used together with Linear Connector with Pendant Kit

BACK

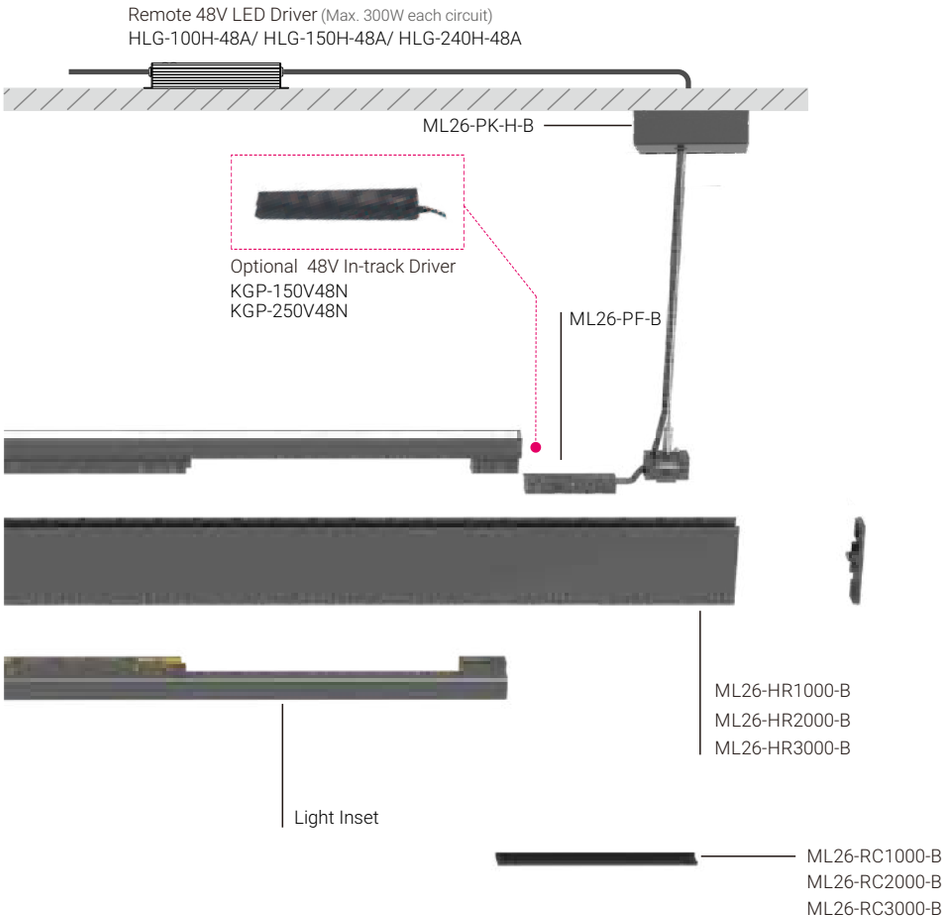

Short Info

- 48V low voltage system
- H Track Rail made of extruded aluminium with 26mm width groove and 90mm height
- Suitable for surface mounted or suspended with 2000mm steel cable
- Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, tool-free insert mounted by mechanical click-in locking mechanism
- Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets

Spotlight



Accent Light



General Light



Wall Wash Light



Pendant Spotlight




* Check details of light insets at following pages


MODULINE 26 – 48V Low Voltage Modular Linear System




Slim Track

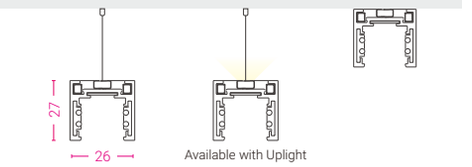


Standard Track

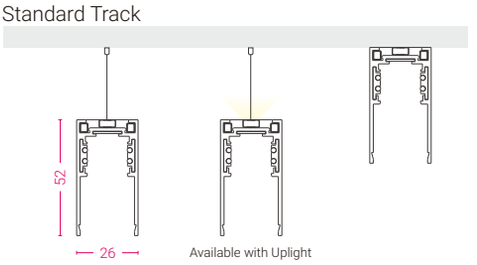


Trim Recessed Track




Trimless Recessed Track-EI




Trimless Recessed Track

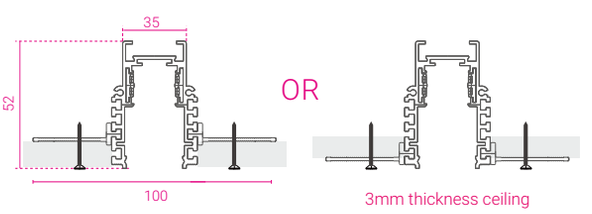


5mm/9mm/12.5mm/15mm/18mm/20mm/25mm thickness ceilings




H Track



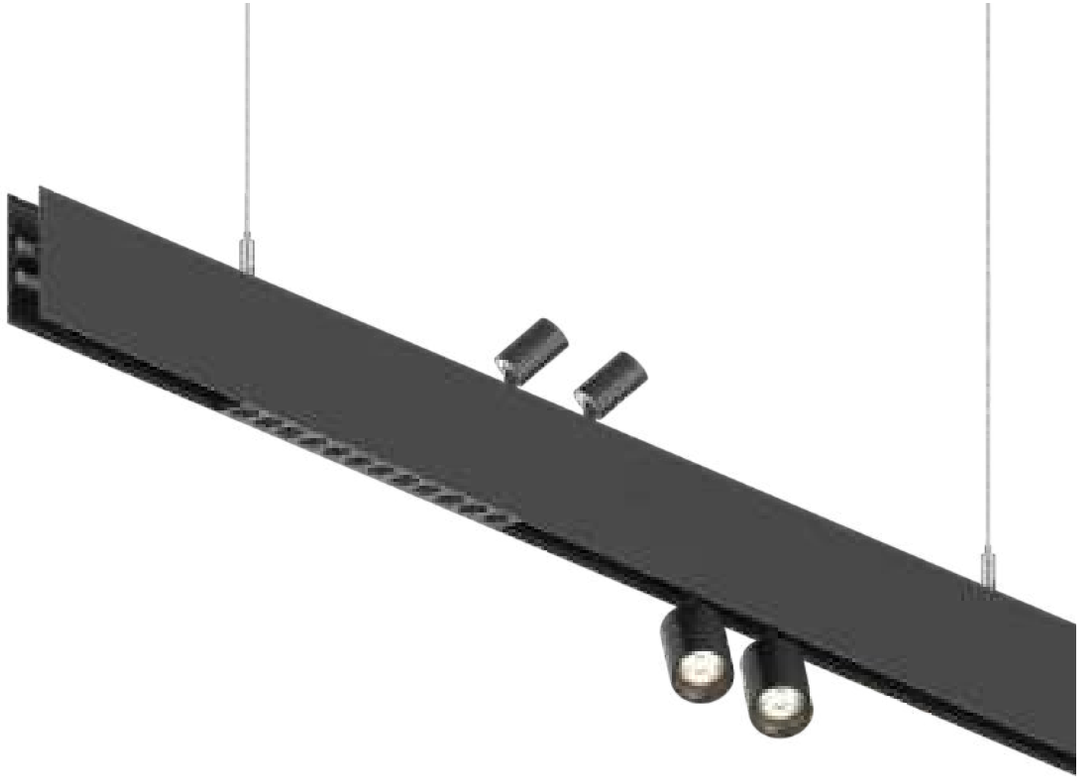

Installations

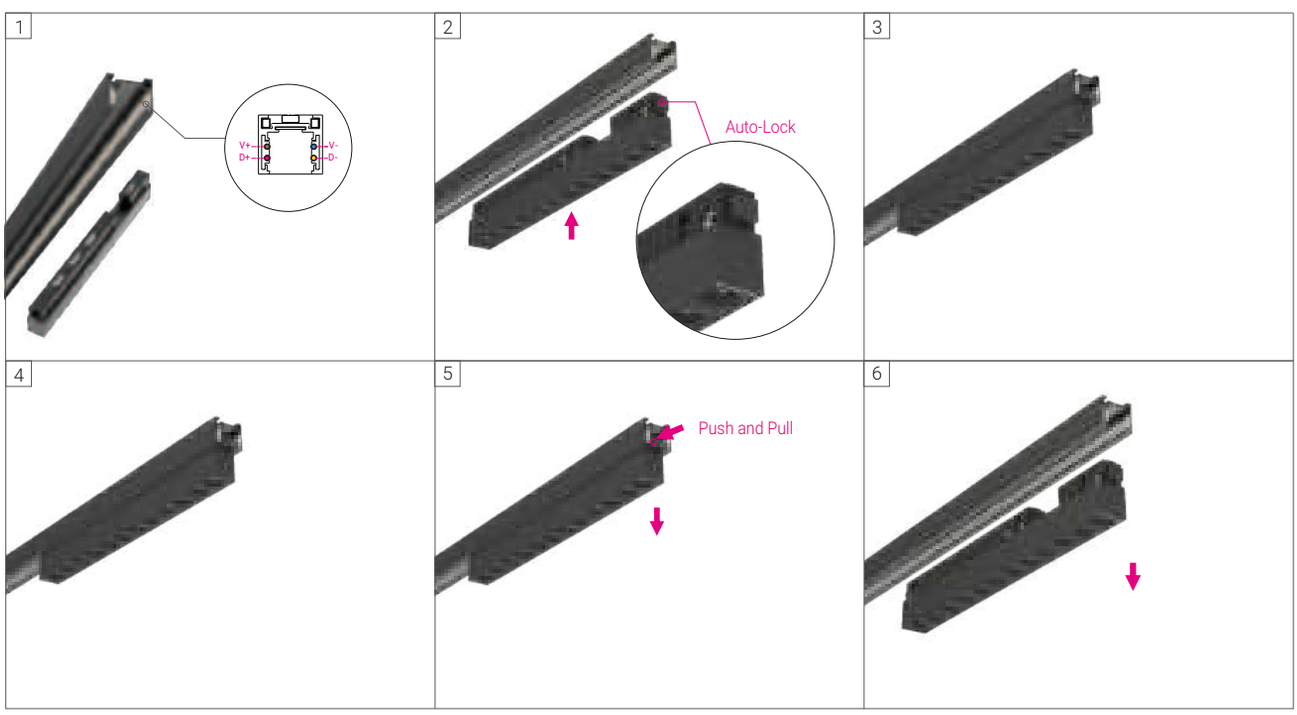

* Tool-free insert mounted by mechanical click-in locking mechanism

MODULINE 26 – 48V Low Voltage Modular Linear System

Recessed Track Configuration




1

ML26-FCM-V (Trim)
ML26-TCM-V (Trimless)
ML26-TCM-EI-V (Trimless-EI)

5

6

2




ML26-FTC (Trim)
ML26-TTC (Trimless)
ML26-TTC-EI (Trimless-EI)

3




ML26-FXC (Trim)
ML26-TXC (Trimless)
ML26-TXC-EI (Trimless-EI)

4




ML26-FCM (Trim)
ML26-TCM (Trimless)
ML26-TCM-EI (Trimless-EI)

5



ML26-FCM-O (Trim)
ML26-TCM-O (Trimless)
ML26-TCM-EI-O (Trimless-EI)


6



ML26-CKI + ML26-LC

MODULINE 26 – 48V Low Voltage Modular Linear System

Trim Recessed Track System

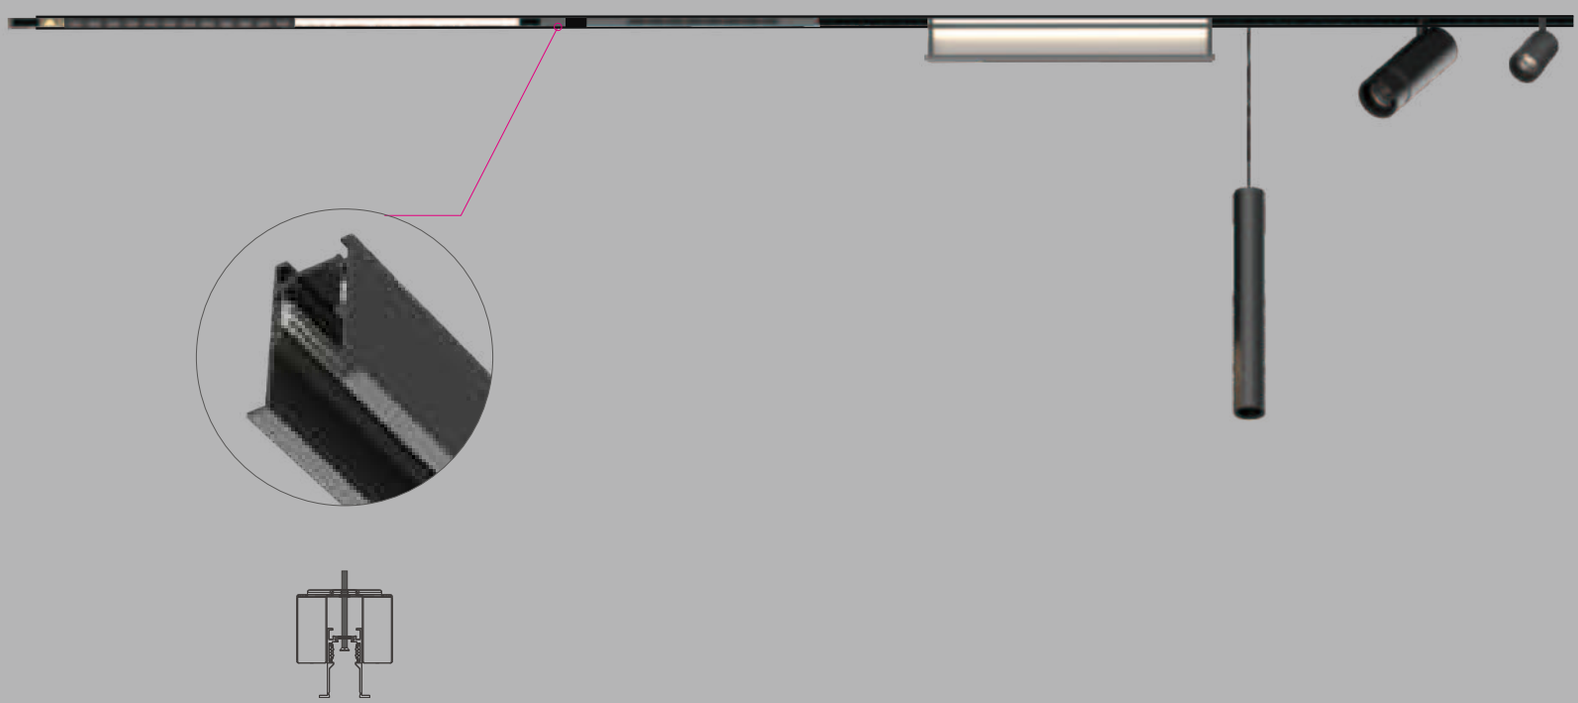

Short Info


·48V low voltage system
·Trim Recessed Track Rail Version made of extruded aluminium with 26mm width groove and 52mm height
·Mounted from inner track , suitable for all thickness ceiling heights
·Track Rail available with standard lengths 1000mm, 2000mm and 1000mm
·'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
·Linear Connector and Continuous Kit provided for continuous Track Rail connection
·Various lighting insets with multiple lighting applications, tool-free insert mounted by mechanical click-in locking mechanism
·Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets



* Check details of light insets at following pages

Features

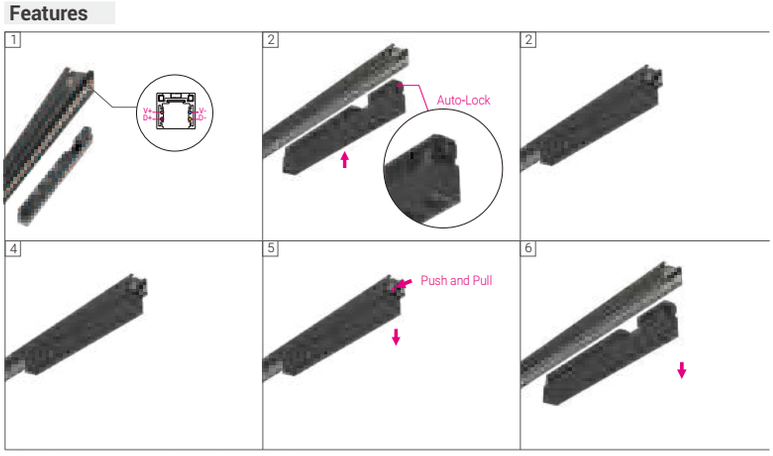

* Tool-free insert mounted by mechanical click-in locking mechanism

Short Info

Moduline 26 Trim Recessed Track System



Moduline 26 Trim Recessed Track System


Please order installation track rail, light insets and mounting accessories separately.

Electrical

Non Dim

1-10V Dim

DALI Dim



Fixture Colour

Black White(Option)








Trim Recessed Track System Version Installation Track Rail

L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)	
1000	Trim Recessed Track Rail	ML26-FR1000-B	ML26-FR1000-W	109,00 €
2000	Trim Recessed Track Rail	ML26-FR2000-B	ML26-FR2000-W	199,00 €
3000	Trim Recessed Track Rail	ML26-FR3000-B	ML26-FR3000-W	299,00 €

*Track Rail including endcaps.

Accessories of Trim Recessed Track System

	L (mm)	Cutout (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)	
	80x80	(32x28)+(32x28)	Vertical 'L' shape corner module-Inner	ML26-FCM-V-B	ML26-FCM-V-W	129,00 €
	80X80	(32x80)+(32x80)	Vertical 'L' shape corner module-Outer	ML26-FCM-O-B	ML26-FCM-O-W	129,00 €
	80x80	(32x77)+(32x45)	Horizontal 'L' shape corner module	ML26-FCM-B	ML26-FCM-W	129,00 €
	120x80	(32x120)+(32x45)	'T' Shape Connector Set	ML26-FTC-B	ML26-FTC-W	119,00 €
	120X120	(32x120)+(32x120)	'X' Shape Connector Set	ML26-FXC-B	ML26-FXC-W	219,00 €
	Flexible Continuous Kit, Electrical			ML26-CKF-C-B	ML26-CKF-C-W	49,00 €

*For Corner Connection.

	Trim Recessed Track Rail Mounting Kit, 2pcs/ set	ML26-FIK	ML26-FIK	19,00 €
	Endcap Kit (2pcs/ set) of Trim Recessed Track	ML26-FEK-B	ML26-FEK-W	19,00 €
	Power Feeder Unit with feeder cables 500mm	ML26-PF-B	ML26-PF-W	19,00 €
	Track Rail Cover 1000mm	ML26-RC1000-B	ML26-RC1000-W	19,00 €
	Track Rail Cover 2000mm	ML26-RC2000-B	ML26-RC2000-W	
	Track Rail Cover 3000mm	ML26-RC3000-B	ML26-RC3000-W	

*Track Rail Cover can be shortened as desired.


	Linear Connector with screws	ML26-RLC-B	ML26-RLC-W	9,00 €
	Straight Continuous Kit*, Electrical	ML26-CKI-B	ML26-CKI-W	49,00 €

*Continuous Kit needs to be used together with Linear Connector as a set.

	48V In-Track Driver, 3000 mm supply line incl. DALI, KGP48V Constant Voltage 100W LED Driver, Black/White	KGP-100V48N	89,00 €
	48V In-Track Driver, 3000 mm supply line incl. DALI, KGP48V Constant Voltage 250W LED Driver, Black/White	KGP-250V48N	109,00 €
	48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	ELG-100-48-3Y	129,00 €
	48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	ELG-150-48-3Y	129,00 €
	48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	ELG-240-48-3Y	169,00 €
	CASAMBI Bluetooth-DALI Converter, Black/White Max. 64 DALI Light Insets Divided into 8 Groups. Each Group Can be Controlled Separately. LxH: 143x58mm	ML26-CBDC-B		499,00 €

MODULINE 26 – 48V Low Voltage Modular Linear System

Trimless Recessed Track System
Ceiling Thickness Adjustable Version

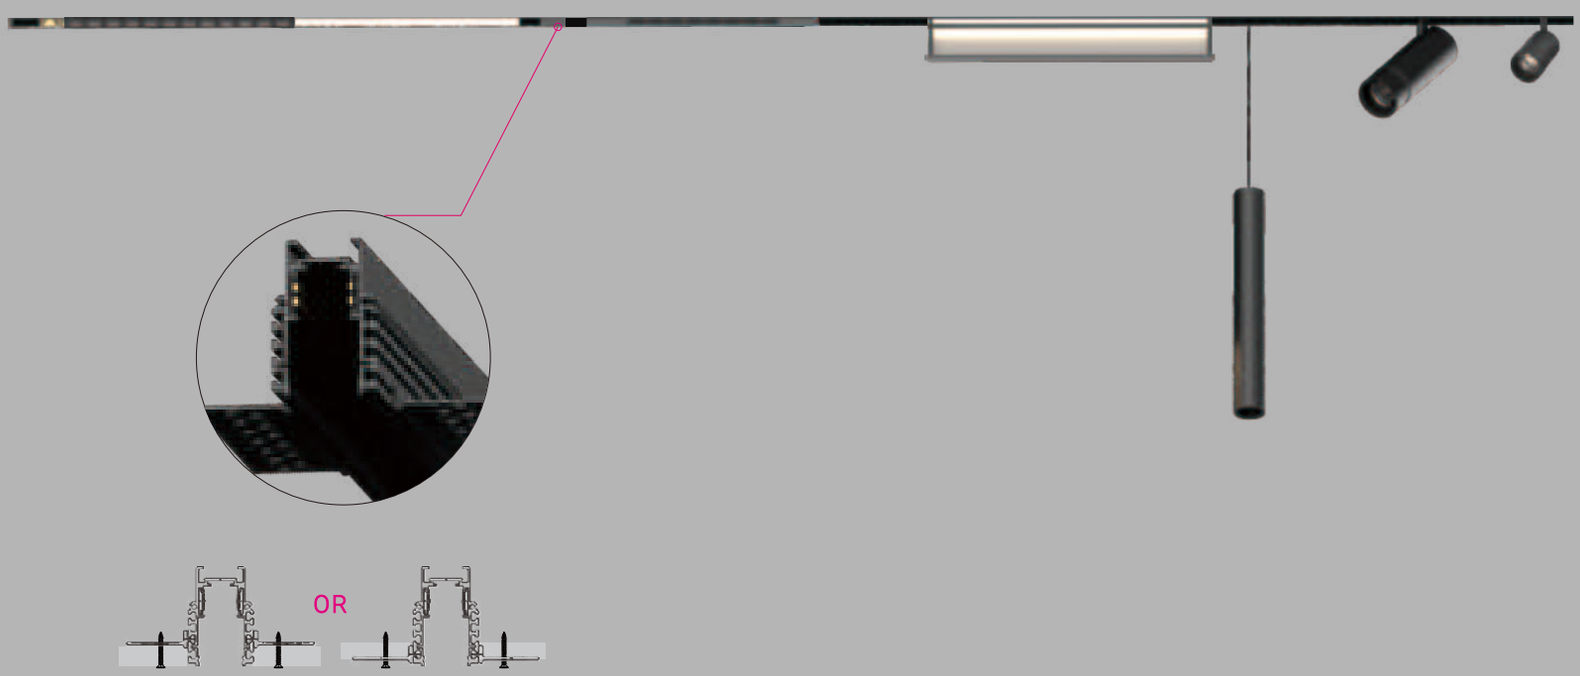

Short Info


·48V low voltage system
·Trimless Recessed Track Rail Version made of extruded aluminium with 35mm width groove and 52mm height
·Suitable for 3mm/5mm/9mm/12.5mm/15mm/18mm/20mm/25mm thickness ceilings heights
·Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
·'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
·Linear Connector and Continuous Kit provided for continuous Track Rail connection
·Various lighting insets with multiple lighting applications, tool-free insert mounted by mechanical click-in locking mechanism
·Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets



* Check details of light insets at following pages

Features

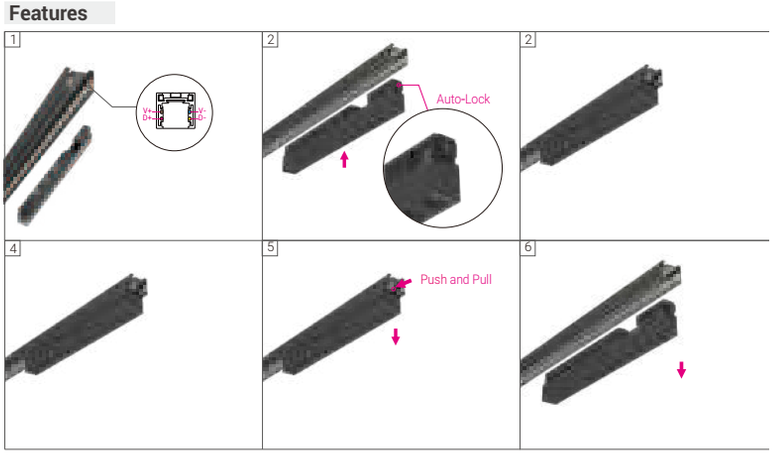

* Tool-free insert mounted by mechanical click-in locking mechanism


BACK

Short Info

Moduline 26 Trimless Recessed Track System
Ceiling Thickness Adjustable


Electrical

Non Dim
1-10V Dim
DALI Dim



Fixture Colour

Black White(Option)





Moduline 26 Trimless Recessed Track System
Ceiling Thickness Adjustable


Please order installation track rail, light insets and mounting accessories separately.

Trimless Recessed Track System Ceiling Thickness Adjustable Version Installation Track Rail


L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)	
1000	Trimless Recessed Track Rail	ML26-TAR1000-B	ML26-TAR1000-W	99,00 €
2000	Trimless Recessed Track Rail	ML26-TAR2000-B	ML26-TAR2000-W	179,00 €
3000	Trimless Recessed Track Rail	ML26-TAR3000-B	ML26-TAR3000-W	279,00 €

*Track Rail including endcaps.


Accessories of Ceiling Thickness Adjustable Trimless Recessed Track System




L (mm)	Cutout (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)	
80x80	(40x28)+(40x28)	Vertical 'L' shape corner module-Inner	ML26-TACM-V-B	ML26-TACM-V-W	99,00 €




80x80	(40x80)+(40x80)	Vertical 'L' shape corner module-Outer	ML26-TACM-O-B	ML26-TACM-O-W	99,00 €



80x80	(40x82)+(40x42)	Horizontal 'L' shape corner module	ML26-TACM-B	ML26-TACM-W	99,00 €



80x120	(40x120)+(40x42)	'T' Shape Connector Set	ML26-TATC-B	ML26-TATC-W	119,00 €



120X120	(40x120)+(40x120)	'X' Shape Connector Set	ML26-TAXC-B	ML26-TAXC-W	239,00 €

Flexible Continuous Kit, Electrical		ML26-CKF-C-B	ML26-CKF-C-W	49,00 €

*For Corner Connection.



Endcap Kit (2pcs/ set) of Trim Recessed Track		ML26-TAEK-B	ML26-TAEK-W	9,00 €



Power Feeder Unit with feeder cables 500mm		ML26-PF-B	ML26-PF-W	19,00 €



Track Rail Cover 1000mm		ML26-RC1000-B	ML26-RC1000-W	19,00 €
Track Rail Cover 2000mm		ML26-RC2000-B	ML26-RC2000-W	
Track Rail Cover 3000mm		ML26-RC3000-B	ML26-RC3000-W	

*Track Rail Cover can be shortened as desired.



Linear Connector with screws		ML26-RLC-B	ML26-RLC-W	9,00 €
Straight Continuous Kit*, Electrical		ML26-CKI-B	ML26-CKI-W	49,00 €

*Continuous Kit needs to be used together with Linear Connector as a set.



Trimless Recessed installation kit 1set for 1000mm track		ML26-TAIK	ML26-TAIK	9,00 €



48V In-Track Driver, 3000mm supply line incl. DALI, KGP48V Constant Voltage 100W LED Driver, Black/White			KGP-100V48N	89,00 €
48V In-Track Driver, 3000mm supply line incl. DALI, KGP48V Constant Voltage 250W LED Driver, Black/White			KGP-250V48N	109,00 €




48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver		ELG-100-48-3Y		129,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver		ELG-150-48-3Y		129,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver		ELG-240-48-3Y		169,00 €



CASAMBI Bluetooth-DALI Converter, Black/White Max. 64 DALI Light Insets Divided into 8 Groups. Each Group Can be Controlled Separately. LxH: 143x58mm		ML26-CBDC-B		499,00 €

MODULINE 26 – 48V Low Voltage Modular Linear System

Trimless Recessed Track System-EI
Easy Installation Version

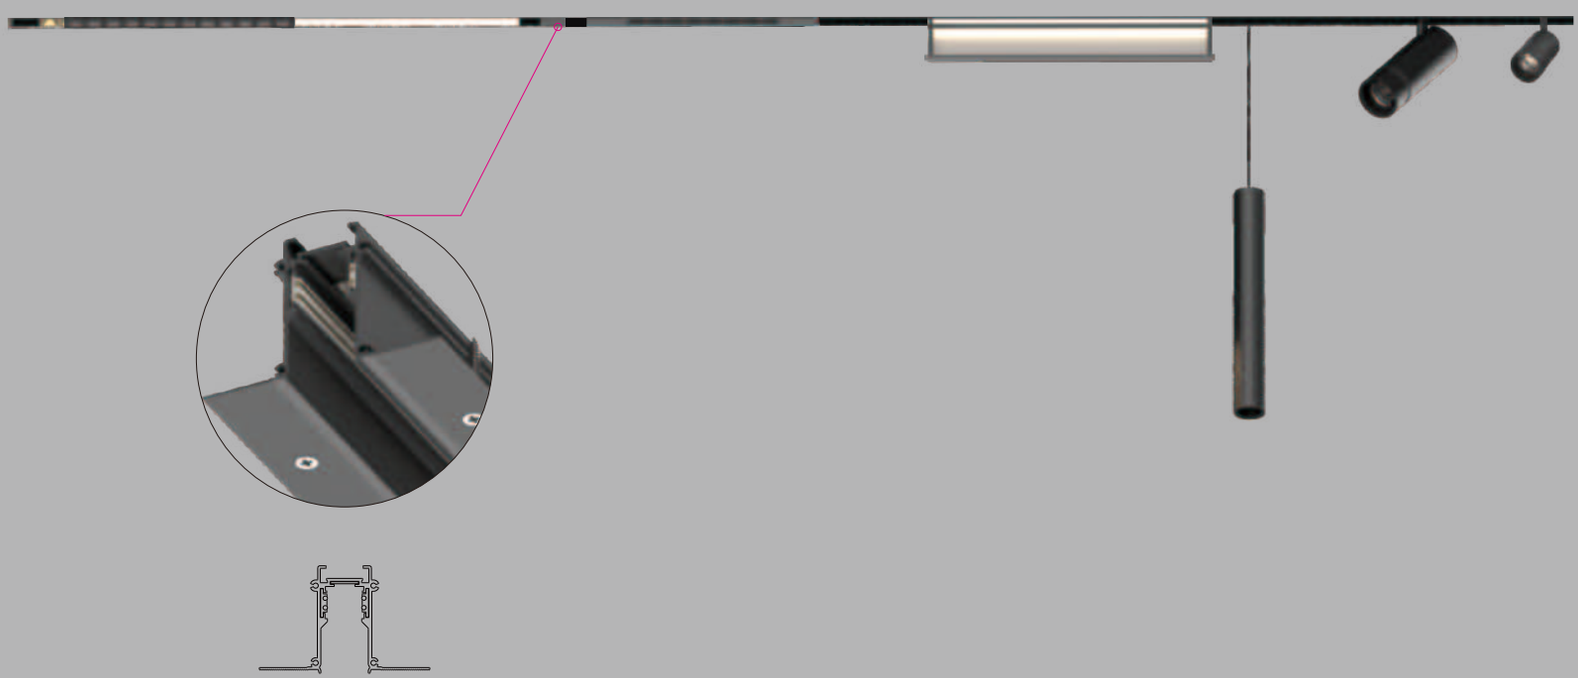

Short Info


·48V low voltage system
·Trimless Recessed Track Rail Easy Installation Version made of extruded aluminium with 26mm width groove and 52mm height
·Mounted from surface, suitable for all thickness ceiling heights
·Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
·'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
·Linear Connector and Continuous Kit provided for continuous Track Rail connection
·Various lighting insets with multiple lighting applications, tool-free insert mounted by mechanical click-in locking mechanism
·Insets available with Non Dim, 1-10V Dim and DALI Dim

Insets



* Check details of light insets at following pages

Features

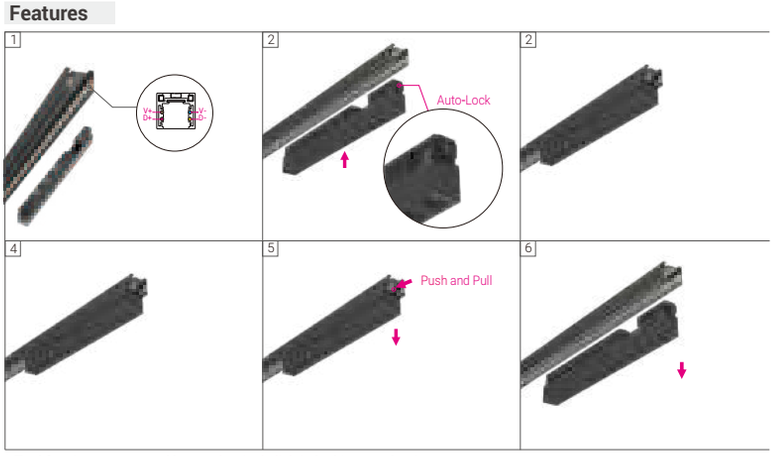

* Tool-free insert mounted by mechanical click-in locking mechanism

BACK


Short Info

Moduline 26 Trimless Recessed Track System
Easy Installation Version



Electrical

Non Dim
1-10V Dim
DALI Dim



Fixture Colour

Black White(Option)



Moduline 26 Trimless Recessed Track System
Easy Installation Version


Please order installation track rail, light insets and mounting accessories separately.

Trimless Recessed Track System Easy Installation Version Installation Track Rail


L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)	
1000	Trimless Recessed Track Rail-EI	ML26-TR1000-EI-B	ML26-TR1000-EI-W	89,00 €
2000	Trimless Recessed Track Rail-EI	ML26-TR2000-EI-B	ML26-TR2000-EI-W	159,00 €
3000	Trimless Recessed Track Rail-EI	ML26-TR3000-EI-B	ML26-TR3000-EI-W	239,00 €

*Track Rail including endcaps.


Accessories of Easy Installation Version Trimless Recessed Track System




L (mm)	Cutout (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)	
100x100	(40x48)+(40x48)	Vertical 'L' shape corner module-Inner	ML26-TCM-EI-V-B	ML26-TCM-EI-V-W	99,00 €




100x100	(40x100)+(40x100)	Vertical 'L' shape corner module-Outer	ML26-TCM-EI-O-B	ML26-TCM-EI-O-W	99,00 €



100x100	(40x80)+(40x40)	Horizontal 'L' shape corner module	ML26-TCM-EI-B	ML26-TCM-EI-W	99,00 €



100x120	(40x120)+(40x40)	'T' Shape Connector Set	ML26-TTC-EI-B	ML26-TTC-EI-W	149,00 €



120X120	(40x120)+(40x120)	'X' Shape Connector Set	ML26-TXC-EI-B	ML26-TXC-EI-W	249,00 €

Flexible Continuous Kit, Electrical		ML26-CKF-C-B	ML26-CKF-C-W	49,00 €

*For Corner Connection.



Endcap Kit (2pcs/ set) of Trim Recessed Track		ML26-TEK-EI-B	ML26-TEK-EI-W	9,00 €



Power Feeder Unit with feeder cables 500mm		ML26-PF-B	ML26-PF-W	19,00 €



Track Rail Cover 1000mm		ML26-RC1000-B	ML26-RC1000-W	19,00 €
Track Rail Cover 2000mm		ML26-RC2000-B	ML26-RC2000-W	
Track Rail Cover 3000mm		ML26-RC3000-B	ML26-RC3000-W	

*Track Rail Cover can be shortened as desired.



Linear Connector with screws		ML26-RLC-B	ML26-RLC-W	9,00 €
Straight Continuous Kit*, Electrical		ML26-CKI-B	ML26-CKI-W	49,00 €

*Continuous Kit needs to be used together with Linear Connector as a set.



Trimless Recessed Track mounting kit 1set for 1000mm track		ML26-RMK	ML26-RMK	5,00 €



48V In-Track Driver, 3000mm supply line incl. DALI, KGP48V Constant Voltage 100W LED Driver, Black/White			KGP-100V48N	89,00 €
48V In-Track Driver, 3000mm supply line incl. DALI, KGP48V Constant Voltage 250W LED Driver, Black/White			KGP-250V48N	109,00 €



48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver		ELG-100-48-3Y		129,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver		ELG-150-48-3Y		129,00 €
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver		ELG-240-48-3Y		169,00 €



CASAMBI Bluetooth-DALI Converter, Black/White Max. 64 DALI Light Insets Divided into 8 Groups. Each Group Can be Controlled Separately. LxH: 143x58mm		ML26-CBDC-B		499,00 €


MODULINE 26 – ML26-RS25 Spotlight Inset




ML26-RS25-3W
Single Spot



ML26-RS25-5W
Double Spot









Quick Info


- System: 3W, 5W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 380lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 1-10V Dim, DALI Dim

Light Distribution

3000K







Finish



Black(B)



White(W)



Brushed Bronze(Z)



Brushed Gold(G)

3W:

Driver	Black/White	Brone/Gold
ON-OFF	99,00 €	119,00 €
DALI Dim	149,00 €	169,00 €

5W:

Driver	Black/White	Brone/Gold
ON-OFF	119,00 €	159,00 €
DALI Dim	179,00 €	219,00 €

Optional accessary



Honeycomb

Code for MLR1-9403005F with Honeycomb
MLR1-9403005F-H

Honeycomb: +9,00€

Order Info (ML26-RS25 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
2W	3W	48V	90	2700K	18°	220lm	170lm	MLR0-9271803F-BB
					30°	220lm	170lm	MLR0-9273003F-BB
					45°	220lm	170lm	MLR0-9274503F-BB
				3000K	18°	230lm	180lm	MLR0-9301803F-BB
					30°	230lm	180lm	MLR0-9303003F-BB
					45°	230lm	180lm	MLR0-9304503F-BB
				4000K	18°	250lm	190lm	MLR0-9401803F-BB
					30°	250lm	190lm	MLR0-9403003F-BB
					45°	250lm	190lm	MLR0-9404503F-BB
4W	5W	48V	90	2700K	18°	420lm	330lm	MLR1-9271805F-BB
					30°	420lm	330lm	MLR1-9273005F-BB
					45°	420lm	330lm	MLR1-9274505F-BB
				3000K	18°	450lm	350lm	MLR1-9301805F-BB
					30°	450lm	350lm	MLR1-9303005F-BB
					45°	450lm	350lm	MLR1-9304505F-BB
				4000K	18°	500lm	380lm	MLR1-9401805F-BB
					30°	500lm	380lm	MLR1-9403005F-BB
					45°	500lm	380lm	MLR1-9404505F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLR0 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLR0 ML26-RS25-3W Single Spot	927 CRI>90/ 2700K	18 18°	03 3W	F On-Off	W White	B Black	H Honeycomb
MLR1 ML26-RS25-5W Double Spot	930 CRI>90/ 3000K	30 30°	05 5W	A 1-10V Dim	B Black		
	940 CRI>90/ 4000K	45 45°		D DALI Dim	Z Brushed Bronze		
					G Brushed Gold		

ML26-CKI-W
-C-W
1000-W

BACK


MODULINE 26 – ML26-RS40 Spotlight Inset





ML26-RS40-8W
Single Spot



ML26-RS40-16W
Double Spot





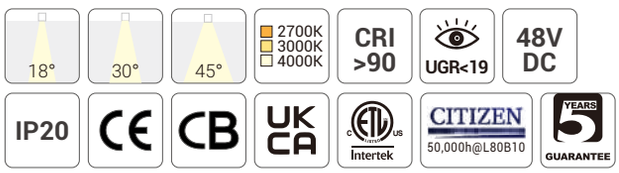



Quick Info


- System: 8W, 16W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 1-10V Dim, DALI Dim

Light Distribution


3000K







Finish

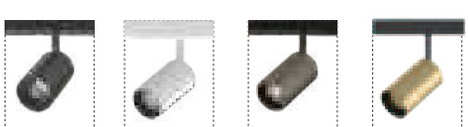

Black(B) White(W) Brushed Bronze(Z) Brushed Gold(G)

	Driver	Black/White	Brone/Gold
8W:	ON-OFF	109,00 €	129,00 €
	DALI Dim	169,00 €	189,00 €

	Driver	Black/White	Brone/Gold
16W:	ON-OFF	169,00 €	219,00 €
	DALI Dim	219,00 €	269,00 €

Optional accessary



Honeycomb

Code for MLR3-9403016F with Honeycomb
MLR3-9403016F-**H**

Honeycomb: +9,00€

Order Info (ML26-RS40 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
7.5W	8W	48V	90	2700K	18°	700lm	550lm	MLR2-9271808F-BB
					30°	700lm	550lm	MLR2-9273008F-BB
					45°	700lm	400lm	MLR2-9274508F-BB
				3000K	18°	750lm	580lm	MLR2-9301808F-BB
					30°	750lm	580lm	MLR2-9303008F-BB
					45°	750lm	420lm	MLR2-9304508F-BB
				4000K	18°	800lm	640lm	MLR2-9401808F-BB
					30°	800lm	640lm	MLR2-9403008F-BB
					45°	800lm	460lm	MLR2-9404508F-BB
15W	16W	48V	90	2700K	18°	1400lm	1000lm	MLR3-9271816F-BB
					30°	1400lm	1000lm	MLR3-9273016F-BB
					45°	1400lm	800lm	MLR3-9274516F-BB
				3000K	18°	1500lm	1100lm	MLR3-9301816F-BB
					30°	1500lm	1000lm	MLR3-9303016F-BB
					45°	1500lm	850lm	MLR3-9304516F-BB
				4000K	18°	1600lm	1200lm	MLR3-9401816F-BB
					30°	1600lm	1200lm	MLR3-9403016F-BB
					45°	1600lm	900lm	MLR3-9404516F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding


MLR2 – * ** ** * – * * – ***

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLR2 ML26-RS40-8W Single Spot	**927** CRI>90/ 2700K	**18** 18°	**08** 8W	**F** On-Off	**W** White	**B** Black	**H** Honeycomb
MLR3 ML26-RS40-16W Double Spot	**930** CRI>90/ 3000K	**30** 30°	**16** 16W	**A** 1-10V Dim	**B** Black		
	940 CRI>90/ 4000K	**45** 45°		**D** DALI Dim	**Z** Brushed Bronze		
					G Brushed Gold		


MODULINE 26 – ML26-RS40 Spotlight Inset



ML26-RS40-12W
Single Spot



ML26-RS40-24W
Double Spot

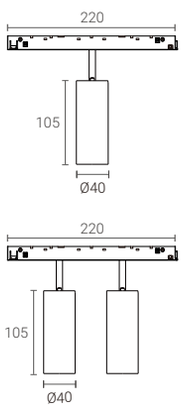


18° 30° 45° 2700K 3000K 4000K CRI >90 UGR<19 48V DC IP20 CE CB UKCA ETL Intertek CITIZEN 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info


- System: 12W, 24W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 1600lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 1-10V Dim, DALI Dim

Light Distribution

■ 3000K







Finish



Black(B)



White(W)



Brushed Bronze(Z)



Brushed Gold(G)

12W:

Driver	Black/White	Brone/Gold
ON-OFF	109,00 €	139,00 €
DALI Dim	169,00 €	199,00 €

24W:

Driver	Black/White	Brone/Gold
ON-OFF	179,00 €	239,00 €
DALI Dim	229,00 €	289,00 €

Optional accessary



Honeycomb

Code for MLR5-9401824F with Honeycomb
MLR5-9401824F-H

Honeycomb: +9,00€

Order Info (ML26-RS40 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
11W	12W	48V	90	2700K	18°	1000lm	700lm	MLR4-9271812F-BB
					30°	1000lm	700lm	MLR4-9273012F-BB
					45°	1000lm	550lm	MLR4-9274512F-BB
				3000K	18°	1100lm	750lm	MLR4-9301812F-BB
					30°	1100lm	750lm	MLR4-9303012F-BB
					45°	1100lm	600lm	MLR4-9304512F-BB
				4000K	18°	1200lm	800lm	MLR4-9401812F-BB
					30°	1200lm	800lm	MLR4-9403012F-BB
					45°	1200lm	650lm	MLR4-9404512F-BB
22W	24W	48V	90	2700K	18°	2000lm	1400lm	MLR5-9271824F-BB
					30°	2000lm	1400lm	MLR5-9273024F-BB
					45°	2000lm	1100lm	MLR5-9274524F-BB
				3000K	18°	2200lm	1500lm	MLR5-9301824F-BB
					30°	2200lm	1500lm	MLR5-9303024F-BB
					45°	2200lm	1200lm	MLR5-9304524F-BB
				4000K	18°	2400lm	1600lm	MLR5-9401824F-BB
					30°	2400lm	1600lm	MLR5-9403024F-BB
					45°	2400lm	1300lm	MLR5-9404524F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLR4 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLR4 ML26-RS40-12W Single Spot	927 CRI>90/ 2700K	18 18°	12 12W	F On-Off	W White	B Black	H Honeycomb
MLR5 ML26-RS40-24W Double Spot	930 CRI>90/ 3000K	30 30°	24 24W	A 1-10V Dim	B Black		
	940 CRI>90/ 4000K	45 45°		D DALI Dim	Z Brushed Bronze		
					G Brushed Gold		

BACK

MODULINE 26 – ML26-RT55 Spotlight Inset



ML26-RT55-10W
Zooming Spot




20°~40° | 35°~60° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°-40°, 35°-60°, Zooming Spot
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 1-10V Dim, DALI Dim

Light Distribution

3000K

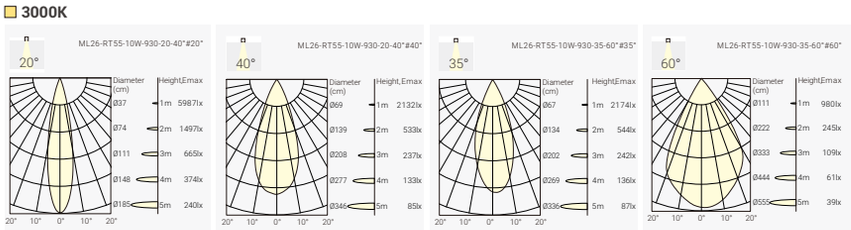

Finish



White Black

Order Info (ML26-RT55 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	20°-40°	1200lm	1000lm	MLR6-927Z410F-BB
					35°-60°	1200lm	950lm	MLR6-927Z610F-BB
				3000K	20°-40°	1300lm	1100lm	MLR6-930Z410F-BB
					35°-60°	1300lm	1000lm	MLR6-930Z610F-BB
				4000K	20°-40°	1400lm	1200lm	MLR6-940Z410F-BB
					35°-60°	1400lm	1100lm	MLR6-940Z610F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black/White
ON-OFF	149,00 €
DALI Dim	209,00 €

Optional accessary



Honeycomb

Code for MLR6-940Z410F with **H**oneycomb
MLR6-940Z410F-**H**

Honeycomb: +9,00€

Coding

MLR6 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLR6 ML26-RS55-10W	**927** CRI>90/ 2700K	**Z4** 20°~40°	**10** 10W	**F** On-Off	**W** White	**B** Black	
	930 CRI>90/ 3000K	**Z6** 35°~60°		**A** 1-10V Dim	**B** Black		
	940 CRI>90/ 4000K			**D** DALI Dim			

MODULINE 26 – ML26-RS55 Spotlight Inset

NEW




ML26-RS55-14W

20° 30° 40° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 14W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 30°, 40°, 50°
- Lumen Output: Up to 1300lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K

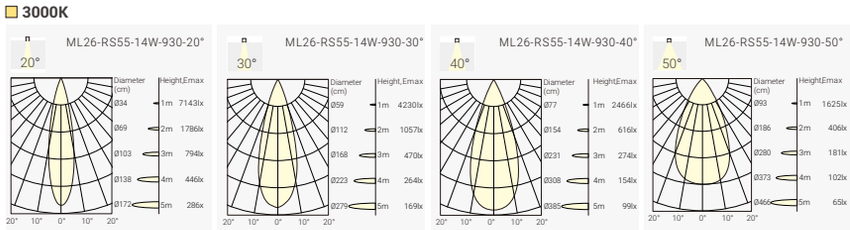

Finish



White Black

Order Info (ML26-RS55 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
12W	14W	48V	90	2700K	20°	1400lm	1100lm	MLR8-9272014F-BB
					30°	1400lm	1100lm	MLR8-9273014F-BB
					40°	1400lm	1100lm	MLR8-9274014F-BB
					50°	1400lm	1050lm	MLR8-9275014F-BB
				3000K	20°	1500lm	1200lm	MLR8-9302014F-BB
					30°	1500lm	1200lm	MLR8-9303014F-BB
					40°	1500lm	1200lm	MLR8-9304014F-BB
					50°	1500lm	1100lm	MLR8-9305014F-BB
				4000K	20°	1600lm	1300lm	MLR8-9402014F-BB
					30°	1600lm	1300lm	MLR8-9403014F-BB
					40°	1600lm	1300lm	MLR8-9404014F-BB
					50°	1600lm	1200lm	MLR8-9405014F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black/White
ON-OFF	149,00 €
DALI Dim	209,00 €

Optional accessary



Honeycomb

Code for MLR8-9403014F with Honeycomb
MLR8-9403014F-**H**

Honeycomb: +9,00€

Coding

MLR8 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLR8 ML26-RS55-14W Single Spot	**927** CRI>90/ 2700K	**20** 20°	**14** 14W	**F** On-Off	**W** White	**B** Black	**H** Honeycomb
	930 CRI>90/ 3000K	**30** 30°		**A** 1-10V Dim	**B** Black		
	940 CRI>90/ 4000K	**40** 40°		**D** DALI Dim			
		50 50°					

BACK

MODULINE 26 – ML26-RS72 Spotlight Inset



ML26-RS72-19W
ML26-RS72-26W



20° 35° 55° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- System: 19W, 26W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 2600lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 1-10V Dim, DALI Dim

Light Distribution

3000K

ML26-RS72-26W-930-20°

Diameter (cm)	Height, Emax
Ø35	1m 12756lx
Ø71	2m 3189lx
Ø107	3m 1417lx
Ø143	4m 797lx
Ø178	5m 510lx

20° 10° 0° 10° 20°

ML26-RS72-26W-930-35°

Diameter (cm)	Height, Emax
Ø58	1m 6375lx
Ø117	2m 1594lx
Ø176	3m 708lx
Ø234	4m 398lx
Ø293	5m 255lx


20° 10° 0° 10° 20°

ML26-RS72-26W-930-55°

Diameter (cm)	Height, Emax
Ø104	1m 2805lx
Ø208	2m 701lx
Ø312	3m 312lx
Ø416	4m 175lx
Ø520	5m 112lx

20° 10° 0° 10° 20°

Finish



White Black

Order Info (ML26-RS72 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W	19W	48V	90	2700K	20°	1800lm	1500lm	MLR7-9272019F-BB
					35°	1800lm	1600lm	MLR7-9273519F-BB
					55°	1800lm	1600lm	MLR7-9275519F-BB
				3000K	20°	1900lm	1600lm	MLR7-9302019F-BB
					35°	1900lm	1700lm	MLR7-9303519F-BB
					55°	1900lm	1700lm	MLR7-9305519F-BB
				4000K	20°	2100lm	1700lm	MLR7-9402019F-BB
					35°	2100lm	1800lm	MLR7-9403519F-BB
					55°	2100lm	1800lm	MLR7-9405519F-BB
25W	26W	48V	90	2700K	20°	2500lm	2100lm	MLR7-9272026F-BB
					35°	2500lm	2300lm	MLR7-9273526F-BB
					55°	2500lm	2300lm	MLR7-9275526F-BB
				3000K	20°	2700lm	2200lm	MLR7-9302026F-BB
					35°	2700lm	2400lm	MLR7-9303526F-BB
					55°	2700lm	2400lm	MLR7-9305526F-BB
				4000K	20°	2900lm	2400lm	MLR7-9402026F-BB
					35°	2900lm	2600lm	MLR7-9403526F-BB
					55°	2900lm	2600lm	MLR7-9405526F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black/White
ON-OFF	179,00 €
DALI Dim	239,00 €

Optional accessary



Honeycomb

Code for MLR7-9402026F with **H**oneycomb
MLR7-9402026F-**H**

Honeycomb: +9,00€

Coding

MLR7 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLR7 ML26-RS72-19W	927 CRI>90/ 2700K	20 20°	19 19W	F On-Off	W White	B Black	
	930 CRI>90/ 3000K	35 35°	26 26W	A 1-10V Dim	B Black		
MLR7 ML26-RS72-26W	940 CRI>90/ 4000K	55 55°		D DALI Dim			

BACK

MODULINE 26 – ML26-RS96 Spotlight Inset




ML26-RS96-9W

15° 25° 35° | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- System: 9W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 25°, 35°
- Lumen Output: Up to 830lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 1-10V Dim, DALI Dim




Light Distribution

3000K







Finish



White Black

Order Info (ML26-RS96 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
8W	9W	48V	90	2700K	15°	900lm	700lm	MLR9-9271509N-BN
					25°	900lm	720lm	MLR9-9272509N-BN
					35°	900lm	720lm	MLR9-9273509N-BN
				3000K	15°	950lm	720lm	MLR9-9301509N-BN
					25°	950lm	750lm	MLR9-9302509N-BN
					35°	950lm	750lm	MLR9-9303509N-BN
				4000K	15°	1050lm	780lm	MLR9-9401509N-BN
					25°	1050lm	830lm	MLR9-9402509N-BN
					35°	1050lm	830lm	MLR9-9403509N-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black/White
ON-OFF	139,00 €
DALI Dim	199,00 €

Coding

MLR9 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLR9 ML26-RS96-9W	927 CRI>90/ 2700K	15 15°	09 9W	F On-Off	W White	N None	
	930 CRI>90/ 3000K	25 25°		A 1-10V Dim	B Black		
	940 CRI>90/ 4000K	35 35°		D DALI Dim			

BACK

MODULINE 26 – ML26-FRS72 Spotlight Inset




ML26-FRS72-10W
Singble Spot




Quick Info


- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 25°, 36°, 50°
- Lumen Output: Up to 780lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 1-10V Dim, DALI Dim




Light Distribution

3000K







Finish



Black(B) White(W) Brushed Bronze(Z) Brushed Gold(G)

Order Info (ML26-FRS72 in Black Housing & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	25°	900lm	620lm	MLF1-9272510F-BC
					36°	900lm	650lm	MLF1-9273610F-BC
					50°	900lm	650lm	MLF1-9275010F-BC
				3000K	25°	950lm	650lm	MLF1-9302510F-BC
					36°	950lm	700lm	MLF1-9303610F-BC
					50°	950lm	700lm	MLF1-9305010F-BC
				4000K	25°	1050lm	700lm	MLF1-9402510F-BC
					36°	1050lm	780lm	MLF1-9403610F-BC
					50°	1050lm	780lm	MLF1-9405010F-BC

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Reflector Options



Dark Light Black Specular Matt White

Driver	Black/White	Brone/Gold
ON-OFF	139,00 €	179,00 €
DALI Dim	199,00 €	239,00 €

Optional accessary



Honeycomb

Code for MLF1-9302510F with **H**oneycomb
MLF1-9302510F-**H**


Honeycomb: +9,00€

Coding

MLF1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessary
MLF1 ML26-FRS72-10W Single Spot	**927** CRI>90/ 2700K	**25** 25°	**10** 10W	**F** On-Off	**W** White	**W** White	**H** Honeycomb
	930 CRI>90/ 3000K	**36** 36°		**A** 1-10V Dim	**B** Black	**B** Black	
	940 CRI>90/ 4000K	**50** 50°		**D** DALI Dim	**Z** Brushed Bronze	**S** Specular	
					G Brushed Gold	**C** Dark Light	
						M Matt	

MODULINE 26 – ML26-FRS72 Double Spotlight Inset




ML26-FRS72-20W
Double Inset




Quick Info


- System: 20W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 25°, 36°, 50°
- Lumen Output: Up to 1550lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 1-10V Dim, DALI Dim




Light Distribution

3000K







Finish



Black(B) White(W) Brushed Bronze(Z) Brushed Gold(G)

Order Info (ML26-FRS72 in Black Housing & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W	20W	48V	90	2700K	25°	1800lm	1250lm	MLF2-9272520F-BC
					36°	1800lm	1300lm	MLF2-9273620F-BC
					50°	1800lm	1300lm	MLF2-9275020F-BC
				3000K	25°	1900lm	1300lm	MLF2-9302520F-BC
					36°	1900lm	1400lm	MLF2-9303620F-BC
					50°	1900lm	1400lm	MLF2-9305020F-BC
				4000K	25°	2100lm	1400lm	MLF2-9402520F-BC
					36°	2100lm	1550lm	MLF2-9403620F-BC
					50°	2100lm	1550lm	MLF2-9405020F-BC

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Reflector Options



Dark Light Black Specular Matt White

Driver	Black/White	Brone/Gold
ON-OFF	229,00 €	309,00 €
DALI Dim	289,00 €	369,00 €

Optional accessary



Honeycomb

Code for MLF2-9302520F with Honeycomb
MLF2-9302520F-**H**

Honeycomb: +9,00€

Coding

MLF2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLF2 ML26-FRS72-20W Double Spot	**927** CRI>90/ 2700K	**25** 25°	**20** 20W	**F** On-Off	**W** White	**W** White	**H** Honeycomb
	930 CRI>90/ 3000K	**36** 36°		**A** 1-10V Dim	**B** Black	**B** Black	
	940 CRI>90/ 4000K	**50** 50°		**D** DALI Dim	**Z** Brushed Bronze	**S** Specular	
					G Brushed Gold	**C** Dark Light	
						M Matt	

BACK

MODULINE 26 – ML26-FRD80 Round Downlight Inset

NEW




ML26-FRD80-10W

30° | Cut-off 30° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UK CA | Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 30°
- Lumen Output: Up to 1000lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim
- Can only fit with MODULINE 26 Slim Track



Light Distribution

3000K



Finish



White



Black

Order Info (ML26-FRD80 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	30°	1100lm	900lm	MLRD-9273010F-BB
				3000K	30°	1200lm	950lm	MLRD-9303010F-BB
				4000K	30°	1300lm	1000lm	MLRD-9403010F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black/White
ON-OFF	149,00 €
DALI Dim	209,00 €

Optional accessary



Honeycomb

Code for MLRD-9303010F with Honeycomb
MLRD-9303010F-H

Honeycomb: +9,00€

Coding

MLRD – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLRD ML26-FRD80-10W	927 CRI>90/ 2700K	30 30°	10 10W	F On-Off	W White	W White	H Honeycomb
	930 CRI>90/ 3000K			A 1-10V Dim	B Black	B Black	
	940 CRI>90/ 4000K			D DALI Dim			

BACK

MODULINE 26 – ML26-FRDH80 Round Downlight Inset

NEW




ML26-FRDH80-10W

30° | Cut-off 30° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 30°
- Lumen Output: Up to 1000lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim
- Can only fit with MODULINE 26 Standard Track



Light Distribution

3000K



Finish



White



Black

Order Info (ML26-FRDH80 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	30°	1100lm	900lm	MLRH-9273010F-BB
				3000K	30°	1200lm	950lm	MLRH-9303010F-BB
				4000K	30°	1300lm	1000lm	MLRH-9403010F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black/White
ON-OFF	169,00 €
DALI Dim	229,00 €

Optional accessary



Honeycomb

Code for MLRH-9303010F with **H**oneycomb
MLRH-9303010F-**H**

Honeycomb: +9,00€

Coding

MLRH – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLRH	**927**	**30**	**10**	**F**	**W**	**W**	**H**
ML26-FRH80-10W	CRI>90/ 2700K	30°	10W	On-Off	White	White	Honeycomb
	930			**A**	**B**	**B**	
	CRI>90/ 3000K			1-10V Dim	Black	Black	
	940			**D**			
	CRI>90/ 4000K			DALI Dim			

BACK

MODULINE 26 – ML26-FSD80 Square Downlight Inset

NEW




ML26-FSD80-10W

30° | Cut-off 30° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 30°
- Lumen Output: Up to 1050lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim
- Can only fit with MODULINE 26 Slim Track




Light Distribution

3000K



Finish



White Black

Order Info (ML26-FSD80 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	30°	1100lm	950lm	MLSD-9273010F-BB
				3000K	30°	1200lm	1000lm	MLSD-9303010F-BB
				4000K	30°	1300lm	1050lm	MLSD-9403010F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black/White
ON-OFF	169,00 €
DALI Dim	229,00 €

Optional accessary



Honeycomb

Code for MLSD-9303010F-BB with Honeycomb
MLSD-9303010F-BB-H

Honeycomb: +9,00€

Coding

MLSD – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLSD ML26-FSD80-10W	927 CRI>90/ 2700K	30 30°	10 10W	F On-Off	W White	W White	H Honeycomb
	930 CRI>90/ 3000K			A 1-10V Dim	B Black	B Black	
	940 CRI>90/ 4000K			D DALI Dim			

BACK

MODULINE 26 – ML26-FSDH80 Square Downlight Inset

NEW




ML26-FSDH80-10W

30° | Cut-off 30° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 30°
- Lumen Output: Up to 1050lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim
- Can only fit with MODULINE 26 Standard Track



Light Distribution

3000K



Finish



White



Black

Order Info (ML26-FSDH80 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	30°	1100lm	950lm	MLSH-9273010F-BB
				3000K	30°	1200lm	1000lm	MLSH-9303010F-BB
				4000K	30°	1300lm	1050lm	MLSH-9403010F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black/White
ON-OFF	189,00 €
DALI Dim	249,00 €

Optional accessary



Honeycomb

Code for MLSH-9303010F-BB with Honeycomb
MLSH-9303010F-BB-**H**

Honeycomb: +9,00€

Coding

MLSH – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLSH ML26-FSH80-10W	927 CRI>90/ 2700K	30 30°	10 10W	F On-Off	W White	W White	H Honeycomb
	930 CRI>90/ 3000K			A 1-10V Dim	B Black	B Black	
	940 CRI>90/ 4000K			D DALI Dim			

BACK

MODULINE 26 – ML26-AL190 Accent Light Inset




ML26-AL190-3W ML26-AL190-7W

20° 35° 55° 2700K 3000K 4000K CRI >90 UGR<19 48V DC

IP20 CE CB UKCA Intertek OSRAM 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info


- System: 3W, 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim




Light Distribution

3000K







Finish



White Black

Order Info (ML26-AL190 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
2W	3W	48V	90	2700K	20°	230lm	170lm	MLA3-9272003F-BB
					35°	230lm	170lm	MLA3-9273503F-BB
					55°	230lm	160lm	MLA3-9275503F-BB
				3000K	20°	250lm	180lm	MLA3-9302003F-BB
					35°	250lm	180lm	MLA3-9303503F-BB
					55°	250lm	170lm	MLA3-9305503F-BB
				4000K	20°	270lm	200lm	MLA3-9402003F-BB
					35°	270lm	200lm	MLA3-9403503F-BB
					55°	270lm	190lm	MLA3-9405503F-BB

Driver	Black/White
ON-OFF	99,00 €
DALI Dim	159,00 €

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48V	90	2700K	20°	700lm	500lm	MLA4-9272007F-BB
					35°	700lm	500lm	MLA4-9273507F-BB
					55°	700lm	470lm	MLA4-9275507F-BB
				3000K	20°	750lm	550lm	MLA4-9302007F-BB
					35°	750lm	550lm	MLA4-9303507F-BB
					55°	750lm	500lm	MLA4-9305507F-BB
				4000K	20°	820lm	600lm	MLA4-9402007F-BB
					35°	820lm	600lm	MLA4-9403507F-BB
					55°	820lm	550lm	MLA4-9405507F-BB

Driver	Black/White
ON-OFF	119,00 €
DALI Dim	179,00 €

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLA3 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLA3 ML26-AL190-3W	927 CRI>90/ 2700K	20 20°	03 3W	F On-Off	W White	B Black	
	930 CRI>90/ 3000K	35 35°	07 7W	A 1-10V Dim	B Black		
MLA4 ML26-AL190-7W	940 CRI>90/ 4000K	55 55°		D DALI Dim			

MODULINE 26 – ML26-AL280 Accent Light Inset




ML26-AL280-9W ML26-AL280-13W

20° 35° 55° 2700K 3000K 4000K CRI >90 UGR<19 48V DC

IP20 CE CB UKCA ETL Intertek OSRAM 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info


- System: 9W, 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim




Light Distribution

3000K







Finish



White Black

Order Info (ML26-AL280 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
8W	9W	48V	90	2700K	20°	950lm	700lm	MLA1-9272009F-BB
					35°	950lm	700lm	MLA1-9273509F-BB
					55°	950lm	650lm	MLA1-9275509F-BB
				3000K	20°	1000lm	750lm	MLA1-9302009F-BB
					35°	1000lm	750lm	MLA1-9303509F-BB
					55°	1000lm	680lm	MLA1-9305509F-BB
				4000K	20°	1100lm	800lm	MLA1-9402009F-BB
					35°	1100lm	800lm	MLA1-9403509F-BB
					55°	1100lm	750lm	MLA1-9405509F-BB
12W	13W	48V	90	2700K	20°	1400lm	1000lm	MLA2-9272013F-BB
					35°	1400lm	1000lm	MLA2-9273513F-BB
					55°	1400lm	950lm	MLA2-9275513F-BB
				3000K	20°	1500lm	1100lm	MLA2-9302013F-BB
					35°	1500lm	1100lm	MLA2-9303513F-BB
					55°	1500lm	1000lm	MLA2-9305513F-BB
				4000K	20°	1600lm	1200lm	MLA2-9402013F-BB
					35°	1600lm	1200lm	MLA2-9403513F-BB
					55°	1600lm	1100lm	MLA2-9405513F-BB

Driver	Black/White
ON-OFF	139,00 €
DALI Dim	199,00 €

Driver	Black/White
ON-OFF	159,00 €
DALI Dim	219,00 €

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLA1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLA1 ML26-AL280-9W	927 CRI>90/ 2700K	20 20°	09 9W	F On-Off	W White	B Black	
	930 CRI>90/ 3000K	35 35°	13 13W	A 1-10V Dim	B Black		
MLA2 ML26-AL280-13W	940 CRI>90/ 4000K	55 55°		D DALI Dim			

BACK

MODULINE 26 – ML26-AL560 Accent Light Inset

NEW




ML26-AL560-26W

20° 35° 55° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC

IP20 | CE | CB | UKCA | Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- System: 26W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim




Light Distribution

3000K







Finish



White Black

Order Info (ML26-AL560 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
24W	26W	48V	90	2700K	20°	2800lm	2200lm	MLA6-9272026F-BB
					35°	2800lm	2350lm	MLA6-9273526F-BB
					55°	2800lm	1900lm	MLA6-9275526F-BB
				3000K	20°	3000lm	2300lm	MLA6-9302026F-BB
					35°	3000lm	2450lm	MLA6-9303526F-BB
					55°	3000lm	2000lm	MLA6-9305526F-BB
				4000K	20°	3200lm	2400lm	MLA6-9402026F-BB
					35°	3200lm	2550lm	MLA6-9403526F-BB
					55°	3200lm	2100lm	MLA6-9405526F-BB

Driver	Black/White
ON-OFF	249,00 €
DALI Dim	309,00 €

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLA6 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLA6 ML26-AL560-26W	927 CRI>90/ 2700K	20 20°	26 26W	F On-Off	W White	B Black	
	930 CRI>90/ 3000K	35 35°		A 1-10V Dim	B Black		
	940 CRI>90/ 4000K	55 55°		D DALI Dim			

BACK

MODULINE 26 – ML26-SA280 Adjustable Accent Light Inset




ML26-SA280-13W

20° 35° 55° 2700K 3000K 4000K CRI >90 UGR<19 48V DC

IP20 CE CB UKCA Intertek OSRAM 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info


- System: 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim

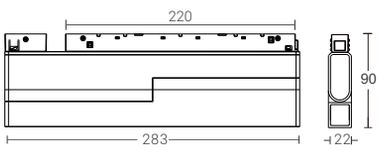


Light Distribution

3000K







Finish



White Black

Order Info (ML26-SA280 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	48V	90	2700K	20°	1400lm	1000lm	MLA5-9272013F-BB
					35°	1400lm	1000lm	MLA5-9273513F-BB
					55°	1400lm	950lm	MLA5-9275513F-BB
				3000K	20°	1500lm	1000lm	MLA5-9302013F-BB
					35°	1500lm	1000lm	MLA5-9303513F-BB
					55°	1500lm	1100lm	MLA5-9305513F-BB
				4000K	20°	1600lm	1200lm	MLA5-9402013F-BB
					35°	1600lm	1200lm	MLA5-9403513F-BB
					55°	1600lm	1100lm	MLA5-9405513F-BB

Driver	Black/White
ON-OFF	229,00 €
DALI Dim	289,00 €

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLA5 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLA5 ML26-SA280-13W Adjustable Accent	927 CRI>90/ 2700K	20 20°	13 13W	F On-Off	W White	B Black	
	930 CRI>90/ 3000K	35 35°		A 1-10V Dim	B Black		
	940 CRI>90/ 4000K	55 55°		D DALI Dim			

BACK

MODULINE 26 – ML26-SG280 Adjustable General Light Inset




ML26-SG280-7W

110° | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | Intertek | 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 110°
- Lumen Output: Up to 450lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim

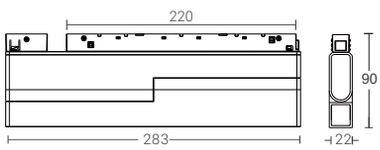


Light Distribution

3000K



Finish



White



Black

Order Info (ML26-SG280 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48V	90	2700K	110°	550lm	430lm	MLG5-927A107F-BN
				3000K	110°	600lm	400lm	MLG5-930A107F-BN
				4000K	110°	650lm	450lm	MLG5-940A107F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black/White
ON-OFF	159,00 €
DALI Dim	219,00 €

Coding

MLG5 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLG5 ML26-SG280-7W General Light	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	A1 110°	07 7W	F On-Off A 1-10V Dim D DALI Dim	W White B Black	N None	

MODULINE 26 – ML26-GL280 & ML26-GL560 General Light Inset




ML26-GL280-7W ML26-GL560-13W

110° | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- System: 7W, 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 110°
- Lumen Output: Up to 450lm or 900lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K





Finish



White Black

Order Info (ML26-GL280 & ML26-GL560 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48V	90	2700K	110°	550lm	430lm	MLG1-927A107F-BN
				3000K	110°	600lm	400lm	MLG1-930A107F-BN
				4000K	110°	650lm	450lm	MLG1-940A107F-BN
12W	13W	48V	90	2700K	110°	1100lm	750lm	MLG2-927A113F-BN
				3000K	110°	1200lm	800lm	MLG2-930A113F-BN
				4000K	110°	1300lm	900lm	MLG2-940A113F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

7W:

Driver	Black/White
ON-OFF	79,00 €
DALI Dim	139,00 €

13W:

Driver	Black/White
ON-OFF	119,00 €
DALI Dim	179,00 €

Coding

MLG1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLG1 ML26-GL280-7W General Light	927 CRI>90/ 2700K	A1 110°	07 7W	F On-Off	W White	N None	
MLG2 ML26-GL560-13W General Light	930 CRI>90/ 3000K		13 13W	A 1-10V Dim	B Black		
	940 CRI>90/ 4000K			D DALI Dim			

BACK

MODULINE 26 – ML26-GL840 & ML26-GL1120 General Light Inset




ML26-GL840-19W ML26-GL1120-26W

110° | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | Intertek | 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- System: 19W, 26W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 110°
- Lumen Output: Up to 1300lm or 1700lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K





Finish



White Black

Order Info (ML26-GL840 & ML26-GL1120 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W	19W	48V	90	2700K	110°	1700lm	1100lm	MLG3-927A119F-BN
				3000K	110°	1800lm	1200lm	MLG3-930A119F-BN
				4000K	110°	1900lm	1300lm	MLG3-940A119F-BN
24W	26W	48V	90	2700K	110°	2200lm	1500lm	MLG4-927A126F-BN
				3000K	110°	2400lm	1600lm	MLG4-930A126F-BN
				4000K	110°	2600lm	1700lm	MLG4-940A126F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

19W:

Driver	Black/White
ON-OFF	139,00 €
DALI Dim	199,00 €

26W:

Driver	Black/White
ON-OFF	179,00 €
DALI Dim	229,00 €

Coding

MLG3 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLG3 ML26-GL840-19W General Light	**927** CRI>90/ 2700K	**A1** 110°	**19** 19W	**F** On-Off	**W** White	**N** None	
MLG4 ML26-GL1120-26W General Light	**930** CRI>90/ 3000K		**26** 26W	**A** 1-10V Dim	**B** Black		
	940 CRI>90/ 4000K			**D** DALI Dim			

MODULINE 26 – ML26-CL280 & ML26-CL560 General Light Inset

NEW




ML26-CL280-7W ML26-CL560-13W

65° | 2700K 3000K 4000K | CRI >90 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- System: 7W, 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 65° (Microprismatic Cover Version)
- Lumen Output: Up to 420lm or 800lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K





Finish



White Black

Order Info (ML26-CL280 & ML26-CL560 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48V	90	2700K	65°	550lm	360lm	MLC1-9276507F-BN
				3000K	65°	600lm	380lm	MLC1-9276507F-BN
				4000K	65°	650lm	420lm	MLC1-9276507F-BN
12W	13W	48V	90	2700K	65°	1100lm	720lm	MLC2-9276513F-BN
				3000K	65°	1200lm	750lm	MLC2-9276513F-BN
				4000K	65°	1300lm	800lm	MLC2-9276513F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

7W:

Driver	Black/White
ON-OFF	89,00 €
DALI Dim	149,00 €

13W:

Driver	Black/White
ON-OFF	129,00 €
DALI Dim	189,00 €

Coding

MLC1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLC1 ML26-CL280-7W General Light	927 CRI>90/ 2700K	65 65° Microprismatic Cover Version	07 7W	F On-Off	W White	N None	
MLC2 ML26-CL560-13W General Light	930 CRI>90/ 3000K		13 13W	A 1-10V Dim	B Black		
	940 CRI>90/ 4000K			D DALI Dim			

BACK


MODULINE 26 – ML26-CL840 & ML26-CL1120 General Light Inset



65° | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | Intertek | 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- System: 19W, 26W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 65° (Microprismatic Cover Version)
- Lumen Output: Up to 1200lm or 1600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim




Light Distribution

3000K





Finish



Order Info (ML26-CL840 & ML26-CL1120 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W	19W	48V	90	2700K	65°	1700lm	1000lm	MLC3-9276519F-BN
				3000K	65°	1800lm	1100lm	MLC3-9276519F-BN
				4000K	65°	1900lm	1200lm	MLC3-9276519F-BN
24W	26W	48V	90	2700K	65°	2200lm	1400lm	MLC4-9276526F-BN
				3000K	65°	2400lm	1500lm	MLC4-9276526F-BN
				4000K	65°	2600lm	1600lm	MLC4-9276526F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

19W:

Driver	Black/White
ON-OFF	159,00 €
DALI Dim	209,00 €

26W:

Driver	Black/White
ON-OFF	189,00 €
DALI Dim	249,00 €

Coding

MLC3 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLC3 ML26-CL840-19W General Light	**927** CRI>90/ 2700K	**65** 65° Microprismatic Cover Version	**19** 19W	**F** On-Off	**W** White	**N** None	
MLC4 ML26-CL1120-26W General Light	**930** CRI>90/ 3000K		**26** 26W	**A** 1-10V Dim	**B** Black		
	940 CRI>90/ 4000K			**D** DALI Dim			

MODULINE 26 – ML26-RB120 & ML26-RB150 Pendant Light Inset

NEW




ML26-RB120-5W
ML26-RB150-7W
(Frosted Glass)

300° | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 5W, 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 300°
- Lumen Output: Up to 470lm or 550lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K



Finish



White



Black

Order Info (ML26-PB120 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
4W	5W	48V	90	2700K	300°	500lm	300lm	MLRB-927C005F-BN
				3000K	300°	550lm	350lm	MLRB-930C005F-BN
				4000K	300°	600lm	400lm	MLRB-940C005F-BN
6W	7W	48V	90	2700K	300°	600lm	500lm	MLRB-927C007F-BN
				3000K	300°	650lm	550lm	MLRB-930C007F-BN
				4000K	300°	700lm	600lm	MLRB-940C007F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLRB – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLRB ML26-RB120-5W Pendant Spot	**927** CRI>90/ 2700K	**C0** 300°	**05** 5W	**F** On-Off	**W** White	**N** None	
MLRB ML26-RB150-7W Pendant Spot	**930** CRI>90/ 3000K		**07** 7W	**A** 1-10V Dim	**B** Black		
	940 CRI>90/ 4000K			**D** DALI Dim			

Driver	Black/White
ON-OFF	149,00 €
DALI Dim	209,00 €

BACK

MODULINE 26 – ML26-PB120 & ML26-PB150 Decorative Ball Inset




ML26-PB120-5W
ML26-PB150-7W
(Frosted Glass)

300° | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | Intertek | 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 5W, 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 300°
- Lumen Output: Up to 470lm or 550lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K



Finish



White Black

Driver	Black/White
ON-OFF	169,00 €
DALI Dim	229,00 €

Order Info (ML26-PB120 & ML26-PB150 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
4W	5W	48V	90	2700K	300°	500lm	300lm	MLPB-927C005F-BN
				3000K	300°	550lm	350lm	MLPB-930C005F-BN
				4000K	300°	600lm	400lm	MLPB-940C005F-BN
6W	7W	48V	90	2700K	300°	600lm	500lm	MLPB-927C007F-BN
				3000K	300°	650lm	550lm	MLPB-930C007F-BN
				4000K	300°	700lm	600lm	MLPB-940C007F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLPB – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLPB ML26-PB120-5W MLPB ML26-PB150-7W	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	C0 300°	05 5W 07 7W	F On-Off A 1-10V Dim D DALI Dim	W White B Black	N None	

MODULINE 26 – ML26-PS40 Pendant Spot Inset




ML26-PS40-12W

18° 30° 45° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- System: 12W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 800lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim

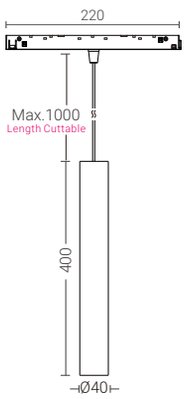


Light Distribution

3000K







Finish



Black(B) White(W) Brushed Bronze(Z) Brushed Gold(G)

Order Info (ML26-PS40 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
11W	12W	48V	90	2700K	18°	1000lm	700lm	MLP1-9271812F-BB
					30°	1000lm	700lm	MLP1-9273012F-BB
					45°	1000lm	550lm	MLP1-9274512F-BB
				3000K	18°	1100lm	750lm	MLP1-9301812F-BB
					30°	1100lm	750lm	MLP1-9303012F-BB
					45°	1100lm	600lm	MLP1-9304512F-BB
				4000K	18°	1200lm	800lm	MLP1-9401812F-BB
					30°	1200lm	800lm	MLP1-9403012F-BB
					45°	1200lm	650lm	MLP1-9404512F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

Hier Text eingeben

MLP1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLP1 ML26-PS40-12W Pendant Spot	927 CRI>90/ 2700K	18 18°	12 12W	F On-Off	W White	B Black	H Honeycomb
	930 CRI>90/ 3000K	30 30°		A 1-10V Dim	B Black		
	940 CRI>90/ 4000K	45 45°		D DALI Dim	Z Brushed Bronze		
					G Brushed Gold		

Driver	Black/White	Bronze/Gold
ON-OFF	169,00 €	209,00 €
DALI Dim	229,00 €	259,00 €

Optional accessary



Honeycomb

Code for MLP1-9301812F with **H**oneycomb
MLP1-9301812F-**H**

Honeycomb: +9,00€

BACK

MODULINE 26 – ML26-PS55 Pendant Spot Inset

NEW



ML26-PS55-10W

18° 24° 36° 50°

2700K
3000K
4000K

CRI >90

UGR<19

48V DC

IP20

CE

CB

UKCA


Intertek

CITIZEN 50,000h@L80B10

5 YEARS GUARANTEE


Quick Info

- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to 870lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K

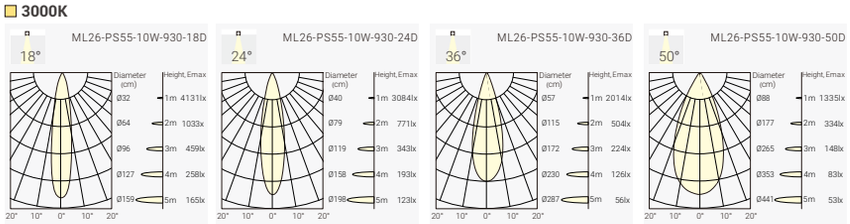

Finish



Black(B) White(W) Brushed Bronze(Z) Brushed Gold(G)

Order Info (ML26-PS55 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	18°	850lm	620lm	MLP4-9271810F-BB
					24°	850lm	620lm	MLP4-9272410F-BB
					36°	850lm	620lm	MLP4-9273610F-BB
					50°	850lm	700lm	MLP4-9275010F-BB
				3000K	18°	950lm	650lm	MLP4-9301810F-BB
					24°	950lm	650lm	MLP4-9302410F-BB
					36°	950lm	650lm	MLP4-9303610F-BB
					50°	950lm	800lm	MLP4-9305010F-BB
				4000K	18°	1000lm	700lm	MLP4-9401810F-BB
					24°	1000lm	700lm	MLP4-9402410F-BB
					36°	1000lm	700lm	MLP4-9403610F-BB
					50°	1000lm	870lm	MLP4-9405010F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLP4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLP4 ML26-PS40-10W Pendant Spot	927 CRI>90/ 2700K	18 18°	10 10W	F On-Off	W White	B Black	H Honeycomb
	930 CRI>90/ 3000K	30 30°		A 1-10V Dim	B Black		
	940 CRI>90/ 4000K	45 45°		D DALI Dim	Z Brushed Bronze		
		50 50°			G Brushed Gold		

Driver	Black/White	Brone/Gold
ON-OFF	179,00 €	209,00 €
DALI Dim	239,00 €	269,00 €

Optional accessary



Honeycomb

Code for MLP4-9301810F with Honeycomb
MLP4-9301810F-H

Honeycomb: +9,00€

BACK

MODULINE 26 – ML26-PS60 Pendant Light Inset




ML26-PS60-5W

18° 24° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | Intertek | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 5W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to 450lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim




Light Distribution

3000K

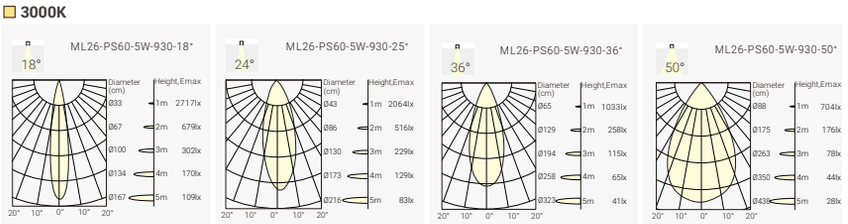

Finish



White Black

Order Info (ML26-PS60 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
4.5W	5W	48V	90	2700K	18°	370lm	370lm	MLP3-9271805F-BB
					24°	370lm	370lm	MLP3-9272405F-BB
					36°	370lm	370lm	MLP3-9273605F-BB
					50°	370lm	370lm	MLP3-9275005F-BB
				3000K	18°	500lm	400lm	MLP3-9301805F-BB
					24°	500lm	400lm	MLP3-9302405F-BB
					36°	500lm	400lm	MLP3-9303605F-BB
					50°	500lm	400lm	MLP3-9305005F-BB
				4000K	18°	550lm	450lm	MLP3-9401805F-BB
					24°	550lm	450lm	MLP3-9402405F-BB
					36°	550lm	450lm	MLP3-9403605F-BB
					50°	550lm	450lm	MLP3-9405005F-BB

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black/White
ON-OFF	179,00 €
DALI Dim	239,00 €

Coding

MLP3 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLP3 ML26-PS60-5W Pendant Spot	**927** CRI>90/ 2700K	**18** 18°	**05** 5W	**F** On-Off	**W** White	**B** Black	
	930 CRI>90/ 3000K	**24** 24°		**A** 1-10V Dim	**B** Black		
	940 CRI>90/ 4000K	**36** 36°		**D** DALI Dim			
		50 50°					

BACK

MODULINE 26 – ML26-WW280 & ML26-WW560 Wall Washer Inset



ML26-WW280-7W



ML26-WW560-13W

Wall Washer | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | Intertek | 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- System: 7W, 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: Wall Washer
- Lumen Output: Up to 450lm or 750lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K





Finish



White



Black

7W:

Driver	Black/White
ON-OFF	119,00 €
DALI Dim	179,00 €

13W:

Driver	Black/White
ON-OFF	149,00 €
DALI Dim	209,00 €

Order Info (ML26-WW280 & WW560 in Black Housing & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48V	90	2700K	WW	550lm	330lm	MLW1-927WW07F-BM
				3000K	WW	600lm	350lm	MLW1-930WW07F-BM
				4000K	WW	650lm	450lm	MLW1-940WW07F-BM
12W	13W	48V	90	2700K	WW	1100lm	670lm	MLW2-927WW13F-BM
				3000K	WW	1200lm	700lm	MLW2-930WW13F-BM
				4000K	WW	1300lm	750lm	MLW2-940WW13F-BM

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

MLW1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLW1 ML26-WW280-7W	927 CRI>90/ 2700K	WW Wall Washer	07 7W	F On-Off	W White	M Matt	
MLW2 ML26-WW560-13W	930 CRI>90/ 3000K		13 13W	A 1-10V Dim	B Black		
	940 CRI>90/ 4000K			D DALI Dim			

MODULINE 26 – ML26-NHU12 Neon Strip Inset

NEW




ML26-NHU12-19W

360° | 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 19W, CRI>90
- CCT: 3000K, 4000K Availabl as Standard
- Beam Angle: 360°
- Lumen Output: Up to 1400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim




Light Distribution

3000K



Finish



White



Black

Order Info (ML26-NHU12 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
17W	19W	48V	90	3000K	360°	2200lm	1300lm	MNHU-930C619F-BN
				4000K	360°	2400lm	1400lm	MNHU-940C619F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black/White
ON-OFF	299,00 €
DALI Dim	359,00 €

Coding

MNHU – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MNHU ML26-NHU12-19W Neon Strip	930 CRI>90/ 3000K 940 CRI>90/ 4000K	C6 360°	19 19W	F On-Off A 1-10V Dim D DALI Dim	W White B Black	N None	

BACK

MODULINE 26 – ML26-NHP10 Neon Strip Inset

NEW




ML26-NHP10-14W

360° | 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 14W, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 360°
- Lumen Output: Up to 1050lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim

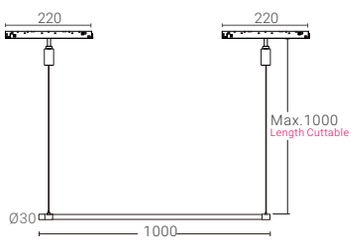

Light Distribution

3000K



Finish



White



Black

Order Info (ML26-NHP10 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
13W	14W	48V	90	3000K	360°	1600lm	1000lm	MNHP-930C614F-BN
				4000K	360°	1700lm	1050lm	MNHP-940C614F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black/White
ON-OFF	229,00 €
DALI Dim	349,00 €

Coding

MNHU – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MNHU ML26-NHU10-14W Neon Strip	930 CRI>90/ 3000K 940 CRI>90/ 4000K	C6 360°	19 19W	F On-Off A 1-10V Dim D DALI Dim	W White B Black	N None	

MODULINE 26 – ML26-NVP12 Neon Strip Inset

NEW



ML26-NVP12-19W

360° | 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 19W, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 360°
- Lumen Output: Up to 1100lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 1-10V Dim, DALI Dim



Light Distribution

3000K



Finish



White



Black

Order Info (ML26-NVP12 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
17W	19W	48V	90	3000K	360°	2200lm	1050lm	MNVP-930C619F-BN
				4000K	360°	2400lm	1100lm	MNVP-940C619F-BN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Black/White
ON-OFF	289,00 €
DALI Dim	349,00 €

Coding

MNVP	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish	Reflector Color		Accessory
MNVP ML26-NVP12-19W Neon Strip		930 CRI>90/ 3000K 940 CRI>90/ 4000K	C6 360°	19 19W	F On-Off A 1-10V Dim D DALI Dim		W White B Black	N None		

BACK

GAME & SUGAR

The High-Efficiency Modern Ceiling Light Series

GAME:
A Classical Flat Design, Available in White & Black

SUGAR:
A Decorative Recessed Frame Design, Available in in White-Gold & Black-Gold.

Featuring a Top-Level Microprismatic Cover to Enhance Visual Comfort (UGR<19) Combined with Homogeneous Lighting.

Four Housing Diameters Available: Ø350, Ø450, Ø600 & Ø900.

Can Be Surface-Mounted Onto the Ceiling, or Pendant Through Wire or Rod.

An Indirect Light Module is Available as an Option, Easily Mounted Onto the Luminaire.

Light Color Temperature Options: 3000K, 4000K, or Tunable White.

Lumen Efficiency up to 140 lm/W.

Well-Suited for Offices, Meeting Rooms, Schools, Shops, & More



Project: Aurum University in Turku, Finland




Magnetic Uplight Module




UPLIGHT





8W Up Light(250mA) 950lm
12W Down Light(350mA) 1800lm
16W Down Light(500mA) 2350lm
ON-OFF/Phase Dim/1-10V/DALI Dim






11W Up Light(350mA) 1200lm
16W Down Light(500mA) 2500lm
24W Down Light(700mA) 3400lm
ON-OFF/Phase Dim/1-10V/DALI Dim







18W Up Light(500mA) 1800lm
24W Down Light(700mA) 3300lm
36W Down Light(1050mA) 5300lm
46W Down Light(1400mA) 6700lm
ON-OFF/Phase Dim/1-10V/DALI Dim

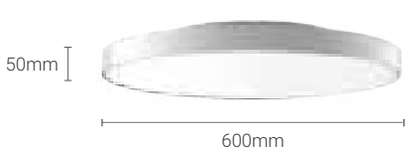



25W Up Light(700mA) 2700lm
65W Down Light(1400mA) 8700lm
ON-OFF/1-10V/DALI Dim

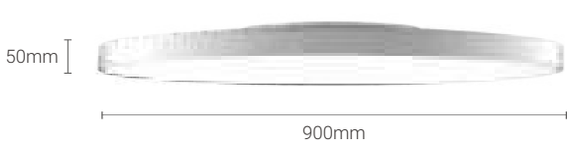

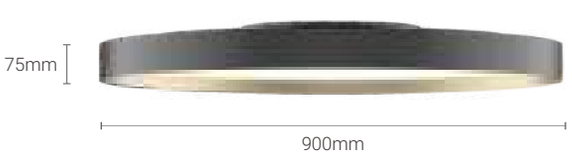


GAME

D1:GAME 350: D1=Ø350mm
GAME 450: D1=Ø450mm
GAME 600: D1=Ø600mm
GAME 900: D1=Ø900mm

D2:GAME 350/ 450: D2=Ø235mm
GAME 600/ 900: D2=Ø350mm

D3:Ø136mm

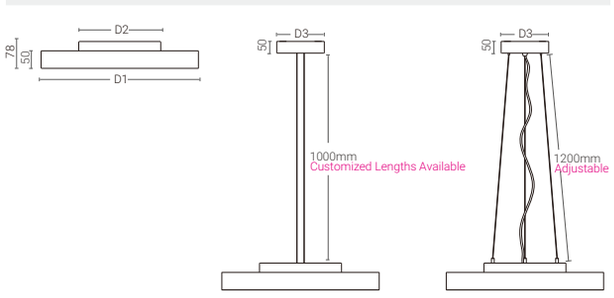


SUGAR

D1:SUGAR 350: D1=Ø350mm
SUGAR 450: D1=Ø450mm
SUGAR 600: D1=Ø600mm
SUGAR 900: D1=Ø900mm


D2: SUGAR 350/ 450: D2=Ø235mm
SUGAR 600/ 900: D2=Ø350mm

D3:Ø136mm

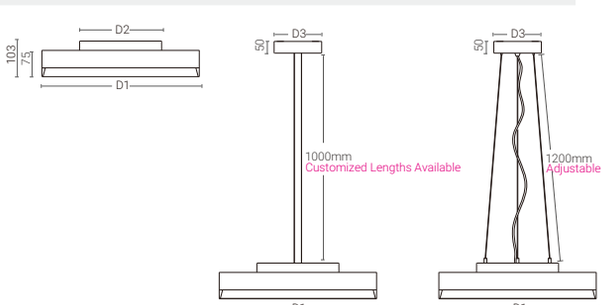

GAME 350 – Ceiling Light System





90° | 2700K 3000K 4000K | Tunable White | CRI >80 | CRI >90 | UGR<19 | IP40


CE | CB | UKCA | ETL Intertek | 5 YEARS GUARANTEE


Quick Info

- LED: 12W, 16W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 2350lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K





Finish

Surface/ Wall Mounted


White


Black

Pendant Rod Mounted

* Standard pendant rod length: 1000mm
* Field cuttable pendant rod solution optional


White


Black

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm


White


Black

Optional Uplight Module


Magnetic Uplight Module 350

Code for G3PR-8309012N-WN with Uplight Module G3PR-8309012N-WN-U

ON-OFF	+120,00 €
Phase Dim	+130,00 €
DALI Dim	+160,00 €

Order Info (Surface/ Wall Mounted GAME 350 in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	14W	34V	350mA	80	2700K	90°	2000lm	1600lm	G3SM-8279012N-BN
					3000K	90°	2100lm	1700lm	G3SM-8309012N-BN
					4000K	90°	2300lm	1800lm	G3SM-8409012N-BN
					2700K–6500K	90°	Max.2100lm	Max.1750lm	G3SM-8T29012N-BN
16W	18W	34V	500mA	80	2700K	90°	2500lm	2000lm	G3SM-8279016N-BN
					3000K	90°	2700lm	2150lm	G3SM-8309016N-BN
					4000K	90°	2900lm	2350lm	G3SM-8409016N-BN
Uplight Module					2700K–6500K	90°	Max.2900lm	Max.2500lm	G3SM-8T29012N-BN
8W	10W	33V	250mA	80	2700K	110°	950lm	850lm	UM35-827A108N-NN
					3000K	110°	1000lm	900lm	UM35-830A108N-NN
					4000K	110°	1100lm	950lm	UM35-840A108N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Surface	Pendant Rod	Pendant Wire
ON-OFF	279,00 €	369,00 €	349,00 €
Phase Dim	289,00 €	379,00 €	359,00 €
DALI Dim	329,00 €	409,00 €	389,00 €
Tunable White DALI Dim	479,00 €	569,00 €	549,00 €

Coding


G3SM – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
G3SM GAME 350 Surface/ Wall Mounted	**827** CRI80/ 2700K	**90** 90°	**12** 12W	**N** No Driver	**W** White	**N** None	**U** Uplight Module
G3PW GAME 350 Pendant Wires	**830** CRI80/ 3000K		**16** 16W	**F** On-Off	**B** Black		
G3PR GAME 350 Pendant Rod	**840** CRI80/ 4000K			**P** Phase Dim			
	8T2 CRI80 2700K–6500K Tunable White			**A** 1-10V Dim			
	927 CRI90/ 2700K			**D** DALI Dim			
	930 CRI90/ 3000K						
	940 CRI90/ 4000K						
	9T2 CRI90 2700K–6500K Tunable White						

BACK

GAME 450 – Ceiling Light System





90° | 2700K 3000K 4000K | Tunable White | CRI >80 | CRI >90 | UGR<19 | IP40


CE | CB | UK CA | Intertek | 5 YEARS GUARANTEE


Quick Info

- LED: 16W, 24W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 3400lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K





Finish

Surface/ Wall Mounted



White Black

Pendant Rod Mounted

* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm



White Black

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm



White Black

Optional Uplight Module



Magnetic Uplight Module 450

Code for G4PR-8309016N-WN with Uplight Module G4PR-8309016N-WN-U

ON-OFF	+130,00 €
Phase Dim	+140,00 €
DALI Dim	+190,00 €

Order Info (Surface/ Wall Mounted GAME 450 in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16W	18W	34V	500mA	80	2700K	90°	2500lm	2150lm	G4SM-8279016N-BN
					3000K	90°	2700lm	2300lm	G4SM-8309016N-BN
					4000K	90°	2900lm	2500lm	G4SM-8409016N-BN
					2700K–6500K	90°	Max.2900lm	Max.2300lm	G4SM-8T09016N-BN
24W	26W	34V	700mA	80	2700K	90°	3500lm	3000lm	G4SM-8279024N-BN
					3000K	90°	3700lm	3150lm	G4SM-8309024N-BN
					4000K	90°	4000lm	3400lm	G4SM-8409024N-BN
Uplight Module					2700K–6500K	90°	Max.4100lm	Max.3200lm	G4SM-8T29024N-BN
11W	13W	33V	350mA	80	2700K	110°	1100lm	1000lm	UM45-827A111N-NN
					3000K	110°	1200lm	1100lm	UM45-830A111N-NN
					4000K	110°	1300lm	1200lm	UM45-840A111N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Surface	Pendant Rod	Pendant Wire
ON-OFF	359,00 €	449,00 €	429,00 €
Phase Dim	369,00 €	459,00 €	439,00 €
DALI Dim	409,00 €	489,00 €	469,00 €
Tunable White DALI Dim	629,00 €	709,00 €	689,00 €


Coding

G4SM – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
G4SM GAME 450 Surface/ Wall Mounted	**827** CRI80/ 2700K	**90** 90°	**16** 16W	**N** No Driver	**W** White	**N** None	**U** Uplight Module
G4PW GAME 450 Pendant Wires	**830** CRI80/ 3000K		**24** 24W	**F** On-Off	**B** Black		
G4PR GAME 450 Pendant Rod	**840** CRI80/ 4000K			**P** Phase Dim			
	8T2 CRI80 2700K–6500K Tunable White			**A** 1-10V Dim			
	927 CRI90/ 2700K			**D** DALI Dim			
	930 CRI90/ 3000K						
	940 CRI90/ 4000K						
	9T2 CRI90 2700K–6500K Tunable White						

GAME 600 – Ceiling Light System





Finish

Surface/ Wall Mounted



White Black

Pendant Rod Mounted

* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm



White Black

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm



White Black

24W/36W:

Driver	Surface	Pendant Rod	Pendant Wire
ON-OFF	569,00 €	649,00 €	629,00 €
Phase Dim	579,00 €	659,00 €	639,00 €
DALI Dim	609,00 €	689,00 €	669,00 €
Tunable White DALI Dim	989,00 €	1069,00 €	1049,00 €

46W:

Driver	Surface	Pendant Rod	Pendant Wire
ON-OFF	599,00 €	679,00 €	659,00 €
DALI Dim	669,00 €	759,00 €	729,00 €

Optional Uplight Module



Magnetic Uplight Module 600

Code for G6PR-8309036N-WN with Uplight Module G6PR-8309036N-WN-U

ON-OFF	+190,00 €
Phase Dim	+200,00 €
DALI Dim	+230,00 €





Quick Info

- LED: 24W, 36W, 46W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 6700lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K





Order Info (Surface/ Wall Mounted GAME 600 in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24W	26W	34V	700mA	80	2700K	90°	3500lm	2850lm	G6SM-8279024N-BN
					3000K	90°	3700lm	3000lm	G6SM-8309024N-BN
					4000K	90°	4000lm	3300lm	G6SM-8409024N-BN
				2700K–6500K		90°	Max.4100lm	Max.3400lm	G6SM-8T29024N-BN
36W	40W	34V	1050mA	80	2700K	90°	5800lm	4750lm	G6SM-8279036N-BN
					3000K	90°	6200lm	5000lm	G6SM-8309036N-BN
					4000K	90°	6600lm	5300lm	G6SM-8409036N-BN
				2700K–6500K		90°	Max.6600lm	Max.5700lm	G6SM-8T29036N-BN
46W	50W	34V	1400mA	80	2700K	90°	7200lm	5850lm	G6SM-8279046N-NN
					3000K	90°	8100lm	6150lm	G6SM-8309046N-NN
					4000K	90°	8600lm	6700lm	G6SM-8409046N-NN
Uplight Module									
18W	20W	36V	500mA	80	2700K	110°	1800lm	1600lm	UM60-827A118N-NN
					3000K	110°	1900lm	1700lm	UM60-830A118N-NN
					4000K	110°	2000lm	1800lm	UM60-840A118N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Coding

G6SM – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
G6SM GAME 600 Surface/ Wall Mounted	**827** CRI80/ 2700K	**90** 90°	**24** 24W	**N** No Driver	**W** White	**N** None	**U** Uplight Module
G6PW GAME 600 Pendant Wires	**830** CRI80/ 3000K		**36** 36W	**F** On-Off	**B** Black		
G6PR GAME 600 Pendant Rod	**840** CRI80/ 4000K		**46** 46W *	**P** Phase Dim			
	8T2 CRI80 2700K–6500K Tunable White			**A** 1-10V Dim			
	927 CRI90/ 2700K			**D** DALI Dim			
	930 CRI90/ 3000K						
	940 CRI90/ 4000K						
	9T2 CRI90 2700K–6500K Tunable White						

* LED 46W is not available with Tunable White

BACK

GAME 900 – Ceiling Light System






90° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP40 | CE | CB | UKCA | Intertek | 5 YEARS GUARANTEE

Quick Info

- LED: 60W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 90°
- Lumen Output: Up to 8700lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, 1-10V Dim, DALI Dim

Light Distribution

3000K



Finish


Surface/ Wall Mounted



White Black

Pendant Rod Mounted


* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm

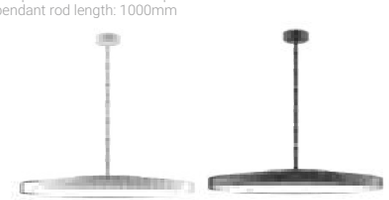

White Black

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm

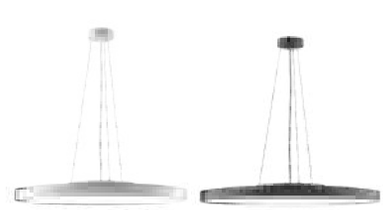

White Black

Optional Uplight Module



Magnetic Uplight Module 900

Code for G9PR-8309060N-WN with Uplight Module G9PR-8309060N-WN-U

ON-OFF	+290,00 €
Phase Dim	+320,00 €

Order Info (Surface/ Wall Mounted GAME 900 in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
60W	62W	43V	1400mA	80	2700K	90°	9900lm	7500lm	G9SM-8279060N-BN
					3000K	90°	10500lm	7900lm	G9SM-8309060N-BN
					4000K	90°	11000lm	8700lm	G9SM-8409060N-BN
Uplight Module									
25W	28W	36V	700mA	80	2700K	110°	2900lm	2500lm	UM90-827A128N-NN
					3000K	110°	3100lm	2700lm	UM90-830A128N-NN
					4000K	110°	3300lm	2950lm	UM90-840A128N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Surface	Pendant Rod	Pendant Wire
ON-OFF	1099,00 €	1189,00 €	1159,00 €
DALI Dim	1149,00 €	1239,00 €	1209,00 €


Coding

G9SM – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
G9SM GAME 900 Surface/ Wall Mounted	**827** CRI80/ 2700K	**90** 90°	**60** 60W	**N** No Driver	**W** White	**N** None	**U** Uplight Module
G94PW GAME 900 Pendant Wires	**830** CRI80/ 3000K			**F** On-Off	**B** Black		
G94PR GAME 900 Pendant Rod	**840** CRI80/ 4000K			**A** 1-10V Dim			
	927 CRI90/ 2700K			**D** DALI Dim			
	930 CRI90/ 3000K						
	940 CRI90/ 4000K						

SUGAR 350 – Ceiling Light System







Quick Info

- LED: 12W, 16W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 2350lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K





Finish

Surface/ Wall Mounted



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Rod Mounted

* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Optional Uplight Module



Magnetic Uplight Module 350

Code for S3SM-8309012N-BG with Uplight Module S3SM-8309012N-BG-U

ON-OFF	+120,00 €
Phase Dim	+130,00 €
DALI Dim	+160,00 €

Order Info (Surface/ Wall Mounted SUGAR 350 in Black -Gold Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	14W	34V	350mA	80	2700K	90°	2000lm	1600lm	S3SM-8279012N-BG
					3000K	90°	2100lm	1700lm	S3SM-8309012N-BG
					4000K	90°	2300lm	1800lm	S3SM-8409012N-BG
					2700K–6500K	90°	Max.2100lm	Max.1750lm	S3SM-8T29012N-BG
16W	18W	34V	500mA	80	2700K	90°	2500lm	2000lm	S3SM-8279016N-BG
					3000K	90°	2700lm	2150lm	S3SM-8309016N-BG
					4000K	90°	2900lm	2350lm	S3SM-8409016N-BG
Uplight Module					2700K–6500K	90°	Max.2900lm	Max.2500lm	S3SM-8T29016N-BG
8W	10W	33V	250mA	80	2700K	110°	950lm	850lm	UM35-827A108N-NN
					3000K	110°	1000lm	900lm	UM35-830A108N-NN
					4000K	110°	1100lm	950lm	UM35-840A108N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Surface	Pendant Rod	Pendant Wire
ON-OFF	299,00 €	379,00 €	359,00 €
Phase Dim	309,00 €	389,00 €	369,00 €
DALI Dim	339,00 €	419,00 €	399,00 €
Tunable White DALI Dim	499,00 €	589,00 €	559,00 €

Coding


S3SM – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Accessory
S3SM SUGAR 350 Surface/ Wall Mounted	**827** CRI80/ 2700K	**90** 90°	**12** 12W	**N** No Driver	**WW** White-White	**U** Uplight Module
S3PW SUGAR 350 Pendant Wires	**830** CRI80/ 3000K		**16** 16W	**F** On-Off	**BB** Black-Black	
S3PR SUGAR 350 Pendant Rod	**840** CRI80/ 4000K			**P** Phase Dim	**BG** Black-Gold	
	8T2 CRI80 2700K–6500K Tunable White			**A** 1-10V Dim	**WG** White-Gold (Optional)	
	927 CRI90/ 2700K			**D** DALI Dim		
	930 CRI90/ 3000K					
	940 CRI90/ 4000K					
	9T2 CRI90 2700K–6500K Tunable White					

BACK

SUGAR 450 – Ceiling Light System









Quick Info

- LED: 16W, 24W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 3400lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K





Order Info (Surface/ Wall Mounted SUGAR 450 in Black -Gold Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16W	18W	34V	500mA	80	2700K	90°	2400lm	2150lm	S4SM-8279016N-BG
					3000K	90°	2600lm	2300lm	S4SM-8309016N-BG
					4000K	90°	2800lm	2500lm	S4SM-8409016N-BG
					2700K–6500K	90°	Max.2900lm	Max.2300lm	S4SM-8T29016N-BG
24W	26W	34V	700mA	80	2700K	90°	3500lm	3000lm	S4SM-8279024N-BG
					3000K	90°	3700lm	3150lm	S4SM-8309024N-BG
					4000K	90°	4000lm	3400lm	S4SM-8409024N-BG
Uplight Module					2700K–6500K	90°	Max.4100lm	Max.3200lm	S4SM-8T29024N-BG
11W	13W	33V	350mA	80	2700K	110°	1100lm	1000lm	UM45-827A111N-NN
					3000K	110°	1200lm	1100lm	UM45-830A111N-NN
					4000K	110°	1300lm	1200lm	UM45-840A111N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Surface	Pendant Rod	Pendant Wire
ON-OFF	379,00 €	469,00 €	439,00 €
Phase Dim	389,00 €	479,00 €	449,00 €
DALI Dim	419,00 €	509,00 €	479,00 €
Tunable White DALI Dim	579,00 €	669,00 €	649,00 €


Finish

Surface/ Wall Mounted

Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Rod Mounted


* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm

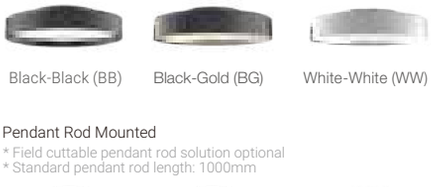

Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm

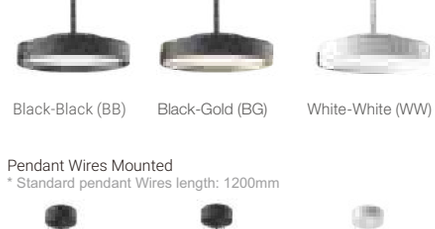

Black-Black (BB) Black-Gold (BG) White-White (WW)

Optional Uplight Module



Magnetic Uplight Module 450

Code for S4SM-8309016N-WN with Uplight Module S4SM-8309016N-WN-U

ON-OFF	+130,00 €
Phase Dim	+140,00 €
DALI Dim	+190,00 €

Coding


G4SM – * ** ** * ** – ***

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Accessory
G4SM SUGAR 450 Surface/ Wall Mounted	**827** CRI80/ 2700K	**90** 90°	**16** 16W	**N** No Driver	**WW** White-White	**U** Uplight Module
G34PW SUGAR 450 Pendant Wires	**830** CRI80/ 3000K		**24** 24W	**F** On-Off	**BB** Black-Black	
G34PR SUGAR 450 Pendant Rod	**840** CRI80/ 4000K			**P** Phase Dim	**BG** Black-Gold	
	8T2 CRI80 2700K–6500K Tunable White			**A** 1-10V Dim	**WG** White-Gold (Optional)	
	927 CRI90/ 2700K			**D** DALI Dim		
	930 CRI90/ 3000K					
	940 CRI90/ 4000K					
	9T2 CRI90 2700K–6500K Tunable White					

BACK

SUGAR 600 – Ceiling Light System





Finish

Surface/ Wall Mounted



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Rod Mounted

* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

24W/36W:

Driver	Surface	Pendant Rod	Pendant Wire
ON-OFF	599,00 €	689,00 €	659,00 €
Phase Dim	609,00 €	699,00 €	669,00 €
DALI Dim	639,00 €	729,00 €	699,00 €
Tunable White DALI Dim	989,00 €	1069,00 €	1049,00 €

46W:

Driver	Surface	Pendant Rod	Pendant Wire
ON-OFF	629,00 €	719,00 €	689,00 €
DALI Dim	699,00 €	789,00 €	759,00 €

Optional Uplight Module



Magnetic Uplight Module 600

Code for G6PR-8309036N-BG with Uplight Module G6PR-8309036N-BG-U

ON-OFF	+190,00 €
Phase Dim	+200,00 €
DALI Dim	+230,00 €





Quick Info

- LED: 24W, 36W, 46W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 6700lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 1-10V Dim, DALI Dim

Light Distribution

3000K





Order Info (Surface/ Wall Mounted SUGAR 600 in Black -Gold Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24W	26W	34V	700mA	80	2700K	90°	3500lm	2850lm	S6SM-8279024N-BG
					3000K	90°	3700lm	3000lm	S6SM-8309024N-BG
					4000K	90°	4000lm	3300lm	S6SM-8409024N-BG
					2700K–6500K	90°	Max.4100lm	Max.3400lm	S6SM-8T29024N-BG
36W	40W	34V	1050mA	80	2700K	90°	5800lm	4750lm	S6SM-8279036N-BG
					3000K	90°	6200lm	5000lm	S6SM-8309036N-BG
					4000K	90°	6600lm	5300lm	S6SM-8409036N-BG
					2700K–6500K	90°	Max.6600lm	Max.5700lm	S6SM-8T29036N-BG
46W	50W	34V	1400mA	80	2700K	90°	7200lm	5850lm	S6SM-8279046N-BG
					3000K	90°	8100lm	6150lm	S6SM-8309046N-BG
					4000K	90°	8600lm	6700lm	S6SM-8409046N-BG
Uplight Module									
18W	20W	36V	500mA	80	2700K	110°	1800lm	1600lm	UM60-827A118N-NN
					3000K	110°	1900lm	1700lm	UM60-830A118N-NN
					4000K	110°	2000lm	1800lm	UM60-840A118N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Coding

S6SM – *** ** ** * – ** – *


Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Accessory
G6SM SUGAR 600 Surface/ Wall Mounted	827 CRI80/ 2700K	90 90°	24 24W	N No Driver	WW White-White	U Uplight Module
G6PW SUGAR 600 Pendant Wires	830 CRI80/ 3000K		36 36W	F On-Off	BB Black-Black	
G6PR SUGAR 600 Pendant Rod	840 CRI80/ 4000K		46 46W *	P Phase Dim	BG Black-Gold	
	8T2 CRI80 2700K–6500K Tunable White			A 1-10V Dim	WG White-Gold (Optional)	
	927 CRI90/ 2700K			D DALI Dim		
	930 CRI90/ 3000K					
	940 CRI90/ 4000K					
	9T2 CRI90 2700K–6500K Tunable White					

* LED 46W is not available with Tunable White

BACK

SUGAR 900 – Ceiling Light System






Quick Info

- LED: 60W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 90°
- Lumen Output: Up to 8700lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, 1-10V Dim, DALI Dim

Light Distribution

3000K



Finish

Surface/ Wall Mounted



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Rod Mounted
* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Wires Mounted
* Standard pendant Wires length: 1200mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Order Info (Surface/ Wall Mounted SUGAR 900 in Black -Gold Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
60W	62W	43V	1400mA	80	2700K	90°	9900lm	7500lm	S9SM-8279060N-BG
					3000K	90°	10500lm	7900lm	S9SM-8309060N-BG
					4000K	90°	11000lm	8700lm	S9SM-8409060N-BG
Uplight Module									
25W	28W	36V	700mA	80	2700K	110°	2900lm	2500lm	UM90-827A128N-NN
					3000K	110°	3100lm	2700lm	UM90-830A128N-NN
					4000K	110°	3300lm	2950lm	UM90-840A128N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Surface	Pendant Rod	Pendant Wire
ON-OFF	1119,00 €	1209,00 €	1189,00 €
DALI Dim	1169,00 €	1259,00 €	1239,00 €

Coding

S9SM – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Accessory
S9SM SUGAR 900 Surface/ Wall Mounted	**827** CRI80/ 2700K	**90** 90°	**60** 60W	**N** No Driver	**WW** White-White	**U** Uplight Module
S9PW SUGAR 900 Pendant Wires	**830** CRI80/ 3000K			**F** On-Off	**BB** Black-Black	
S9PR SUGAR 900 Pendant Rod	**840** CRI80/ 4000K			**A** 1-10V Dim	**BG** Black-Gold	
	927 CRI90/ 2700K			**D** DALI Dim	**WG** White-Gold (Optional)	
	930 CRI90/ 3000K					
	940 CRI90/ 4000K					

Optional Uplight Module



Magnetic Uplight Module 900

Code for S9PR-8309060N-BG **with** Uplight Module S9PR-8309060N-BG-U

ON-OFF	+290,00 €
DALI Dim	+320,00 €

GLAMOR

3000K-3500K-4000K CCT Switchable
Lumen Efficiency up to 130 lm/W
Three Diameters Available: Ø300, Ø400, Ø600
Surface Mounted & Pendant
IP44, UGR≤15



GLAMOR 300 – CCT Switchable LED Ceiling Light


NEW



80° | 3000K 3500K 4000K | CRI >80 | UGR<19 | IP44 | CE | 5 YEARS GUARANTEE


Quick Info


- LED: 8W, 11W, CRI>80
- CCT: 3000K-3500K-4000K Switchable
- Beam Angle: 80°
- Lumen Output: Up to 1200lm, 1600lm System Luminous Flux
- IP Class: IP44
- LED Driver: On-off, Phase Dim, 1-10V Dim, DALI Dim

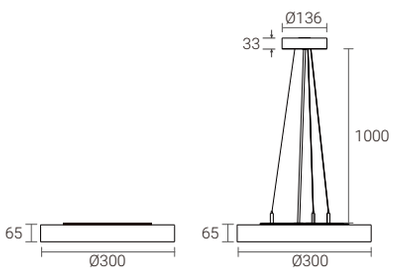

Light Distribution

☐ 4000K





Finish

Surface/ Wall Mounted



White



Black

Pendant Wires Mounted
* Standard pendant Wires length: 1000mm



White



Black

Order Info (Surface/ Wall Mounted GLAMOR 300 in White Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8W	10W	33V	250mA	80	@3000K @3500K @4000K	80° 80° 80°	1650lm 1700lm 1800lm	1100lm 1150lm 1200lm	G3RS-8S38010F-WN
11W	13W	33V	350mA	80	@3000K @3500K @4000K	80° 80° 80°	2150lm 2200lm 2300lm	1450lm 1500lm 1600lm	G3RS-8S38013F-WN

Code Remark: F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Surface	Pendant
ON-OFF	159,00 €	219,00 €
Phase Dim	169,00 €	229,00 €
DALI Dim	219,00 €	279,00 €

Coding

G3RS – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
G3RS GLAMOR 300 Suface/ Wall Mounted G3RP GLAMOR 300 Pendant Wires	8S3 CRI>80/ 3000K -3500K-4000K Switchable	80 80°	10 10W 13 13W	F On-Off P Phase Dim A 1-10V Dim D DALI Dim	W White B Black	N None	

BACK

GLAMOR 400 – CCT Switchable LED Ceiling Light


NEW



80° | 3000K 3500K 4000K | CRI >80 | UGR<19 | IP44 | CE | 5 YEARS GUARANTEE


Quick Info


- LED: 16W, 23W, CRI>80
- CCT: 3000K-3500K-4000K Switchable
- Beam Angle: 80°
- Lumen Output: Up to 2400lm, 3400lm System Luminous Flux
- IP Class: IP44
- LED Driver: On-off, Phase Dim, 1-10V Dim, DALI Dim

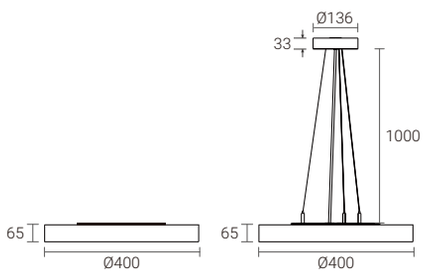

Light Distribution

☐ 4000K





Finish

Surface/ Wall Mounted



White Black

Pendant Wires Mounted
* Standard pendant Wires length: 1000mm



White Black

Order Info (Surface/ Wall Mounted GLAMOR 400 in White Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16W	18W	33V	500mA	80	@3000K	80°	3100lm	2200lm	G4RS-8S38018F-WN
					@3500K	80°	3200lm	2300lm	
					@4000K	80°	3300lm	2400lm	
23W	25W	33V	700mA	80	@3000K	80°	4400lm	3100lm	G4RS-8S38025F-WN
					@3500K	80°	4550lm	3200lm	
					@4000K	80°	4650lm	3400lm	

Code Remark: F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Surface	Pendant
ON-OFF	229,00 €	289,00 €
Phase Dim	249,00 €	309,00 €
DALI Dim	289,00 €	359,00 €

Coding

G4RS – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
G4RS GLAMOR 400 Suface/ Wall Mounted	**8S3** CRI>80/ 3000K -3500K-4000K Switchable	**80** 80°	**18** 18W	**F** On-Off	**W** White	**N** None	
G4RP GLAMOR 400 Pendant Wires			**25** 25W	**P** Phase Dim	**B** Black		
				A 1-10V Dim			
				D DALI Dim			

BACK


GLAMOR 600 – CCT Switchable LED Ceiling Light






Quick Info


- LED: 34W, 40W,CRI>80
- CCT: 3000K-3500K-4000K Switchable
- Beam Angle: 80°
- Lumen Output: Up to 5300lm, 5900lm System Luminous Flux
- IP Class: IP44
- LED Driver: On-off, Phase Dim, 1-10V Dim, DALI Dim

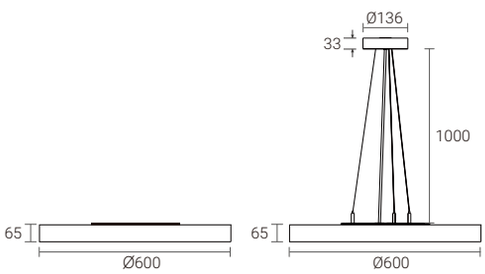

Light Distribution

☐ **4000K**





Finish

Surface/ Wall Mounted



White Black

Pendant Wires Mounted
* Standard pendant Wires length: 1000mm



White Black

Order Info (Surface/ Wall Mounted GLAMOR 600 in White Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
34W	37W	33V	1050mA	80	@3000K	80°	6650lm	5000lm	G6RS-8S38037F-WN
					@3500K	80°	6800lm	5200lm	
					@4000K	80°	6950lm	5300lm	
40W	43W	33V	1200mA	80	@3000K	80°	7500lm	5600lm	G6RS-8S38043F-WN
					@3500K	80°	7650lm	5700lm	
					@4000K	80°	7800lm	5900lm	

Code Remark: F=F(ON-OFF) P=P(Phase Dim) A=A(1-10V Dim) D=D(DALI Dim)

Driver	Surface	Pendant
ON-OFF	389,00 €	449,00 €
Phase Dim	409,00 €	469,00 €
DALI Dim	499,00 €	559,00 €

Coding

G6RS – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
G6RS GLAMOR 600 Suface/ Wall Mounted	**8S3** CRI>80/ 3000K -3500K-4000K Switchable	**80** 80°	**37** 37W	**F** On-Off	**W** White	**N** None	
G6RP GLAMOR 600 Pendant Wires			**43** 43W	**P** Phase Dim	**B** Black		
				A 1-10V Dim			
				D DALI Dim			

BACK

MINT

3000K-3500K-4000K CCT Switchable
Power Switchable
IP54




MINT 280 – CCT Switchable & Power Switchable LED Ceiling Light



120° | CRI >80 | IK10 | IP54 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info


- Power Switchable 13W-18W-24W, CRI>80
- CCT Switchable 2700K-3000K-4000K
- Beam Angle: 120°
- Lumen Output: Up to 2350lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off




Light Distribution

3000K







Finish



White

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	78V	155mA	80	@2700K @3000K @4000K	120° 120° 120°	1600lm 1700lm 1800lm	1350lm 1400lm 1500lm	MASM-8S3A224F-WN
16W	18W	78V	200mA	80	@2700K @3000K @4000K	120° 120° 120°	2000lm 2100lm 2200lm	1700lm 1800lm 1900lm	MASM-8S3A224F-WN
22W	24W	78V	280mA	80	@2700K @3000K @4000K	120° 120° 120°	2400lm 2550lm 2600lm	2100lm 2200lm 2350lm	MASM-8S3A224F-WN

Code Remark: F=F(On-Off LED Driver, Power Switchable)

ON-OFF	79,00 €

BACK


MINT 280 – CCT Switchable & Power Switchable LED Ceiling Light




120° | CRI >80 | IK10 | IP54 | CE | UKCA | Microwave Sensor | 5 YEARS GUARANTEE

Quick Info


- Power Switchable 13W-18W-24W, CRI>80
- CCT Switchable 2700K-3000K-4000K
- Beam Angle: 120°
- Lumen Output: Up to 2350lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off LED Driver+Microwave Sensor




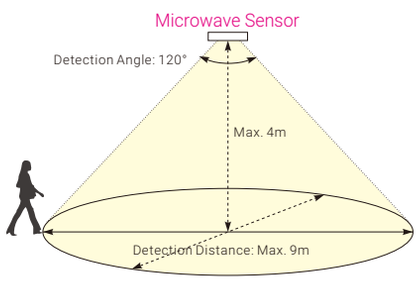


Light Distribution

3000K







Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	78V	155mA	80	@2700K @3000K @4000K	120° 120° 120°	1600lm 1700lm 1800lm	1350lm 1400lm 1500lm	MASM-8S3A224S-WN
16W	18W	78V	200mA	80	@2700K @3000K @4000K	120° 120° 120°	2000lm 2100lm 2200lm	1700lm 1800lm 1900lm	MASM-8S3A224S-WN
22W	24W	78V	280mA	80	@2700K @3000K @4000K	120° 120° 120°	2400lm 2550lm 2600lm	2100lm 2200lm 2350lm	MASM-8S3A224S-WN

Code Remark: S=S(On-Off LED Driver+Microwave Sensor)

Finish



White

ON-OFF | 139,00 €


MINT 280 – CCT Switchable & Power Switchable LED Ceiling Light



120° | CRI >80 | IK10 | IP54 | CE | UKCA | Emergency Version | 5 YEARS GUARANTEE

Quick Info


- Power Switchable 13W-18W-24W, CRI>80
- CCT Switchable 2700K-3000K-4000K
- Beam Angle: 120°
- Lumen Output: Up to 2350lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off LED Driver+Emergency Backup




Light Distribution

3000K


MASM-13W-830-120°



MASM-18W-830-120°



MASM-24W-830-120°



Finish



White

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	78V	155mA	80	@2700K @3000K @4000K	120° 120° 120°	1600lm 1700lm 1800lm	1350lm 1400lm 1500lm	MASM-8S3A224E-WN
16W	18W	78V	200mA	80	@2700K @3000K @4000K	120° 120° 120°	2000lm 2100lm 2200lm	1700lm 1800lm 1900lm	MASM-8S3A224E-WN
22W	24W	78V	280mA	80	@2700K @3000K @4000K	120° 120° 120°	2400lm 2550lm 2600lm	2100lm 2200lm 2350lm	MASM-8S3A224E-WN

Code Remark: E=E(On-Off LED Driver+Emergency Backup)

ON-OFF 149,00 €

BACK


MINT 420 – CCT Switchable & Power Switchable LED Ceiling Light



120° | CRI >80 | IK10 | IP54 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info


- Power Switchable 20W-28W-35W, CRI>80
- CCT Switchable 2700K-3000K-4000K
- Beam Angle: 120°
- Lumen Output: Up to 3600lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off LED Driver+Power Switchable




Light Distribution

3000K







Finish



White

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	20W	130V	138mA	80	@2700K @3000K @4000K	120° 120° 120°	2100lm 2200lm 2400lm	1900lm 2050lm 2200lm	MASM-8S3A235F-WN
26W	28W	130V	190mA	80	@2700K @3000K @4000K	120° 120° 120°	2800lm 3000lm 3300lm	2550lm 2800lm 3000lm	MASM-8S3A235F-WN
22W	35W	130V	250mA	80	@2700K @3000K @4000K	120° 120° 120°	3400lm 3700lm 4000lm	3100lm 3400lm 3600lm	MASM-8S3A235F-WN

Code Remark: F=(On-Off LED Driver, Power Switchable)

ON-OFF | 109,00 €

BACK


MINT 420 – CCT Switchable & Power Switchable LED Ceiling Light




120° | CRI >80 | IK10 | IP54 | CE | UKCA | Microwave Sensor | 5 YEARS GUARANTEE

Quick Info


- Power Switchable 20W-28W-35W, CRI>80
- CCT Switchable 2700K-3000K-4000K
- Beam Angle: 120°
- Lumen Output: Up to 3600lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off LED Driver+Microwave Sensor




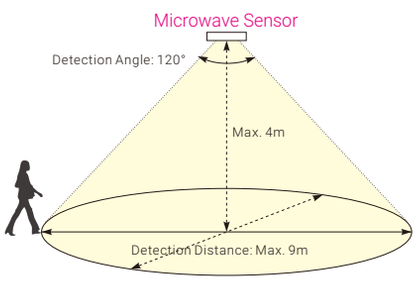


Light Distribution

3000K







Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	20W	130V	138mA	80	@2700K @3000K @4000K	120° 120° 120°	2100lm 2200lm 2400lm	1900lm 2050lm 2200lm	MASM-8S3A235S-WN
26W	28W	130V	190mA	80	@2700K @3000K @4000K	120° 120° 120°	2800lm 3000lm 3300lm	2550lm 2800lm 3000lm	MASM-8S3A235S-WN
22W	35W	130V	250mA	80	@2700K @3000K @4000K	120° 120° 120°	3400lm 3700lm 4000lm	3100lm 3400lm 3600lm	MASM-8S3A235S-WN

Code Remark: S=(On-Off LED Driver, Microwave Sensor)

Finish



White

ON-OFF | 159,00 €


MINT 420 – CCT Switchable & Power Switchable LED Ceiling Light



120° CRI >80 IK10 IP54 CE UKCA Emergency Version 5 YEARS GUARANTEE


Quick Info


- Power Switchable 20W-28W-35W, CRI>80
- CCT Switchable 2700K-3000K-4000K
- Beam Angle: 120°
- Lumen Output: Up to 3600lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off LED Driver+Emergency Backup




Light Distribution

3000K







Finish



White

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	20W	130V	138mA	80	@2700K @3000K @4000K	120° 120° 120°	2100lm 2200lm 2400lm	1900lm 2050lm 2200lm	MASM-8S3A235E-WN
26W	28W	130V	190mA	80	@2700K @3000K @4000K	120° 120° 120°	2800lm 3000lm 3300lm	2550lm 2800lm 3000lm	MASM-8S3A235E-WN
22W	35W	130V	250mA	80	@2700K @3000K @4000K	120° 120° 120°	3400lm 3700lm 4000lm	3100lm 3400lm 3600lm	MASM-8S3A235E-WN

Code Remark: E=E(On-Off LED Driver+Emergency Backup)

ON-OFF 169,00 €

BACK

SKYDRIVER
SKYJOY
SKYLINE

LED Ceiling Light
Incl. Phase Dim Driver & Fast Connector



SKYDRIVER SDRC – LED Ceiling Light incl. Phase Dim Driver






25°Tiltable and 355° Rotation




Quick Info

- CITIZEN LED: 10W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 780lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim




Light Distribution

2700K



3000K



Finish

White



Black

Order Info


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8W	10W	36V	230mA	90	2700K	36°	950lm	750lm	SDRC-9273610P-WW
					3000K	36°	1000lm	780lm	SDRC-9303610P-WW
8W	10W	36V	230mA	90	2700K	36°	950lm	750lm	SDRC-9273610P-BB
					3000K	36°	1000lm	780lm	SDRC-9303610P-BB

Code Remark: P=P(Phase Dim)

Phase Dim | 109,00 €

BACK

SKYDRIVER SDSC – LED Ceiling Light incl. Phase Dim Driver

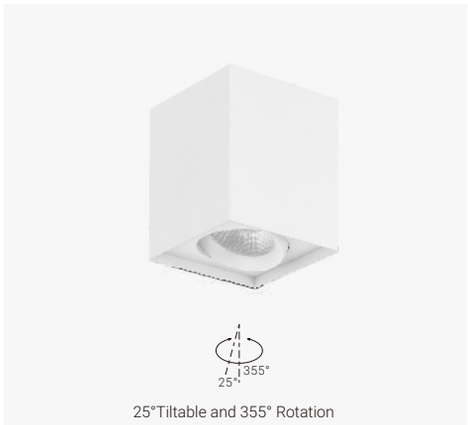


25°Tiltable and 355° Rotation




Quick Info

- CITIZEN LED: 10W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 780lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim




Light Distribution


2700K



3000K



Finish


White Black


Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8W	10W	36V	230mA	90	2700K	36°	950lm	750lm	SDSC-9273610P-WW
					3000K	36°	1000lm	780lm	SDSC-9303610P-WW
8W	10W	36V	230mA	90	2700K	36°	950lm	750lm	SDSC-9273610P-BB
					3000K	36°	1000lm	780lm	SDSC-9303610P-BB

Code Remark: P=P(Phase Dim)

Phase Dim 109,00 €

SKYJOY SJSC – LED Ceiling Light incl. Phase Dim Driver

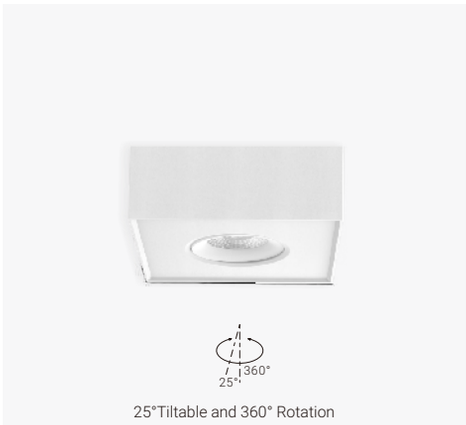


25°Tiltable and 360° Rotation




Quick Info

- CITIZEN LED: 8W, CRI>90
- CCT: 2700K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 580lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim



Light Distribution

2700K



Finish



White



Black

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	10W	36V	200mA	90	2700K	36°	750lm	580lm	SJSC-9303610P-WW
7W	10W	36V	200mA	90	2700K	36°	750lm	580lm	SJSC-9303610P-BB

Code Remark: P=P(Phase Dim)

Phase Dim 119,00 €

BACK

SKYJOY SJSC – LED Ceiling Light incl. Phase Dim Driver






25°Tiltable and 360° Rotation




Quick Info

- BRIDGELUX LED: 10W, CRI>90
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 36°
- Lumen Output: Up to Max.650lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim



Light Distribution

3000K



Finish



White Black

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	36V	250mA	90	1800K-3000K	36°	850lm	Max.650lm	SJSC-9D33610P-WW
9W	10W	36V	250mA	90	1800K-3000K	36°	850lm	Max.650lm	SJSC-9D33610P-BB

Code Remark: P=P(Phase Dim)

Phase Dim 129,00 €



SKYJOY SJDC – LED Ceiling Light incl. Phase Dim Driver




25°Tiltable and 360° Rotation




Quick Info

- CITIZEN LED: 16W, CRI>90
- CCT: 2700K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 1300lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim



Light Distribution

2700K



Finish


White

Black

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
14W	16W	36V	400mA	90	2700K	36°	1600lm	1300lm	SJDC-9273616P-WW
14W	16W	36V	400mA	90	2700K	36°	1600lm	1300lm	SJDC-9273616P-BB

Code Remark: P=P(Phase Dim)


Phase Dim 179,00 €

BACK

SKYJOY SJDC – LED Ceiling Light incl. Phase Dim Driver



25°Tiltable and 360° Rotation




36° | CRI >90 | UGR<19 | IP20 | CE | bridgelux 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- BRIDGELUX LED: 16W, CRI>90
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 36°
- Lumen Output: Up to Max.1300lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim

Light Distribution

3000K



Finish



White



Black

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	20W	36V	500mA	90	1800K-3000K	36°	1700lm	Max.1300lm	SJDC-9D33620P-WW
18W	20W	36V	500mA	90	1800K-3000K	36°	1700lm	Max.1300lm	SJDC-9D33620P-BB

Code Remark: P=P(Phase Dim)

Phase Dim | 189,00 €




SKYLINE SL5C – LED Ceiling Light incl. Phase Dim Driver






Quick Info

- Bridgelux LED: 8.5W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 30°
- Lumen Output: Up to 750lm System Luminous Flux
- IP Class: IP20 from Front
- LED Driver: Phase Dim




Light Distribution

2700K



3000K



Finish



White-Specular (WS)



Black-Specular (BS)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8.5W	10W	14.5V	600mA	90	2700K	30°	950lm	720lm	SL5C-9273010P-WS
					3000K	30°	1000lm	750lm	SL5C-9303010P-WS
8.5W	10W	14.5V	600mA	90	2700K	30°	950lm	720lm	SL5C-9273010P-BS
					3000K	30°	1000lm	750lm	SL5C-9303010P-BS

Code Remark: P=P(Phase Dim)

Phase Dim 139,00 €

BACK

MIU

Architectural Ceiling & Pendant Light
Elegant Design, No Visible Screw



Project: Office Borg Forvaltning Trondheim, Norway





Project : Office Borg Forvaltning Trondheim, Norway



MIU-C M – Ceiling Mounted Light




18° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- CITIZEN LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 36°, 50°
- Lumen Output: Up to 1900lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim




Light Distribution

3000K







Finish



White Black

Dali 209,00

Order Info (MIU-C M in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	15°	1400lm	1100lm	MCM1-9271515F-WB
						36°	1400lm	1150lm	MCM1-9273615F-WB
						50°	1400lm	1100lm	MCM1-9275015F-WB
ON-OFF 149,00 €					3000K	15°	1500lm	1200lm	MCM1-9301515F-WB
Phase Dim 159,00 €						36°	1500lm	1250lm	MCM1-9303615F-WB
						50°	1500lm	1200lm	MCM1-9305015F-WB
					4000K	15°	1600lm	1300lm	MCM1-9401515F-WB
						36°	1600lm	1350lm	MCM1-9403615F-WB
						50°	1600lm	1300lm	MCM1-9405015F-WB
18W	21W	36V	500mA	90	2700K	15°	1900lm	1600lm	MCM2-9271521F-WB
						36°	1900lm	1700lm	MCM2-9273621F-WB
						50°	1900lm	1600lm	MCM2-9275021F-WB
ON-OFF 159,00 €					3000K	15°	2000lm	1700lm	MCM2-9301521F-WB
						36°	2000lm	1800lm	MCM2-9303621F-WB
						50°	2000lm	1700lm	MCM2-9305021F-WB
					4000K	15°	2100lm	1800lm	MCM2-9401521F-WB
						36°	2100lm	1900lm	MCM2-9403621F-WB
						50°	2100lm	1800lm	MCM2-9405021F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Reflector Options



Black White Gold

Coding

MCM1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MCM1 MIU-C M-15W	927 CRI90/ 2700K	15 15°	15 15W	F On-Off	W Wihte	W Wihte	H Honeycomb
MCM2 MIU-C M-21W	930 CRI90/ 3000K	36 36°	21 21W	P* Phase Dim	B Black	B Black	
	940 CRI90/ 4000K	50 50°		D* DALI Dim		G Gold	

* 21W is not available with Phase Dim, DALI Dim

Optional accessary



Honeycomb

Code for MCM1-9301515F-WB with Honeycomb MCM1-9301515F-WB-H

Honeycomb: +9,00€

BACK

MIU-C L – Ceiling Mounted Light




18° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 36°, 50°
- Lumen Output: Up to 2900lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim




Light Distribution

3000K







Finish



White Black

Order Info (MIU-C L in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	18°	3200lm	2500lm	MCL1-9271828F-WB
						36°	3200lm	2500lm	MCL1-9273628F-WB
						50°	3200lm	2500lm	MCL1-9275028F-WB
					3000K	18°	3400lm	2700lm	MCL1-9301828F-WB
						36°	3400lm	2700lm	MCL1-9303628F-WB
						50°	3400lm	2700lm	MCL1-9305028F-WB
					4000K	18°	3600lm	2900lm	MCL1-9401828F-WB
						36°	3600lm	2900lm	MCL1-9403628F-WB
						50°	3600lm	2900lm	MCL1-9405028F-WB

ON-OFF	199,00 €
DALI Dim	239,00 €

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Reflector Options



Black White Gold

Coding

MCL1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MCM1 MIU-C L	927 CRI90/ 2700K	18 18°	28 28W	F On-Off	W Wihte	W Wihte	H Honeycomb
	930 CRI90/ 3000K	36 36°		D DALI Dim	B Black	B Black	
	940 CRI90/ 4000K	50 50°				G Gold	

Optional accessary



Honeycomb

Code for MCL1-9301828F-WB with Honeycomb
MCL1-9301828F-WB-H

Honeycomb: +9,00€


MIU-P S – Pendant Light



18° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- CITIZEN LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 36°, 50°
- Lumen Output: Up to 880lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, DALI Dim




Light Distribution

3000K







Finish



White Black

Order Info (MIU-P S in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	36V	250mA	90	2700K	18°	900lm	750lm	MPS1-9271811F-WB
						36°	900lm	750lm	MPS1-9273611F-WB
						50°	900lm	750lm	MPS1-9275011F-WB
					3000K	18°	1000lm	800lm	MPS1-9301811F-WB
						36°	1000lm	800lm	MPS1-9303611F-WB
						50°	1000lm	800lm	MPS1-9305011F-WB
					4000K	18°	1100lm	880lm	MPS1-9401811F-WB
						36°	1100lm	880lm	MPS1-9403611F-WB
						50°	1100lm	880lm	MPS1-9405011F-WB

ON-OFF	179,00 €
Phase Dim	199,00 €
DALI Dim	219,00 €

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Reflector Options



Black White Gold

Coding

MPS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MPS1 MIU-P S-11W	927 CRI90/ 2700K	15 15°	11 11W	F On-Off	W Wihte	W Wihte	H Honeycomb
	930 CRI90/ 3000K	36 36°		P Phase Dim	B Black	B Black	
	940 CRI90/ 4000K	50 50°		D DALI Dim		G Gold	

Optional accessary



Honeycomb


Code for MPS1-9301811F-WB with Honeycomb
MPS1-9301811F-WB-H

Honeycomb: +9,00€

BACK

MIU-P M – Pendant Light






18° 36° 50° 2700K 3000K 4000K CRI >90 UGR<19 IP20 CE CB UKCA CITIZEN 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info


- CITIZEN LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 36°, 50°
- Lumen Output: Up to 1900lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim

Light Distribution

3000K







Finish



White Black

Order Info (MIU-P M in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	15°	1400lm	1100lm	MPM1-9271515F-WB
						36°	1400lm	1150lm	MPM1-9273615F-WB
						50°	1400lm	1100lm	MPM1-9275015F-WB
ON-OFF 199,00 €					3000K	15°	1500lm	1200lm	MPM1-9301515F-WB
Phase Dim 229,00 €						36°	1500lm	1250lm	MPM1-9303615F-WB
DALI Dim 259,00 €						50°	1500lm	1200lm	MPM1-9305015F-WB
					4000K	15°	1600lm	1300lm	MPM1-9401515F-WB
						36°	1600lm	1350lm	MPM1-9403615F-WB
						50°	1600lm	1300lm	MPM1-9405015F-WB
18W	21W	36V	500mA	90	2700K	15°	1900lm	1600lm	MPM2-9271521F-WB
						36°	1900lm	1700lm	MPM2-9273621F-WB
						50°	1900lm	1600lm	MPM2-9275021F-WB
ON-OFF 219,00 €					3000K	15°	2000lm	1700lm	MPM2-9301521F-WB
						36°	2000lm	1800lm	MPM2-9303621F-WB
						50°	2000lm	1700lm	MPM2-9305021F-WB
					4000K	15°	2100lm	1800lm	MPM2-9401521F-WB
						36°	2100lm	1900lm	MPM2-9403621F-WB
						50°	2100lm	1800lm	MPM2-9405021F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Reflector Options



Black White Gold

Coding

MPM1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MPM1 MIU-P M-15W	927 CRI90/ 2700K	15 15°	15 15W	F On-Off	W Wihte	W Wihte	H Honeycomb
MPM2 MIU-P M-21W	930 CRI90/ 3000K	36 36°	21 21W	P* Phase Dim	B Black	B Black	
	940 CRI90/ 4000K	50 50°		D* DALI Dim		G Gold	

* 21W is not available with Phase Dim, DALI Dim

Optional accessary



Honeycomb


Code for MPM1-9301515F-WB with Honeycomb MPM1-9301515F-WB-H

Honeycomb: +9,00€

BACK

MIU -P L – Pendant Light



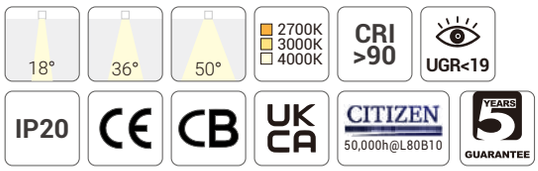


Quick Info


- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 36°, 50°
- Lumen Output: Up to 2900lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim




Light Distribution

3000K







Finish



White Black

Order Info (MIU-P L in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	18°	3200lm	2500lm	MPL1-9271828F-WB
						36°	3200lm	2500lm	MPL1-9273628F-WB
						50°	3200lm	2500lm	MPL1-9275028F-WB
					3000K	18°	3400lm	2700lm	MPL1-9301828F-WB
						36°	3400lm	2700lm	MPL1-9303628F-WB
						50°	3400lm	2700lm	MPL1-9305028F-WB
					4000K	18°	3600lm	2900lm	MPL1-9401828F-WB
						36°	3600lm	2900lm	MPL1-9403628F-WB
						50°	3600lm	2900lm	MPL1-9405028F-WB

ON-OFF	239,00 €
DALI Dim	279,00 €

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Reflector Options



Black White Gold

Coding

MPL1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MPL1 MIU-P L-28W	927 CRI90/ 2700K	15 15°	28 28W	F On-Off	W Wihte	W Wihte	H Honeycomb
	930 CRI90/ 3000K	36 36°		D DALI Dim	B Black	B Black	
	940 CRI90/ 4000K	50 50°				G Gold	

Optional accessary



Honeycomb

Code for MPL1-9301828F-WB with Honeycomb
MPL1-9301828F-WB-H

Honeycomb: +9,00€

BACK



MIU Art

Minimum & Flat Design
Within AC LED Board, No Additional Power Supply Required
Phase Dimming Compatible
Easy Installation



MIU Art-S – Ceiling Mounted Light

NEW








Quick Info


- LUMENS LED: AC COB, 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 240lm System Luminous Flux
- IP Class: IP20
- Dimming: 220-240VAC Direct Input, Phase Dim

Light Distribution

3000K




Standard Finish



White Black

Optional Finish



Gold Chrome

*Customized Colors Optional

Color customization: +29,00 €

Order Info (MIU Art-S in Black Housing as an Example)

LED Power	System Power	Input Power	CRI	CCT	Beam	LED Output	System Output	Code
3W	4W	220-240VAC	90	2700K	36°	300lm	210lm	MIAS-9273604P-BB
				3000K	36°	320lm	220lm	MIAS-9303604P-BB
				4000K	36°	350lm	240lm	MIAS-9403604P-BB

Phase Dim 119,00 €

Code Remark: P=P(Phase Dim)

Coding


MIAS – *** ** ** * – ** –

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
MIAS MIU Art-S-4W	927 CRI90/ 2700K 930 CRI90/ 3000K 940 CRI90/ 4000K	36 36°	04 4W	P Phase Dim	WW Wihte BB Black GG Gold CR Chrome SL Silver BR Brown	

BACK

MIU Art-M – Ceiling Mounted Light

NEW

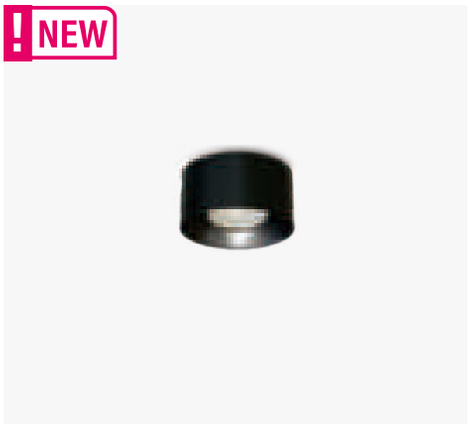




Quick Info

- LUMENS LED: AC COB, 8W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 48°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: IP20
- Dimming: 220-240VAC Direct Input, Phase Dim



Light Distribution

3000K



Standard Finish



White Black

Order Info (MIU Art-M in Black Housing as an Example)

LED Power	System Power	Input Power	CRI	CCT	Beam	LED Output	System Output	Code
7W	8W	220-240VAC	90	2700K	48°	670lm	520lm	MIAM-9274808P-BB
				3000K	48°	700lm	550lm	MIAM-9304808P-BB
				4000K	48°	750lm	600lm	MIAM-9404808P-BB

Phase Dim 129,00 €

Code Remark: P=P(Phase Dim)

Optional Finish



Gold Chrome

*Customized Colors Optional

Color customization: +29,00 €

Coding

MIAM – *** ** ** * – ** –

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
MIAM MIU Art-M-8W	927 CRI90/ 2700K 930 CRI90/ 3000K 940 CRI90/ 4000K	48 48°	08 8W	P Phase Dim	WW Wihte BB Black GG Gold CR Chrome SL Silver BR Brown	

BREEZE

Ceiling Mounted Spotlight
Incl. Phase Dim Driver & Fast Connector




BREEZE SINGLE – Ceiling Mounted Soptlight






Quick Info

- Bridgelux LED: 7W, CRI>90
- CCT: 2700K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 700lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim



Light Distribution

2700K



Finish



White



Black

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	36V	200mA	90	2700K	36°	800lm	700lm	B1SC-9273609P-WB
7W	9W	36V	200mA	90	2700K	36°	800lm	700lm	B1SC-9273609P-BB

Code Remark: P=P(Phase Dim)

Phase Dim 149,00 €

BACK


BREEZE DOUBLE – Ceiling Mounted Soptlight






Quick Info

- Bridgelux LED: 14W, CRI>90
- CCT: 2700K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 1400lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim



Light Distribution

2700K



Finish



White Black

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x7W	2x9W	36V	2x200mA	90	2700K	36°	1600lm	1400lm	B2SC-9273618P-WB
2x7W	2x9W	36V	2x200mA	90	2700K	36°	1600lm	1400lm	B2SC-9273618P-BB

Code Remark: P=P(Phase Dim)

Phase Dim 249,00 €


BREEZE TRIPLE – Ceiling Mounted Soptlight






Quick Info

- Bridgelux LED: 21W, CRI>90
- CCT: 2700K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 2100lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim

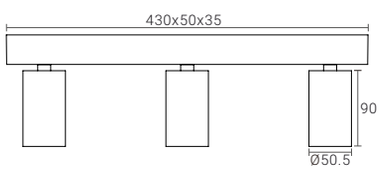

Light Distribution

2700K



Finish



White Black

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
3x7W	3x9W	36V	3x200mA	90	2700K	36°	2400lm	2100lm	B3SC-9273627P-WB
3x7W	3x9W	36V	3x200mA	90	2700K	36°	2400lm	2100lm	B3SC-9273627P-BB

Code Remark: P=P(Phase Dim)

Phase Dim 349,00 €

BACK

VIBES



Different Mounting Bases (White/ Black)

Surface Mounted



1RC Base



1SC Base



2RC Base



2SC Base

Recessed Mounted



1RR Base



1SR Base



2RR Base



2SR Base



Accessory



Honeycomb

Module Color



Black



Brushed Gold



Chrome



White


VIBES V1RC – Single-Head Ceiling Mounted Spotlight



36° | 2700K 3000K | CRI >90 | IP20 | CE | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CITIZEN LED: 14W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim




Light Distribution

2700K



3000K



Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Black-Chrome/ Black-Gold + 40,00 €

Order Info (VIBES V1RC in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5W	14W	36V	350mA	90	2700K	36°	1400lm	1100lm	V1RC-9273614P-WW
					3000K	36°	1500lm	1200lm	V1RC-9303614P-WW

Code Remark: P=P(Phase Dim)

Phase Dim 159,00 €

Coding

V1RC – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
V1RC	927 CRI90/ 2700K	36 36°	14 14W	P Phase Dim	WW Wihte-Wihte (WW)	H Honeycomb
	930 CRI90/ 3000K				BB Black-Black (BB)	
					BC Black-Chrome (BC)	
					BG Black-Gold (BG)	

Optional accessary



Honeycomb

Code for V1RC-9273614P-WW with Honeycomb V1RC-9273614P-WW-H

Honeycomb: + 9,00 €

BACK


VIBES V2RC – Double-Head Ceiling Mounted Spotlight



36° | 2700K 3000K | CRI >90 | IP20 | CE | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim




Light Distribution

2700K



3000K



Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Black-Chrome/ Black-Gold + 80,00 €

Optional accessary



Honeycomb

Code for V2RC-9273628P-WW with Honeycomb
V2RC-9273628P-WW-H

Honeycomb: + 9,00 €

Order Info (VIBES V2RC in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5W	2x14W	36V	2x350mA	90	2700K	36°	2900lm	2300lm	V2RC-9273628P-WW
					3000K	36°	3000lm	2400lm	V2RC-9303628P-WW

Code Remark: P=P(Phase Dim)

Phase Dim 309,00 €

Coding

V2RC – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
V2RC	927 CRI90/ 2700K	36 36°	28 28W	P Phase Dim	WW Wihte-Wihte (WW)	H Honeycomb
	930 CRI90/ 3000K				BB Black-Black (BB)	
					BC Black-Chrome (BC)	
					BG Black-Gold (BG)	


VIBES V1SC – Single-Head Ceiling Mounted Spotlight






Quick Info

- CITIZEN LED: 14W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim




Light Distribution

2700K



3000K



Base Finish


White-White (WW)


Black-Black (BB)


Black-Chrome (BC)


Black-Gold (BG)

Black-Chrome/ Black-Gold + 40,00 €

Optional accessary


Honeycomb

Code for V1SC-9273614P-WW with Honeycomb
V1SC-9273614P-WW-H

Honeycomb: +9,00€

Order Info (VIBES V1SC in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5W	14W	36V	350mA	90	2700K	36°	1400lm	1100lm	V1SC-9273614P-WW
					3000K	36°	1500lm	1200lm	V1SC-9303614P-WW

Code Remark: P=P(Phase Dim)

Phase Dim 169,00 €

Coding

V1SC – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
V1SC	927 CRI90/ 2700K	36 36°	14 14W	P Phase Dim	WW Wihte-Wihte (WW)	H Honeycomb
	930 CRI90/ 3000K				BB Black-Black (BB)	
					BC Black-Chrome (BC)	
					BG Black-Gold (BG)	

BACK


VIBES V2SC – Double-Head Ceiling Mounted Spotlight



36° | 2700K 3000K | CRI >90 | IP20 | CE | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim




Light Distribution

2700K



3000K



Base Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Black-Chrome/ Black-Gold + 80,00 €

Order Info (VIBES V2SC in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5W	2x14W	36V	2x350mA	90	2700K	36°	2900lm	2300lm	V2SC-9273628P-WW
					3000K	36°	3000lm	2400lm	V2SC-9303628P-WW

Code Remark: P=P(Phase Dim)

Phase Dim 329,00 €

Coding

V2SC – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
V2SC	927 CRI90/ 2700K	36 36°	28 28W	P Phase Dim	WW Wihte-Wihte (WW)	H Honeycomb
	930 CRI90/ 3000K				BB Black-Black (BB)	
					BC Black-Chrome (BC)	
					BG Black-Gold (BG)	

Optional accessary



Honeycomb

Code for V2SC-9273628P-WW with Honeycomb V2SC-9273628P-WW-H

Honeycomb: +9,00€


VIBES V1RR – Single-Head Recessed Soptlight




36°
2700K
3000K
CRI >90
IP20
CE
CITIZEN 50,000h@L80B10
5 YEARS GUARANTEE

Quick Info


- CITIZEN LED: 14W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

2700K



3000K



Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Black-Chrome/ Black-Gold + 40,00 €

Optional accessary



Honeycomb

Code for V1RR-9273614P-WW with Honeycomb V1RR-9273614P-WW-H

Honeycomb: +9,00€

Order Info (VIBES V1RR in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5W	14W	36V	350mA	90	2700K	36°	1400lm	1100lm	V1RR-9273614P-WW
					3000K	36°	1500lm	1200lm	V1RR-9303614P-WW

Code Remark: P=P(Phase Dim)

Phase Dim 149,00 €

Coding

V1RR – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
V1RR	927 CRI90/ 2700K	36 36°	14 14W	P Phase Dim	WW Wihte-Wihte (WW)	H Honeycomb
	930 CRI90/ 3000K			D DALI Dim	BB Black-Black (BB)	
					BC Black-Chrome (BC)	
					BG Black-Gold (BG)	

BACK


VIBES V2RR – Double-Head Recessed Soptlight






Quick Info

- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim, DALI Dim, Casambi Wireless Dim




Light Distribution

2700K



3000K




Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Black-Chrome/ Black-Gold + 80,00 €

Order Info (VIBES V2RR in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5W	2x14W	36V	2x350mA	90	2700K	36°	2900lm	2300lm	V2RR-9273628P-WW
					3000K	36°	3000lm	2400lm	V2RR-9303628P-WW

Code Remark: P=P(Phase Dim)

Phase Dim 309,00 €

Coding

V2RR – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
V2RR	927 CRI90/ 2700K	36 36°	28 28W	P Phase Dim	WW Wihte-Wihte (WW)	H Honeycomb
	930 CRI90/ 3000K			D DALI Dim	BB Black-Black (BB)	
					BC Black-Chrome (BC)	
					BG Black-Gold (BG)	

Optional accessary



Honeycomb

Code for V2RR-9273628P-WW with Honeycomb V2RR-9273628P-WW-H

Honeycomb: +9,00€


VIBES V1SR – Single-Head Recessed Soptlight




36° | 2700K 3000K | CRI >90 | IP20 | CE | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- CITIZEN LED: 14W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

2700K



3000K



Finish


White-White (WW)


Black-Black (BB)


Black-Chrome (BC)


Black-Gold (BG)

Black-Chrome/ Black-Gold + 40,00 €

Order Info (VIBES V1SR in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5W	14W	36V	350mA	90	2700K	36°	1400lm	1100lm	V1SR-9273614P-WW
					3000K	36°	1500lm	1200lm	V1SR-9303614P-WW

Code Remark: P=P(Phase Dim)

Phase Dim 149,00 €

Coding

V1SR – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
V1SR	927 CRI90/ 2700K	36 36°	14 14W	P Phase Dim	WW Wihte-Wihte (WW)	H Honeycomb
	930 CRI90/ 3000K			D DALI Dim	BB Black-Black (BB)	
					BC Black-Chrome (BC)	
					BG Black-Gold (BG)	

Optional accessary


Honeycomb

Code for V1SR-9273614P-WW with Honeycomb V1SR-9273614P-WW-H

Honeycomb: +9,00€

BACK


VIBES V2SR – Double-Head Recessed Soptlight






Quick Info

- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

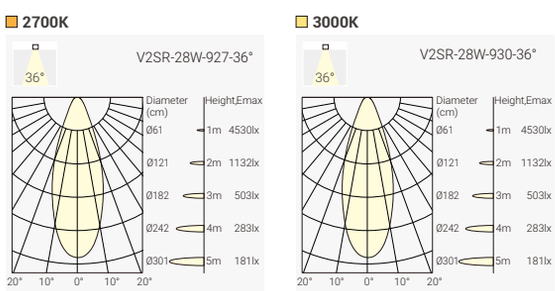

Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Black-Chrome/ Black-Gold + 80,00 €

Order Info (VIBES V2SR in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5W	2x14W	36V	2x350mA	90	2700K	36°	2900lm	2300lm	V2SR-9273628P-WW
					3000K	36°	3000lm	2400lm	V2SR-9303628P-WW

Code Remark: P=P(Phase Dim)

Phase Dim 309,00 €

Coding

V2SR – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
V2SR	927 CRI90/ 2700K	36 36°	28 28W	P Phase Dim	WW Wihte-Wihte (WW)	H Honeycomb
	930 CRI90/ 3000K			D DALI Dim	BB Black-Black (BB)	
					BC Black-Chrome (BC)	
					BG Black-Gold (BG)	

Optional accessary



Honeycomb

Code for V2SR-9273628P-WW with Honeycomb V2SR-9273628P-WW-H

Honeycomb: +9,00€

PURE-C

Ceiling Mounted Spotlight
Integrated LED Driver
No Visible Screw



Project: Clarence House, UK

PURE Art-C – Ceiling Mounted Spotlight




18° 24° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- CITIZEN LED: 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to1000lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim




Light Distribution


3000K







Finish



White Black

Order Info (PURE Art-C in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	18°	850lm	900lm	PUAC-9271815F-WB
						24°	1100lm	900lm	PUAC-9272415F-WB
						36°	1100lm	900lm	PUAC-9273615F-WB
						50°	1100lm	900lm	PUAC-9275015F-WB
					3000K	18°	1200lm	950lm	PUAC-9301815F-WB
						24°	1200lm	950lm	PUAC-9302415F-WB
						36°	1200lm	950lm	PUAC-9303615F-WB
						50°	1200lm	950lm	PUAC-9305015F-WB
					4000K	18°	1300lm	1000lm	PUAC-9401815F-WB
						24°	1300lm	1000lm	PUAC-9402415F-WB
						36°	1300lm	1000lm	PUAC-9403615F-WB
						50°	1300lm	1000lm	PUAC-9405015F-WB

ON-OFF	159,00 €
Phase Dim	189,00 €

Code Remark: F=F(ON-OFF) P=P(Phase Dim)

Optional accessary



Honeycomb

Code for PUAC-9302511F-WB with Honeycomb
PUAC-9302511F-WB-H

Honeycomb: +9,00€

Coding

PUAC – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUAC PURE Art-C	**927** CRI90/ 2700K	**18** 18°	**15** 15W	**F** On-Off	**W** Wihte	**B** Black	**H** Honeycomb
	930 CRI90/3000K	**24** 24°		**P** Phase Dim	**B** Black		
	940 CRI90/ 4000K	**36** 36°					
		50 50°					

BACK

PURE S-C – Ceiling Mounted Spotlight





15° 25° 30° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- CITIZEN LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 25°, 30°, 50°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, DALI Dim







Light Distribution


3000K







Finish



White Black

Order Info (PURE S-C in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	250mA	90	2700K	15°	1400lm	1100lm	PUSC-9271515F-WB
						25°	1400lm	1100lm	PUSC-9272515F-WB
						30°	1400lm	1100lm	PUSC-9273015F-WB
						50°	1400lm	850lm	PUSC-9275015F-WB
					3000K	15°	1500lm	1200lm	PUSC-9301515F-WB
						25°	1500lm	1200lm	PUSC-9302515F-WB
						30°	1500lm	1200lm	PUSC-9303015F-WB
						50°	1500lm	900lm	PUSC-9305015F-WB
					4000K	15°	1600lm	1300lm	PUSC-9401515F-WB
						25°	1600lm	1300lm	PUSC-9402515F-WB
						30°	1600lm	1300lm	PUSC-9403015F-WB
						50°	1600lm	1000lm	PUSC-9405015F-WB
18W	21W	36V	500mA	90	2700K	15°	1900lm	1500lm	PUSC-9271521F-WB
						25°	1900lm	1500lm	PUSC-9272521F-WB
						30°	1900lm	1500lm	PUSC-9273021F-WB
						50°	1900lm	1100lm	PUSC-9275021F-WB
					3000K	15°	2000lm	1600lm	PUSC-9301521F-WB
						25°	2000lm	1600lm	PUSC-9302521F-WB
						30°	2000lm	1600lm	PUSC-9303021F-WB
						50°	2000lm	1200lm	PUSC-9305021F-WB
					4000K	15°	2100lm	1700lm	PUSC-9401521F-WB
						25°	2100lm	1700lm	PUSC-9402521F-WB
						30°	2100lm	1700lm	PUSC-9403021F-WB
						50°	2100lm	1300lm	PUSC-9405021F-WB

ON-OFF	169,00 €
Phase Dim	199,00 €
DALI Dim	319,00 €

ON-OFF	189,00 €
Phase Dim	199,00 €
DALI Dim	319,00 €

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for PUSC--9302515F-WB with Honeycomb
PUSC--9302515F-WB-H

Honeycomb: +9,00€

Coding

PUSC – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUSC PURE-S-C	**927** CRI90/ 2700K	**15** 15°	**15** 15W	**F** On-Off	**W** Wihte	**B** Black	**H** Honeycomb
	930 CRI90/3000K	**25** 25°	**21** 21W	**P** Phase Dim	**B** Black		
	940 CRI90/ 4000K	**30** 30°		**D** DALI Dim			
		50 50°					

PURE

LED Tracklight
Integrated LED Driver
Elegant Design



Project: VALO Hotel Helsinki, Finland


PURE Art – LED Tracklight



18° 24° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- CITIZEN LED: 11W, 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to1000lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim




Light Distribution

3000K







Finish


White


Black

Order Info (PURE Art in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	36V	250mA	90	2700K	18°	850lm	640lm	PUA2-9271811F-WB
						24°	850lm	640lm	PUA2-9272411F-WB
						36°	850lm	640lm	PUA2-9273611F-WB
						50°	850lm	640lm	PUA2-9275011F-WB
					3000K	18°	950lm	720lm	PUA2-9301811F-WB
						24°	950lm	720lm	PUA2-9302411F-WB
						36°	850lm	720lm	PUA2-9303611F-WB
						50°	850lm	720lm	PUA2-9305011F-WB
ON-OFF	129,00 €				4000K	18°	1050lm	800lm	PUA2-9401811F-WB
Phase Dim	159,00 €					30°	1050lm	800lm	PUA2-9402411F-WB
						36°	1050lm	800lm	PUA2-9403611F-WB
						50°	1050lm	800lm	PUA2-9405011F-WB
13W	15W	36V	350mA	90	2700K	18°	1100lm	900lm	PUA2-9271815F-WB
						24°	1100lm	900lm	PUA2-9272415F-WB
						36°	1100lm	900lm	PUA2-9273615F-WB
						50°	1100lm	900lm	PUA2-9275015F-WB
					3000K	18°	1200lm	950lm	PUA2-9301815F-WB
						24°	1200lm	950lm	PUA2-9302415F-WB
						36°	1200lm	950lm	PUA2-9303615F-WB
						50°	1200lm	950lm	PUA2-9305015F-WB
					4000K	18°	1300lm	1000lm	PUA2-9401815F-WB
						24°	1300lm	1000lm	PUA2-9402415F-WB
						36°	1300lm	1000lm	PUA2-9403615F-WB
						50°	1300lm	1000lm	PUA2-9405015F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim)


Optional accessary


Honeycomb

Code for PUA2-9302511F-WB with Honeycomb
PUA2-9302511F-WB-H

Honeycomb: +9,00€

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

Coding

PUA2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUA2 PURE Art	**927** CRI90/ 2700K	**18** 18°	**11** 11W	**F** On-Off	**W** Wihte	**B** Black	**H** Honeycomb
	930 CRI90/3000K	**24** 24°	**15** 15W	**P** Phase Dim	**B** Black		
	940 CRI90/ 4000K	**36** 36°					
		50 50°					

BACK

PURE S – LED Tracklight




15° 25° 30° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- CITIZEN LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 25°, 30°, 50°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim




Light Distribution

3000K







Finish



White



Black

Order Info (PURE S in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	250mA	90	2700K	15°	1400lm	1100lm	PUS1-9271515F-WB
						25°	1400lm	1100lm	PUS1-9272515F-WB
						30°	1400lm	1100lm	PUS1-9273015F-WB
						50°	1400lm	850lm	PUS1-9275015F-WB
					3000K	15°	1500lm	1200lm	PUS1-9301515F-WB
						25°	1500lm	1200lm	PUS1-9302515F-WB
						30°	1500lm	1200lm	PUS1-9303015F-WB
						50°	1500lm	900lm	PUS1-9305015F-WB
ON-OFF 159,00 €					4000K	15°	1600lm	1300lm	PUS1-9401515F-WB
Phase Dim 189,00 €						25°	1600lm	1300lm	PUS1-9402515F-WB
						30°	1600lm	1300lm	PUS1-9403015F-WB
						50°	1600lm	1000lm	PUS1-9405015F-WB
18W	21W	36V	500mA	90	2700K	15°	1100lm	1500lm	PUS2-9271521F-WB
						25°	1100lm	1500lm	PUS2-9272521F-WB
						30°	1100lm	1500lm	PUS2-9273021F-WB
						50°	1100lm	1100lm	PUS2-9275021F-WB
					3000K	15°	1200lm	1600m	PUS2-9301521F-WB
						25°	1200lm	1600lm	PUS2-9302521F-WB
						30°	1200lm	1600lm	PUS2-9303021F-WB
						50°	1200lm	1200lm	PUS2-9305021F-WB
ON-OFF 179,00 €					4000K	15°	1300lm	1700lm	PUS2-9401521F-WB
Phase Dim 189,00 €						25°	1300lm	1700lm	PUS2-9402521F-WB
						30°	1300lm	1700lm	PUS2-9403021F-WB
						50°	1300lm	1300lm	PUS2-9405021F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim)

Optional accessary



Honeycomb

Code for PUS1-9301515F-WB with Honeycomb
PUS1-9301515F-WB-H


Honeycomb: +9,00€

Coding

PUS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUS1 PURE S-15W	**927** CRI90/ 2700K	**15** 15°	**15** 15W	**F** On-Off	**W** Wihte	**B** Black	**H** Honeycomb
PUS2 PURE S-21W	**930** CRI90/3000K	**24** 24°	**21** 21W	**P** Phase Dim	**B** Black		
	940 CRI90/ 4000K	**36** 36°					
		50 50°					

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

PURE S – LED Tracklight




15° 25° 30° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | CITIZEN 50,000h@L80B10 | GLOBAL | DALI 2 | 5 YEARS GUARANTEE


Quick Info


- CITIZEN LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 25°, 30°, 50°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: IP20
- LED Driver: DALI Dim




Light Distribution

3000K







Finish


White


Black

Order Info (PURE S in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	250mA	90	2700K	15°	1400lm	1100lm	PUS1-9271515D-WB
						25°	1400lm	1100lm	PUS1-9272515D-WB
						30°	1400lm	1100lm	PUS1-9273015D-WB
						50°	1400lm	850lm	PUS1-9275015D-WB
					3000K	15°	1500lm	1200lm	PUS1-9301515D-WB
						25°	1500lm	1200lm	PUS1-9302515D-WB
						30°	1500lm	1200lm	PUS1-9303015D-WB
						50°	1500lm	900lm	PUS1-9305015D-WB
					4000K	15°	1600lm	1300lm	PUS1-9401515D-WB
						25°	1600lm	1300lm	PUS1-9402515D-WB
DALI Dim	309,00 €					30°	1600lm	1300lm	PUS1-9403015D-WB
						50°	1600lm	1000lm	PUS1-9405015D-WB
18W	21W	36V	500mA	90	2700K	15°	1900lm	1500lm	PUS2-9271521D-WB
						25°	1900lm	1500lm	PUS2-9272521D-WB
						30°	1900lm	1500lm	PUS2-9273021D-WB
						50°	1900lm	1100lm	PUS2-9275021D-WB
					3000K	15°	2000lm	1600lm	PUS2-9301521D-WB
						25°	2000lm	1600lm	PUS2-9302521D-WB
						30°	2000lm	1600lm	PUS2-9303021D-WB
						50°	2000lm	1200lm	PUS2-9305021D-WB
					4000K	15°	2100lm	1700lm	PUS2-9401521D-WB
						25°	2100lm	1700lm	PUS2-9402521D-WB
DALI Dim	309,00 €					30°	2100lm	1700lm	PUS2-9403021D-WB
						50°	2100lm	1300lm	PUS2-9405021D-WB

Code Remark: D=D(DALI Dim)


Optional accessary


Honeycomb

Code for PUS1--9301515D-WB with Honeycomb
PUS1--9301515D-WB-H

Honeycomb: + 9,00 €

Track System



Compatible with GLOBAL 3-Circuit Track System

Coding


PUS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUS1 PURE S-15W	**927** CRI90/ 2700K	**15** 15°	**15** 15W	**D** DALI DIM	**W** Wihte	**B** Black	**H** Honeycomb
PUS2 PURE S-21W	**930** CRI90/3000K	**24** 24°	**21** 21W		**B** Black		
	940 CRI90/ 4000K	**36** 36°					
		50 50°					

BACK


PURE M – LED Tracklight



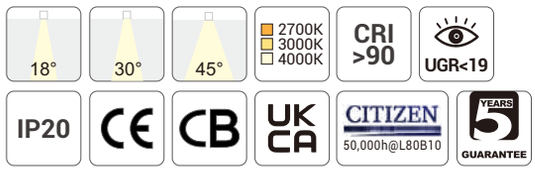


Quick Info


- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 2900lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off




Light Distribution

3000K







Finish



White Black

Order Info (PURE M in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	18°	3200lm	2500lm	PUM1-9271828F-WB
						30°	3200lm	2500lm	PUM1-9273028F-WB
						45°	3200lm	2500lm	PUM1-9274528F-WB
					3000K	18°	3400lm	2700lm	PUM1-9301828F-WB
						30°	3400lm	2700lm	PUM1-9303028F-WB
						45°	3400lm	2700lm	PUM1-9304528F-WB
ON-OFF	209,00 €				4000K	18°	3600lm	2900lm	PUM1-9401828F-WB
						30°	3600lm	2900lm	PUM1-9403028F-WB
						45°	3600lm	2900lm	PUM1-9404528F-WB

Code Remark: F=F(ON-OFF)

Optional accessary



Honeycomb

Code for PUM1-9301828F-WB with Honeycomb
PUM1-9301828F-WB-H

Honeycomb: + 9,00 €

Track System



Compatible with GLOBAL / POWERGEAR
3-Circuit Track System

Coding

PUM1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUM1	**927**	**18**	**28**	**F**	**W**	**B**	**H**
PURE M	CRI90/ 2700K	18°	28W	On-Off	Wihte	Black	Honeycomb
	930	**30**			**B**		
	CRI90/3000K	30°			Black		
	940	**45**					
	CRI90/ 4000K	45°					

PURE M – LED Tracklight




18° 30° 45° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | CITIZEN 50,000h@L80B10 | GLOBAL | DALI 2 | 5 YEARS GUARANTEE


Quick Info


- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 2900lm System Luminous Flux
- IP Class: IP20
- LED Driver: DALI Dim




Light Distribution


3000K







Finish



White Black

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	18°	3200lm	2500lm	PUM1-9271828D-WB
						30°	3200lm	2500lm	PUM1-9273028D-WB
						45°	3200lm	2500lm	PUM1-9274528D-WB
					3000K	18°	3400lm	2700lm	PUM1-9301828D-WB
						30°	3400lm	2700lm	PUM1-9303028D-WB
						45°	3400lm	2700lm	PUM1-9304528D-WB
					4000K	18°	3600lm	2900lm	PUM1-9401828D-WB
						30°	3600lm	2900lm	PUM1-9403028D-WB
						45°	3600lm	2900lm	PUM1-9404528D-WB

DALI Dim 329,00 €

Code Remark: D=D(DALI Dim)

Optional accessary




Honeycomb

Code for PUM1--9301828D-WB with Honeycomb
PUM1--9301828D-WB-H

Honeycomb: + 9,00 €

Track System



Compatible with GLOBAL 3-Circuit Track System

Coding

PUM1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUM1 PURE M	**927** CRI90/ 2700K	**18** 18°	**28** 28W	**D** DALI DIM	**W** Wihte	**B** Black	**H** Honeycomb
	930 CRI90/3000K	**30** 30°			**B** Black		
	940 CRI90/ 4000K	**45** 45°					

BACK

ROXY

In-Track Driver LED Tracklight Clean Design



Project: Clever armaturval för Kv Poolen, Sweden


ROXY Art – In-Track Driver LED Tracklight



18° 24° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | CB | UK CA | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CITIZEN LED: 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to 1000lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off




Light Distribution

3000K

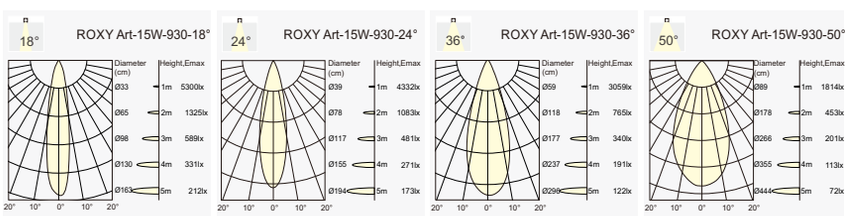

Finish



White Black

Order Info (ROXY Art in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	18°	1200lm	900lm	ROA1-9271815F-WB
						24°	1200lm	900lm	ROA1-9272415F-WB
						36°	1200lm	900lm	ROA1-9273615F-WB
						50°	1200lm	900lm	ROA1-9275015F-WB
					3000K	18°	1300lm	950lm	ROA1-9301815F-WB
						24°	1300lm	950lm	ROA1-9302415F-WB
						36°	1300lm	950lm	ROA1-9303615F-WB
						50°	1300lm	950lm	ROA1-9305015F-WB
					4000K	18°	1400lm	1000lm	ROA1-9401815F-WB
						24°	1400lm	1000lm	ROA1-9402415F-WB
						36°	1400lm	1000lm	ROA1-9403615F-WB
						50°	1400lm	1000lm	ROA1-9405015F-WB
ON-OFF	149,00 €								

Code Remark: F=F(ON-OFF)

Optional accessary




Code for ROA1-9301815F-WB with Honeycomb ROA1-9301815F-WB-H

Honeycomb

Honeycomb: + 9,00 €

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

Coding

ROA1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROA1 ROXY Art	**927** CRI90/ 2700K	**18** 18°	**15** 15W	**F** On-Off	**W** Wihte	**B** Black	**H** Honeycomb
	930 CRI90/3000K	**24** 24°			**B** Black		
	940 CRI90/ 4000K	**36** 36°					
		50 50°					

BACK

ROXY Art – In-Track Driver LED Tracklight




18° 24° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | CITIZEN 50,000h@L80B10 | DALI 2 | 5 YEARS GUARANTEE


Quick Info

- CITIZEN LED: 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to 1000lm System Luminous Flux
- IP Class: IP20
- LED Driver: DALI Dim



Light Distribution

3000K

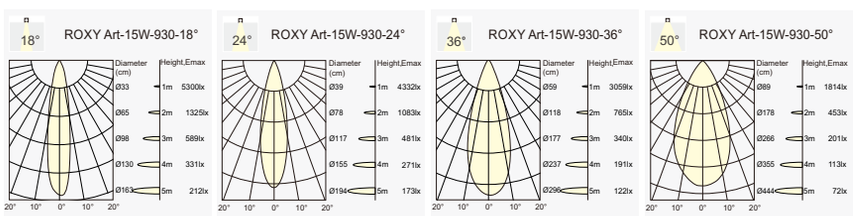

Finish



White Black

Order Info (ROXY Art in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	18°	1200lm	900lm	ROA1-9271815D-WB
						24°	1200lm	900lm	ROA1-9272415D-WB
						36°	1200lm	900lm	ROA1-9273615D-WB
						50°	1200lm	900lm	ROA1-9275015D-WB
					3000K	18°	1300lm	950lm	ROA1-9301815D-WB
						24°	1300lm	950lm	ROA1-9302415D-WB
						36°	1300lm	950lm	ROA1-9303615D-WB
						50°	1300lm	950lm	ROA1-9305015D-WB
					4000K	18°	1400lm	1000lm	ROA1-9401815D-WB
						24°	1400lm	1000lm	ROA1-9402415D-WB
						36°	1400lm	1000lm	ROA1-9403615D-WB
						50°	1400lm	1000lm	ROA1-9405015D-WB

DALI Dim 219,00 €

Code Remark: D=D(DALI Dim)

Optional accessary




Code for ROA1-9301815D-WB with Honeycomb
ROA1-9301815D-WB-H

Honeycomb

Honeycomb: + 9,00 €

Track System




Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

Coding

ROA1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROA1 ROXY Art	**927** CRI90/ 2700K	**18** 18°	**15** 15W	**D** DALI Dim	**W** Wihte	**B** Black	**H** Honeycomb
	930 CRI90/3000K	**24** 24°			**B** Black		
	940 CRI90/ 4000K	**36** 36°					
		50 50°					

ROXY S – In-Track Driver LED Tracklight

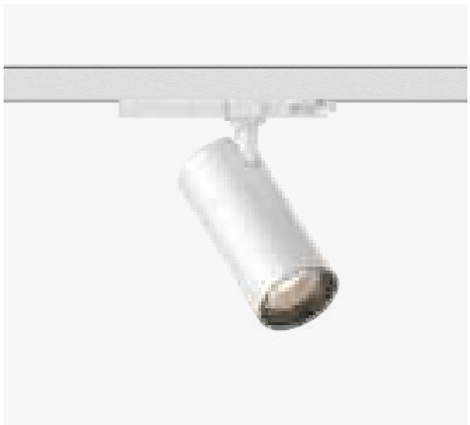


15° 30° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- CITIZEN LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 50°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off




Light Distribution


3000K







Finish



White Black

Order Info (ROXY S in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	250mA	90	2700K	15°	1400lm	1100lm	ROS1-9271515F-WB
						30°	1400lm	1100lm	ROS1-9273015F-WB
						50°	1400lm	850lm	ROS1-9275015F-WB
					3000K	15°	1500lm	1200lm	ROS1-9301515F-WB
						30°	1500lm	1200lm	ROS1-9303015F-WB
						50°	1500lm	900lm	ROS1-9305015F-WB
					4000K	15°	1600lm	1300lm	ROS1-9401515F-WB
						30°	1600lm	1300lm	ROS1-9403015F-WB
						50°	1600lm	1000lm	ROS1-9405015F-WB
18W	21W	36V	500mA	90	2700K	15°	1900lm	1500lm	ROS2-9271521F-WB
						30°	1900lm	1500lm	ROS2-9273021F-WB
						50°	1900lm	1100lm	ROS2-9275021F-WB
					3000K	15°	2000lm	1600lm	ROS2-9301521F-WB
						30°	2000lm	1600lm	ROS2-9303021F-WB
						50°	2000lm	1100lm	ROS2-9305021F-WB
					4000K	15°	2100lm	1700lm	ROS2-9401521F-WB
						30°	2100lm	1700lm	ROS2-9403021F-WB
						50°	2100lm	1300lm	ROS2-9405021F-WB

ON-OFF 149,00 €

Code Remark: F=F(ON-OFF)

Optional accessary




Honeycomb

Code for ROS1-9302515F-WB with Honeycomb
ROS1-9302515F-WB-H

Honeycomb: + 9,00 €

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

Coding

ROS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROS1 ROXY S-15W	**927** CRI90/ 2700K	**15** 15°	**15** 15W	**F** On-Off	**W** Wihte	**B** Black	**H** Honeycomb
ROS2 ROXY S-21W	**930** CRI90/3000K	**30** 30°	**21** 21W		**B** Black		
	940 CRI90/ 4000K	**50** 50°					

BACK

ROXY S – In-Track Driver LED Tracklight




15° 30° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | CITIZEN 50,000h@L80B10 | DALI 2 | 5 YEARS GUARANTEE


Quick Info


- CITIZEN LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 50°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: IP20
- LED Driver: DALL Dim




Light Distribution

3000K







Finish



White



Black

Order Info (ROXY S in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	250mA	90	2700K	15°	1400lm	1100lm	ROS1-9271515D-WB
						30°	1400lm	1100lm	ROS1-9273015D-WB
						50°	1400lm	850lm	ROS1-9275015D-WB
					3000K	15°	1500lm	1200lm	ROS1-9301515D-WB
						30°	1500lm	1200lm	ROS1-9303015D-WB
						50°	1500lm	900lm	ROS1-9305015D-WB
					4000K	15°	1600lm	1300lm	ROS1-9401515D-WB
						30°	1600lm	1300lm	ROS1-9403015D-WB
						50°	1600lm	1000lm	ROS1-9405015D-WB
18W	21W	36V	500mA	90	2700K	15°	1900lm	1500lm	ROS2-9271521D-WB
						30°	1900lm	1500lm	ROS2-9273021D-WB
						50°	1900lm	1500lm	ROS2-9275021D-WB
					3000K	15°	2000lm	1600lm	ROS2-9301521D-WB
						30°	2000lm	1600lm	ROS2-9303021D-WB
						50°	2000lm	1500lm	ROS2-9305021D-WB
					4000K	15°	2100lm	1700lm	ROS2-9401521D-WB
						30°	2100lm	1700lm	ROS2-9403021D-WB
						50°	2100lm	1700lm	ROS2-9405021D-WB

DALI Dim | 219,00 €

Code Remark: D=D(DALI Dim)

Optional accessary




Honeycomb

Code for ROS1-9302515D-WB with Honeycomb
ROS1-9302515D-WB-H

Honeycomb: + 9,00 €

Track System



Compatible with GLOBAL / POWERGEAR
3-Circuit Track System

Coding

ROS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROS1 ROXY S-15W	**927** CRI90/ 2700K	**15** 15°	**15** 15W	**d** DALI Dim	**W** Wihte	**B** Black	**H** Honeycomb
ROS2 ROXY S-21W	**930** CRI90/3000K	**30** 30°	**21** 21W		**B** Black		
	940 CRI90/ 4000K	**50** 50°					

BACK

ROXY K – In-Track Driver LED Tracklight




20° 35° 55° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 2600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off




Light Distribution

3000K







Finish


White


Black

Order Info (ROXY K in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	20°	2500lm	2000lm	ROK1-9272028F-WB
						35°	2500lm	2200lm	ROK1-9273528F-WB
						55°	2500lm	2200lm	ROK1-9275528F-WB
					3000K	15°	2700lm	2200lm	ROK1-9302028F-WB
						35°	2700lm	2400lm	ROK1-9303528F-WB
						55°	2700lm	2400lm	ROK1-9305528F-WB
					4000K	20°	2900lm	2400lm	ROK1-9402028F-WB
						35°	2900lm	2600lm	ROK1-9403528F-WB
						55°	2900lm	2600lm	ROK1-9405528F-WB

ON-OFF 209,00 €

Code Remark: F=F(ON-OFF)

Optional accessary


Honeycomb

Code for ROK1-9303528F-WB with Honeycomb
ROK1-9303528F-WB-H

Honeycomb: + 9,00 €

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

Coding

ROK1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROK1 ROXY K	**927** CRI90/ 2700K	**20** 20°	**28** 28W	**F** On-Off	**W** Wihte	**B** Black	**H** Honeycomb
	930 CRI90/3000K	**35** 35°			**B** Black		
	940 CRI90/ 4000K	**55** 55°					

BACK


ROXY K – In-Track Driver LED Tracklight






Quick Info


- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 2600lm System Luminous Flux
- IP Class: IP20
- LED Driver: DALL Dim




Light Distribution


3000K







Finish



White Black

Order Info (ROXY K in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	20°	2500lm	2000lm	ROK1-9272028D-WB
						35°	2500lm	2200lm	ROK1-9273528D-WB
						55°	2500lm	2200lm	ROK1-9275528D-WB
					3000K	15°	2700lm	2200lm	ROK1-9302028D-WB
						35°	2700lm	2400lm	ROK1-9303528D-WB
						55°	2700lm	2400lm	ROK1-9305528D-WB
					4000K	20°	2900lm	2400lm	ROK1-9402028D-WB
						35°	2900lm	2600lm	ROK1-9403528D-WB
						55°	2900lm	2600lm	ROK1-9405528D-WB

DALI Dim 269,00 €

Code Remark: F=F(ON-OFF)

Optional accessary



Honeycomb

Code for ROK1-9303528D-WB with Honeycomb
ROK1-9303528D-WB-H

Honeycomb: + 9,00 €

Track System



Compatible with GLOBAL / POWERGEAR
3-Circuit Track System

Coding

ROK1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROK1 ROXY K	**927** CRI90/ 2700K	**20** 20°	**28** 28W	**d** DALI Dim	**W** Wihte	**B** Black	**H** Honeycomb
	930 CRI90/3000K	**35** 35°			**B** Black		
	940 CRI90/ 4000K	**55** 55°					

ROXY Art-Z – In-Track Driver LED Tracklight





20°~35° | 35°~60° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- CITIZEN LED: 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°~35°, 35°~60°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off , DALL Dim








20°-60° Zooming

Light Distribution

3000K







Order Info (ROXY Art-Z in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	20°~35°	1200lm	1000lm	ROA1-927Z315F-WB
					3000K	20°~35°	1300lm	1100lm	ROA1-930Z315F-WB
					4000K	20°~35°	1400lm	1200lm	ROA1-940Z315F-WB
					2700K	35°~60°	1200lm	950lm	ROA1-927Z615F-WB
					3000K	35°~60°	1300lm	1000lm	ROA1-930Z615F-WB
					4000K	35°~60°	1400lm	1100lm	ROA1-940Z615F-WB

ON-OFF	149,00 €
DALI Dim	219,00 €

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Finish



White Black

Coding

ROA1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROA1 ROXY Art-Z	**927** CRI90/ 2700K	**Z3** 20°~35°	**15** 15W	**F** On-Off	**W** Wihte	**B** Black	**H** Honeycomb
	930 CRI90/3000K	**Z6** 35°~60°		**D** DALI Dim	**B** Black		
	940 CRI90/ 4000K						

Optional accessary




Honeycomb

Code for ROA1-930Z315F-WB with Honeycomb
ROA1-930Z315F-WB-H

Honeycomb: + 9,00 €

Track System



Compatible with GLOBAL / POWERGEAR
3-Circuit Track System

BACK

ROXY S-Z – In-Track Driver LED Tracklight





18°~35° | 35°~60° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- CITIZEN LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°~35°, 35°~60°
- Lumen Output: Up to 1800lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off , DALL Dim








20°-60° Zooming

Light Distribution

3000K








Order Info (ROXY S-Z in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	18°~35°	1400lm	1200lm	ROS1-927Z315F-WB
					3000K	18°~35°	1500lm	1300lm	ROS1-930Z315F-WB
					4000K	18°~35°	1600lm	1400lm	ROS1-940Z315F-WB
					2700K	35°~60°	1400lm	1100lm	ROS1-927Z615F-WB
					3000K	35°~60°	1500lm	1200lm	ROS1-930Z615F-WB
					4000K	35°~60°	1600lm	1300lm	ROS1-940Z615F-WB
18W	21W	36V	500mA	90	2700K	18°~35°	1900lm	1600lm	ROS1-927Z321F-WB
					3000K	18°~35°	2000lm	1700lm	ROS1-930Z321F-WB
					4000K	18°~35°	2100lm	1800lm	ROS1-940Z321F-WB
					2700K	35°~60°	1900lm	1500lm	ROS1-927Z621F-WB
					3000K	35°~60°	2000lm	1600lm	ROS1-930Z621F-WB
					4000K	35°~60°	2100lm	1700lm	ROS1-940Z621F-WB

ON-OFF	169,00 €
DALI Dim	239,00 €

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Finish



White Black

Coding

ROS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROS1	**927**	**Z3**	**15**	**F**	**W**	**B**	**H**
ROXY S-Z	CRI90/ 2700K	20°~35°	15W	On-Off	Wihte	Black	Honeycomb
	930	**Z6**	**21**	**D**	**B**		
	CRI90/3000K	35°~60°	21W	DALI Dim	Black		
	940						
	CRI90/ 4000K						

Optional accessary




Honeycomb

Code for ROS1-930Z315F-WB with Honeycomb
ROS1-930Z315F-WB-H

Honeycomb: + 9,00 €

Track System



Compatible with GLOBAL / POWERGEAR
3-Circuit Track System

BACK

INLINE

Single Phase LED Tracklight System
Incl. Phase Dim Driver
Direct Connection 230V – No External Driver




INLINE – Single Phase LED Tracklight System






Quick Info

- LUMINUS LED: 9W, CRI>90
- CCT: 2700K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 700lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim



Light Distribution

2700K



Finish



White



Black


Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	18V	500mA	90	3000K	36°	900lm	700lm	ILST-9273611P-WB
9W	11W	18V	500mA	90	3000K	36°	900lm	700lm	ILST-9273611P-BB

Code Remark: P=P(Phase Dim)

Phase Dim 119,00 €

Track System



Compatible with NEKO INLINE Single Circuit Track System

BACK


INLINE – Single Phase LED Tracklight System






Quick Info

- LUMINUS LED: 6W, CRI>90
- CCT: 2700K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim



Light Distribution

2700K



Finish



White Black


Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	8W	18V	350mA	90	2000K	36°	700lm	500lm	ILSP-9273608P-WB
9W	8W	18V	350mA	90	2000K	36°	700lm	500lm	ILSP-9273608P-BB

Code Remark: P=P(Phase Dim)

Phase Dim 159,00 €

Track System




Compatible with NEKO INLINE Single Circuit Track System

INLINE – Single Phase LED Tracklight System




Quick Info


- Aluminum extrusion track shell
- 2 pieces copper busbars, insulated by plastic
- Single circuit track system for 16A (3500W) input
- Track length available in 1000mm and 2000mm
- Various connectors and accessories available forbuilding comprehensive lighting system
- Color finish in White(RAL9003) or Black(RAL9005)
- Surface mounted



Load of Track

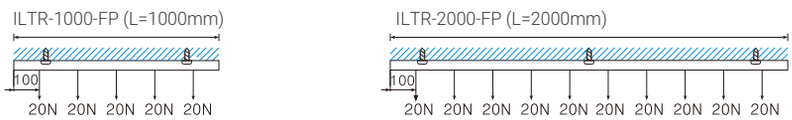


Connection Diagram

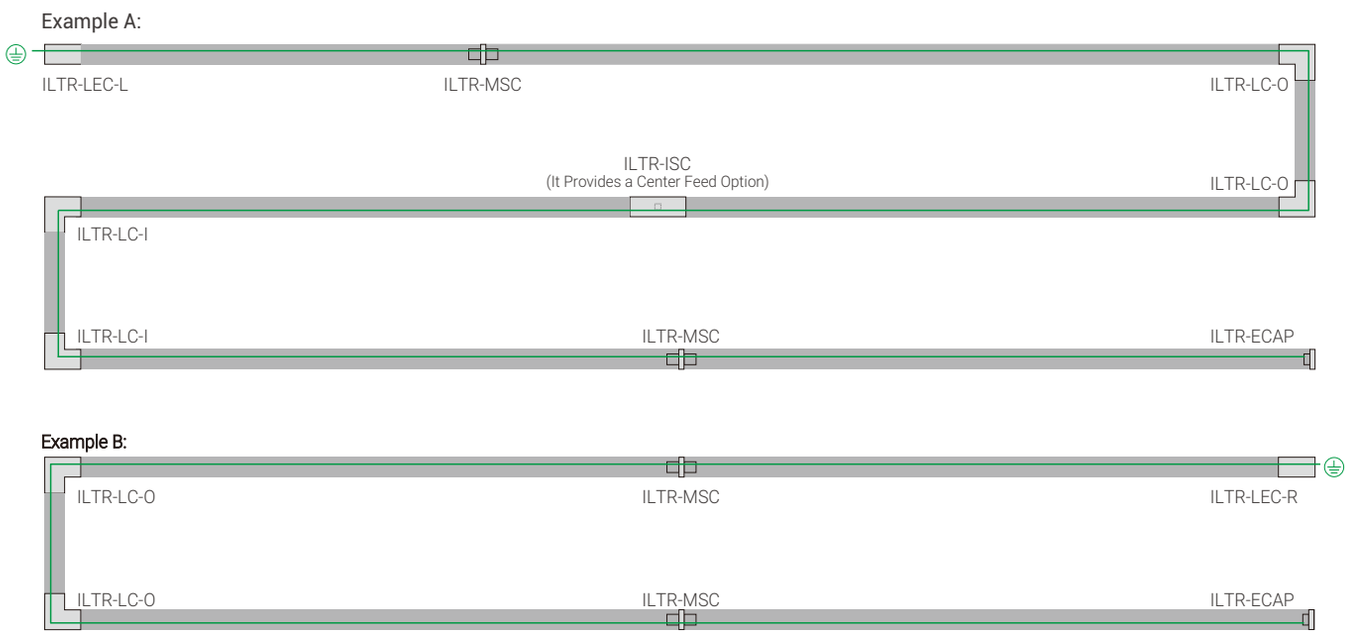

BACK






INLINE Single Phase Track

Description	Code/Model	
INLINE Single Phase Track, 1000mm Length, White	ILTR-1000-FP-W	49,00 €
INLINE Single Phase Track, 1000mm Length, Black	ILTR-1000-FP-W	
INLINE Single Phase Track, 2000mm Length, White	ILTR-2000-FP-W	89,00 €
INLINE Single Phase Track, 2000mm Length, Black	ILTR-2000-FP-B	






Live End Connector


Description	Code/Model	
Live End Connector, Left, White	ILTR-LEC-L-W	19,00 €
Live End Connector, Left, Black	ILTR-LEC-L-B	
Live End Connector, Right, White	ILTR-LEC-R-W	
Live End Connector, Right, Black	ILTR-LEC-R-B	






I Straight Connector

Description	Code/Model	
I Straight Connector, It Provides a Center Feed Option, White	ILTR-ISC-W	29,00 €
I Straight Connector, It Provides a Center Feed Option, Black	ILTR-ISC-B	






L Connector

Description	Code/Model	
L Connector, Outer, White	ILTR-LC-O-W	29,00 €
L Connector, Outer, Black	ILTR-LC-O-B	
L Connector, Inner, White	ILTR-LC-I-W	
L Connector, Inner, Black	ILTR-LC-I-B	





Mini Straight Connector

Description	Code/Model	
Mini Straight Connector, White	ILTR-MSC-W	9,00 €
Mini Straight Connector, Black	ILTR-MSC-B	





Endcap

Description	Code/Model	
Endcap, White	ILTR-ECAP-W	5,00 €
Endcap, Black	ILTR-ECAP-B	


Control NEKO luminaires via CASAMBI

CASAMBI is a versatile Bluetooth-based lighting control solution for commercial, residential, hospitality, office, and retail spaces. Supporting NEKO luminaires, it offers seamless, smart control over lighting networks through an intuitive app, making it ideal for various applications.

Connect NEKO luminaires onto CASAMBI


Here below are the options.

①



NEKO Luminaire


+



CASAMBI-Ready LED Driver


→

②



NEKO Luminaire

+



DALI Dim LED Driver


+



CASAMBI DALI Dim Module


→

③



MODULINE 26 Track
+DALI Version Light Inset

+



48V LED Driver
Any 48V LED Driver

+




CASAMBI Bluetooth-DALI Converter

→

BACK


CASAMBI Wireless Controls




CASAMBI App

CASAMBI Switch

① DALI Dim, CASAMBI-Ready LED Driver

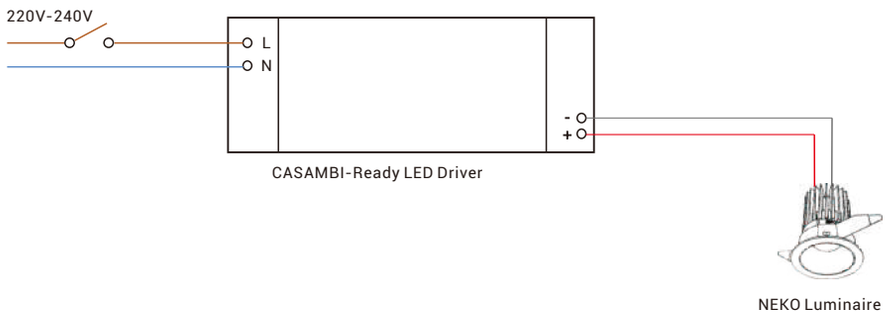


② DALI Dim, CASAMBI DALI Dim Module

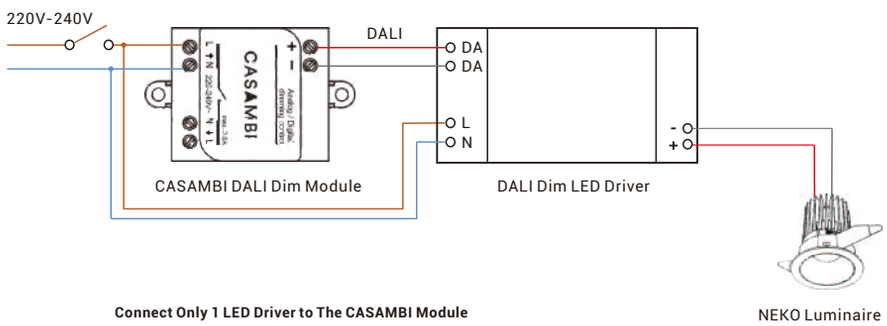

Connect Only 1 LED Driver to The CASAMBI Module


③ CASAMBI DALI Dim Control for NEKO Moduline 26 System

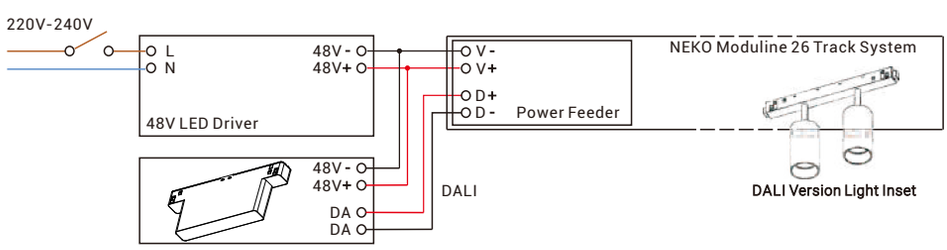


CASAMBI Bluetooth-DALI Converter
Max. 64 DALI Light Insets Divided into 8 Groups
Each Group Can be Controlled Separately
LxH: 143x58mm

Lighting Controls Wiring Diagrams

On-Off/ Non-dim

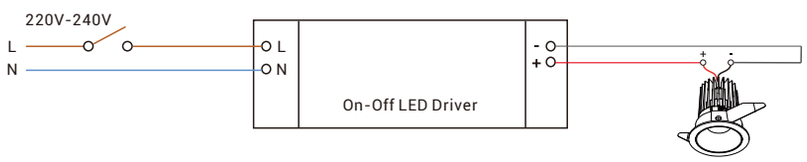


Triac Dim/ Phase Dim

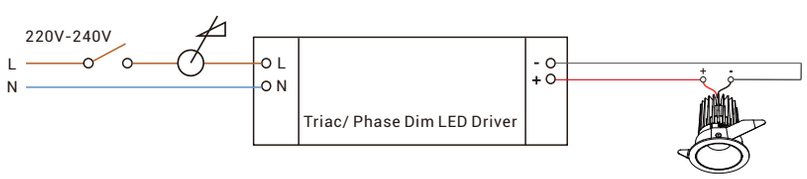


Check the Compatibility of Dimmer and LED Driver

0/1-10V Dim

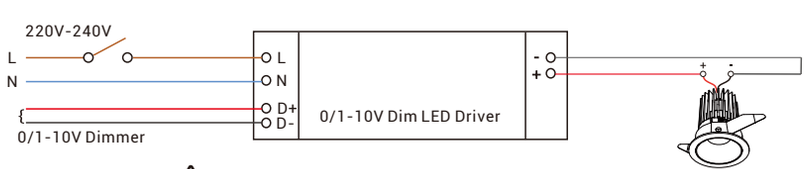

Always Respect Polarity of 0/1-10V Dim Signal


DALI Dim

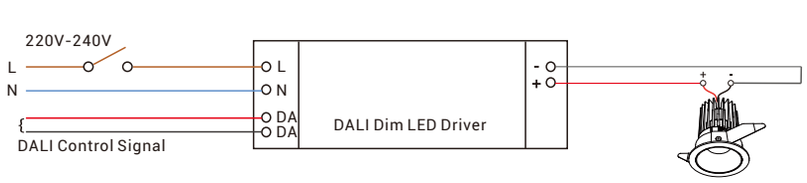


BACK

Wiring Diagrams of Moduline 26 Track System


On-Off/ Non-dim

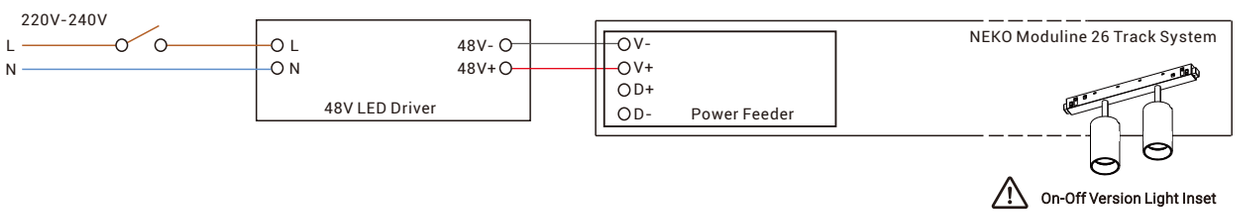


1-10V Dim

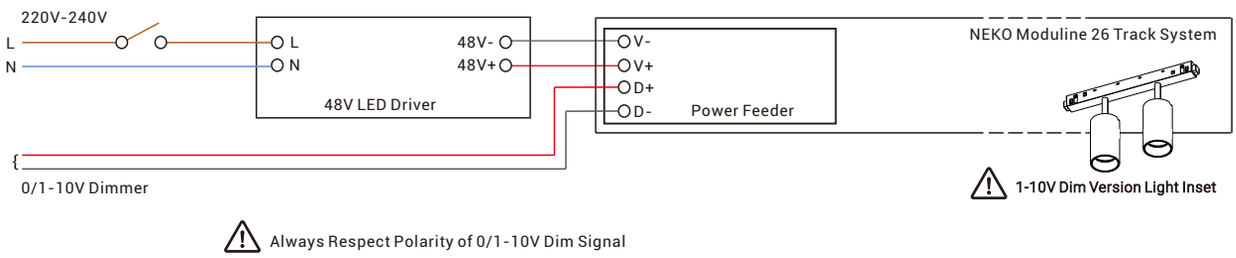

DALI Dim

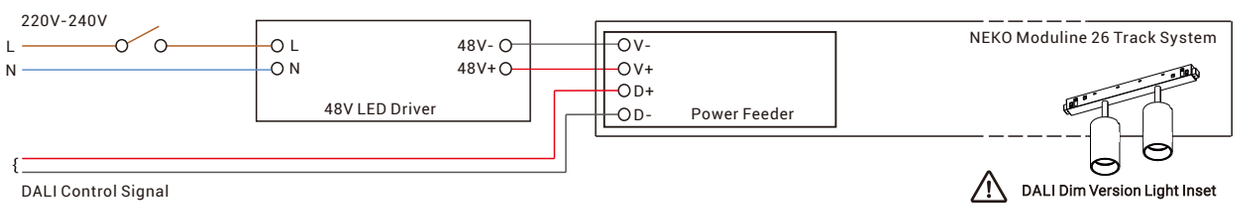


CASAMBI DALI Dim Control for NEKO Moduline 26 System

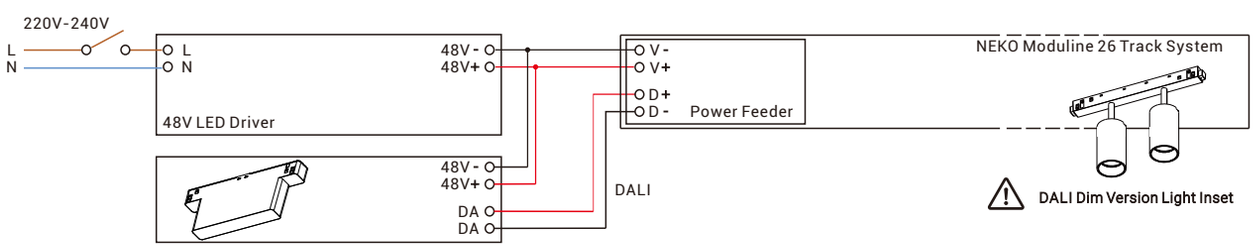

CASAMBI Bluetooth-DALI Converter
Max. 64 DALI Light Insets Divided into 8 Groups
Each Group Can be Controlled Separately
LxH: 143x58mm

CASAMBI


OUTDOOR

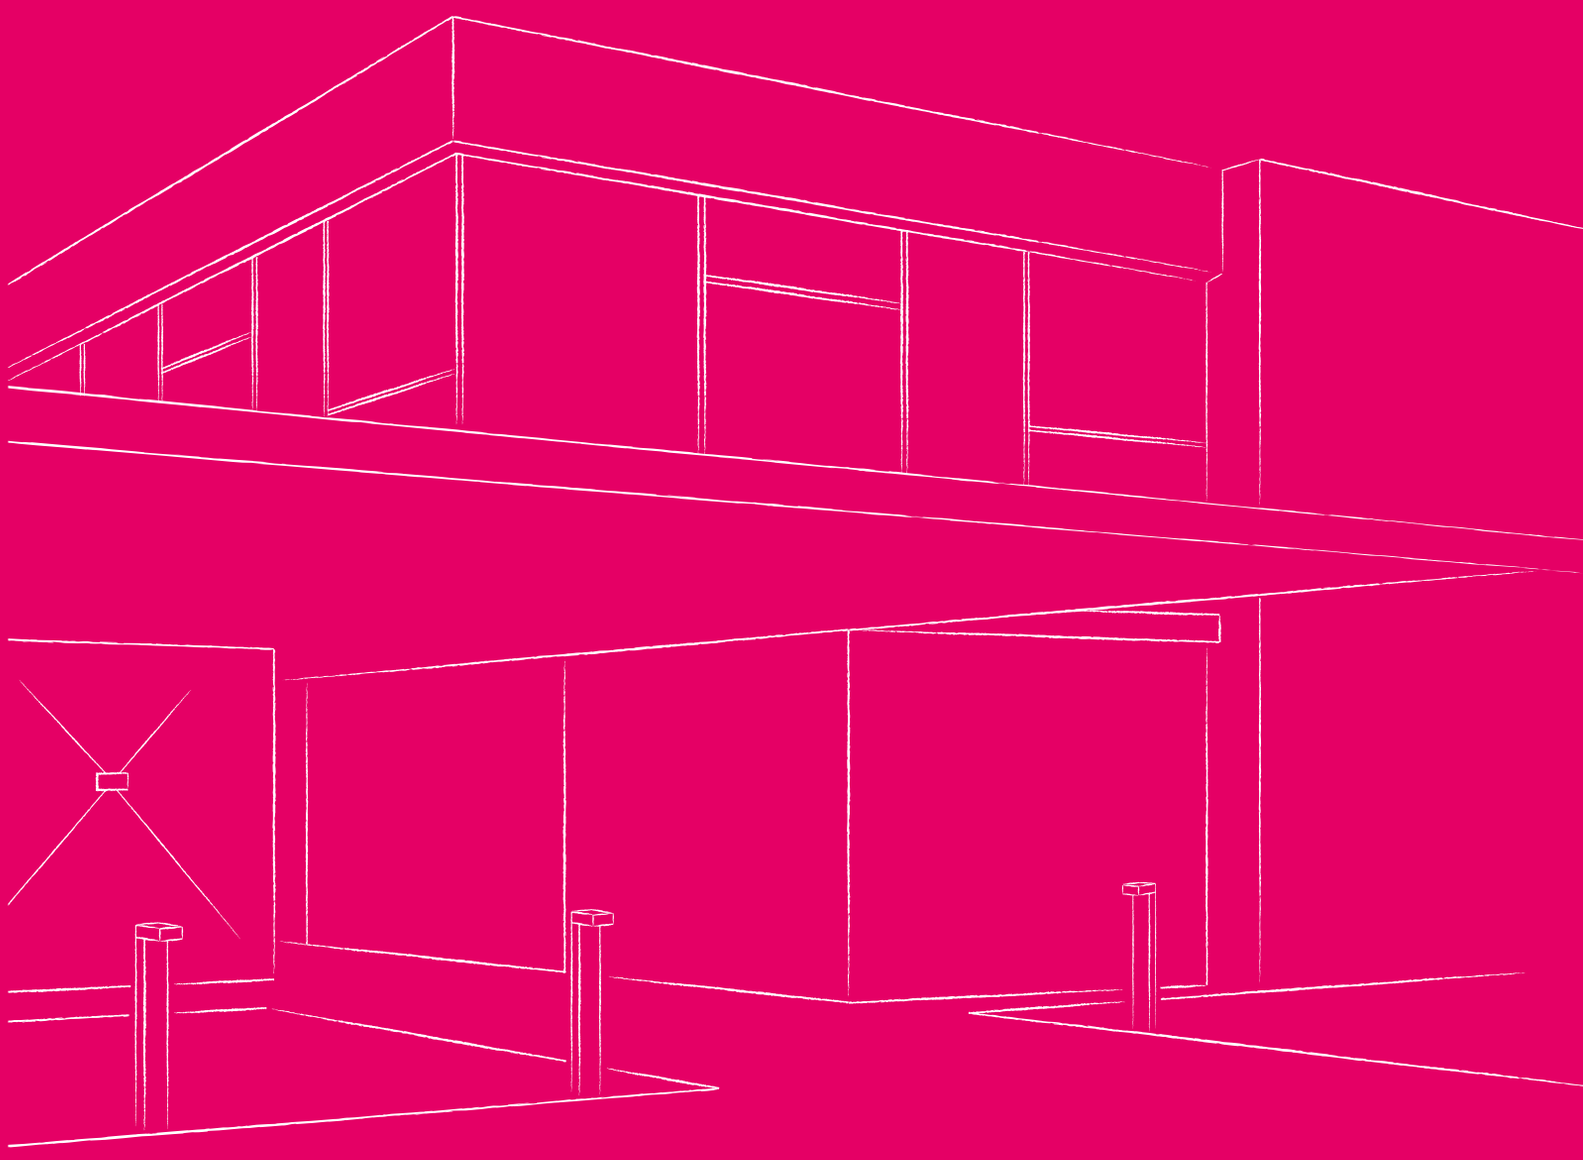

OUTDOOR RANGE

INDEX

SEAPOINT Series



SEAPOINT
■355

LAKEPOINT Series



LAKEPOINT Fixed
■356



LAKEPOINT Adjustable
■357

CARMEL Series



SKYSURFER SSRC
■358



CARMEL Round
■359

CLIFTON Series



CLIFTON
■360

RIVA Series



RIVA Round
■361



RIVA Square
■362

CAMPSBAY Series



CAMPSBAY Single
■363



CAMPSBAY Double

LAGOON Series



LAGOON
■364

CRUZ D Series



CRUZ D
■365

CAPRI Series



CAPRI
■366

BAY Series




BAY
■367

NICE Series



NICE 250S & NICE 250D
■368




NICE 500S & NICE 500D
■369

St.Tropez Series



St.Tropez
■370

Capetown-Recessed Series




Capetown Round-Recessed
■371



Capetown Square-Recessed

Capetown-Surface Series



Capetown Round-Surface
■372




Capetown Square-Surface

CALIFORNIA Series



CALIFORNIA 12
■373

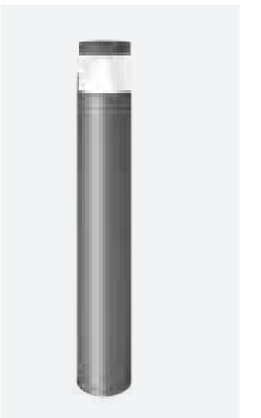


CALIFORNIA 16

DURBAN Series




DURBAN
■374

POSITANO Series

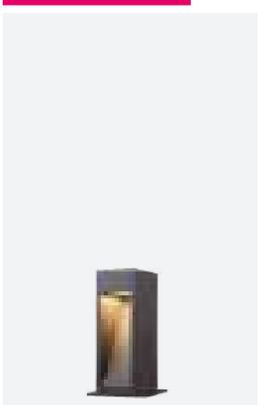

POSITANO 300
■375

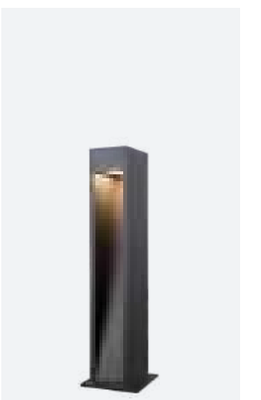

POSITANO 600

PORTOFINO Series



PORTOFINO S
■376



PORTOFINO L



PORTOFINO Adjustable
■377

AFTER7 Series



AFTER7 Mini
■378



AFTER7 Maxi
■379

NEPTUNE Series



NEPTUNE XSU CV
■380




NEPTUNE SU CV
■381



NEPTUNE MU CV
■382



NEPTUNE LU CV
■383



NEPTUNE SR CV
NEPTUNE SR HV
■385



NEPTUNE MR CV
NEPTUNE MR HV
■386



NEPTUNE LR CV
NEPTUNE LR HV
■387

TERARACE Series



TERARACE Micro
■388



TERARACE Nano
■389



TERARACE Mini
■390



TERARACE Maxi
■391


SEAPOINT – Exterior LED Downlight




25° | 3000K | CRI >80 | UGR<19 | IP67 | IK07 | CE | CREE 50,000h@L80B10 | 3 YEAR GUARANTEE

Quick Info


- Ceiling Cut-out: Ø100mm
- CREE LED: 6W, CRI>90, 3000K
- Beam Angle: 25°
- Lumen Output: Up to 450lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Black
- LED Driver: With internal Non-Dimmable LED driver





Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5W	6W	220-240V	90	3000K	25°	450lm	SEAPOINT-830-25°	SEAP-8302506F-BN


Remark: With internal Non-Dimmable LED driver


ON-OFF | 189,00 €

BACK

LAKEPOINT Fixed – Exterior LED Downlight








30° | 3000K | CRI >80 | IP65 | CE | CREE 50,000h@L80B10 | 3 YEAR GUARANTEE

Quick Info

- Ceiling Cut-out: Ø90mm, 3000K
- CREE LED: 6W, CRI>80
- Beam Angle: 30°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: White/ Black
- LED Driver: With Non-Dimmable LED driver

Light Distribution

3000K



Finish



White (WW)



Black (BB)

Order Info


LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
6W	8W	220-240VAC	80	3000K	30°	500lm	LAKEPOINT F-830-30°	LAPF-8303008F-WW LAPF-8303008F-BB


Remark: With internal Non-Dimmable LED driver

ON-OFF | 109,00 €

LAKEPOINT Adjustable – Exterior LED Downlight








30° | 3000K | CRI >80 | ±30° Tiltable | IP65 | CE | CREE 50,000h@L80B10 | 3 YEAR GUARANTEE

Quick Info

- Ceiling Cut-out: Ø100mm
- CREE LED: 6W, CRI>80, 3000K
- Beam Angle: 30°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: White/ Black
- LED Driver: With Non-Dimmable LED driver

Light Distribution

3000K



Finish



White (WW)



Black (BB)

Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
6W	8W	220-240VAC	80	3000K	30°	500lm	LAKEPOINT A-830-30°	LAPA-8303008F-WW LAPA-8303008F-BB


Remark: With internal Non-Dimmable LED driver

ON-OFF | 139,00 €

BACK

SKYSURFER SSRC – IP65 LED Ceiling Light






36° | 3000K | CRI >90 | UGR<19 | IP65 | CE | CITIZEN 50,000h@L80B10

Quick Info

- CITIZEN LED: 8W, CRI>90, 3000K
- Beam Angle: 36°
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Black
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K



Order Info


LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
8W	10W	220-240VAC	90	3000K	36°	850lm	SSRC-10W	SSRC-9303610F-BN

Remark: With internal Non-Dimmable LED driver

ON-OFF 119,00 €

CARMEL – LED Ceiling Light






55° | 3000K | CRI >80 | UGR<19 | IP54 | IK07 | CE | CREE 50,000h@L80B10 | 3 YEAR GUARANTEE

Quick Info

- CREE LED: 5W, CRI>80, 3000K
- Beam Angle: 55°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP54
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5W	6W	220-240VAC	80	3000K	55°	500lm	CARMEL R-830-55°	CARR-8305506F-DN


Remark: With internal Non-Dimmable LED driver

ON-OFF 129,00 €

BACK

CLIFTON – LED Ceiling Light






110°
3000K
CRI >80
IP54
IK10
EDISON 50,000h@L80B10
3 YEAR GUARANTEE

Quick Info

- EDISON LED: 22W, CRI>80, 3000K
- Beam Angle: 110°
- Lumen Output: Up to 2350lm System Luminous Flux
- IP Class: IP54
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K



Order Info


LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
22W	25W	220-240VAC	80	3000K	110°	2350lm	RIVA Round-830-110°	CLIF-830A125F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF 259,00 €

RIVA ROUND – LED Ceiling Light






110° | 3000K | CRI >80 | IP54 | CE | PHILIPS 50,000h@L80B10 | GUARANTEE 3 YEAR

Quick Info

- PHILIPS LED: 12W, CRI>80, 3000K
- Beam Angle: 110°
- Lumen Output: Up to 1150lm System Luminous Flux
- IP Class: IP54
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
12W	14W	220-240VAC	80	3000K	110°	1150lm	RIVR-14W-830-110°	RIVR-830A114F-DN


Remark: With internal Non-Dimmable LED driver

ON-OFF | 209,00 €

BACK

RIVA SQURE – LED Ceiling Light








Quick Info

- PHILIPS LED: 12W, CRI>80, 3000K
- Beam Angle: 110°
- Lumen Output: Up to 1150lm System Luminous Flux
- IP Class: IP54
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
12W	14W	220-240VAC	80	3000K	110°	1150lm	RIVA Square-830-110°	RIVS-830A114F-DN


Remark: With internal Non-Dimmable LED driver

ON-OFF 209,00 €


CAMPSBAY – LED Wall Light




CAMPSBAY Single



CAMPSBAY Double









Quick Info

- CREE LED: 5W, 10W, CRI>80, 3000K
- CCT: 3000K Available as Standard
- Beam Angle: 45°
- Lumen Output: Up to 500lm/ 1000lm System Luminous Flux
- IP Class: IP54
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K





Order Info

ON-OFF	139,00 €
ON-OFF	159,00 €

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5W	6W	220-240VAC	80	3000K	45°	500lm	CAMPSBAY Single-830-45°	CAMS-8304506F-DN
10W	12W	220-240VAC	80	3000K	45°↑45°↓	1000lm	CAMPSBAY Double-830-45°	CAMD-8304512F-DN

Remark: With internal Non-Dimmable LED driver

BACK


LAGOON – LED Wall Light



100° □ 100° | 3000K | CRI >80 | IP65 | IK07 | CE | CREE 50,000h@L80B10 | 3 YEAR GUARANTEE


Quick Info

- CREE LED: 9W, CRI>80, 3000K
- Beam Angle: 100°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
9W	11W	220-240VAC	80	3000K	100°↓ 100°↑	950lm	LAGOON-830-110°	LAG-830A111F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF | 189,00 €


CRUZ D – LED Wall Light



120° □ 120° | 3000K | CRI >80 | IP65 | IK07 | OSRAM 50,000h@L80B10 | 3 YEAR GUARANTEE


Quick Info

- OSRAM LED: 12W, CRI>80, 3000K
- Beam Angle: 120°
- Lumen Output: Up to 1400lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
12W	14W	220-240VAC	80	3000K	120°↓ 120°↑	1400lm	CRUD-830-120°	CRUD-830A214F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF 119,00 €

BACK


CAPRI – LED Wall Light



100° □ 100° | 3000K | CRI >80 | IP65 | IK07 | CREE 50,000h@L80B10 | 3 YEAR GUARANTEE


Quick Info

- CREE LED: 14W, CRI>80, 3000K
- Beam Angle: 100°
- Lumen Output: Up to 1300lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K



Order Info


LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
14W	16W	220-240VAC	80	3000K	100°↓ 100°↑	1300lm	CAPRI-830-100°	CAPI-830A016F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF | 169,00 €

BAY – LED Wall Light






90°
90°
3000K
CRI >80
IP65
IK07
CE
CREE
50,000h@L80B10
3 YEAR GUARANTEE

Quick Info

- CREE LED: 5W, CRI>80, 3000K
- Beam Angle: 90°
- Lumen Output: Up to 430lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5W	6W	220-240VAC	80	3000K	90°↓ 90°↑	430lm	BAY-830-90°	BAY-8309006F-DN


Remark: With internal Non-Dimmable LED driver

ON-OFF 129,00 €

BACK

NICE 250 – LED Wall Light






110° | 3000K | CRI >80 | IP65 | IK07 | PHILIPS 50,000h@L80B10 | 3 YEAR GUARANTEE


Quick Info

- PHILIPS LED: 5W,12W, CRI>80, 3000K
- Beam Angle: 110°
- Lumen Output: Up to 650lm/ 1300lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K





Order Info


LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5W	7W	220-240VAC	80	3000K	110°↓	650lm	NICE 250S-830-110°	N25S-830A107F-DN
12W	14W	220-240VAC	80	3000K	110°↓ 110°↑	1300lm	NICE 250D-830-110°	N25D-830A114F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF	169,00 €
ON-OFF	209,00 €

NICE 500 – LED Wall Light





110°

3000K

CRI >80

IP65

IK07

PHILIPS 50,000h@L80B10


GUARANTEE 3 YEAR


Quick Info

- PHILIPS LED: 12W, 18W, CRI>80, 3000K
- Beam Angle: 110°
- Lumen Output: Up to 1300lm/ 1800lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K





Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code		
12W	14W	220-240VAC	80	3000K	110°↓	1300lm	NICE500S-830-110°	N50S-830A114F-DN	ON-OFF	239,00 €
18W	20W	220-240VAC	80	3000K	110°↓ 110°↑	1800lm	NICE500D-830-110°	N50D-830A120F-DN	ON-OFF	289,00 €

Remark: With internal Non-Dimmable LED driver

BACK


St.Tropez – Window Light



3° | 3000K | CRI >80 | IP65 | IK10 | CE | CREE 50,000h@L80B10 | 3 YEAR GUARANTEE


Quick Info

- EDISON LED: 4W, CRI>80, 3000K
- Beam Angle: 3°
- Lumen Output: Up to 300lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
4W	6W	220-240VAC	80	3000K	3°	300lm	St.Tropez-830-3°	STTZ-8300306F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF 229,00 €

BACK

CAPETOWN – Recessed LED Step Light



Capetown Round-Recessed





Capetown Square-Recessed

65° | 3000K | CRI >80 | IP65 | IK07 | CE | EDISON 50,000h@L80B10 | 3 YEAR GUARANTEE

Quick Info


- EDISON LED: 3W, CRI>80, 3000K
- Beam Angle: 65°
- Lumen Output: Up to 155lm/ 165lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver






Light Distribution

3000K





Order Info

LED Power	System Power	Input	Cutout	CRI	CCT	Beam	System Output	Model	Code
3W	4.5W	220-240VAC	Ø110*55	80	3000K	65°	155lm	Capetown RR-830-65°	CTRR-8306505F-DN
3W	4.5W	220-240VAC	110*110*55	80	3000K	65°	165lm	Capetown SR-830-65°	CTSR-8306505F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF 119,00 €

BACK


CAPETOWN – Surface LED Step Light




Capetown Round-Surface



Capetown Square-Surface









Quick Info

- EDISON LED: 3W, CRI>80, 3000K
- Beam Angle: 65°
- Lumen Output: Up to 150lm/ 170lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K





Order Info


LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
3W	4.5W	220-240VAC	80	3000K	65°	150lm	Capetown RS-830-65°	CTRS-8306505F-DN
3W	4.5W	220-240VAC	80	3000K	65°	170lm	Capetown SS-830-65°	CTSS-8306505F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF 79,00 €

CALIFORNIA – LED Bollard Lamp





360° | 3000K | CRI >80 | IP65 | IK07 | CE | EDISON 50,000h@L80B10 | 3 YEAR GUARANTEE


Quick Info

- DISON LED: 11W, 17W, CRI>80, 3000K
- Beam Angle: Light Emission 360°
- Lumen Output: Up to 660m/ 1220lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver


Light Distribution

3000K

CALIFORNIA 12-13W-830-65°

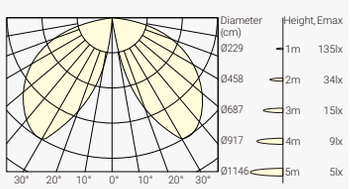

CALIFORNIA 16-19W-830-65°

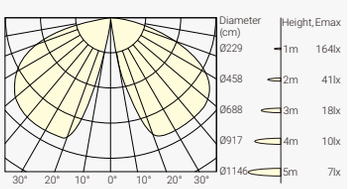

Order Info


		LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
ON-OFF	339,00 €	11W	13W	220-240VAC	80	3000K	65°	660lm	CALIFORNIA 12-830	CA12-830C613F-DN
ON-OFF	499,00 €	17W	19W	220-240VAC	80	3000K	65°	1220lm	CALIFORNIA 16-830	CA16-830C619F-DN

Remark: With internal Non-Dimmable LED driver

BACK

DURBAN – LED Bollard Lamp





270° | 3000K | CRI >80 | IP65 | IK10 | CE | EDISON 50,000h@L80B10 | 3 YEAR GUARANTEE


Quick Info

- EDISON LED: 5W, CRI>80, 3000K
- Beam Angle: Light Emission 270°
- Lumen Output: Up to 450lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K

DURBAN-6W-830-270°




Order Info


LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5W	6W	220-240VAC	80	3000K	270°	450lm	DURBAN-830	DURB-830B706F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF | 319,00 €

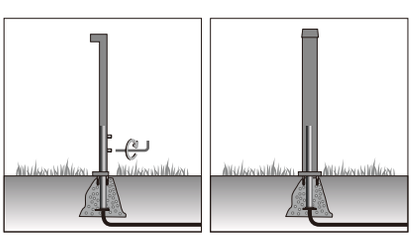


Anchorage installation

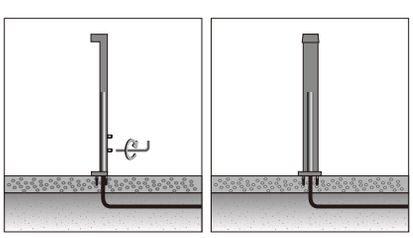

Surface installation

POSITANO – LED Bollard Lamp









Quick Info

- PHILIPS LED: 5W, CRI>80, 3000K
- Beam Angle: 50°
- Lumen Output: Up to 200lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K





Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5W	7W	220-240VAC	80	3000K	50°	200lm	POSITANO 300-830	PTO3-8305007F-DN
							POSITANO 600-830	PTO6-8305007F-DN

Remark: With internal Non-Dimmable LED driver


ON-OFF	289,00 €
ON-OFF	369,00 €


BACK

PORTOFINO – Projector Light



PORTOFINO S PORTOFINO L



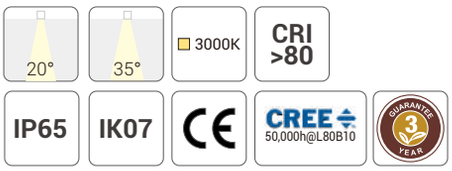



Quick Info

- CREE LED: 3W, 11W, CRI>80, 3000K
- Beam Angle: 20°, 35°
- Lumen Output: Up to 250lm/ 1050lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K





Accessory : Stake for PORTOFINO series projectors



Order Info


LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
3W	4W	220-240VAC	80	3000K	35°	250lm	PORTOFINO S-830-35°	PORS-8303504F-DN
11W	13W	220-240VAC	80	3000K	20°	1050lm	PORTOFINO L-830-20°	PORL-8302013F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF	139,00 €	PORS-8303504F-DN
ON-OFF	209,00 €	PORM-8303504F-DN
ON-OFF	259,00 €	PORD-8303504F-DN

PORTOFINO Adjustable – Beam Angle Zooming Projector Light






15-60° Zooming | 3000K | CRI >80 | IP65 | IK07 | CE | EDISON 50,000h@L80B10 | 3 YEAR GUARANTEE


Quick Info

- EDISON LED: 9W, CRI>80, 3000K
- Beam Angle: 15°-60° Zooming
- Lumen Output: Up to 450lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver

Light Distribution

3000K






Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
9W	11W	220-240VAC	80	3000K	15°-60°	Max.450lm	PORTOFINO A-830-Z	PORA-830ZM11F-DN

Remark: With internal Non-Dimmable LED driver

ON-OFF 249,00 €


+60° 15°-

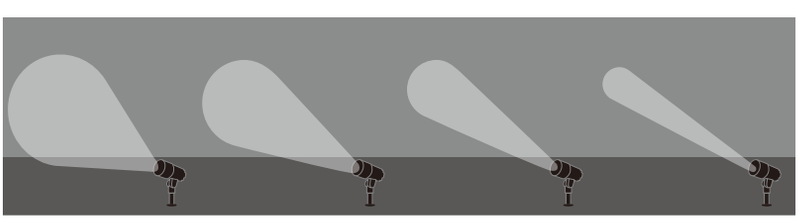

BACK

AFTER7 MINI – Projector Light



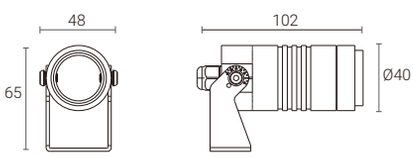

30° 45° 2700K 3000K CRI >80


IP67 IK08 CE CITIZEN 50,000h@L80B10 GUARANTEE 3 YEAR


Quick Info

- CITIZEN LED: 5W, CRI>80, 2700K, 3000K
- Beam Angle: 30°, 45°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)

Light Distribution

3000K





Versions



Without Snoot



Without Snoot (H)

Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5W	5.5W	24V	80	2700K	30°	480lm	AFTER7 Mini-827-30°	AFMI-8273006F-DN
					45°	480lm	AFTER7 Mini-827-45°	AFMI-8274506F-DN
					30°	450lm	AFTER7 Mini-82730°-H	AFMI-8273006F-DN-H
					45°	450lm	AFTER7 Mini-827-45°-H	AFMI-8274506F-DN-H
				3000K	30°	500lm	AFTER7 Mini-830-30°	AFMI-8303006F-DN
					45°	500lm	AFTER7 Mini-830-45°	AFMI-8304506F-DN
					30°	470lm	AFTER7 Mini-830-30°-H	AFMI-8303006F-DN-H
					45°	470lm	AFTER7 Mini-830-45°-H	AFMI-8304506F-DN-H

Remark: Remote 24VDC LED driver is required (Non-Dimmable)

Without Snoot:

ON-OFF(IP67) 159,00 €

Without Snoot (H):

ON-OFF(IP67) 179,00 €


Accessory : Stake for AFTER7 series projectors



BACK

AFTER7 MAXI – Projector Light



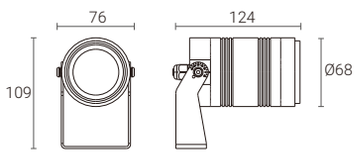

20° 30° 50° 2700K 3000K CRI >80


IP67 IK08 CE UKCA bridgelux. 50,000h@L80B10 GUARANTEE 3 YEAR


Quick Info


- Bridgelux LED: 9W, CRI>80, 2700K, 3000K
- Beam Angle: 20°, 30°, 50°
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)

Light Distribution

3000K







Versions



Without Snoot



Without Snoot (H)

Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
9W	10W	24V	80	2700K	20°	800lm	AFTER7 Maxi-827-20°	AFMA-8272010F-DN
					30°	800lm	AFTER7 Maxi-827-30°	AFMA-8273010F-DN
					50°	800lm	AFTER7 Maxi-827-50°	AFMA-8275010F-DN
					20°	750lm	AFTER7 Maxi-827-20°-H	AFMA-8272010F-DN
					30°	750lm	AFTER7 Maxi-827-30°-H	AFMA-8273010F-DN
					50°	750lm	AFTER7 Maxi-827-50°-H	AFMA-8275010F-DN
				3000K	20°	850lm	AFTER7 Maxi-830-20°	AFMA-8302010F-DN
					30°	850lm	AFTER7 Maxi-830-30°	AFMA-8303010F-DN
					50°	850lm	AFTER7 Maxi-830-50°	AFMA-8305010F-DN
					20°	800lm	AFTER7 Maxi-830-20°-H	AFMA-8302010F-DN
					30°	800lm	AFTER7 Maxi-830-30°-H	AFMA-8303010F-DN
					50°	800lm	AFTER7 Maxi-830-50°-H	AFMA-8305010F-DN

Remark: Remote 24VDC LED driver is required (Non-Dimmable)

Accessory : Stake for AFTER7 series projectors



Without Snoot:

ON-OFF(IP67) 329,00 €

Without Snoot (H):

ON-OFF(IP67) 349,00 €

BACK

NEPTUNE XSU CV – Projector Light

NEW




12° 18° 30° 50° 2700K 3000K CRI >80 UGR<19

IP67 CE OSRAM 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- OSRAM LED: 3W, CRI>80, 2700K, 3000K
- Beam Angle: 12°, 18°, 30°, 50°
- Lumen Output: Up to 150lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Remote 24VDC LED Driver to be Ordered Separately



Light Distribution

2700K

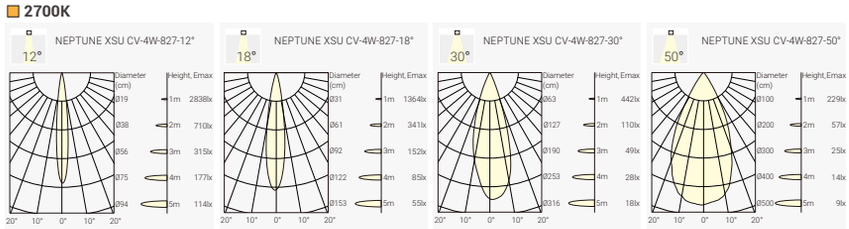

Accessory: Stake for NEPTUNE series projectors




Order Info

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
3W	4W	24VDC	80	2700K	12°	140lm	NEPTUNE XSU-4W-827-12°	NU1C-8271204N-DN
					18°	140lm	NEPTUNE XSU-4W-827-18°	NU1C-8271804N-DN
					30°	140lm	NEPTUNE XSU-4W-827-30°	NU1C-8273004N-DN
					50°	140lm	NEPTUNE XSU-4W-827-50°	NU1C-8275004N-DN
				3000K	12°	150lm	NEPTUNE XSU-4W-830-12°	NU1C-8301204N-DN
					18°	150lm	NEPTUNE XSU-4W-830-18°	NU1C-8301804N-DN
					30°	150lm	NEPTUNE XSU-4W-830-30°	NU1C-8303004N-DN
					50°	150lm	NEPTUNE XSU-4W-830-50°	NU1C-8305004N-DN

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

Optional Accessary



Honeycomb

Honeycomb: +9,00€

ON-OFF 129,00 €

NEPTUNE SU CV – Projector Light

NEW




8° 15° 30° 40° 2700K 3000K CRI >80 UGR<19

IP67 CE CREE 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- OSRAM LED: 4W, CRI>80, 2700K, 3000K
- Beam Angle: 8°, 15°, 30°, 40°
- Lumen Output: Up to 420lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Remote 24VDC LED Driver to be Ordered Separately



Light Distribution

2700K

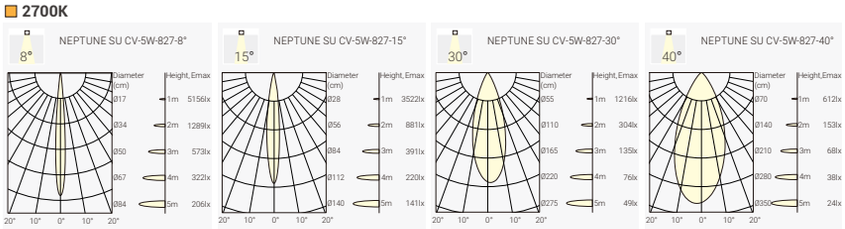

Accessory: Stake for NEPTUNE series projectors




Order Info

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
4W	5W	24VDC	80	2700K	8°	260lm	NEPTUNE SU-5W-827-8°	NU2C-8270805N-DN
				3000K	8°	280lm	NEPTUNE SU-5W-830-8°	NU2C-8300805N-DN
4.2W	5W	24VDC	80	2700K	15°	380lm	NEPTUNE SU-5W-827-15°	NU2C-8271505N-DN
					30°	380lm	NEPTUNE SU-5W-827-30°	NU2C-8273005N-DN
					40°	300lm	NEPTUNE SU-5W-827-40°	NU2C-8274005N-DN
				3000K	15°	420lm	NEPTUNE SU-5W-830-15°	NU2C-8301505N-DN
					30°	420lm	NEPTUNE SU-5W-830-30°	NU2C-8303005N-DN
					40°	350lm	NEPTUNE SU-5W-830-40°	NU2C-8304005N-DN

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

Optional Accessary



Honeycomb



Bevel Snoot



Straight Snoot

Honeycomb: +9,00€

ON-OFF 199,00 €

BACK

NEPTUNE MU CV – Projector Light

NEW




10° 20° 30° 50° | 2700K 3000K | CRI >80 | UGR<19

IP67 | CE | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CREE LED: 11W, CRI>80, 2700K, 3000K
- Beam Angle: 10°, 20°, 30°, 50°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Remote 24VDC LED Driver to be Ordered Separately



Light Distribution

2700K

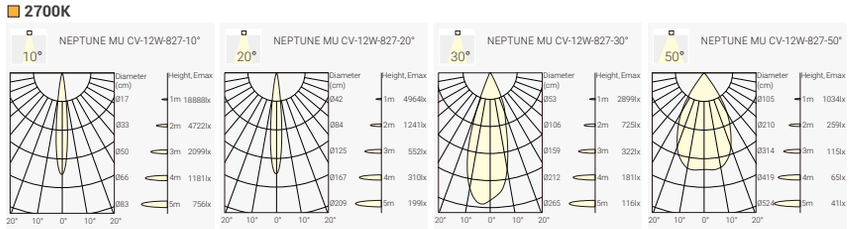

Accessory: Stake for NEPTUNE series projectors




Order Info

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
11W	12W	24VDC	80	2700K	10°	800lm	NEPTUNE MU-12W-827-10°	NU3C-8271012N-DN
					20°	850lm	NEPTUNE MU-12W-827-20°	NU3C-8272012N-DN
					30°	850lm	NEPTUNE MU-12W-827-30°	NU3C-8273012N-DN
					50°	800lm	NEPTUNE MU-12W-827-50°	NU3C-8275012N-DN
				3000K	10°	850lm	NEPTUNE MU-12W-830-10°	NU3C-8301012N-DN
					20°	950lm	NEPTUNE MU-12W-830-20°	NU3C-8302012N-DN
					30°	950lm	NEPTUNE MU-12W-830-30°	NU3C-8303012N-DN
					50°	850lm	NEPTUNE MU-12W-830-50°	NU3C-8305012N-DN

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver Remote 24VDC LED Driver to be Ordered Separately

Optional Accessary



Honeycomb



Bevel Snoot




Straight Snoot

Honeycomb: +9,00€

ON-OFF 289,00 €

NEPTUNE LU CV – Projector Light






Quick Info

- CREE LED: 16W, CRI>80, 2700K, 3000K
- Beam Angle: 10°, 20°, 30°, 50°
- Lumen Output: Up to 1600lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Remote 24VDC LED Driver to be Ordered Separately

Light Distribution

2700K

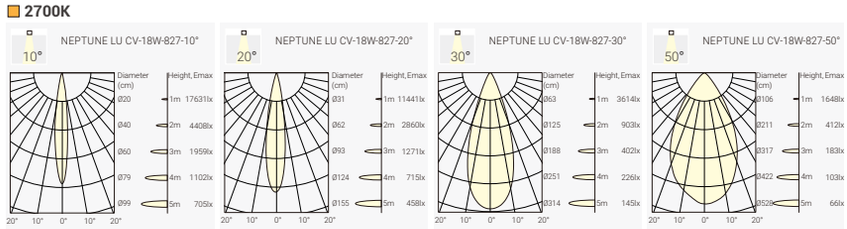

Accessory: Stake for NEPTUNE series projectors




Order Info

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
16W	18W	24VDC	80	2700K	10°	1400lm	NEPTUNE LU-18W-827-10°	NU4C-8271018N-DN
					20°	1450lm	NEPTUNE LU-18W-827-20°	NU4C-8272018N-DN
					30°	1450lm	NEPTUNE LU-18W-827-30°	NU4C-8273018N-DN
					50°	1400lm	NEPTUNE LU-18W-827-50°	NU4C-8275018N-DN
				3000K	10°	1500lm	NEPTUNE LU-18W-830-10°	NU4C-8301018N-DN
					20°	1600lm	NEPTUNE LU-18W-830-20°	NU4C-8302018N-DN
					30°	1600lm	NEPTUNE LU-18W-830-30°	NU4C-8303018N-DN
					50°	1500lm	NEPTUNE LU-18W-830-50°	NU4C-8305018N-DN

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

Optional Accessary



Honeycomb

ON-OFF	369,00 €

Honeycomb: +9,00€

NEPTUNE Base Version

Standard 24VDC Version
LED Driver Integrated Version Optional

Installation Possibilities:

1 -Rear Cable
2 -Metal Tube
3 -PVC Pipe
4 -Direct Cable
5 -Corrugated Tube
6 -Spike Mounted



NEPTUNE SR – Projector Light


NEW



15° 30° 40° | 2700K 3000K | CRI >80 | UGR<19 | IP66 | CE | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CREE LED: 4W, CRI>80, 2700K, 3000K
- Beam Angle: 15°, 30°, 40°
- Lumen Output: Up to 420lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input



Light Distribution


2700K

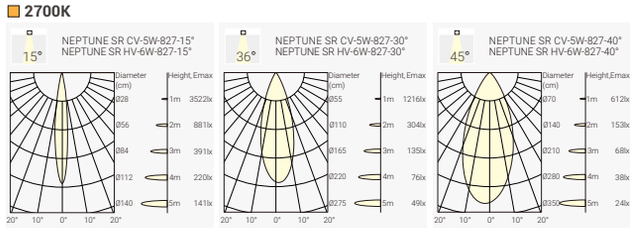

Accessory: Stake for NEPTUNE series projectors



Optional Accessary



Honeycomb



Bevel Snoot



Straight Snoot

Honeycomb: +9,00€
Bevel Snoot:
Straight Snoot:

Order Info

24VDC Verison

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
4W	5W	24VDC	80	2700K	15°	380lm	NEPTUNE SR CV-5W-827-15°	NR1C-8271505F-DN
					30°	380lm	NEPTUNE SR CV-5W-827-30°	NR1C-8273005F-DN
					40°	300lm	NEPTUNE SR CV-5W-827-40°	NR1C-8274005F-DN
				3000K	15°	420lm	NEPTUNE SR CV-5W-830-15°	NR1C-8301505F-DN
					30°	420lm	NEPTUNE SR CV-5W-830-30°	NR1C-8303005F-DN
					40°	350lm	NEPTUNE SR CV-5W-830-40°	NR1C-8304005F-DN

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

ON-OFF	189,00 €

LED Driver Integrated Version

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
4W	6W	220-240VAC	80	2700K	15°	380lm	NEPTUNE SR HV-6W-827-15°	NR1H-8271506F-DN
					30°	380lm	NEPTUNE SR HV-6W-827-30°	NR1H-8273006F-DN
					40°	300lm	NEPTUNE SR HV-6W-827-40°	NR1H-8274006F-DN
				3000K	15°	420lm	NEPTUNE SR HV-6W-830-15°	NR1H-8301506F-DN
					30°	420lm	NEPTUNE SR HV-6W-830-30°	NR1H-8303006F-DN
					40°	350lm	NEPTUNE SR HV-6W-830-40°	NR1H-8304006F-DN


Code Remark: F=(ON-OFF) **Remark**: On-Off LED Driver Integrated, 220~240VAC Input

ON-OFF	189,00 €

BACK

NEPTUNE MR – Projector Light

NEW

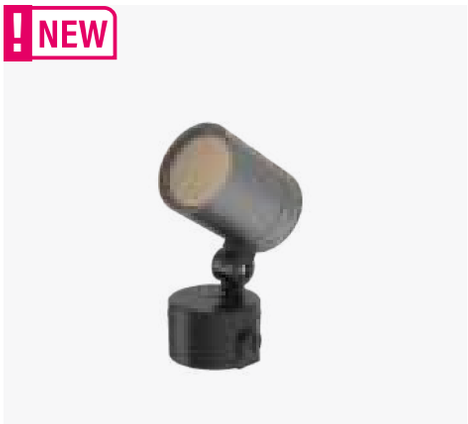


10° 20° 30° 50° 2700K 3000K CRI >80 UGR<19

IP66 CE CREE 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- CREE LED: 11W, CRI>80, 2700K, 3000K
- Beam Angle: 10°, 20°, 30°, 50°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input



Light Distribution

2700K

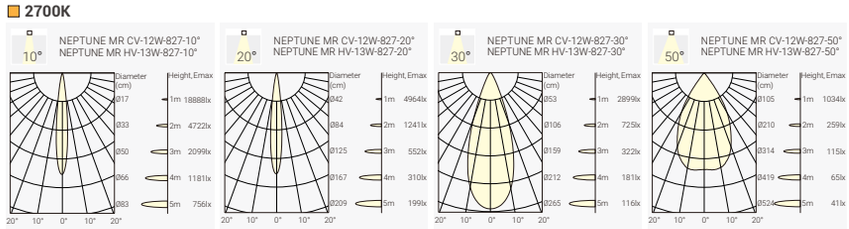

Accessory: Stake for NEPTUNE series projectors



Optional Accessary



Honeycomb



Bevel Snoot



Straight Snoot

Honeycomb: +9,00€

Order Info

24VDC Verison

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
11W	12W	24VDC	80	2700K	10°	800lm	NEPTUNE MR CV-12W-827-10°	NR2C-8271012F-DN
					20°	850lm	NEPTUNE MR CV-12W-827-20°	NR2C-8272012F-DN
					30°	850lm	NEPTUNE MR CV-12W-827-30°	NR2C-8273012F-DN
					50°	800lm	NEPTUNE MR CV-12W-827-50°	NR2C-8275012F-DN
				3000K	10°	850lm	NEPTUNE MR CV-12W-830-10°	NR2C-8301012F-DN
					20°	950lm	NEPTUNE MR CV-12W-830-20°	NR2C-8302012F-DN
					30°	950lm	NEPTUNE MR CV-12W-830-30°	NR2C-8303012F-DN
					50°	850lm	NEPTUNE MR CV-12W-830-50°	NR2C-8305012F-DN

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

ON-OFF 269,00 €

LED Driver Integrated Version


LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
11W	13W	220-240VAC	80	2700K	10°	800lm	NEPTUNE MR HV-13W-827-10°	NR2H-8271013F-DN
					20°	850lm	NEPTUNE MR HV-13W-827-20°	NR2H-8272013F-DN
					30°	850lm	NEPTUNE MR HV-13W-827-30°	NR2H-8273013F-DN
					50°	800lm	NEPTUNE MR HV-13W-827-50°	NR2H-8275013F-DN
				3000K	10°	850lm	NEPTUNE MR HV-13W-830-10°	NR2H-8301013F-DN
					20°	950lm	NEPTUNE MR HV-13W-830-20°	NR2H-8302013F-DN
					30°	950lm	NEPTUNE MR HV-13W-830-30°	NR2H-8303013F-DN
					50°	850lm	NEPTUNE MR HV-13W-830-50°	NR2H-8305013F-DN

Code Remark: F=(ON-OFF) **Remark**: On-Off LED Driver Integrated, 220~240VAC Input

ON-OFF 269,00 €

NEPTUNE LR – Projector Light

NEW

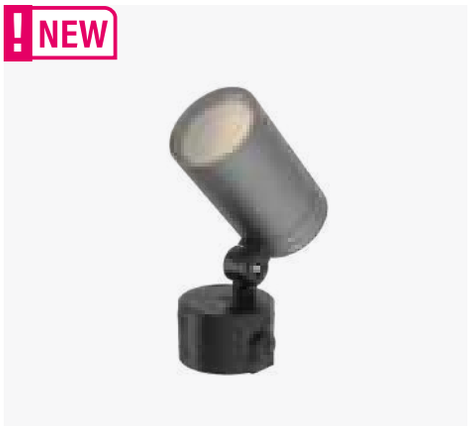


10° 20° 30° 50° | 2700K 3000K | CRI >80 | UGR<19

IP66 | CE | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CREE LED: 16W, CRI>80, 2700K, 3000K
- Beam Angle: 10°, 20°, 30°, 50°
- Lumen Output: Up to 1600lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input



Light Distribution


2700K

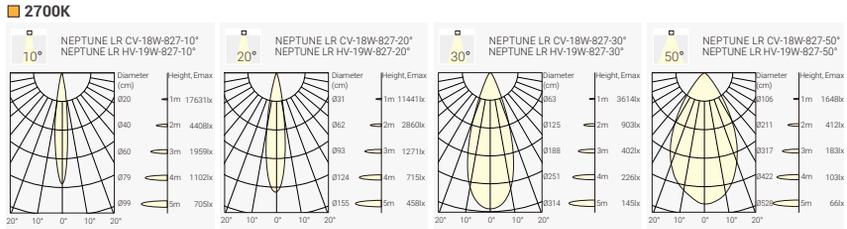

Accessory: Stake for NEPTUNE series projectors



Optional Accessary



Honeycomb

Honeycomb: +9,00€

Order Info

24VDC Verison

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
16W	18W	24VDC	80	2700K	10°	1400lm	NEPTUNE LR CV-18W-827-10°	NR3C-8271018F-DN
					20°	1450lm	NEPTUNE LR CV-18W-827-20°	NR3C-8272018F-DN
					30°	1450lm	NEPTUNE LR CV-18W-827-30°	NR3C-8273018F-DN
					50°	1400lm	NEPTUNE LR CV-18W-827-50°	NR3C-8275018F-DN
				3000K	10°	1500lm	NEPTUNE LR CV-18W-830-10°	NR3C-8301018F-DN
					20°	1600lm	NEPTUNE LR CV-18W-830-20°	NR3C-8302018F-DN
					30°	1600lm	NEPTUNE LR CV-18W-830-30°	NR3C-8303018F-DN
					50°	1500lm	NEPTUNE LR CV-18W-830-50°	NR3C-8305018F-DN

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

ON-OFF 329,00 €

LED Driver Integrated Version

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
16W	19W	220-240VAC	80	2700K	10°	1400lm	NEPTUNE LR HV-19W-827-10°	NR3H-8271019F-DN
					20°	1450lm	NEPTUNE LR HV-19W-827-20°	NR3H-8272019F-DN
					30°	1450lm	NEPTUNE LR HV-19W-827-30°	NR3H-8273019F-DN
					50°	1400lm	NEPTUNE LR HV-19W-827-50°	NR3H-8275019F-DN
				3000K	10°	1500lm	NEPTUNE LR HV-19W-830-10°	NR3H-8301019F-DN
					20°	1600lm	NEPTUNE LR HV-19W-830-20°	NR3H-8302019F-DN
					30°	1600lm	NEPTUNE LR HV-19W-830-30°	NR3H-8303019F-DN
					50°	1500lm	NEPTUNE LR HV-19W-830-50°	NR3H-8305019F-DN


Code Remark: F=(ON-OFF) **Remark**: On-Off LED Driver Integrated, 220~240VAC Input

ON-OFF 329,00 €

BACK

TERARACE MICRO – Recessed Ground Light





18° 40° 65° 2700K 3000K CRI >80


IP67 IK08 CE OSRAM 50,000h@L80B10 GUARANTEE 3 YEAR


Quick Info


- OSRAM LED: 1W, CRI>80, 2700K, 3000K
- Beam Angle: 18°, 40°, 40°
- Lumen Output: Up to 100lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)

Light Distribution

3000K







Accessory: Pre-embedded Tube



Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
1W	1.5W	24V	80	2700K	18°	90lm	TERARACE Micro-827-18°	TEMI-8271802F-DN
					40°	90lm	TERARACE Micro-827-40°	TEMI-8274002F-DN
					65°	90lm	TERARACE Micro-827-65°	TEMI-8276502F-DN
				3000K	18°	100lm	TERARACE Micro-830-18°	TEMI-8301802F-DN
					40°	100lm	TERARACE Micro-830-40°	TEMI-8304002F-DN
					65°	100lm	TERARACE Micro-830-65°	TEMI-8306502F-DN


Remark: Remote 24VDC LED driver is required (Non-Dimmable)

ON-OFF (IP65) 109,00 €

BACK

TERARACE NANO – Recessed Ground Light





18° 35° 60° 2700K 3000K CRI >80


IP67 IK08 CE OSRAM 50,000h@L80B10 GUARANTEE 3 YEAR


Quick Info


- OSRAM LED: 1.6W, CRI>80, 2700K, 3000K
- Beam Angle: 18°, 35°, 60°
- Lumen Output: Up to 120lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)

Light Distribution

3000K







Accessory: Pre-embedded Tube



Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
1.6W	2W	24V	80	2700K	18°	110lm	TERARACE Nano-827-18°	TEMI-8271802F-DN
					35°	110lm	TERARACE Nano-827-35°	TEMI-8273502F-DN
					60°	110lm	TERARACE Nano-827-60°	TEMI-8276002F-DN
				3000K	18°	120lm	TERARACE Nano-830-18°	TEMI-8301802F-DN
					35°	120lm	TERARACE Nano-830-35°	TEMI-8303502F-DN
					60°	120lm	TERARACE Nano-830-60°	TEMI-8306002F-DN


Remark: Remote 24VDC LED driver is required (Non-Dimmable)

ON-OFF (IP65) 139,00 €

BACK

TERARACE MINI – Recessed Ground Light





30° 45° 2700K 3000K CRI >80


IP67 IK10 CE CITIZEN 50,000h@L80B10 GUARANTEE 3 YEAR


Quick Info

- CITIZEN LED: 5 W, CRI>80, 2700K, 3000K
- Beam Angle: 30°, 45°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)

Light Distribution

3000K





Accessory: Pre-embedded Tube



Order Info


LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5W	5.5W	24V	80	2700K	30°	480lm	TERARACE Mini-827-30°	TEMI-8273006F-DN
					45°	480lm	TERARACE Mini-827-45°	TEMI-8274506F-DN
				3000K	30°	500lm	TERARACE Mini-830-30°	TEMI-8303006F-DN
					45°	500lm	TERARACE Mini-830-45°	TEMI-8304506F-DN

Remark: Remote 24VDC LED driver is required (Non-Dimmable)

ON-OFF (IP65) 189,00 €

TERARACE MAXI – Recessed Ground Light





20° 30° 50° 2700K 3000K CRI >80


IP67 IK10 CE bridgelux 50,000h@L80B10 GUARANTEE 3 YEAR


Quick Info


- CITIZEN LED: 9W, CRI>80, 2700K, 3000K
- Beam Angle: 20°, 30°, 45°
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)

Light Distribution

3000K







Accessory: Pre-embedded Tube



Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
9W	10W	24V	80	2700K	20°	850lm	TERARACE Maxi-827-20°	TEMA-8272010F-DN
					30°	850lm	TERARACE Maxi-827-30°	TEMA-8273010F-DN
					50°	850lm	TERARACE Maxi-827-50°	TEMA-8275010F-DN
				3000K	20°	850lm	TERARACE Maxi-830-20°	TEMA-8302010F-DN
					30°	850lm	TERARACE Maxi-830-30°	TEMA-8303010F-DN
					50°	850lm	TERARACE Maxi-830-50°	TEMA-8305010F-DN


Remark: Remote 24VDC LED driver is required (Non-Dimmable)

ON-OFF (IP65) 309,00 €

BACK

Partnerschaft/Partnership

- Headquarters
- Factory
- German Office / Warehouse
- N. America
- UK Office
- France Office
- Beijing Office
- Shanghai Office
- Distributor

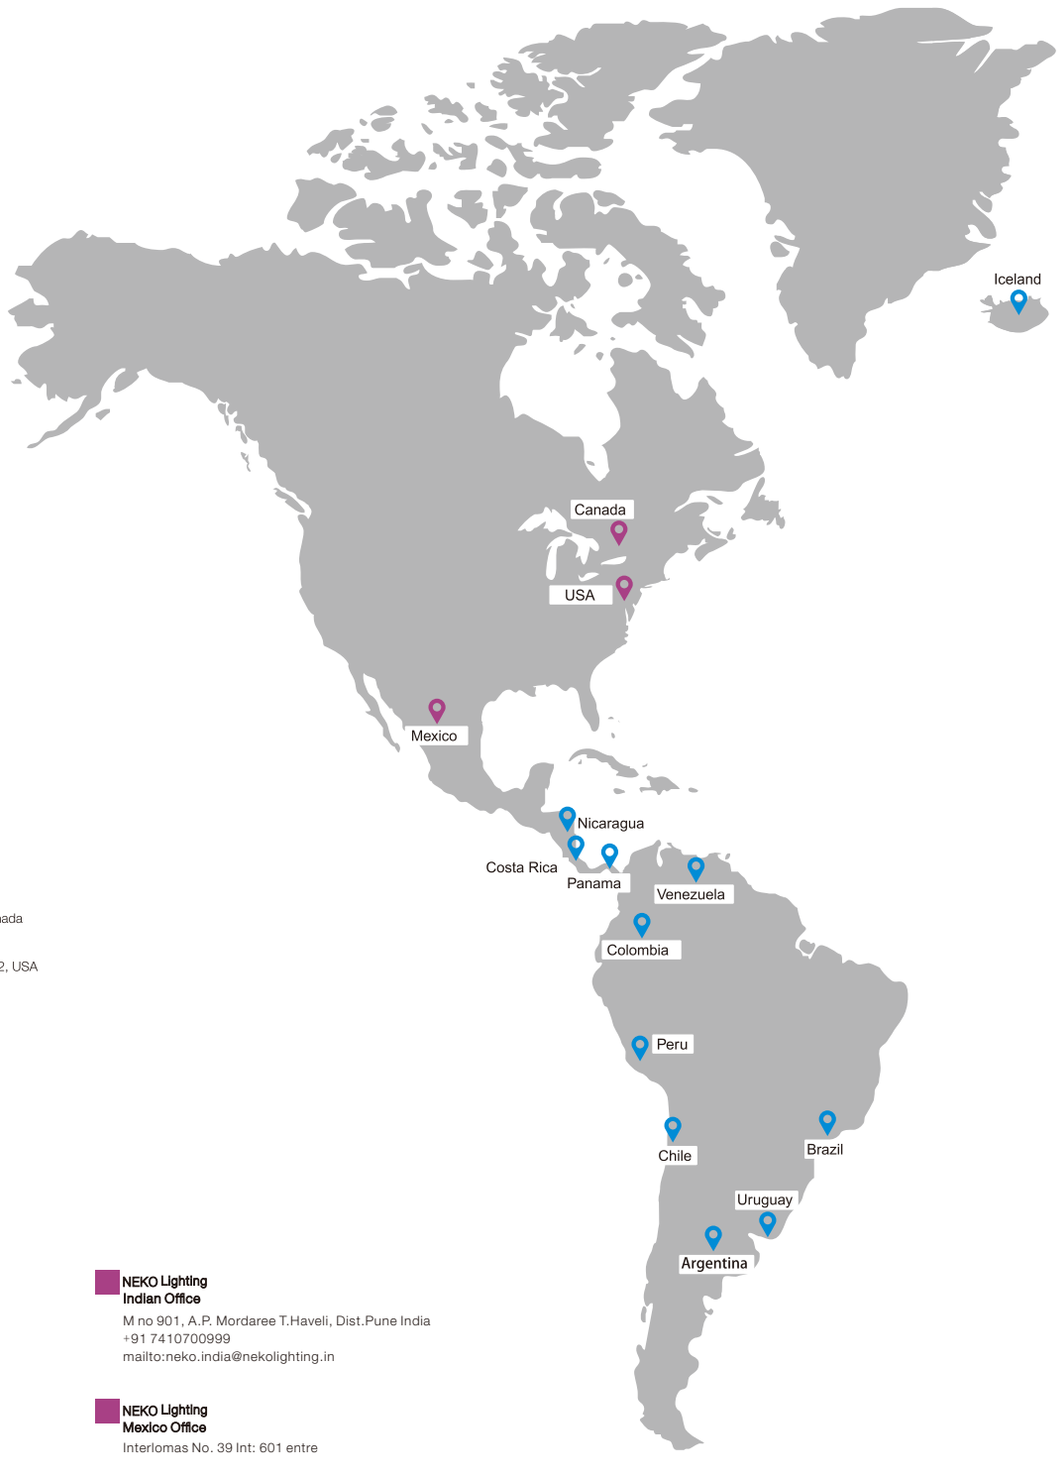

NEKO LIGHTING AG

Switzerland Headquarters
Kreuzstrasse 2, CH-8008 Zürich, Switzerland
Tel: +41 44 451 80 15
sales@nekolighting.com
www.nekolighting.com

NEKO LIGHTING LTD.

China Factory
Huizhou, P.R.China | P.C.: 516057
Tel: +86 755 3669 7712
sales@nekolighting.com
www.nekolighting.com

NEKO LIGHTING GmbH

German Office / Warehouse
Lange Reihe 170, 59071 Hamm, Germany
Tel: +49 2381 8770960
sales@nekolighting.de
www.nekolighting.de

NEKO LIGHTING INC.

Canada Office
3025 Bates Road, Montreal, QC H3S 2W8, Canada

USA Office
132 32nd Street, Suite 313, Brooklyn, NY 11232, USA
Tel: +1 855 LED NEKO (533 6356)
sales@nekolighting.com

NEKO Lighting Ltd.
UK Office
6C Calderdale Business Park, Club Lane,
Ovenden, Halifax, Hx2 8DB
andy@nekolightinguk.com
www.nekolighting.com

NEKO Lighting
France Office
41 rue des dames – 75017 Paris
+33 1 44 50 20 30
sales@nekolighting.fr
www.nekolighting.com

NEKO Lighting Middle East

1905-55 Prism Tower, Business Bay, Dubai
Tel: +971 50 2426 911
david@nekolighting.com

NEKO Beijing Office

Room 218, Huaxi Loft, 5th Da Yang Fang Road,
Chaoyang District, Beijing, P.R.China
Tel: +86 173 2681 1100
sales@nekolighting.com


NEKO Shanghai Office

Haiyang Building Room 2811, No. 550, Yan'an East Road,
Huangfu District, Shanghai, P.R.China
Tel: +86 189 2602 8927
jonson@nekolighting.com

NEKO Lighting
Indian Office
M no 901, A.P. Mordaree T.Haveli, Dist.Pune India
+91 7410700999
mailto:neko.india@nekolighting.in

NEKO Lighting
Mexico Office
Interlomas No. 39 Int: 601 entre
Calle Via magna y Calle Magno Centro,
Col. La Herradura,
CP: 52784, Huixquilucan,
Estado de México, México
administracion@nekolighting.com.mx

NEKO Lighting
Singapore Office
The Quartz, Singapore
+65 96442381
Jeremy@nekolighting.com

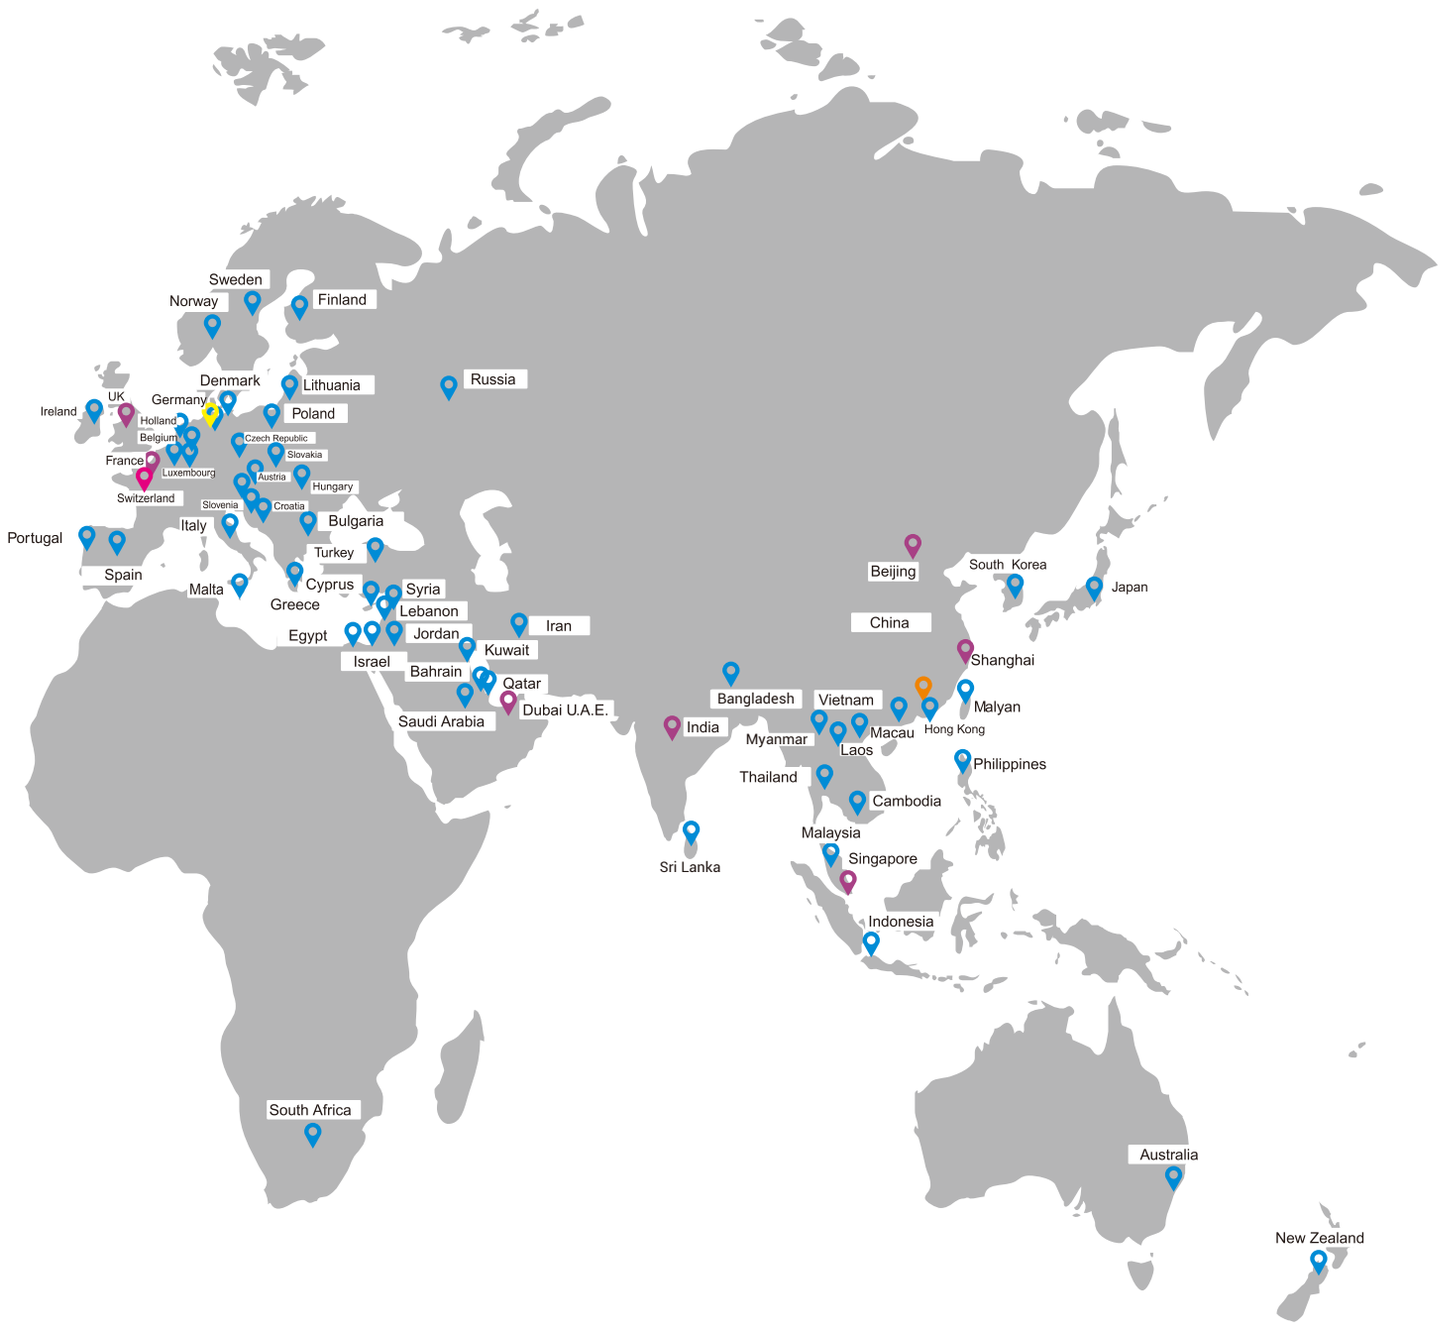
Sweden
Norway
Finland
Denmark
Lithuania
Russia
Ireland
UK
Germany
Holland
Poland
Belgium
Czech Republic
France
Slovakia
Luxembourg
Austria
Hungary
Switzerland
Slovenia
Croatia
Italy
Bulgaria
Portugal
Turkey
Spain
Malta
Cyprus
Greece
Syria
Lebanon
Egypt
Jordan
Iran
Israel
Kuwait
Bahrain
Qatar
Saudi Arabia
Dubai U.A.E.
Beijing
South Korea
Japan
China
Shanghai
Bangladesh
Vietnam
Malyan
India
Myanmar
Macau
Hong Kong
Laos
Philippines
Thailand
Cambodia
Malaysia
Singapore
Sri Lanka
Indonesia
South Africa
Australia
New Zealand