


! NEW




Features

- Modular designed pathway light with IP66 waterproof rating, perfect for outdoor use
- Twist & Lock covers are interchangeable, styles can be custom made
- Press button for CCT changeable, warm 2700K(2200K Optional) or cozy 3000K
- Extension poles are available with shrubbery growing
- Multiple installation accessories; Pole, Spike or base mounting
- Triple layer coating, ensuring over 1000hours of salt mist test, suitable for seaside installations
- Wider light distribution 130° achieved by advanced lens design
- Invisible screws for esthetic appeal
- Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Side wiring and rear wiring are available

- The top cover is designed to prevent loss, requiring a downward press to unlock, similar to the safety cap mechanism.

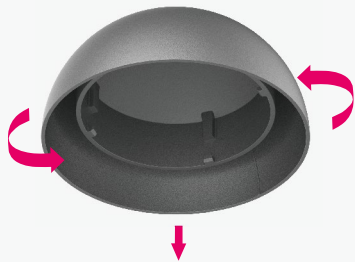

- Interchangeable Covers

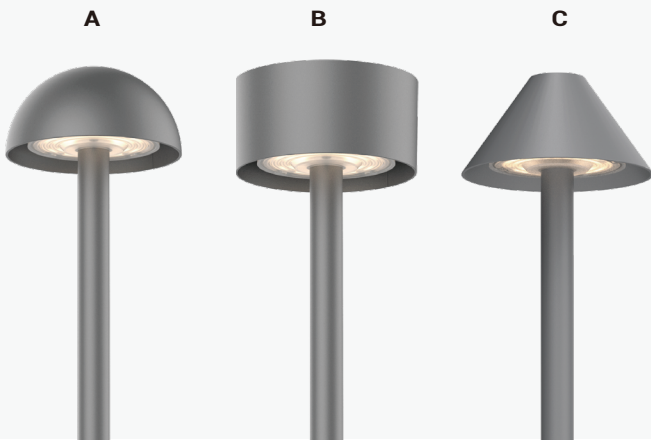


- Press Button for 2CCT Changeable



- 2700K-3000K Changeable

POSEIDON Series – IP66 Garden Light


Cover

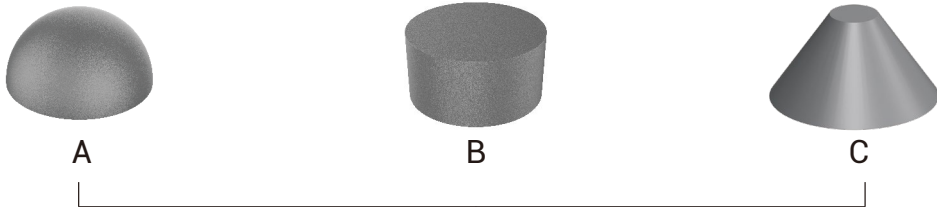


Light Engine




Mounting Type

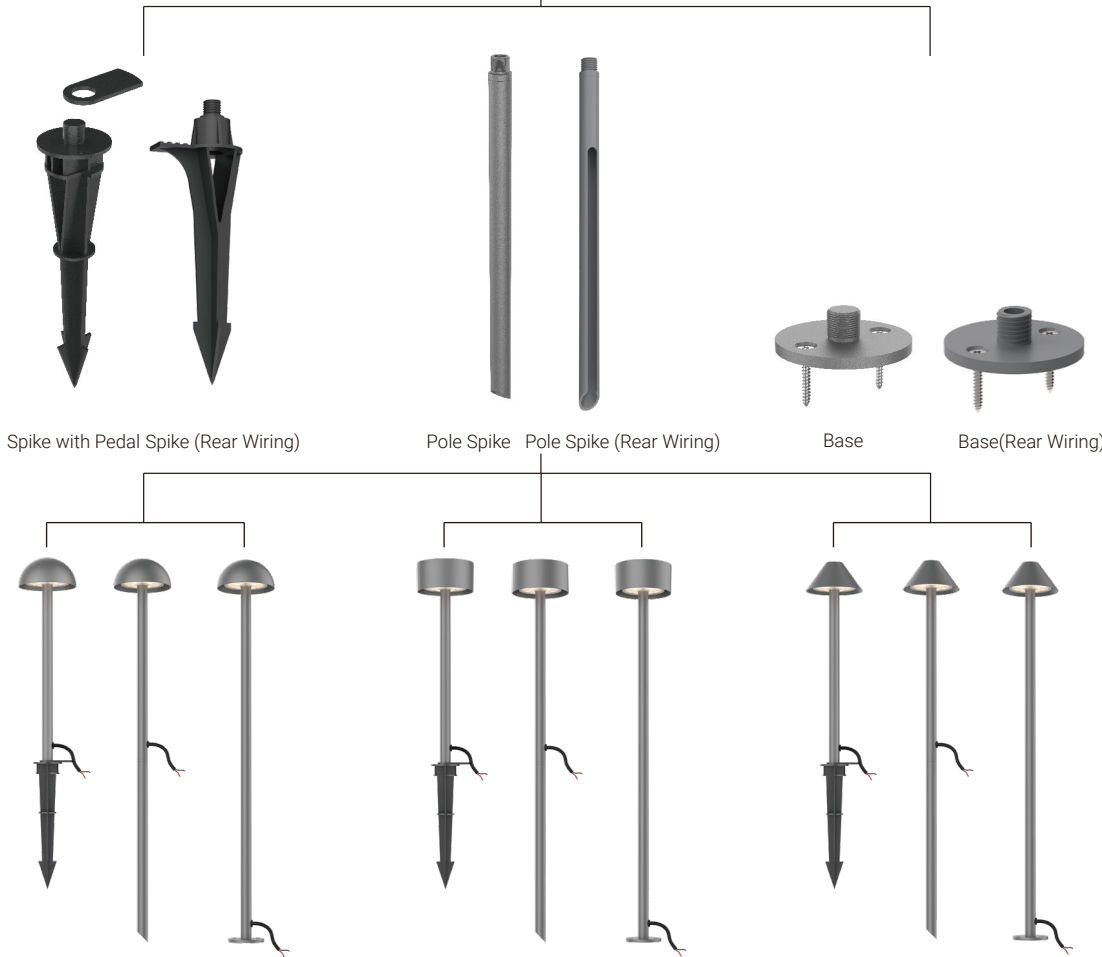

POSEIDON Series – IP66 Garden Light

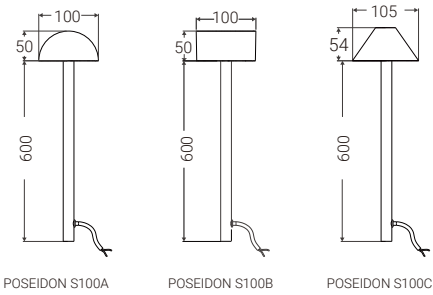

Accessory

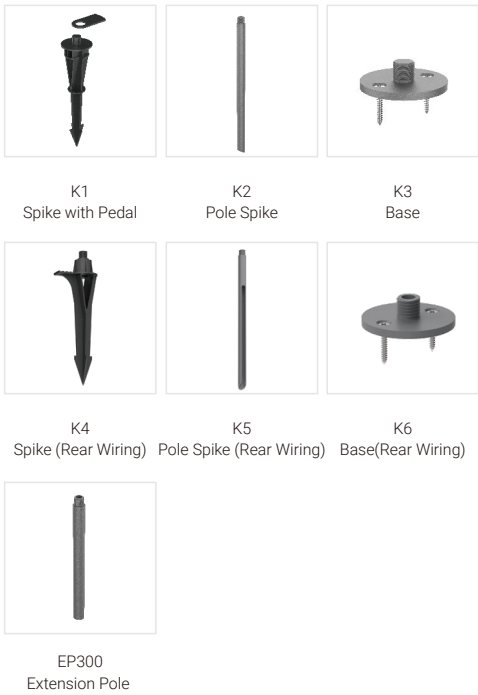

360°

2700K

3000K

CRI

>80

IP66

IK07

CE

OSRAM

50,000h@L80B10


5 YEARS

GUARANTEE

Quick Info

- OSRAM LED: 4W, 5W, CRI>80, 2700K(2200K Optional)-3000K Changeable
- Beam Angle: Light Emission 360°
- Lumen Output: Up to 370m/ 485lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input

Light Distribution

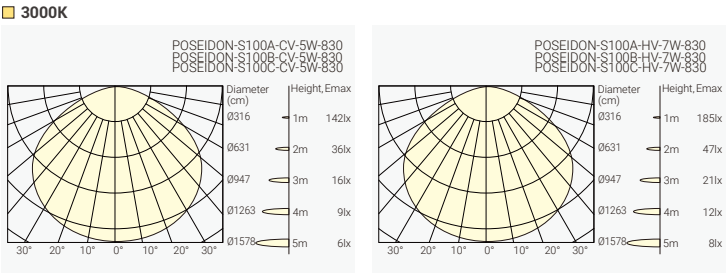

Order Info

24VDC Version							
LED Power	System Power	Voltage	CRI	CCT	System Output	Model	
4W	5W	24VDC	80	@2700K	350lm	POSEIDON-S100A-CV	PAV1-8A3C605N-DN-K1
				@3000K	370lm	POSEIDON-S100B-CV	PBV1-8A3C605N-DN-K1
				@2700K	350lm	POSEIDON-S100C-CV	PCV1-8A3C605N-DN-K1
				@3000K	370lm		
Code Remark: K1=(Spike with Pedal) K2=(Pole Spike) K3=(Base) K4=Spike (Rear Wiring) K5=Pole Spike (Rear Wiring) K6=Base(Rear Wiring)							
Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver Remote 24VDC LED Driver to be Ordered Separately							

LED Driver Integrated Version									
LED Power	System Power	Input	CRI	CCT	System Output	Model	Code		
5W	7W	220-240VAC	80	@2700K	460lm	POSEIDON-S100A-HV	PAH1-8A3C607F-DN-K1		
				@3000K	485lm				
				@2700K	460lm	POSEIDON-S100B-HV	PBH1-8A3C607F-DN-K1		
				@3000K	485lm				
				@2700K	460lm	POSEIDON-S100C-HV	PCH1-8A3C607F-DN-K1		
				@3000K	485lm				
Code Remark: K1=(Spike with Pedal) K2=(Pole Spike) K3=(Base) K4=Spike (Rear Wiring) K5=Pole Spike (Rear Wiring) K6=Base(Rear Wiring)									

