

SPACE 60 EVO Ring



Different diameters for options
Different install type such as pendant wire,
ceiling, trim recessed
Direct/ indirect available for pendant luminaires



SPACE 60 EVO – Ring

The SPACE 60 EVO Ring is a comprehensive series of circular luminaires available in a complete size range, with diameters spanning from 660mm to 3060mm (refer to the size chart for details). It offers three mounting options—pendant, ceiling-mounted, and trim recessed installation—enabling versatile application across various scenarios. Additionally, the pendant version features an optional uplight function, which provides softer and more uniform ambient lighting, effectively enhancing user visual comfort.


Pendant, Ceiling and Trim Recessed Profile Options

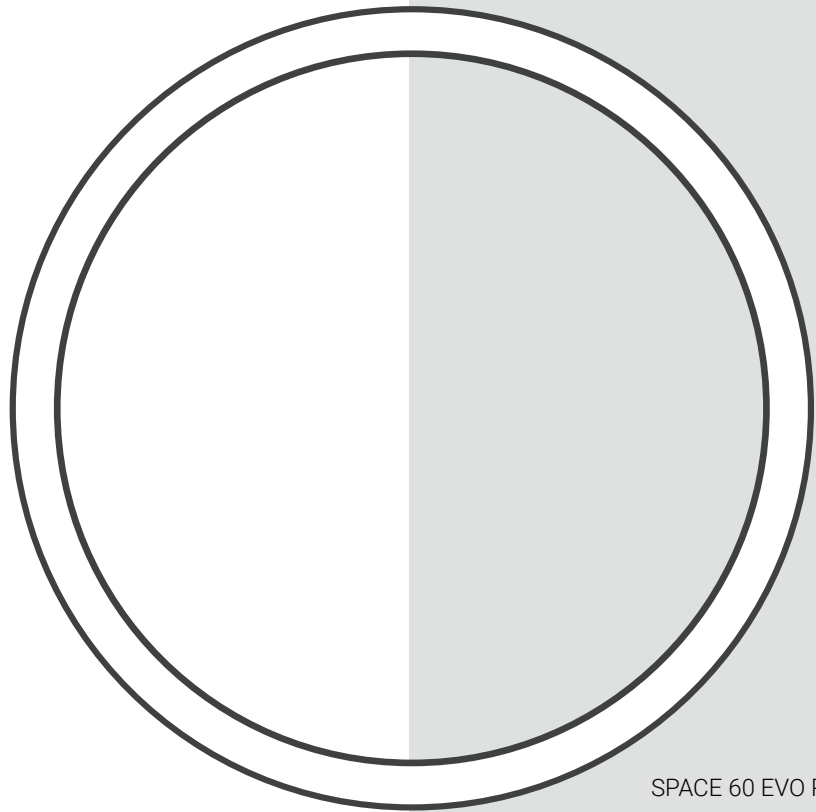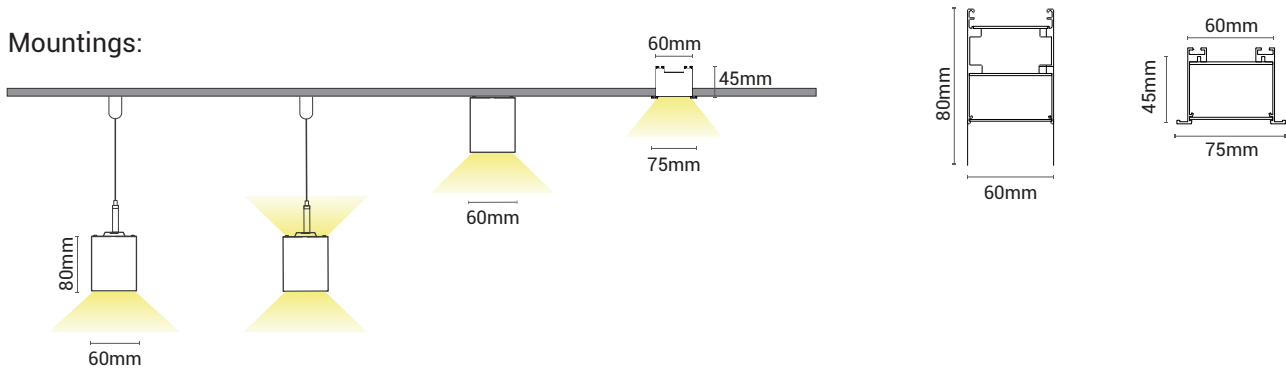


SPACE 60 EVO Ring Ceiling

SPACE 60 EVO Ring Trim Recessed

Pendant & Ceiling

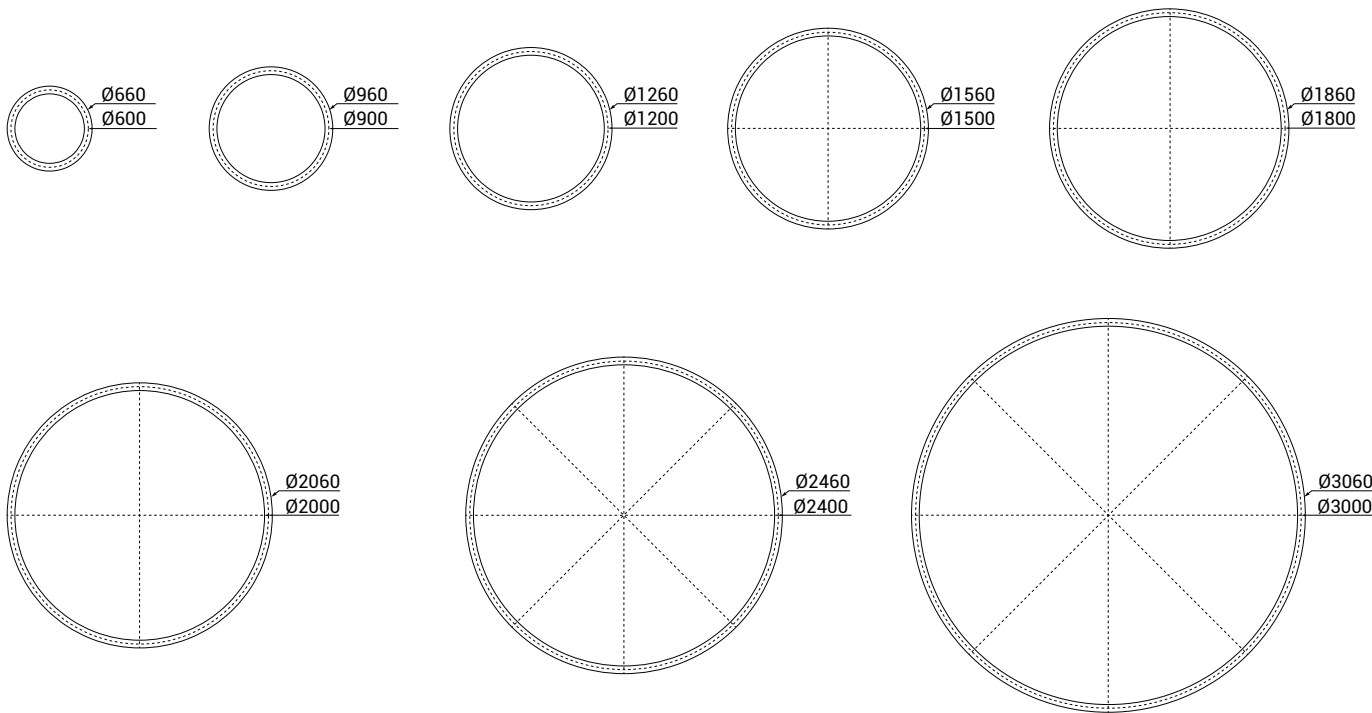

Trim Recessed:

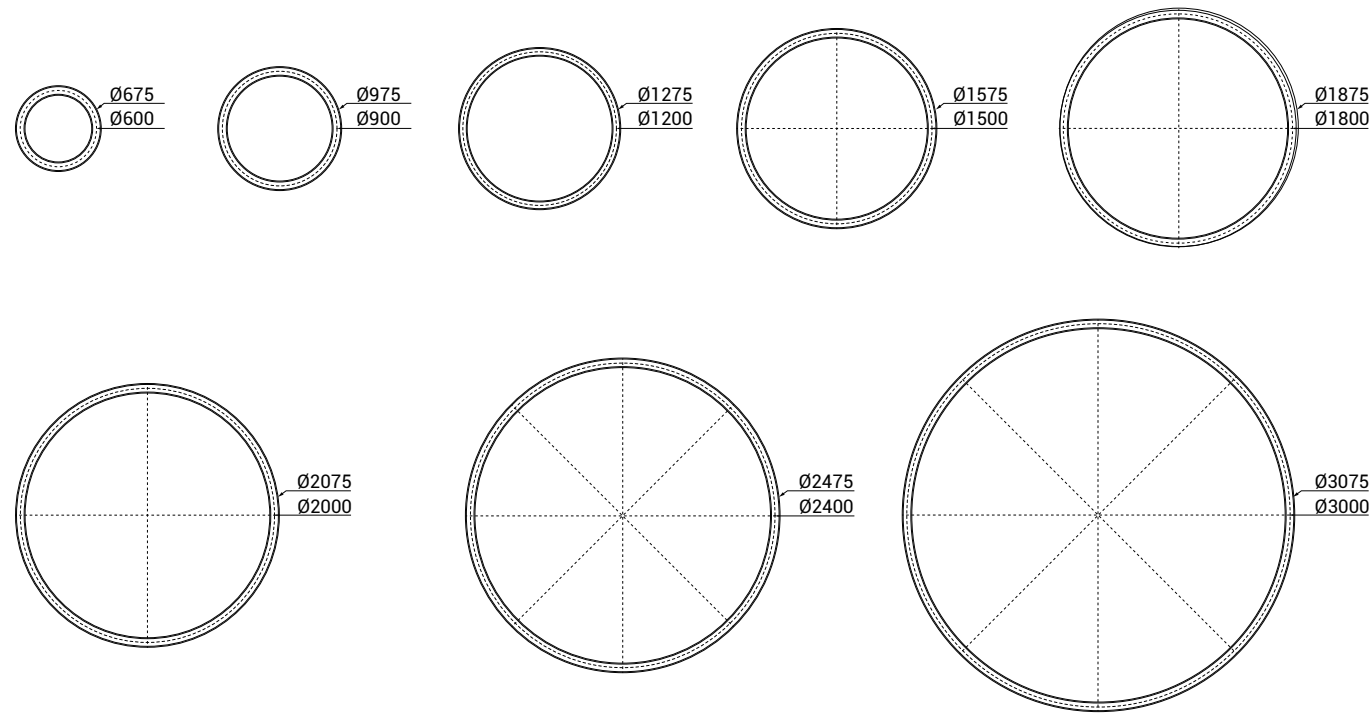


SPACE 60 EVO – Ring Pendant Direct



Quick Info

- General Lighting, Pendant Direct
- LED: 25W, 35W, 52W, 65W, 77W, 86W, 103W, 129W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 95° ↓
- Lumen Output: Up to 18200lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
25W	28W	33V	750mA	D660mm	White	80	4000K	95° ↓	3542lm	SV60CLD066P-84095028F-WN
35W	38W	33V	1050mA	D960mm	White	80	4000K	95° ↓	5030lm	SV60CLD096P-84095038F-WN
52W	55W	33V	1500mA	D1260mm	White	80	4000K	95° ↓	7423lm	SV60CLD126P-84095055F-WN
65W	70W	33V	1900mA	D1560mm	White	80	4000K	95° ↓	9315lm	SV60CLD156P-84095070F-WN
77W	84W	33V	2250mA	D1860mm	White	80	4000K	95° ↓	11103lm	SV60CLD186P-84095084F-WN
86W	93W	33V	2500mA	D2060mm	White	80	4000K	95° ↓	12384lm	SV60CLD206P-84095093F-WN
103W	112W	33V	3000mA	D2460mm	White	80	4000K	95° ↓	14876lm	SV60CLD246P-84095112F-WN
129W	140W	33V	3750mA	D3060mm	White	80	4000K	95° ↓	18564lm	SV60CLD306P-84095140F-WN
Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)										

Coding

SV60CLD***	— ***	**	***	*	— *	*	— *
Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLD066P Pendant D660mm	830 CRI>80/ 3000K	95 95° ↓	028 28W	F On-Off	W White	N None	
SV60CLD096P Pendant D960mm	840 CRI>80/ 4000K		038 38W	A 1-10V Dim	B Black		
SV60CLD126P Pendant D1260mm			055 55W	D DALI Dim			
SV60CLD156P Pendant D1560mm			070 70W				
SV60CLD186P Pendant D1860mm			084 84W				
SV60CLD206P Pendant D2060mm			093 93W				
SV60CLD246P Pendant D2460mm			112 112W				
SV60CLD306P Pendant D3060mm			140 140W				


SPACE 60 EVO – Ring Pendant Direct & Indirect



Quick Info

- General Lighting, Pendant Direct & Indirect
- LED: 38W, 52W, 77W, 96W, 115W, 128W, 154W, 193W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 95° ↓ 110° ↑
- Lumen Output: Up to 27300lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
38W	42W	33V	1100mA	D660mm	White	80	4000K	95° ↓ 110° ↑	5880lm	SV60CLD066P-84095042F-WN-U
52W	57W	33V	1700mA	D960mm	White	80	4000K	95° ↓ 110° ↑	7980lm	SV60CLD096P-84095057F-WN-U
77W	84W	33V	2250mA	D1260mm	White	80	4000K	95° ↓ 110° ↑	11760lm	SV60CLD126P-84095084F-WN-U
96W	105W	33V	2800mA	D1560mm	White	80	4000K	95° ↓ 110° ↑	14700lm	SV60CLD156P-84095105F-WN-U
115W	126W	33V	3400mA	D1860mm	White	80	4000K	95° ↓ 110° ↑	17640lm	SV60CLD186P-84095126F-WN-U
128W	140W	33V	3750mA	D2060mm	White	80	4000K	95° ↓ 110° ↑	19600lm	SV60CLD206P-84095140F-WN-U
154W	168W	33V	4500mA	D2460mm	White	80	4000K	95° ↓ 110° ↑	23520lm	SV60CLD246P-84095168F-WN-U
193W	210W	33V	5600mA	D3060mm	White	80	4000K	95° ↓ 110° ↑	29400lm	SV60CLD306P-84095210F-WN-U
Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)										

Coding

SV60CLD***	— ***	**	***	*	— *	*	— *
Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLD066P Pendant D660mm	830 CRI>80/ 3000K	95 95° ↓	042 42W	F On-Off	W White	N None	U Uplight
SV60CLD096P Pendant D960mm	840 CRI>80/ 4000K	95 95° ↓ 110° ↑	057 57W	A 1-10V Dim	B Black		
SV60CLD126P Pendant D1260mm			084 84W	D DALI Dim			
SV60CLD156P Pendant D1560mm			105 105W				
SV60CLD186P Pendant D1860mm			126 126W				
SV60CLD206P Pendant D2060mm			140 140W				
SV60CLD246P Pendant D2460mm			168 168W				
SV60CLD306P Pendant D3060mm			210 210W				



SPACE 60 EVO – Ring Ceiling



Quick Info

- General Lighting, Ring Ceiling
- LED: 25W, 35W, 52W, 65W, 77W, 86W, 103W, 129W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 95° ↓
- Lumen Output: Up to 18200lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution



Order Info


LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
25W	28W	33V	750mA	D660mm	White	80	4000K	95° ↓	3542lm	SV60CLD066C-84095028F-WN
35W	38W	33V	1050mA	D960mm	White	80	4000K	95° ↓	5030lm	SV60CLD096C-84095038F-WN
52W	55W	33V	1500mA	D1260mm	White	80	4000K	95° ↓	7423lm	SV60CLD126C-84095055F-WN
65W	70W	33V	1900mA	D1560mm	White	80	4000K	95° ↓	9315lm	SV60CLD156C-84095070F-WN
77W	84W	33V	2250mA	D1860mm	White	80	4000K	95° ↓	11103lm	SV60CLD186C-84095084F-WN
86W	93W	33V	2500mA	D2060mm	White	80	4000K	95° ↓	12384lm	SV60CLD206C-84095093F-WN
103W	112W	33V	3000mA	D2460mm	White	80	4000K	95° ↓	14876lm	SV60CLD246C-84095112F-WN
129W	140W	33V	3750mA	D3060mm	White	80	4000K	95° ↓	18564lm	SV60CLD306C-84095140F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60CLD***	***	**	***	*	- *	*	- *
Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLD066C Ceiling D660mm	830 CRI>80/ 3000K	95 95° ↓	028 28W	F On-Off	W White	N None	
SV60CLD096C Ceiling D960mm	840 CRI>80/ 4000K		038 38W	A 1-10V Dim	B Black		
SV60CLD126C Ceiling D1260mm			055 55W	D DALI Dim			
SV60CLD156C Ceiling D1560mm			070 70W				
SV60CLD186C Ceiling D1860mm			084 84W				
SV60CLD206C Ceiling D2060mm			093 93W				
SV60CLD246C Ceiling D2460mm			112 112W				
SV60CLD306C Ceiling D3060mm			140 140W				



SPACE 60 EVO – Ring Trim Recessed

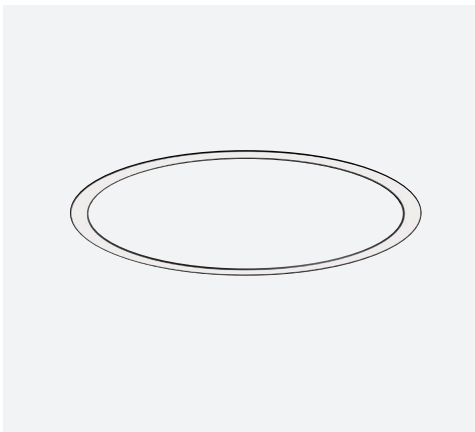

Quick Info

- General Lighting, Ring Trim Recessed
- LED: 25W, 35W, 52W, 65W, 77W, 86W, 103W, 129W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 95° ↓
- Lumen Output: Up to 18200lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
25W	28W	33V	750mA	D660mm	White	80	4000K	95° ↓	3542lm	SV60CLD067F-84095028F-WN
35W	38W	33V	1050mA	D960mm	White	80	4000K	95° ↓	5030lm	SV60CLD097F-84095038F-WN
52W	55W	33V	1500mA	D1260mm	White	80	4000K	95° ↓	7423lm	SV60CLD127F-84095055F-WN
65W	70W	33V	1900mA	D1560mm	White	80	4000K	95° ↓	9315lm	SV60CLD157F-84095070F-WN
77W	84W	33V	2250mA	D1860mm	White	80	4000K	95° ↓	11103lm	SV60CLD187F-84095084F-WN
86W	93W	33V	2500mA	D2060mm	White	80	4000K	95° ↓	12384lm	SV60CLD207F-84095093F-WN
103W	112W	33V	3000mA	D2460mm	White	80	4000K	95° ↓	14876lm	SV60CLD247F-84095112F-WN
129W	140W	33V	3750mA	D3060mm	White	80	4000K	95° ↓	18564lm	SV60CLD307F-84095140F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60CLD***	***	**	***	*	- *	*	- *
Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLD067F Trim recessed D675mm	830 CRI>80/ 3000K	95 95° ↓	028 28W	F On-Off	W White	N None	
SV60CLD097F Trim recessed D975mm	840 CRI>80/ 4000K		038 38W	A 1-10V Dim	B Black		
SV60CLD127F Trim recessed D1275mm			055 55W	D DALI Dim			
SV60CLD157F Trim recessed D1575mm			070 70W				
SV60CLD187F Trim recessed D1875mm			084 84W				
SV60CLD207F Trim recessed D1975mm			093 93W				
SV60CLD247F Trim recessed D2475mm			112 112W				
SV60CLD307F Trim recessed D3075mm			140 140W				