

SPACE 60 EVO


Ideal Linear System
for Office and Public Space Lighting
Customizable Lengths and Shape Modules
Independent and Continuous Lighting Options




The SPACE 60 EVO series is a versatile linear lighting system designed for modern offices and public spaces. The profile features a precisely engineered 60mm width to ensure strict glare control (UGR<19) and uniform illumination. Available profile lengths include 1196mm, 1476mm, and 1826mm (lengths include 3mm end cap kits on each side), which can be used individually or connected in continuous runs to accommodate different spatial requirements. Combined with L-corner, T-corner, cross-corner, and arc-corner modules, SPACE 60 EVO offers enhanced flexibility for seamless integration into any project.

Pendant and Surface-Mounted Profile Options


Standard Lengths:

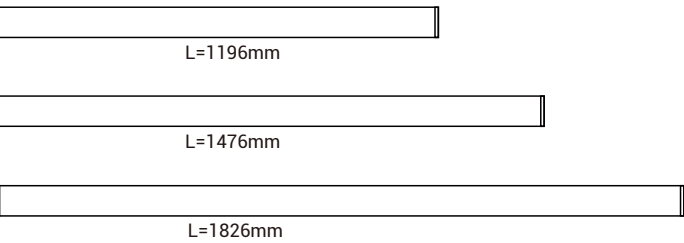


Customized Lengths Available:
Endcap Kit=2X3mm

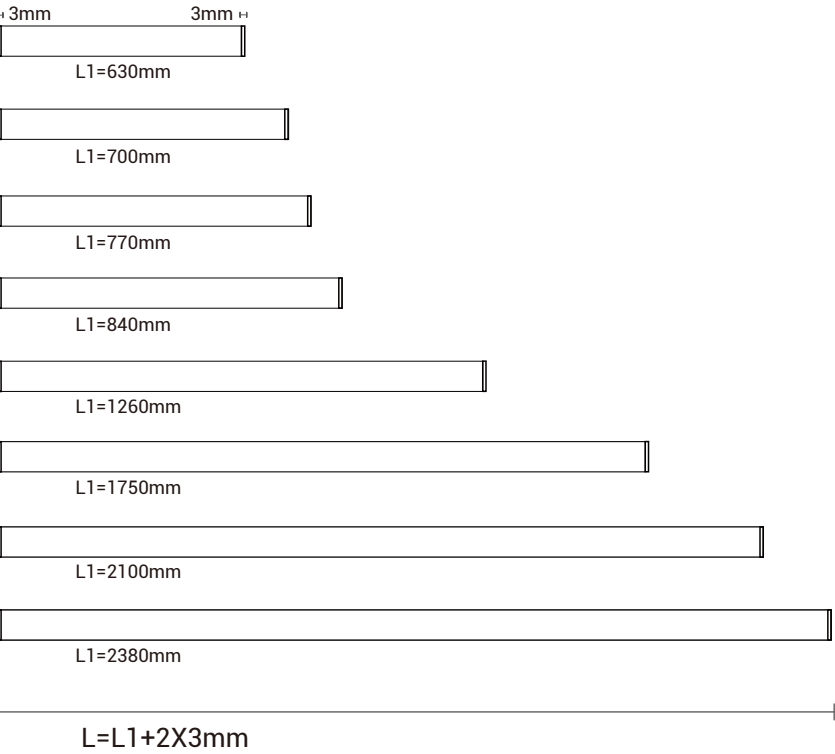


Corner Modules:

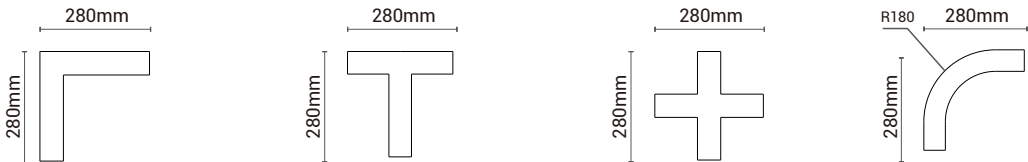


Module Lengths:




Mountings:

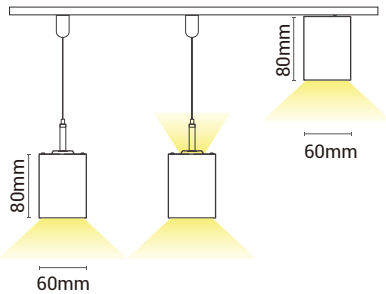


Trim Recessed Profile Options

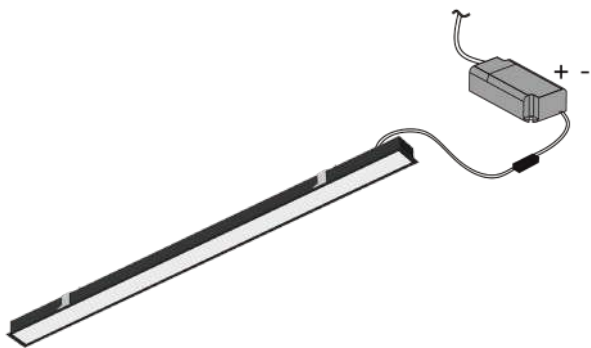


Standard Lengths:

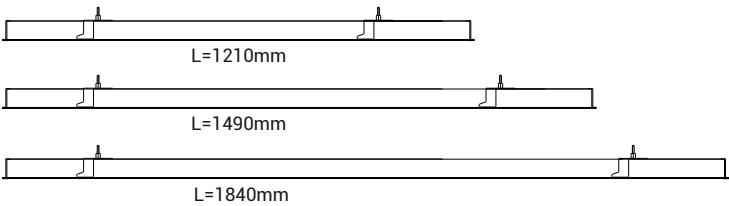


Customized Lengths Available Trim Recessed:
Endcap Kit thickness(2x2.5mm)+flange width(2x7.5mm)=2X10mm

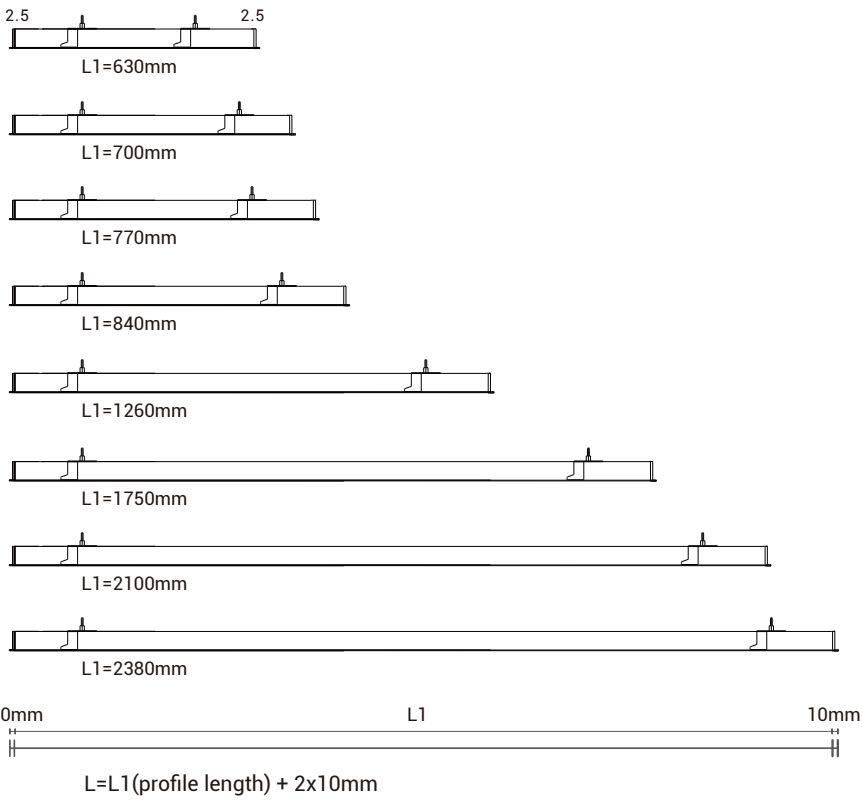


Corner Modules:

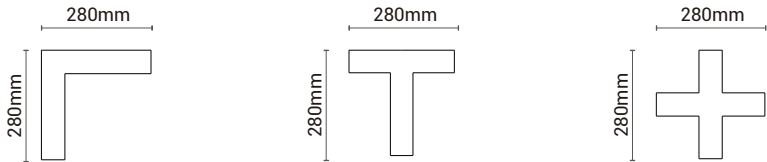

Module Lengths:



Mountings:



Cut-out length=L-10mm
Cut-out width=60mm+5mm =65mm


Designed to enrich modern office and public lighting environments, SPACE 60 EVO Curve expands the creative potential of linear lighting design. It seamlessly connects with the straight version of the SPACE 60 EVO system.

The Standard Curve modules are available in multiple radii – 1/2 Circle (D600/D900), 1/4 Circle (D1200/D1500/D1800/D2000), and 1/8 Circle (D2400/D3000). It enables flexible combinations to suit any space layout.

Pendant and Surface-Mounted Profile Options




Standard Curve:

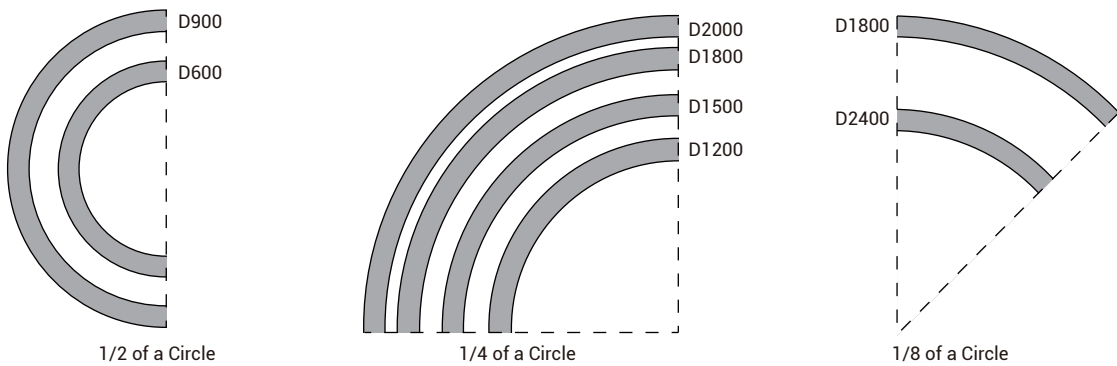


Customized Curve Available
Custom production based on your drawings is available upon request


Trim Recessed Profile Options

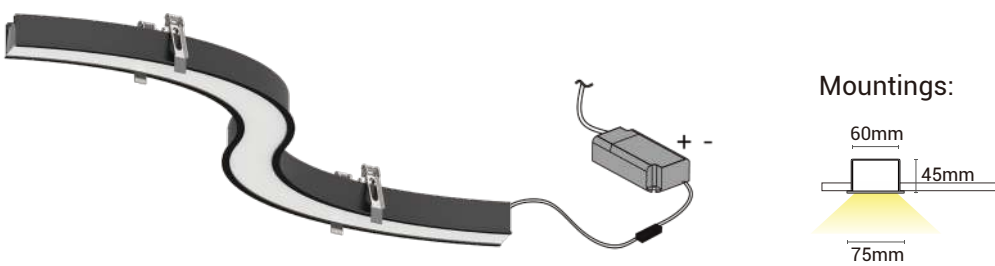

Standard Curve:

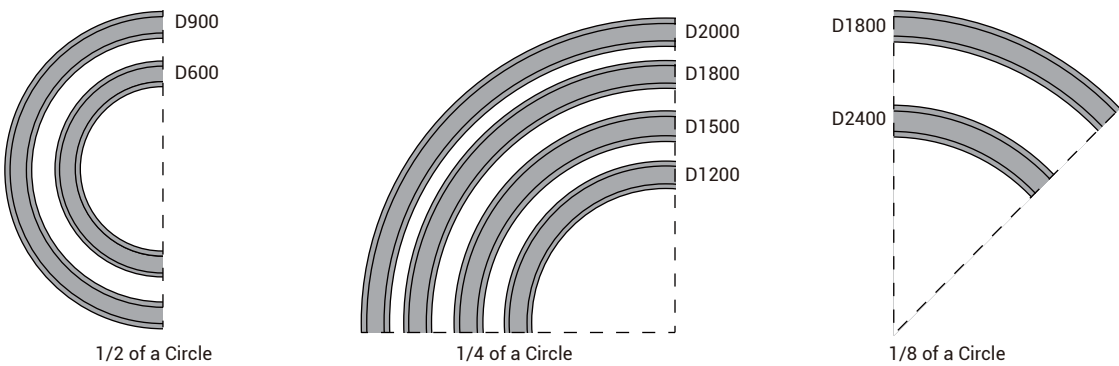

Customized Curve Available
Custom production based on your drawings is available upon request

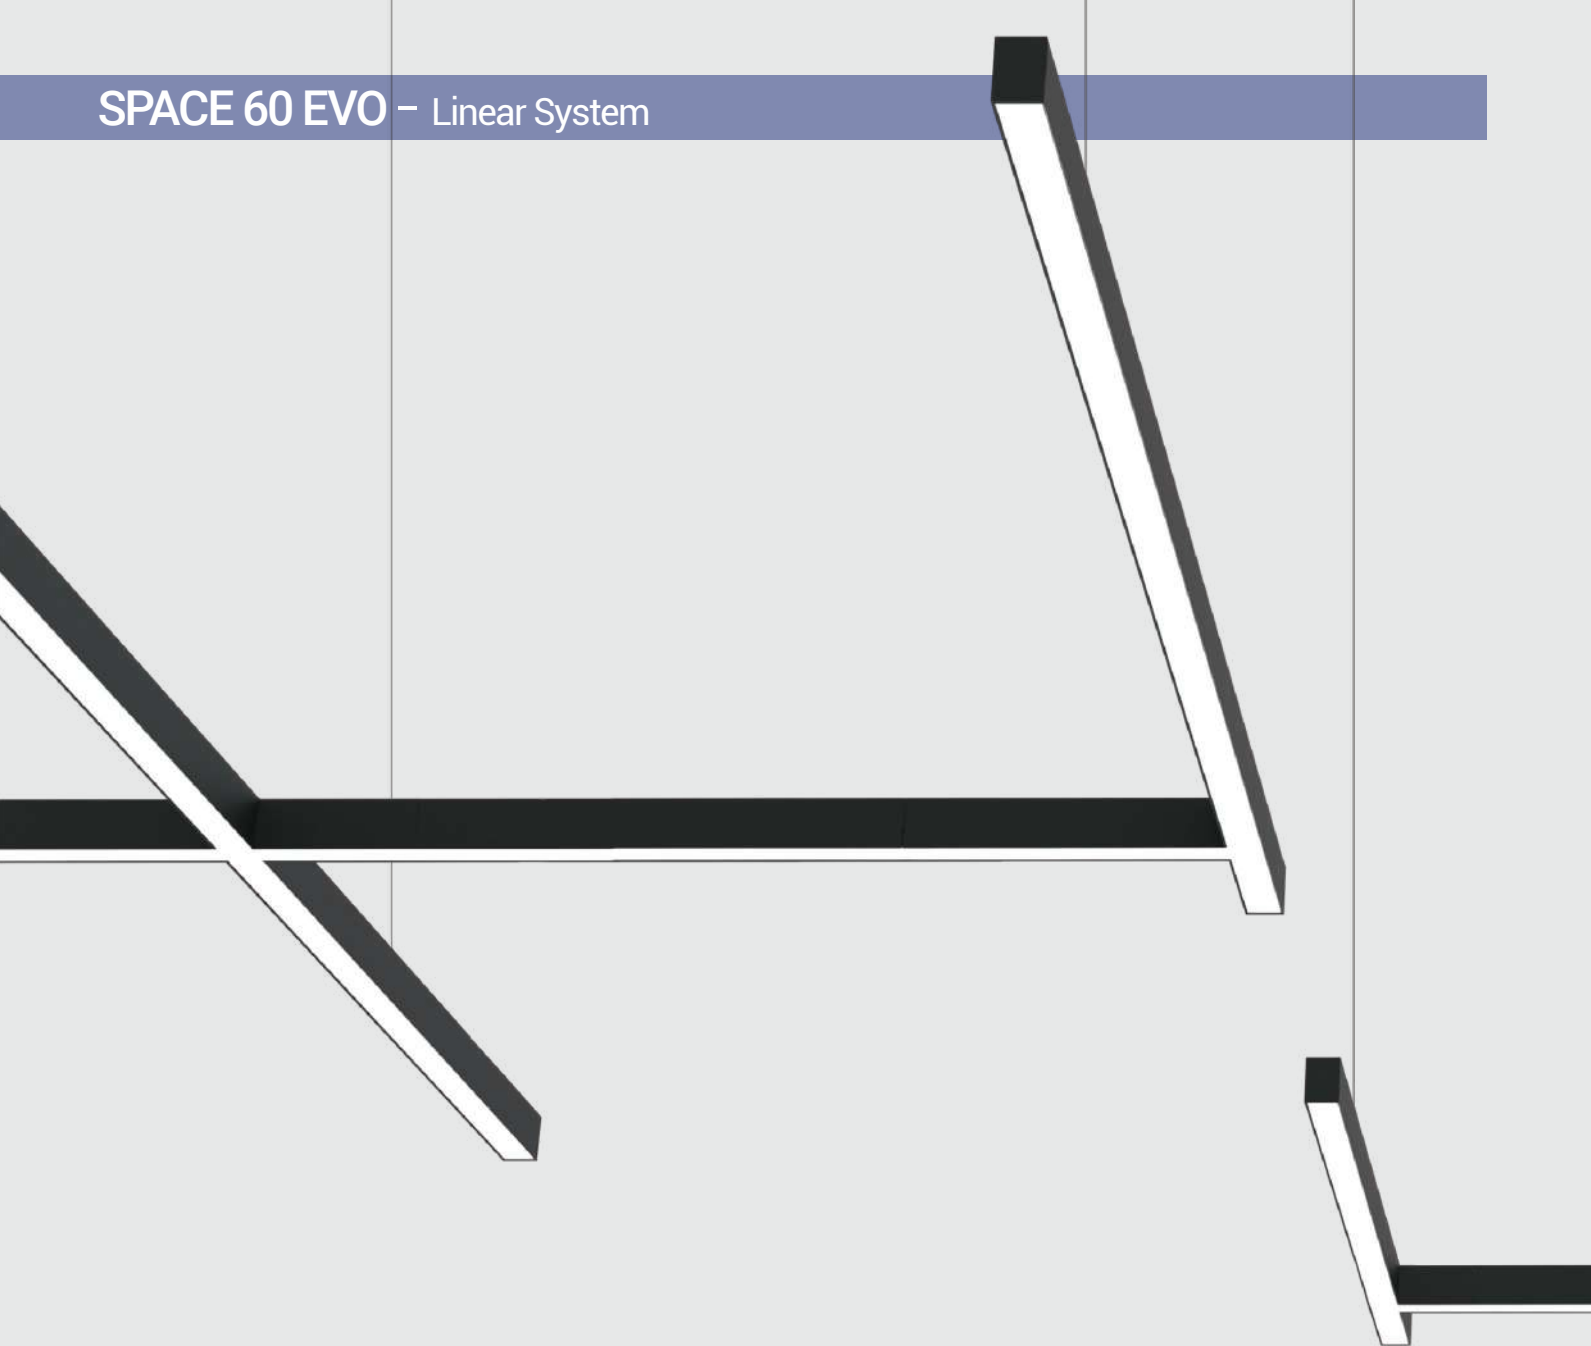


SPACE 60 EVO standard version features a microprismatic cover that enhances visual comfort (UGR<19) while providing homogeneous lighting. An opal cover version is also available as an option, offering uniform illumination and a wider beam angle (UGR<25).

Besides its elegant appearance, the detail-oriented design makes it a preferred choice among designers, electricians, and end users. All profile connection joints and end caps (with NO visible screws) are designed with anti-leakage measures to ensure optimal and clean light performance. Each profile is equipped with quick-connectors for fast and easy installation and maintenance.

Mounting options include pendant direct, pendant direct & indirect, surface-mounted, and trim-recessed installations. The LED driver—available in ON-OFF or DALI dimming versions—is integrated into the aluminium channel. Other dimming driver options are also available upon request.

Its elegant appearance and precision design make SPACE 60 EVO an ideal profile system for office lighting or any profile-based general lighting application.

Quick Connector for Fast Installation

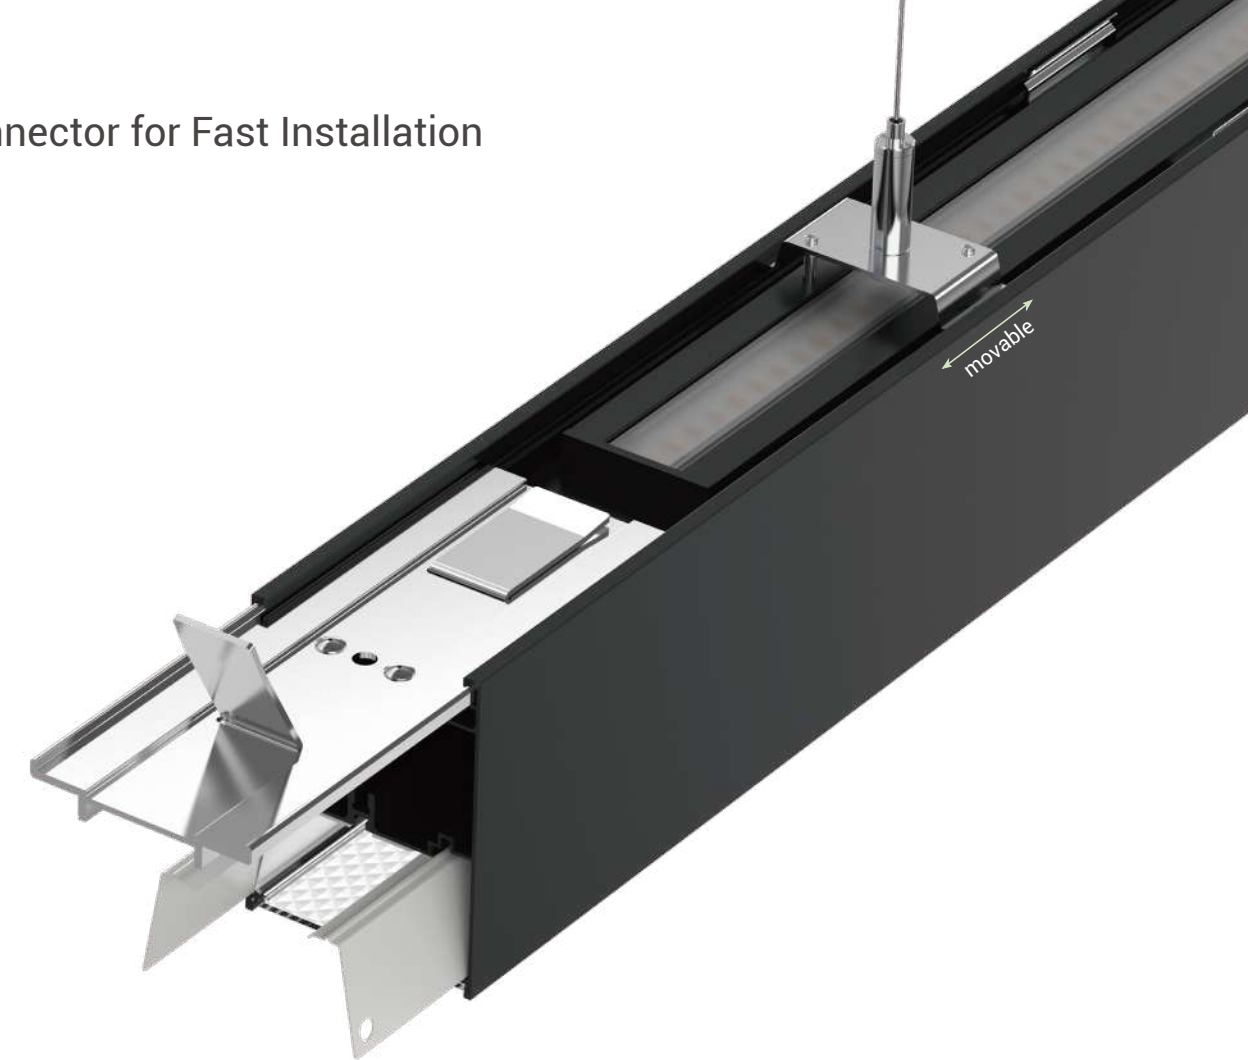


Product Features:




Seamless joints with no light leakage



Customizable shape modules

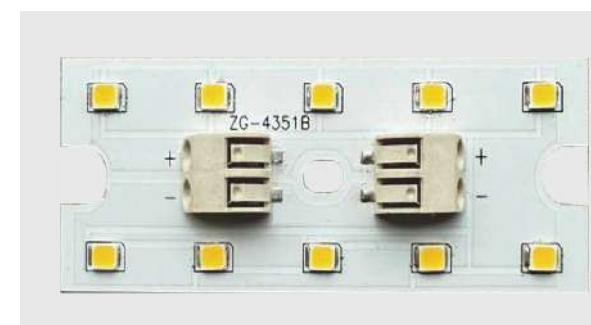


Custom lengths available in 70mm increments

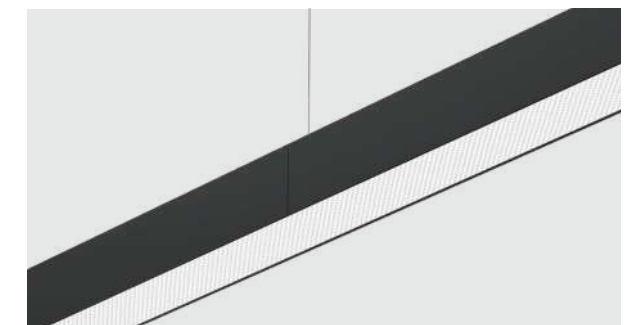

Microprismatic diffuser for visual comfort (UGR<19)


Pendant & Surface Mounted

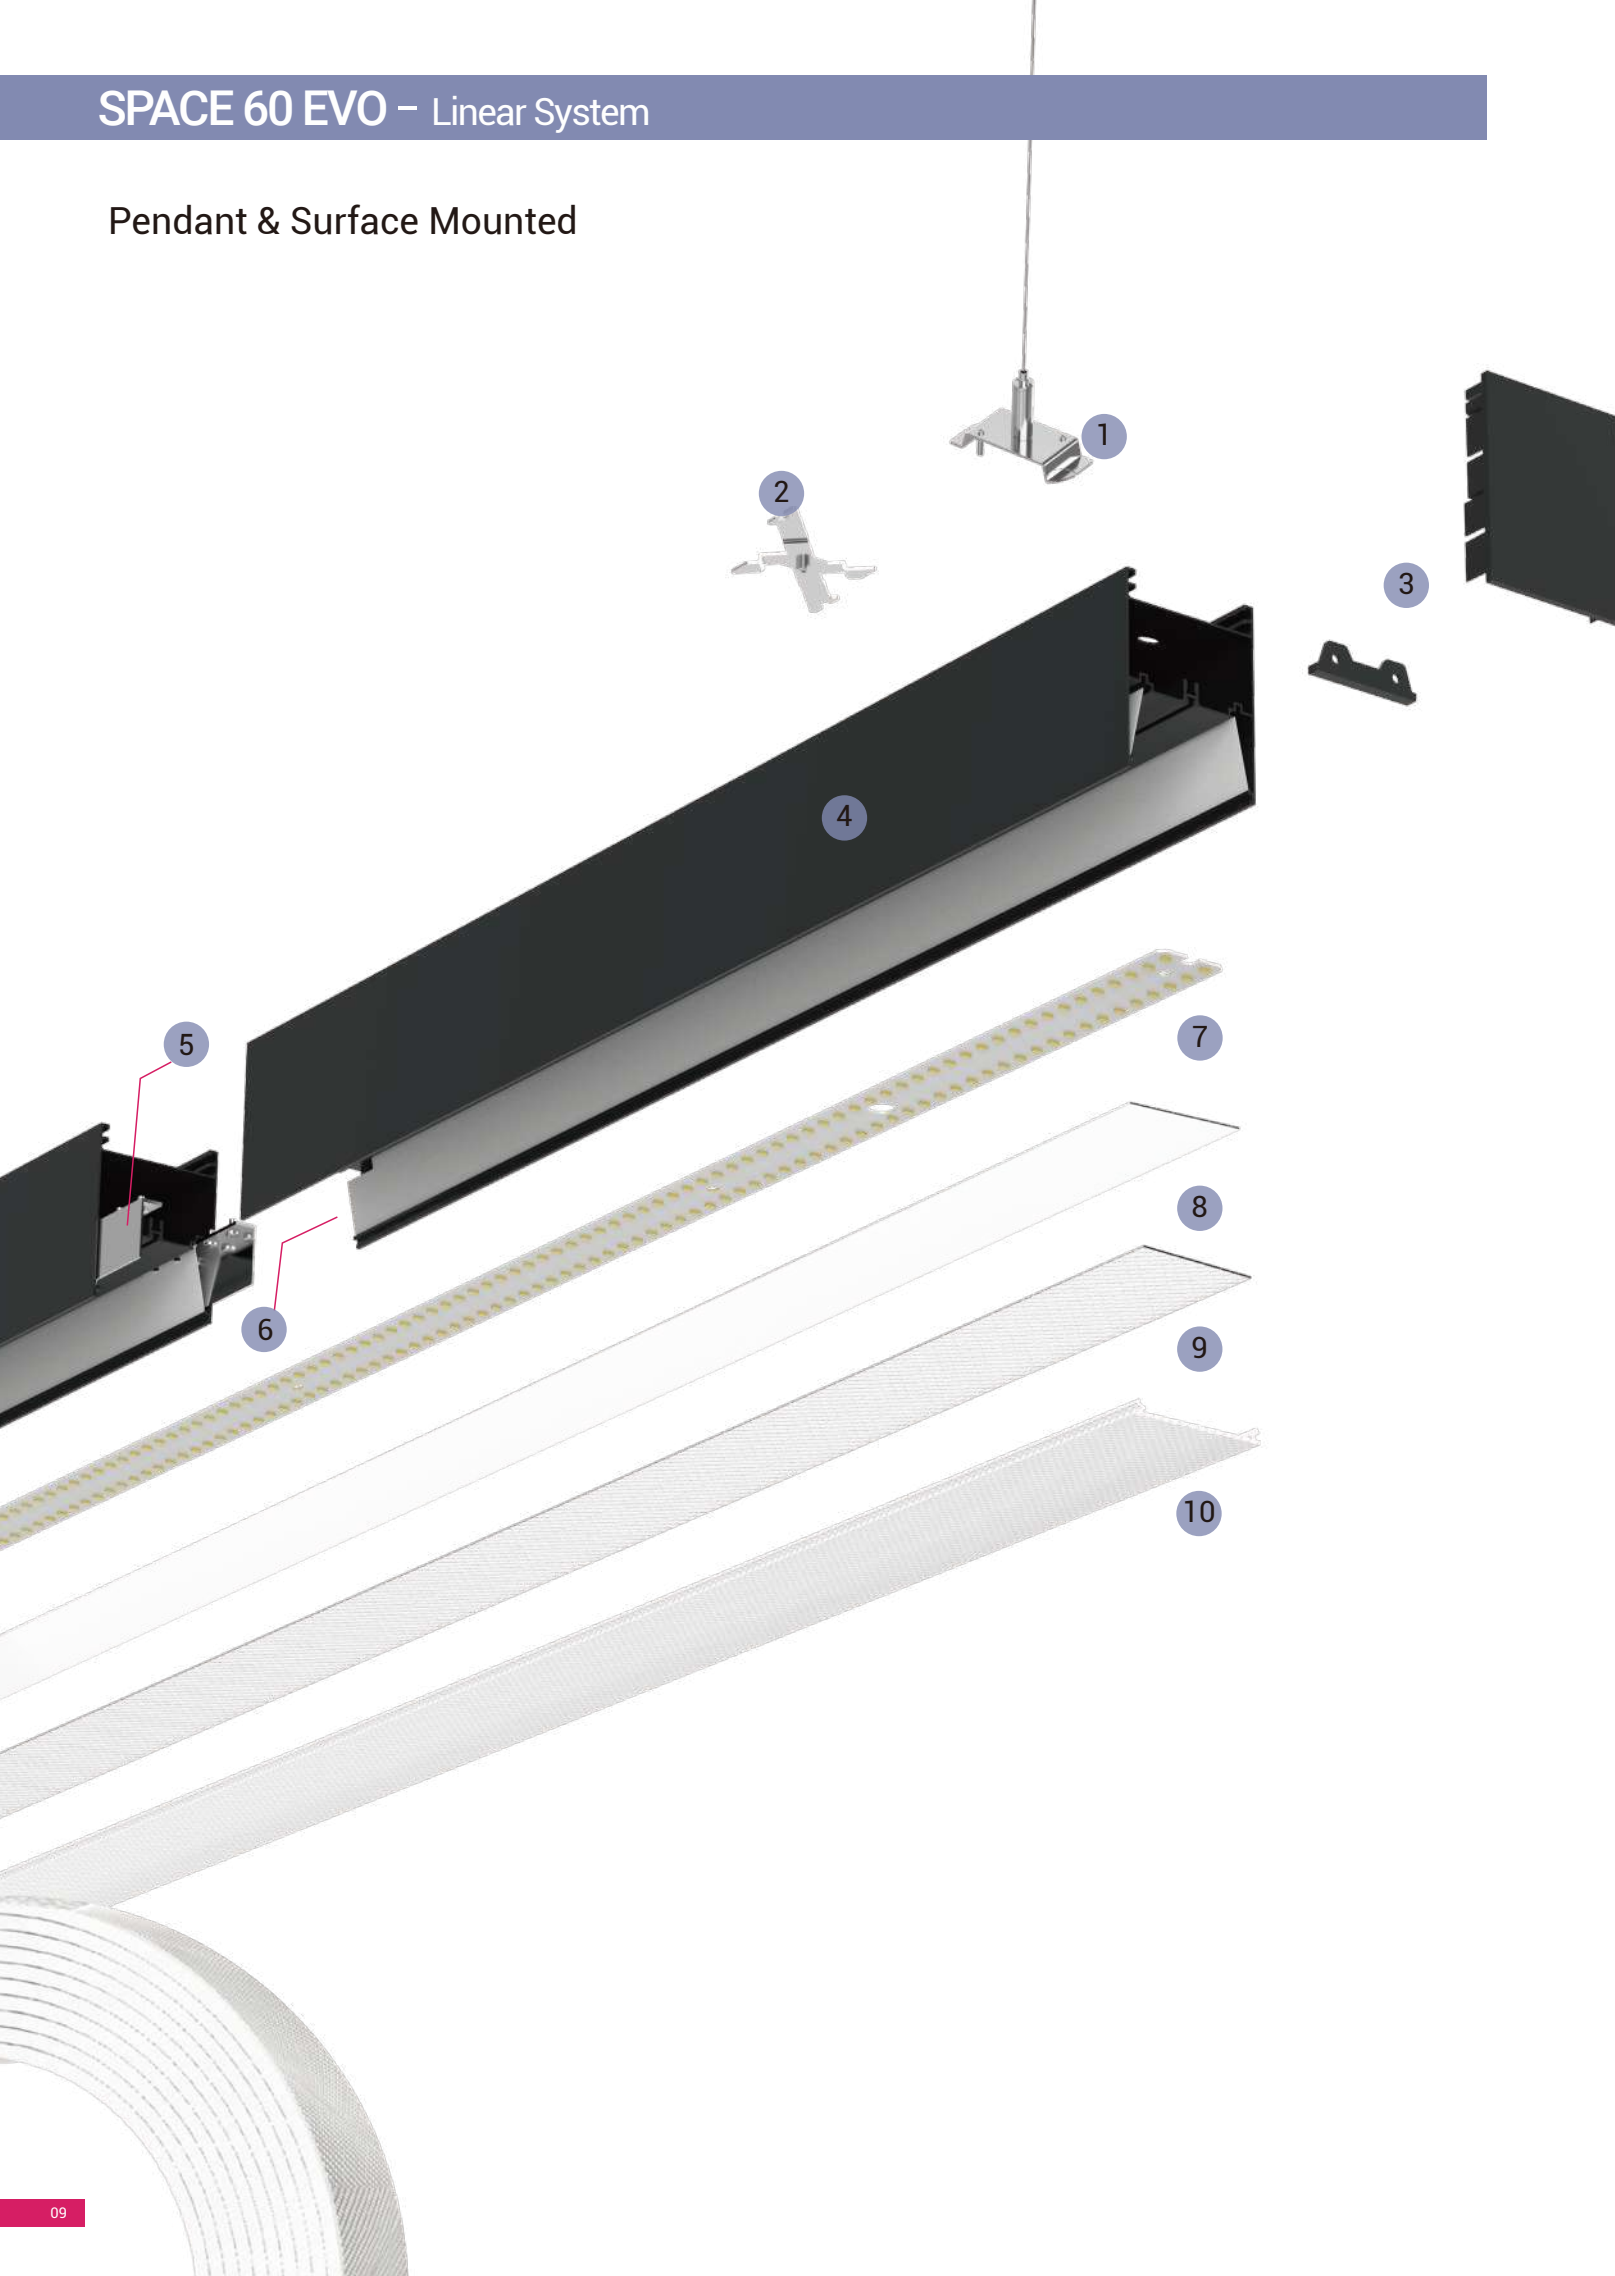

Construction

- 1 Pendant Insallation Steel Wire Kit
- 2 Surface Mounted Installation Brackets
- 3 End Cap Set (no light leakage, no visible screw)
- 4 Profile Channel without Trim
- 5 Linear Connector
- 6 Light Leakage Prevention Cover
- 7 LED Module
- 8 Opal Diffuser Film
- 9 Microprismatic Film
- 10 Flexible Microprismatic Cover (UGR<19)/ Flexible Opal Diffuser
30 meters per run, in-field cuttable

Trim Recessed

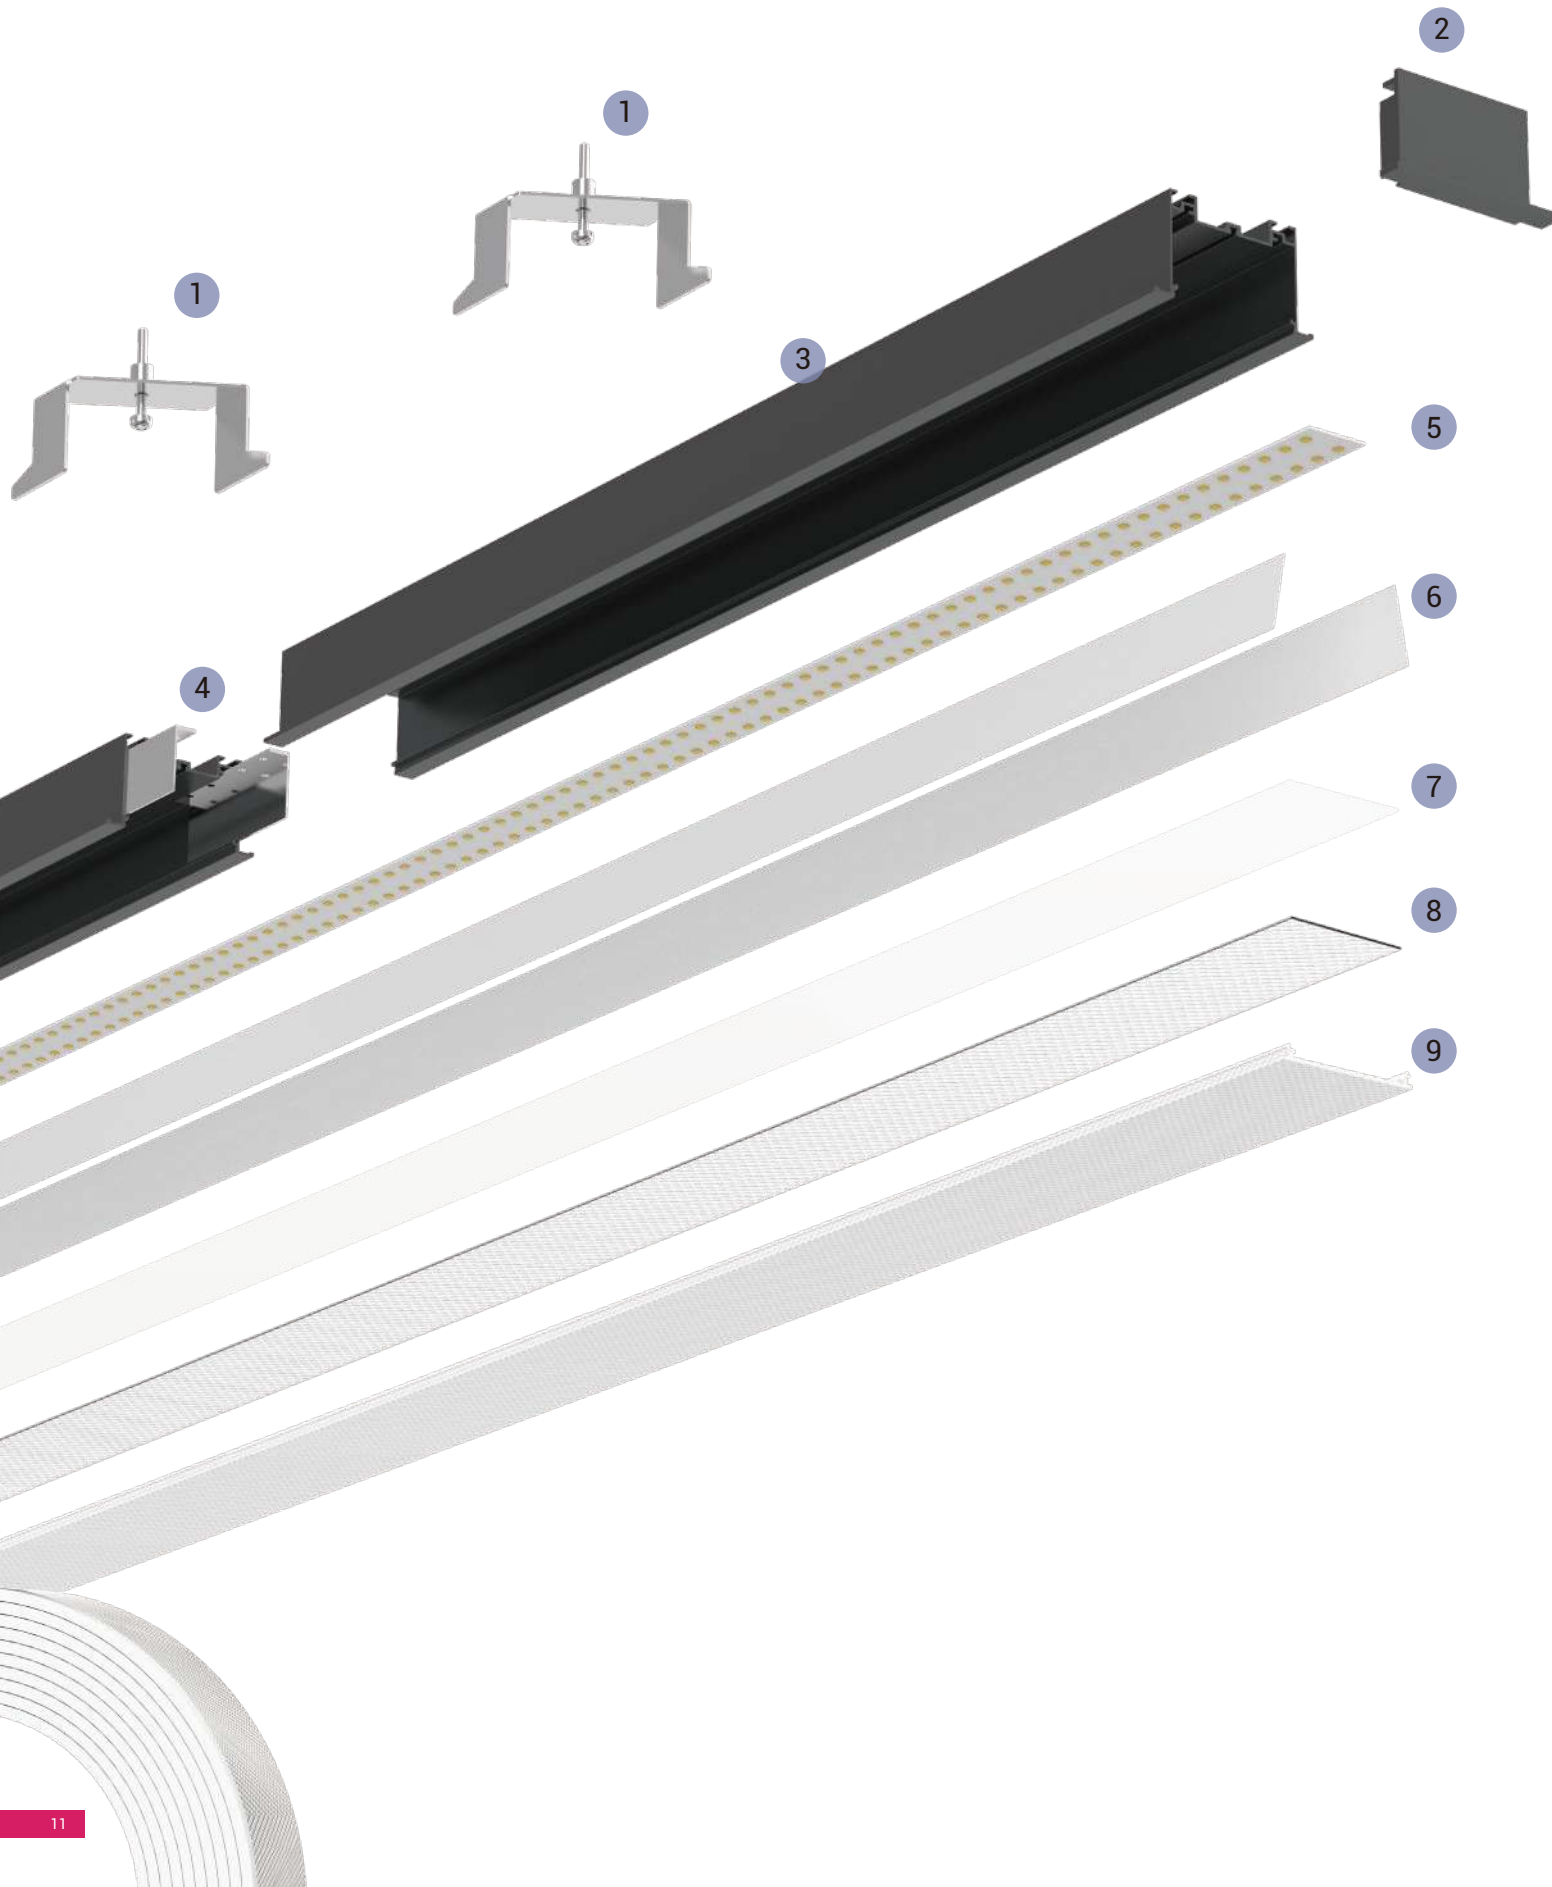

Construction

- 1 Trim Recessed Mounting Kit
- 2 End Cap with Trim
- 3 Profile Channel with Trim
- 4 Linear Connector
- 5 LED Module
- 6 Light Reflection Film
- 7 Opal Diffuser Film
- 8 Microprismatic Film
- 9 Flexible Microprismatic Cover (UGR<19)/ Flexible Opal Diffuser
30 meters per run, in-field cuttable




SPACE 60 EVO – Pendant Direct & Indirect Linear System




Quick Info

- General Lighting, Pendant Direct & Indirect
- Lumileds LED: 17W, 37W, 44W, 57W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓ 105° ↑
- Lumen Output: Up to 6850lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim


Light Distribution

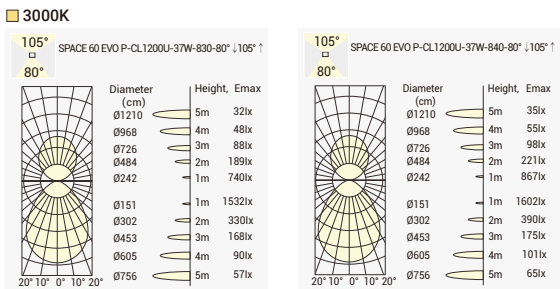

Module Lengths:



Customized Lengths Available:

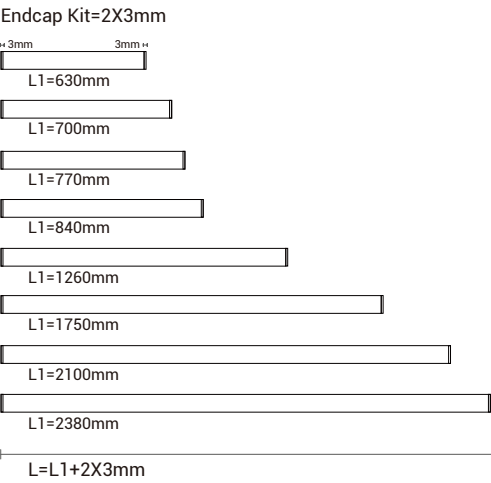

Customized Output:
Direct Lighting: 22W/m @840, 110 lm/W
Direct & Indirect Lighting: 33W/m @840, 120 lm/W



Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
15W	17W	28V	500mA	560mm	White	80	4000K	80° ↓ 105° ↑	1350lm ↓ 700lm ↑	SV60CL056M-8408017F-WN-U
34W	37W	28V	1200mA	1196mm	White	80	4000K	80° ↓ 105° ↑	2900lm ↓ 1550lm ↑	SV60CL119P-8408037F-WN-U
41W	44W	28V	1550mA	1476mm	White	80	4000K	80° ↓ 105° ↑	3300lm ↓ 2000lm ↑	SV60CL147P-8408044F-WN-U
52W	57W	28V	1850mA	1826mm	White	80	4000K	80° ↓ 105° ↑	4300lm ↓ 2550lm ↑	SV60CL182P-8408057F-WN-U

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CL056M	830	80	17	F	W	N	U
Pendant 560mm	CRI80/ 3000K	80° ↓	17W	On-Off	White	None	Uplight
SV60CL119P	840	80	37	A	B		
Pendant 1196mm	CRI80/ 4000K	80° ↓ 105° ↑	37W	1-10V Dim	Black		
SV60CL147P	930		44	D			
Pendant 1476mm	CRI90/ 3000K		44W	DALI Dim			
SV60CL182P	940		57				
Pendant 1826mm	CRI90/ 4000K		57W				


SPACE 60 EVO – Pendant Direct Linear System



Quick Info

- General Lighting, Pendant Direct & Indirect
- Lumileds LED: 13W, 27W, 32W, 40W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 4400lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution

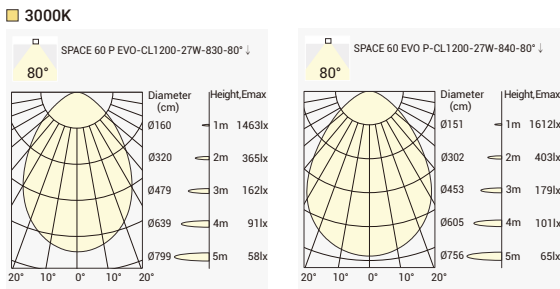

Order Info


LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
11W	13W	28V	400mA	560mm	White	80	4000K	80° ↓	1450lm ↓	SV60CL056M-8408013F-WN
24W	27W	28V	850mA	1196mm	White	80	4000K	80° ↓	3000lm ↓	SV60CL119P-8408027F-WN
29W	32W	28V	1050mA	1476mm	White	80	4000K	80° ↓	3550lm ↓	SV60CL147P-8408032F-WN
36W	40W	28V	1300mA	1826mm	White	80	4000K	80° ↓	4400lm ↓	SV60CL182P-8408040F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60	-	***	**	**	*	-	*	*	-	*
Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory			
SV60CL056M	830	80	13	F	W	N				
Pendant 560mm	CRI80/ 3000K	80° ↓	13W	On-Off	White	None				
SV60CL119P	840		27	A	B					
Pendant 1196mm	CRI80/ 4000K		27W	1-10V Dim	Black					
SV60CL147P	930		32	D						
Pendant 1476mm	CRI90/ 3000K		32W	DALI Dim						
SV60CL182P	940		40							
Pendant 1826mm	CRI90/ 4000K		40W							

Customized Lengths Available:

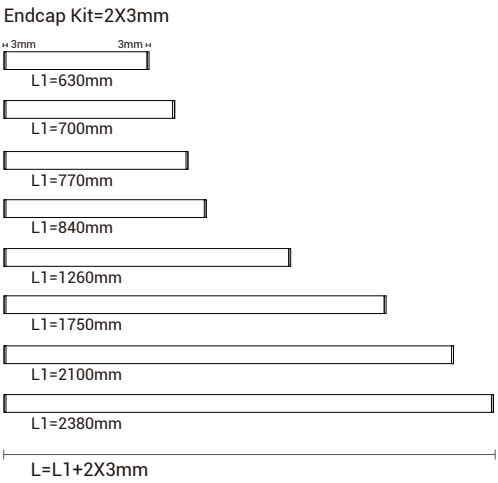

Customized Output:
Direct & Indirect Lighting: 33W/m @840, 120 lm/W


SPACE 60 EVO – Surface Mounted Linear System



Quick Info

- General Lighting, Pendant Direct & Indirect
- Lumileds LED: 13W, 27W, 32W, 40W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 4400lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution

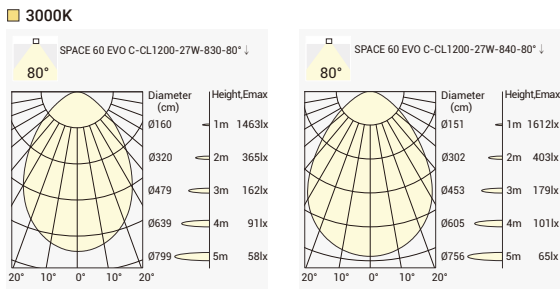

Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
11W	13W	28V	400mA	560mm	White	80	4000K	80° ↓	1450lm ↓	SV60CL056M-8408013F-WN
24W	27W	28V	850mA	1196mm	White	80	4000K	80° ↓	3000lm ↓	SV60CL119C-8408027F-WN
29W	32W	28V	1050mA	1476mm	White	80	4000K	80° ↓	3550lm ↓	SV60CL147C-8408032F-WN
36W	40W	28V	1300mA	1826mm	White	80	4000K	80° ↓	4400lm ↓	SV60CL182C-8408040F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60	-	***	**	**	*	-	*	*	-	*
Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory			
SV60CL056M	830	80	13	F	W	N				
560mm Module	CRI80/ 3000K	80° ↓	13W	On-Off	White	None				
SV60CL119P	840		27	A	B					
Surface Mounted 1196mm	CRI80/ 4000K		27W	1-10V Dim	Black					
SV60CL147P	930		32	D						
Surface Mounted 1476mm	CRI90/ 3000K		32W	DALI Dim						
SV60CL182P	940		40							
Surface Mounted 1826mm	CRI90/ 4000K		40W							

Customized Output:
Direct & Indirect Lighting: 33W/m @840, 120 lm/W


SPACE 60 EVO – Trim Recessed Linear System




Quick Info

- General Light Version also Available
- Lumileds LED: 13W, 27W, 32W, 40W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 4400lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim


Light Distribution

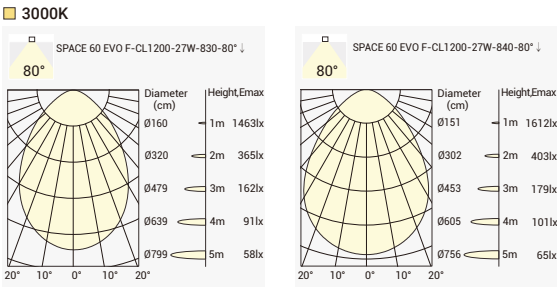

Module Lengths for Trim Recessed:




Customized Lengths Available Trim Recessed:
Endcap Kit thickness(2x2.5mm)+flange width(2x7.5mm)=2x10mm

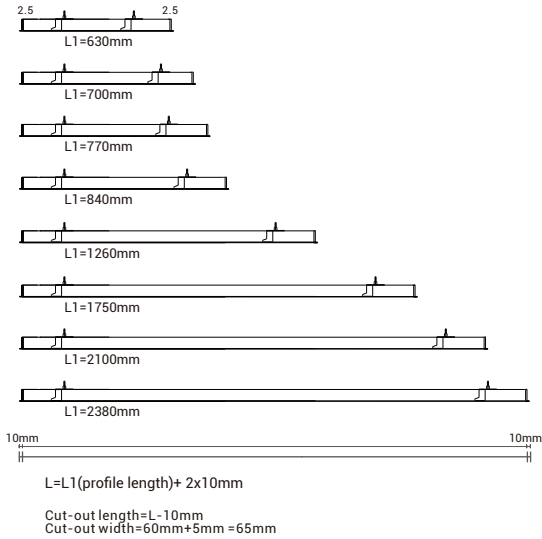

Customized Output:
Direct Lighting: 22W/m @840, 110 lm/W


SPACE 60 EVO – Corner Modules for Trim Recessed Linear System

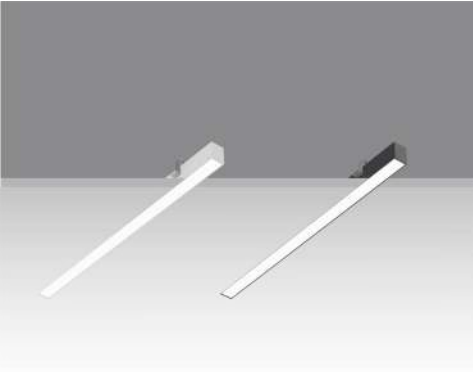


Quick Info

- General Light Version also Available
- Lumileds LED: 12W
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 1350lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution

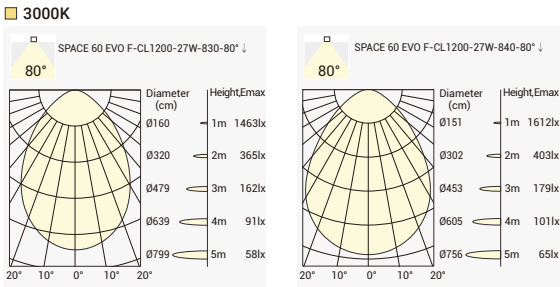

Corner Modules:

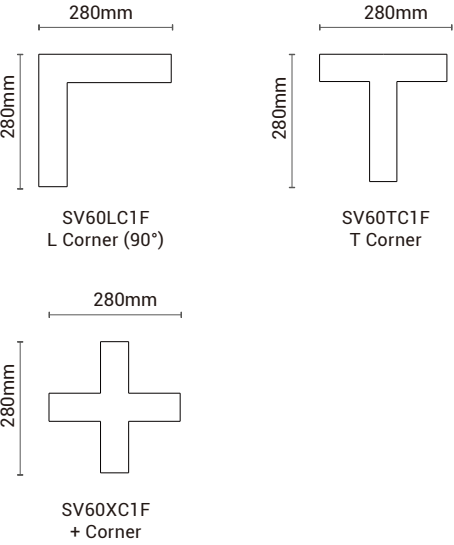

Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
10W	12W	28V	350mA	280*280mm	White	80	4000K	80° ↓	1350lm	SV60CLLC1F-8408012F-WN
10W	12W	28V	350mA	280*280mm	White	80	4000K	80° ↓	1350lm	SV60CLTC1F-8408012F-WN
10W	12W	28V	350mA	280*280mm	White	80	4000K	80° ↓	1350lm	SV60CLXC1F-8408012F-WN

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60	-	***	**	**	*	-	*	*	-	*
Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory			
SV60CLLC1F SV60LC1F L Corner	830 CRI80/ 3000K	80 80° ↓	12 12W	F On-Off	W White	N None				
SV60CLTC1F SV60TC1F T Corner	840 CRI80/ 4000K			A 1-10V Dim	B Black					
SV60CLXC1F SV60XC1F + Corner	930 CRI90/ 3000K			D DALI Dim						
	940 CRI90/ 4000K									

	SV60-LFK	Trim Resessed Linear Connector Kit
	SV60-FRK	Trim Recessed Mounting kit
	SV60 -EFK	SPACE EVO Trim Recessed Endcap Kit White/ Black Two unit for two sides
	SV60 -FMPC-30M	Flexible Microprismatic Cover, in 30 Meters per Roll With an anti-glare film and a diffusion film in 30 Meters per Roll
	SV60 -FOPC-30M	Flexible Opal Cover, in 30 Meters per Roll



SPACE 60 EVO Curve – Pendant Direct&Indirect linear system



105°

80°

3000K

4000K

CRI >80

CRI >90

UGR<19

IP20

CE

CB

UK

CA

LUMILEDS

50,000h@L80B10

5


YEARS

GUARANTEE

Quick Info

- General Lighting, Pendant Direct & Indirect
- Lumileds LED: 33W, 34W, 42W, 51W, 56W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓ 105° ↑
- Lumen Output: Up to 6750lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution

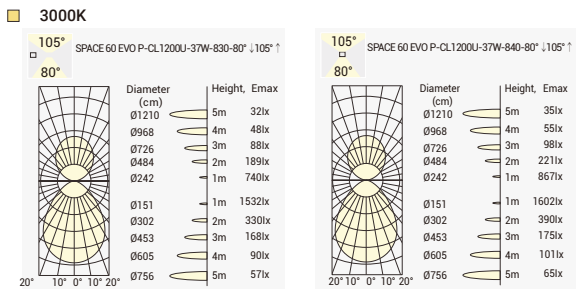

Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
31W	34W	28V	1100mA	1036mm	White 80	4000K	80° ↓ 105° ↑	2550lm ↓ 1550lm ↑	SV60CLC066P-8408034	F-WN-U-CM
46W	51W	28V	1650mA	1507mm	White 80	4000K	80° ↓ 105° ↑	3750lm ↓ 2400lm ↑	SV60CLC096P-8408051	F-WN-U-CM
31W	34W	28V	1100mA	989mm	White 80	4000K	80° ↓ 105° ↑	2550lm ↓ 1550lm ↑	SV60CLC126P-8408034	F-WN-U-CM
38W	42W	28V	1350mA	1225mm	White 80	4000K	80° ↓ 105° ↑	3100lm ↓ 1950lm ↑	SV60CLC156P-8408042	F-WN-U-CM
46W	51W	28V	1650mA	1460mm	White 80	4000K	80° ↓ 105° ↑	3750lm ↓ 2400lm ↑	SV60CLC186P-8408051	F-WN-U-CM
50W	56W	28V	1800mA	1617mm	White 80	4000K	80° ↓ 105° ↑	3750lm ↓ 3000lm ↑	SV60CLC206P-8408056	F-WN-U-CM
29W	33W	28V	1050mA	966mm	White 80	4000K	80° ↓ 105° ↑	2450lm ↓ 1550lm ↑	SV60CLC246P-8408033	F-WN-U-CM
38W	42W	28V	1350mA	1201mm	White 80	4000K	80° ↓ 105° ↑	3100lm ↓ 1950lm ↑	SV60CLC306P-8408042	F-WN-U-CM

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60	-	***	**	**	*	-	*	*	-	*
Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory			
SV60CLC066P	830	80	33	F	W	N	U			
Pendant D600mm	CRI80/ 3000K	80° ↓ 105° ↑	33W	On-Off	White	None	With Uplight, Extrusion Cover			
SV60CLC096P	840		34	A	B					
Pendant D900mm	CRI80/ 4000K		34W	1-10V Dim	Black					
SV60CLC126P	930		42	D			U			
Pendant D1200mm	CRI90/ 3000K		42W	DALI Dim			Uplight, Extrusion Cover, Middle Section			
SV60CLC156P	940		51							
Pendant D1500mm	CRI90/ 4000K		51W							
SV60CLC186P			56							
Pendant D1800mm			56W							
SV60CLC206P										
Pendant D2000mm										
SV60CLC246P										
Pendant D2400mm										
SV60CLC306P										
Pendant D3000mm										

SPACE 60 EVO Curve – Pendant Direct linear system



80°

4000K

>80

>90

UGR<19

IP20

CE

CB

UK

CA

LUMILEDS

50,000h@L80B10

5


YEARS

GUARANTEE

Quick Info

- General Lighting, Pendant Direct & Indirect
- Lumileds LED: 22W, 23W, 28W, 34W, 37W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓ 105° ↑
- Lumen Output: Up to 4100lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution

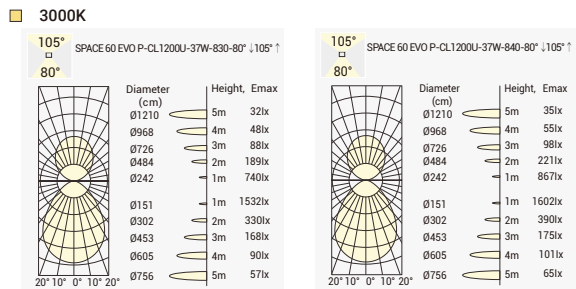

Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
21W	23W	28V	750mA	1036mm	White 80	4000K	80°	2550lm	SV60CLC066P-8408023	F-WN-CM
31W	34W	28V	1100mA	1507mm	White 80	4000K	80°	3750lm	SV60CLC096P-8408034	F-WN-CM
21W	23W	28V	750mA	989mm	White 80	4000K	80°	2550lm	SV60CLC126P-8408023	F-WN-CM
25W	28W	28V	900mA	1225mm	White 80	4000K	80°	3100lm	SV60CLC156P-8408028	F-WN-CM
31W	34W	28V	1100mA	1460mm	White 80	4000K	80°	3750lm	SV60CLC186P-8408034	F-WN-CM
34W	37W	28V	1200mA	1617mm	White 80	4000K	80°	4100lm	SV60CLC206P-8408037	F-WN-CM
20W	22W	28V	700mA	966mm	White 80	4000K	80°	2450lm	SV60CLC246P-8408022	F-WN-CM
25W	28W	28V	900mA	1201mm	White 80	4000K	80°	3100lm	SV60CLC306P-8408028	F-WN-CM

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60	-	***	**	**	*	-	*	*	-	*
Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory			
SV60CLC066P	830	80	22	F	W	N	U			
Pendant D600mm	CRI80/ 3000K	80° ↓ 105° ↑	22W	On-Off	White	None	With Uplight, Extrusion Cover			
SV60CLC096P	840		23	A	B					
Pendant D900mm	CRI80/ 4000K		23W	1-10V Dim	Black					
SV60CLC126P	930		28	D			U			
Pendant D1200mm	CRI90/ 3000K		28W	DALI Dim			Uplight, Extrusion Cover, Middle Section			
SV60CLC156P	940		34							
Pendant D1500mm	CRI90/ 4000K		34W							
SV60CLC186P			37							
Pendant D1800mm			37W							
SV60CLC206P										
Pendant D2000mm										
SV60CLC246P										
Pendant D2400mm										
SV60CLC306P										
Pendant D3000mm										

SPACE 60 EVO Curve – Surface Mounted Linear System



105°
80°

3000K

4000K

CRI >80

CRI >90

UGR<19

IP20

CE

CB

UK CA

LUMILEDS

50,000h@L80B10

5 YEARS

GUARANTEE

Quick Info

- General Lighting, Pendant Direct & Indirect
- Lumileds LED: 22W, 23W, 28W, 34W, 37W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓ 105° ↑
- Lumen Output: Up to 4100lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution

3000K

105°
80°

SPACE 60 EVO P-CL1200U-37W-830-80° ,105° ↑

Diameter (cm)	Height, Emax
Ø1210	5m 32lx
Ø968	4m 48lx
Ø726	3m 88lx
Ø484	2m 189lx
Ø242	1m 740lx
Ø151	1m 1532lx
Ø302	2m 330lx
Ø453	3m 168lx
Ø605	4m 90lx
Ø756	5m 57lx

105°
80°

SPACE 60 EVO P-CL1200U-37W-840-80° ,105° ↑

Diameter (cm)	Height, Emax
Ø1210	5m 35lx
Ø968	4m 55lx
Ø726	3m 99lx
Ø484	2m 221lx
Ø242	1m 867lx
Ø151	1m 1602lx
Ø302	2m 390lx
Ø453	3m 175lx
Ø605	4m 101lx
Ø756	5m 65lx

Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
21W	23W	28V	750mA	1036mm	White	80	4000K	80°	2550lm	SV60CLC066C-8408023F-WN-CM
31W	34W	28V	1100mA	1507mm	White	80	4000K	80°	3750lm	SV60CLC096C-8408034F-WN-CM
21W	23W	28V	750mA	989mm	White	80	4000K	80°	2550lm	SV60CLC126C-8408023F-WN-CM
25W	28W	28V	900mA	1225mm	White	80	4000K	80°	3100lm	SV60CLC156C-8408028F-WN-CM
31W	34W	28V	1100mA	1460mm	White	80	4000K	80°	3750lm	SV60CLC186C-8408034F-WN-CM
34W	37W	28V	1200mA	1617mm	White	80	4000K	80°	4100lm	SV60CLC206C-8408037F-WN-CM
20W	22W	28V	700mA	966mm	White	80	4000K	80°	2450lm	SV60CLC246C-8408022F-WN-CM
25W	28W	28V	900mA	1201mm	White	80	4000K	80°	3100lm	SV60CLC306C-8408028F-WN-CM

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60	-	***	**	**	*	-	*	*	-	*
Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory			
SV60CLC066C Surface D600mm	830 CRI80/ 3000K	80 80° ↓ 105° ↑	22 22W	F On-Off	W White	N None	U With Uplight, Extrusion Cover			
SV60CLC096C Surface D900mm	840 CRI80/ 4000K		23 23W	A 1-10V Dim	B Black					
SV60CLC126C Surface D1200mm	930 CRI90/ 3000K		28 28W	D DALI Dim			U Uplight, Extrusion Cover, Middle Section			
SV60CLC156C Surface D1500mm	940 CRI90/ 4000K		34 34W							
SV60CLC186C Surface D1800mm			37 37W							
SV60CLC206C Surface D2000mm										
SV60CLC246C Surface D2400mm										
SV60CLC306C Surface D3000mm										

SPACE 60 EVO Curve – Trim Recessed Linear System

80°

4000K

>80

>90

UGR<19

IP20

CE

CB

UK CA

LUMILEDS

50,000h@L80B10

5 YEARS

GUARANTEE

Quick Info

- General Lighting, Pendant Direct & Indirect
- Lumileds LED: 22W, 23W, 28W, 34W, 37W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓ 105° ↑
- Lumen Output: Up to 4100lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution

3000K

105°
80°

SPACE 60 EVO P-CL1200U-37W-830-80° ,105° ↑

Diameter (cm)	Height, Emax
Ø1210	5m 32lx
Ø968	4m 48lx
Ø726	3m 88lx
Ø484	2m 189lx
Ø242	1m 740lx
Ø151	1m 1532lx
Ø302	2m 330lx
Ø453	3m 168lx
Ø605	4m 90lx
Ø756	5m 57lx

105°
80°

SPACE 60 EVO P-CL1200U-37W-840-80° ,105° ↑

Diameter (cm)	Height, Emax
Ø1210	5m 35lx
Ø968	4m 55lx
Ø726	3m 99lx
Ø484	2m 221lx
Ø242	1m 867lx
Ø151	1m 1602lx
Ø302	2m 390lx
Ø453	3m 175lx
Ø605	4m 101lx
Ø756	5m 65lx

Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
21W	23W	28V	750mA	1036mm	White	80	4000K	80°	2550lm	SV60CLC066F-8408023F-WN-CM
31W	34W	28V	1100mA	1507mm	White	80	4000K	80°	3750lm	SV60CLC096F-8408034F-WN-CM
21W	23W	28V	750mA	989mm	White	80	4000K	80°	2550lm	SV60CLC126F-8408023F-WN-CM
25W	28W	28V	900mA	1225mm	White	80	4000K	80°	3100lm	SV60CLC156F-8408028F-WN-CM
31W	34W	28V	1100mA	1460mm	White	80	4000K	80°	3750lm	SV60CLC186F-8408034F-WN-CM
34W	37W	28V	1200mA	1617mm	White	80	4000K	80°	4100lm	SV60CLC206F-8408037F-WN-CM
20W	22W	28V	700mA	966mm	White	80	4000K	80°	2450lm	SV60CLC246F-8408022F-WN-CM
25W	28W	28V	900mA	1201mm	White	80	4000K	80°	3100lm	SV60CLC306F-8408028F-WN-CM



Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

SV60	-	***	**	**	*	-	*	*	-	*
Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory			
SV60CLC066F Trim Recessed D600mm	830 CRI80/ 3000K	80 80° ↓ 105° ↑	22 22W	F On-Off	W White	N None	U With Uplight, Extrusion Cover			
SV60CLC096F Trim Recessed D900mm	840 CRI80/ 4000K		23 23W	A 1-10V Dim	B Black					
SV60CLC126F Trim Recessed D1200mm	930 CRI90/ 3000K		28 28W	D DALI Dim			U Uplight, Extrusion Cover, Middle Section			
SV60CLC156F Trim Recessed D1500mm	940 CRI90/ 4000K		34 34W							
SV60CLC186F Trim Recessed D1800mm			37 37W							
SV60CLC206F Trim Recessed D2000mm										
SV60CLC246F Trim Recessed D2400mm										
SV60CLC306F Trim Recessed D3000mm										

25

www.nekolighting.com 26

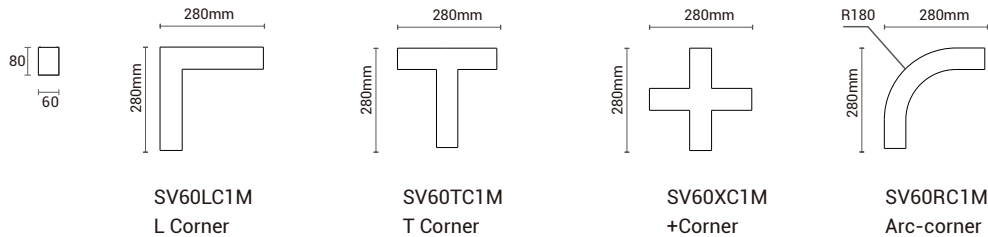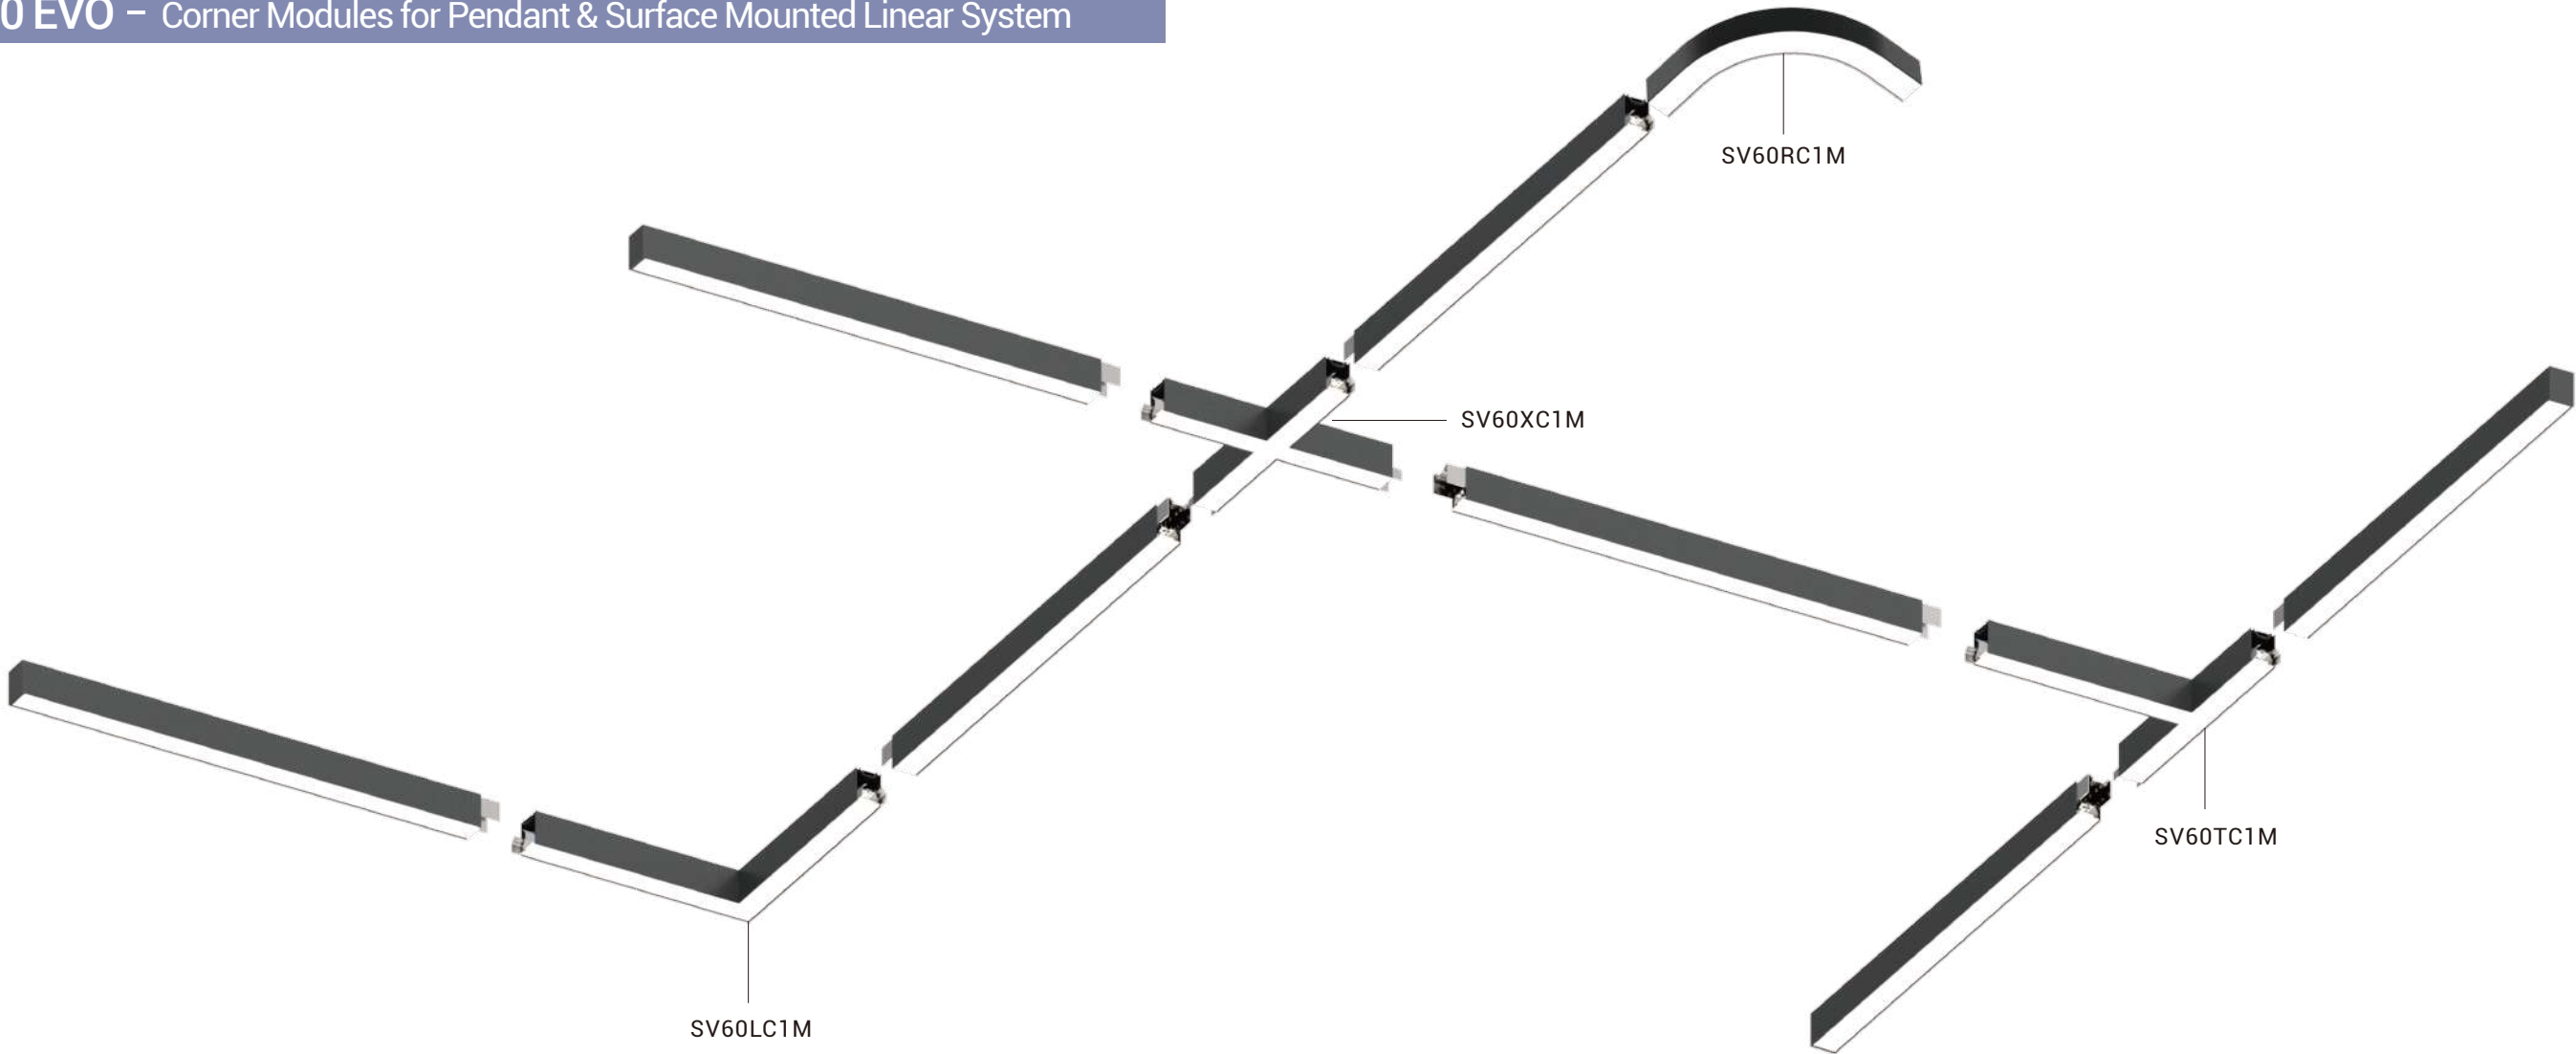

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
10W	12W	28V	350mA	280x280mm	White	80	4000K	80°	1350lm	SV60CLLC1M-8408012F-WN
10W	12W	28V	350mA	280x280mm	White	80	4000K	80°	1350lm	SV60CLTC1M-8408012F-WN
10W	12W	28V	350mA	280x280mm	White	80	4000K	80°	1350lm	SV60CLXC1M-8408012F-WN
10W	12W	28V	350mA	280x280mm	White	80	4000K	80°	1350lm	SV60CLRC1M-8408012F-WN

Code Remark: **F**=F(ON-OFF) **A**=A(1-10V Dim) **D**=D(DALI Dim)


Coding

SV60	—	***	**	**	*	—	*	*	—	*
Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory			
SV60CLLC1M	830	80	12	F	W	N				
SV60LC1M L Corner 280*280mm	CRI80/ 3000K	80° ↓	12W	On-Off	White	None				
SV60CLTC1M	840			A	B					
SV60TC1M T Corner 280*280mm	CRI80/ 4000K			1-10V Dim	Black					
SV60CLXC1M	930			D						
SV60XC1M + Corner 280*280mm	CRI90/ 3000K			DALI Dim						
SV60CLRC1M	940									
SV60RC1M Arc-corner 280*280mm	CRI90/ 4000K									


	SV60-PK	Pendant Installation Kit (with Ceiling Box)
	SV60-PWK	Pendant Steel Wire Kit (no Ceiling Box)
	SV60-SMK	Surface Mounted Kit
	SV60-LCK	Linear Connector Kit
	SV60-ECK	SPACE 60 EVO Surface Mounted&Pendant Endcap Kit White/ Black Two unit for two sides
	SV60-FCK	2.5-meter three-core input wire&Quick-connect for ON/OFF
	SV60-DCK	2.5-meter five-core input wire&Quick-connect for Dimming control
	SV60-FMPC-30M	Flexible Microprismatic Cover, in 30 Meters per Roll With an anti-glare film and a diffusion film in 30 Meters per Roll
	SV60-FOPC-30M	Flexible Opal Cover, in 30 Meters per Roll

Modules & Installation Kits for
Pendant & Surface-Mounted Linear System


Non-standard Lengths

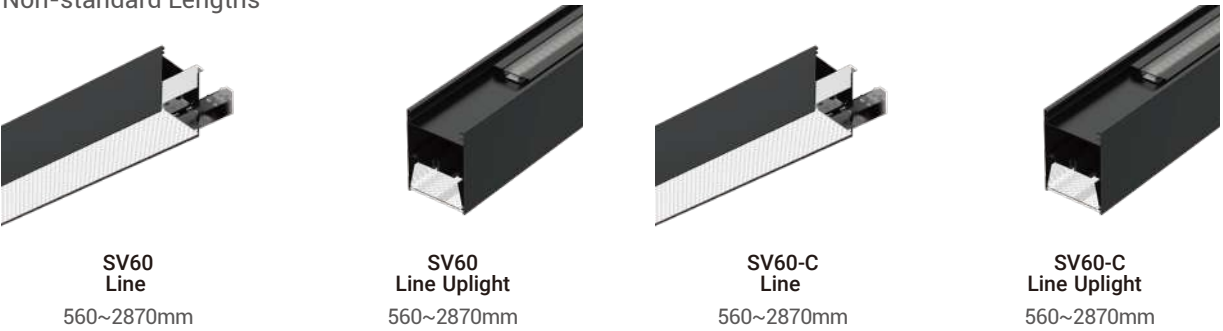



L / T / X / Arc Corners

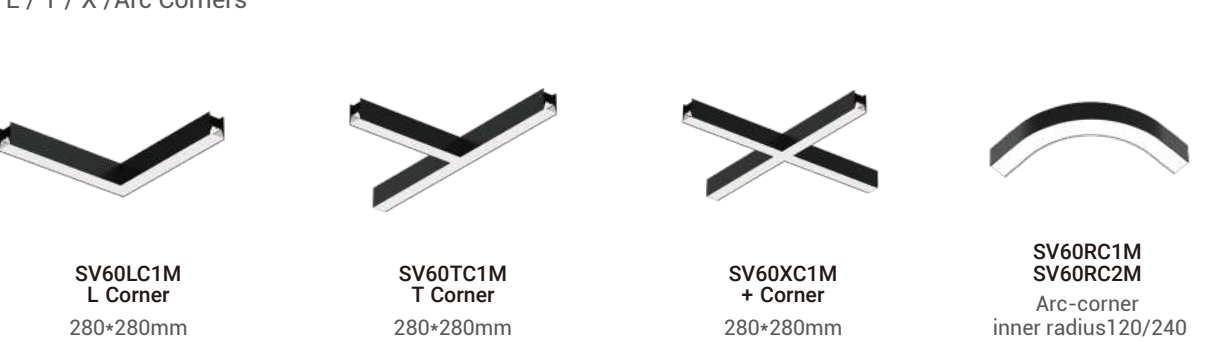

Installation Kits

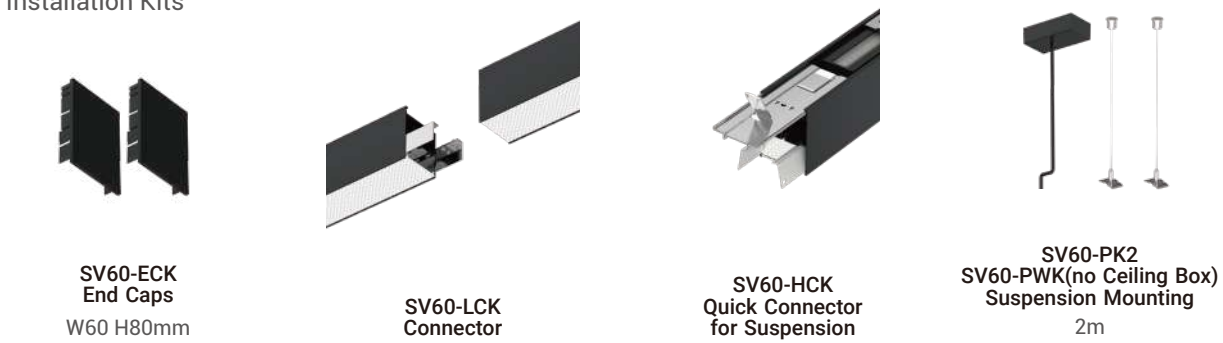

Installation Kits

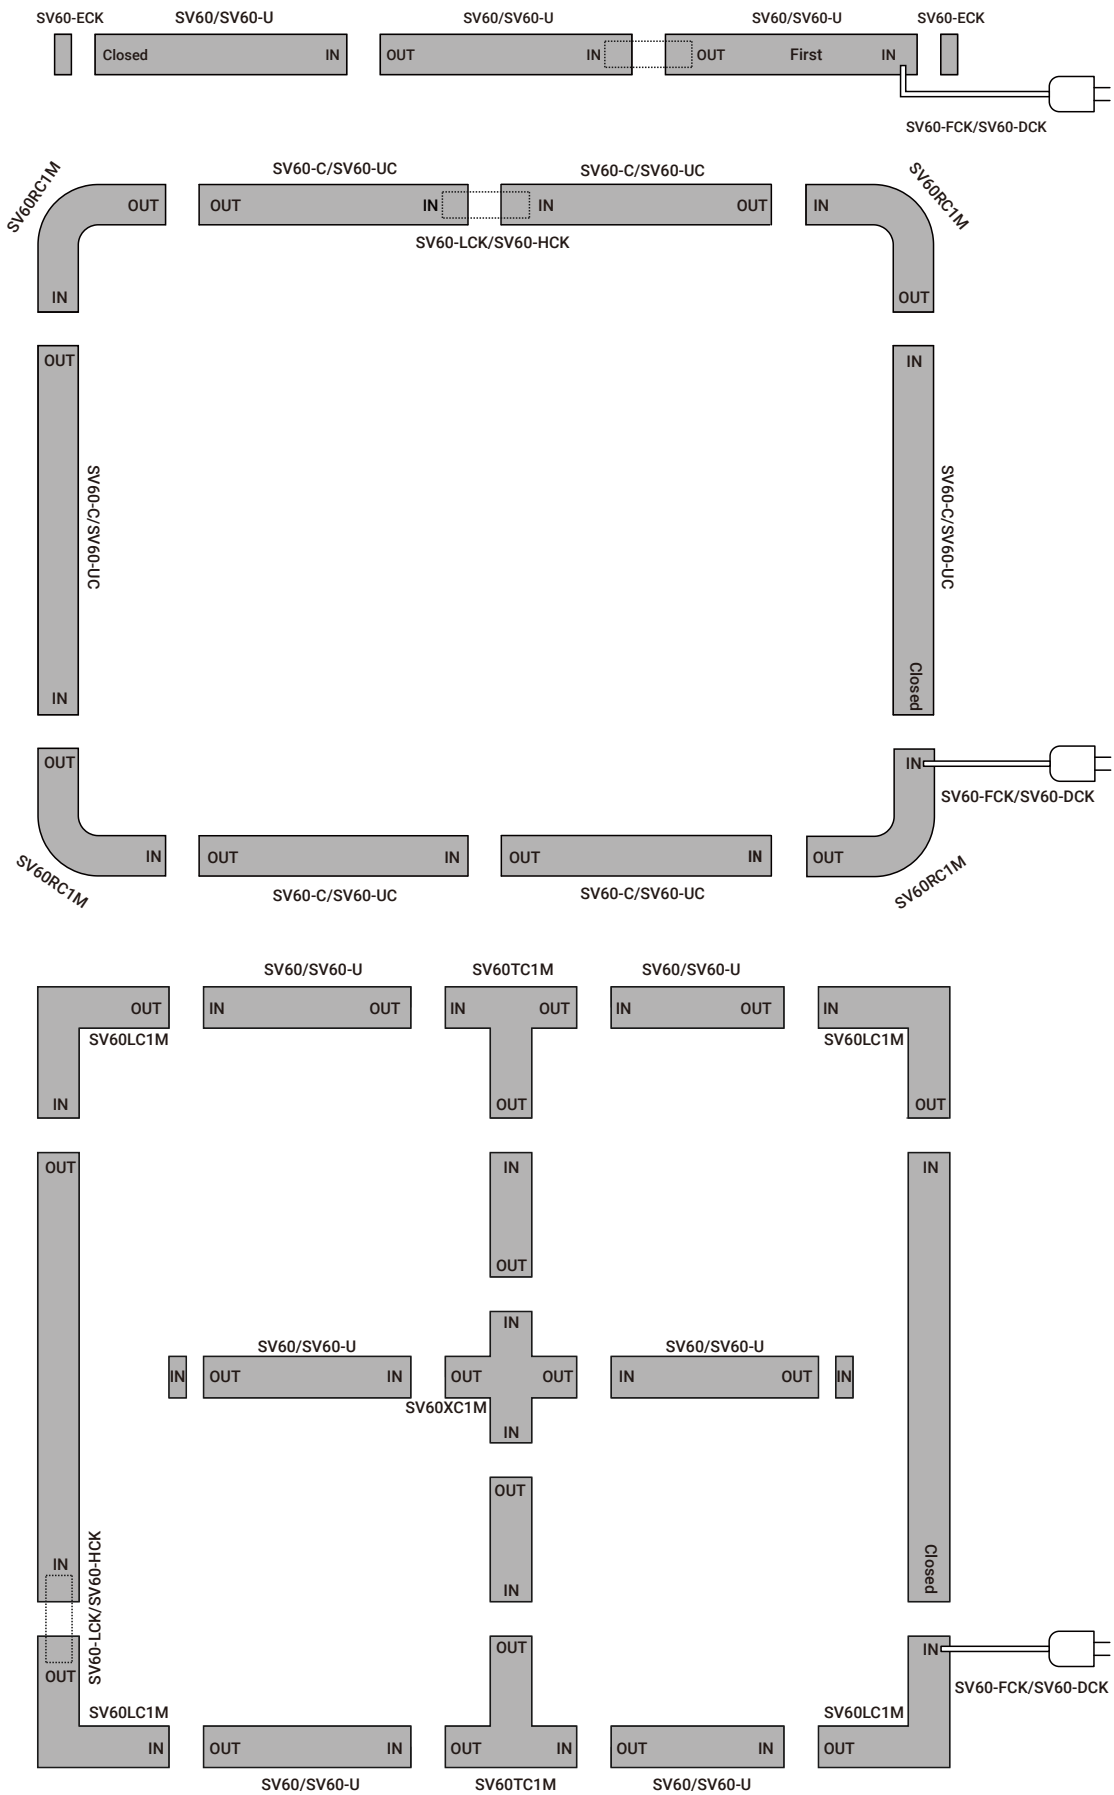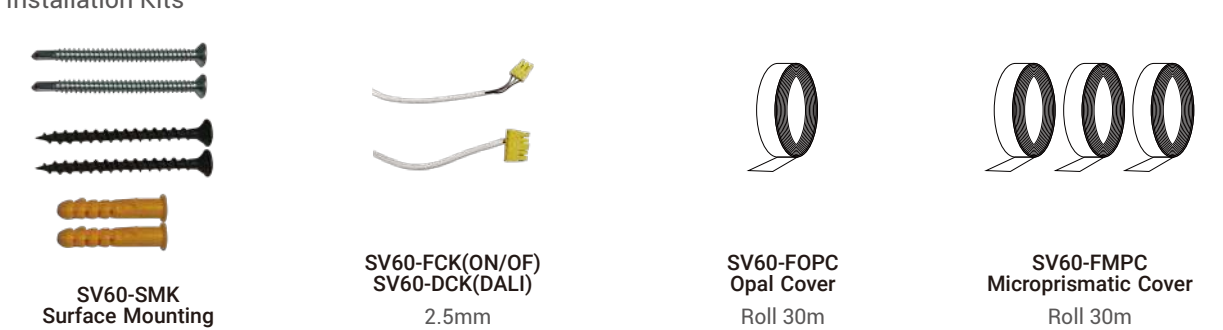

Modules & Installation Kits for
Trim Recessed Linear System

Non-standard Lengths



SV60-F
Line
560~2870mm



SV60-F-C
Line
560~2870mm



SV60-LFK

L / T / X /Arc Corners



SV60LC1F
L Corner (90°)
280*280mm



SV60TC1F
T Corner
280*280mm



SV60XC1F
+ Corner
280*280mm


Installation Kits




SV60-FRK
Trim Recessed



SV60-EFK
End Caps
45*45mm



SV60-FOPC
Opal Cover
Roll 30m



SV60-FMPC
Microprismatic Cover
Roll 30m

