

# SPACE 60 EVO


Ideal Linear System  
for Office and Public Space Lighting  
Customizable Lengths and Shape Modules  
Independent and Continuous Lighting Options




The SPACE 60 EVO series is a versatile linear lighting system designed for modern offices and public spaces. The profile features a precisely engineered 60mm width to ensure strict glare control (UGR<19) and uniform illumination. Available profile lengths include 1196mm, 1476mm, and 1826mm (lengths include 3mm end cap kits on each side), which can be used individually or connected in continuous runs to accommodate different spatial requirements. Combined with L-corner, T-corner, cross-corner, and arc-corner modules, SPACE 60 EVO offers enhanced flexibility for seamless integration into any project.

Pendant and Surface-Mounted Profile Options


Standard Lengths:

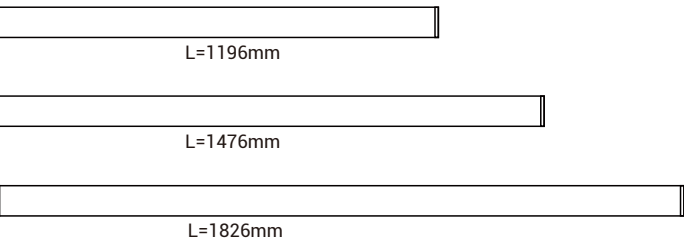


Customized Lengths Available:  
Endcap Kit=2X3mm

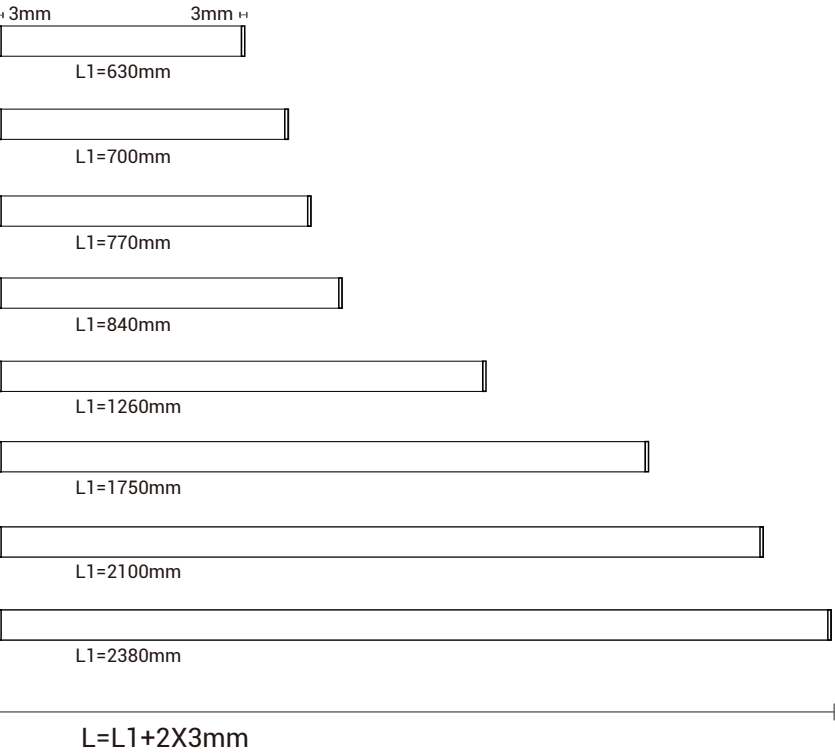


Corner Modules:

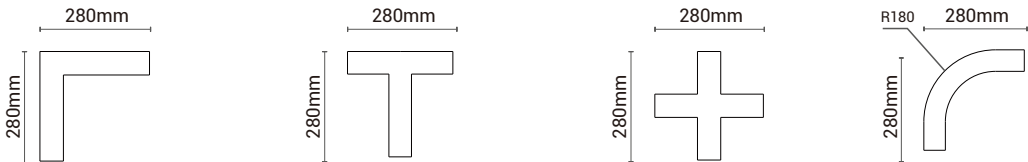

Module Lengths:




Mountings:

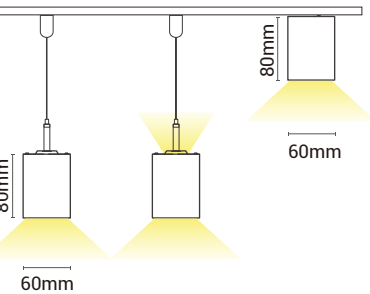


Trim Recessed Profile Options




Standard Lengths:

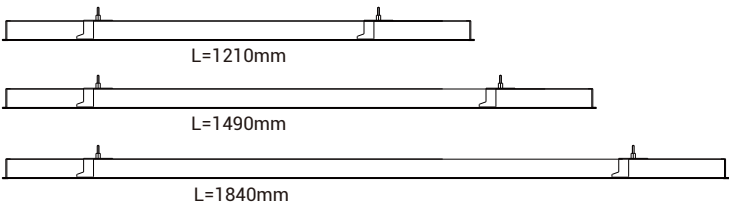


Customized Lengths Available Trim Recessed:  
Endcap Kit thickness(2x2.5mm)+flange width(2x7.5mm)=2X10mm

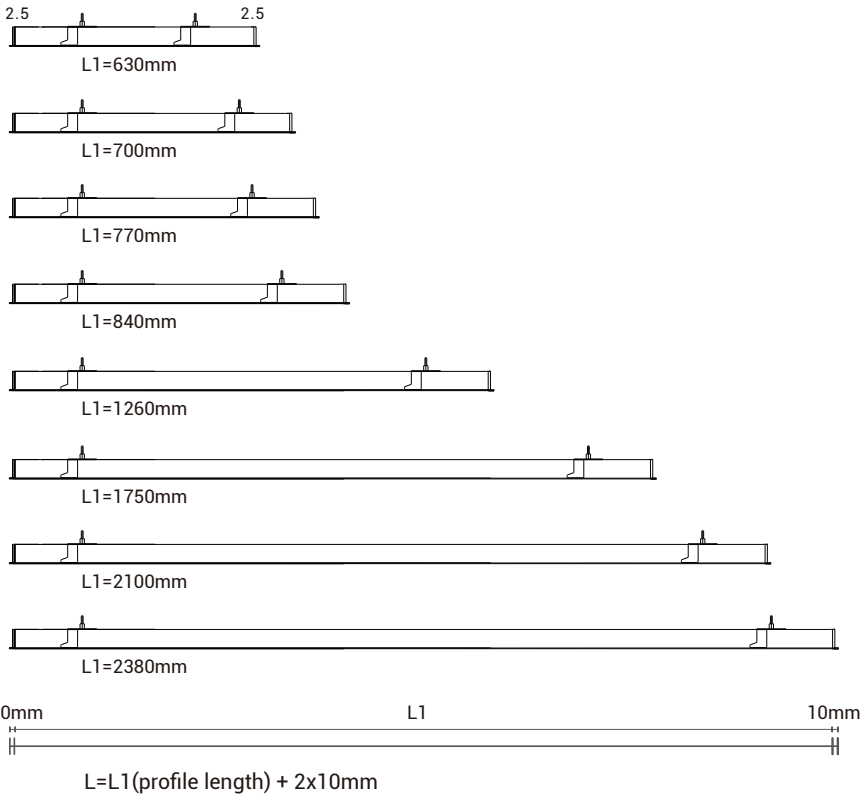


Corner Modules:

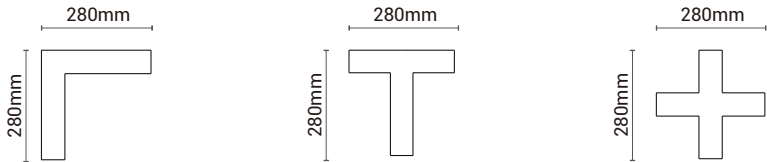

Module Lengths:



Mountings:




Designed to enrich modern office and public lighting environments, SPACE 60 EVO Curve expands the creative potential of linear lighting design. It seamlessly connects with the straight version of the SPACE 60 EVO system.

The Standard Curve modules are available in multiple radii – 1/2 Circle (D600/D900), 1/4 Circle (D1200/D1500/D1800/D2000), and 1/8 Circle (D2400/D3000). It enables flexible combinations to suit any space layout.

Pendant and Surface-Mounted Profile Options




Standard Curve:

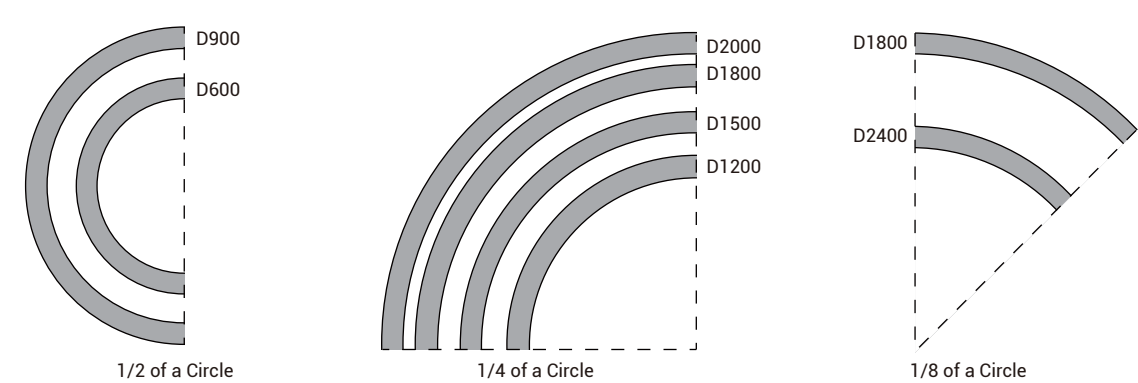


Customized Curve Available  
Custom production based on your drawings is available upon request


Trim Recessed Profile Options

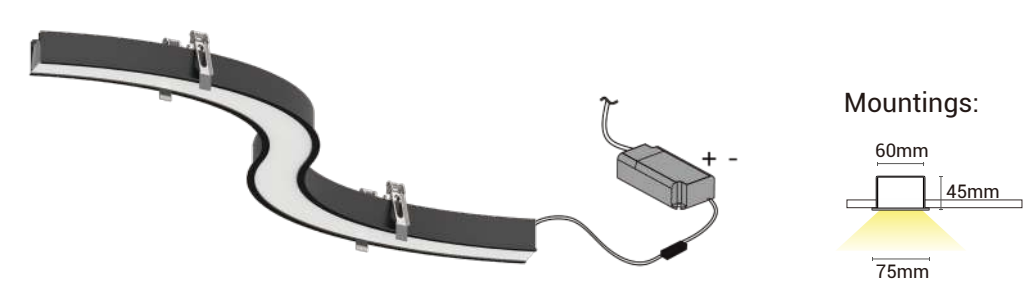

Standard Curve:

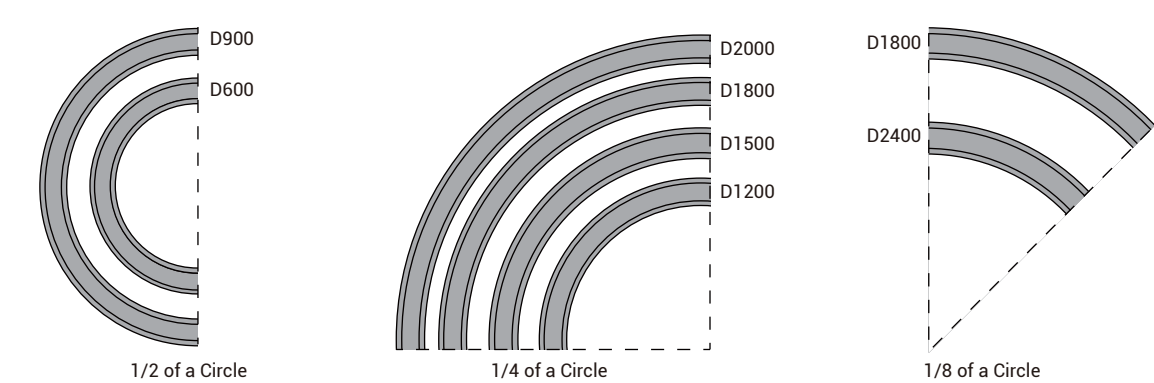

Customized Curve Available  
Custom production based on your drawings is available upon request

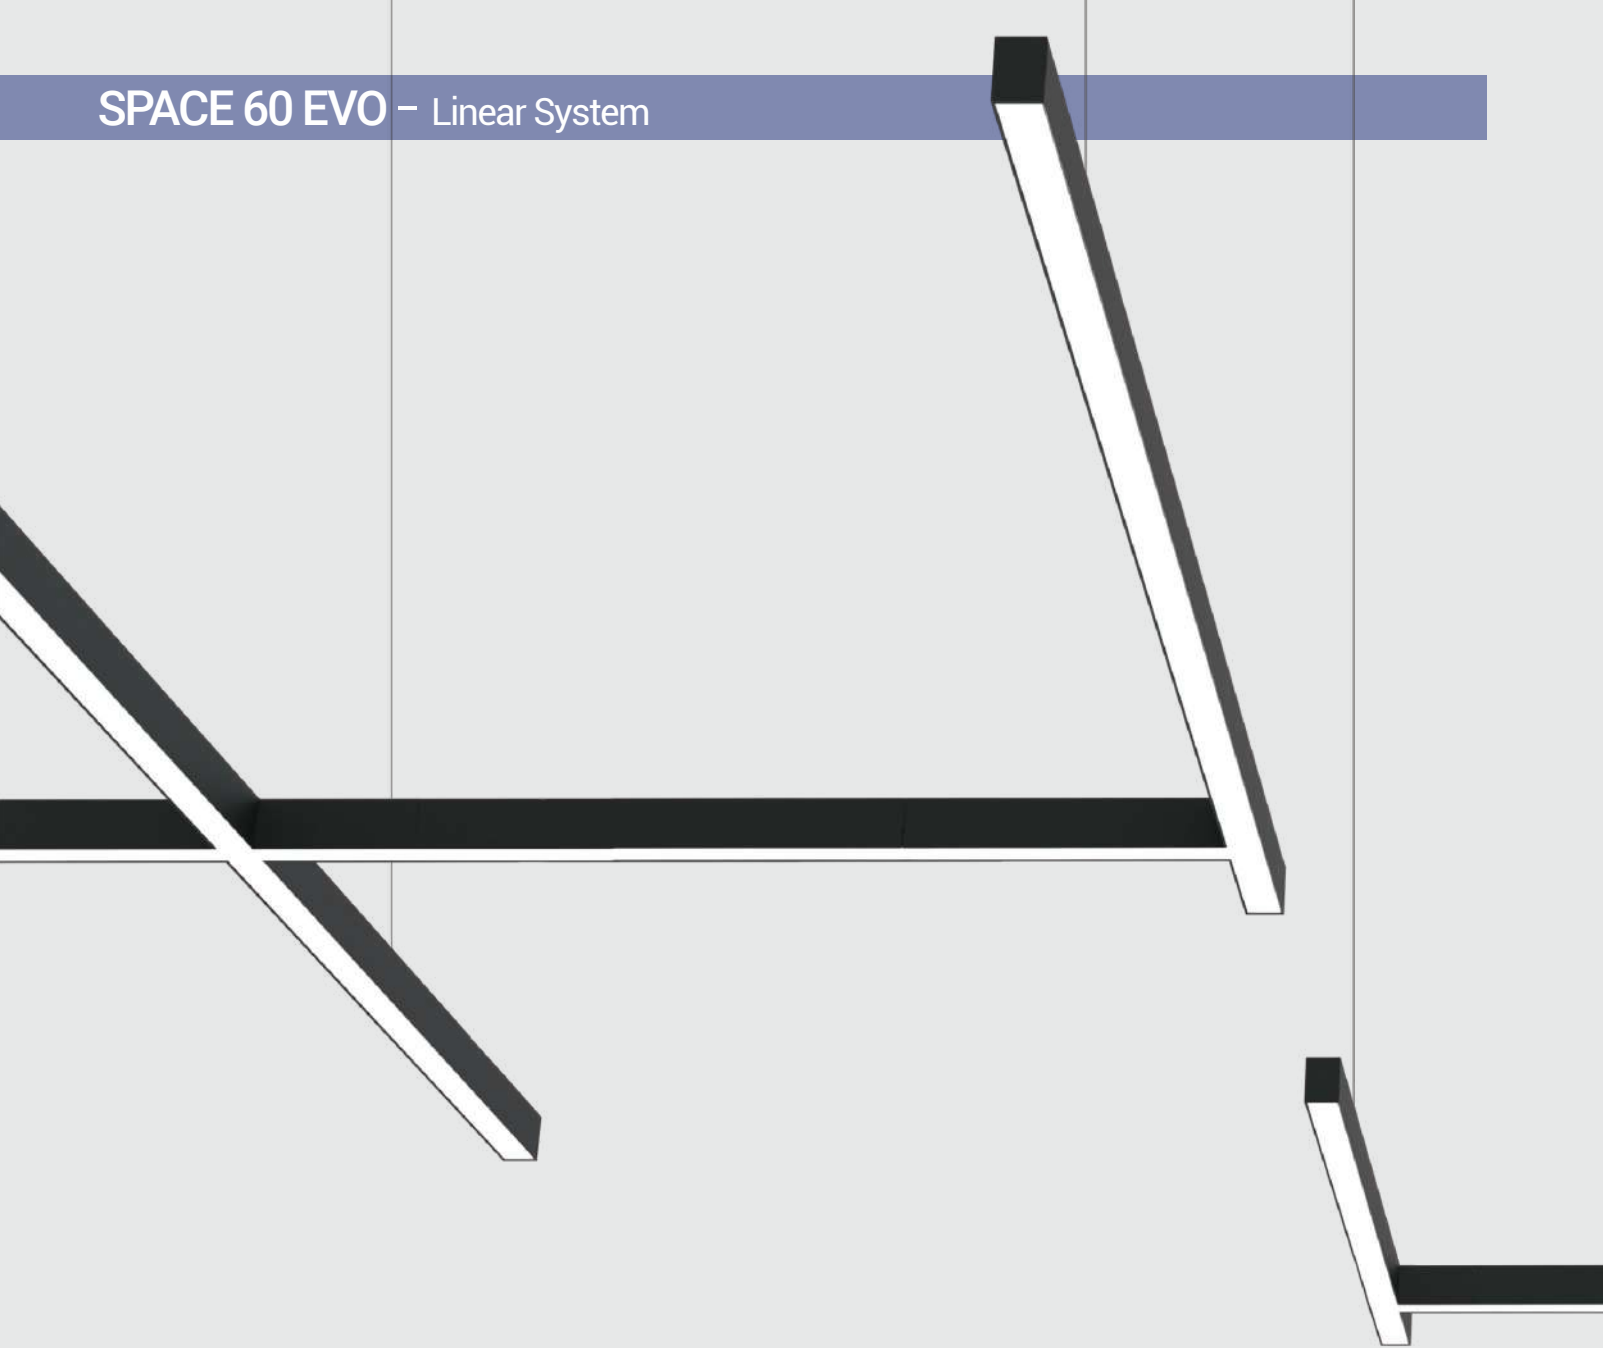


SPACE 60 EVO standard version features a microprismatic cover that enhances visual comfort (UGR<19) while providing homogeneous lighting. An opal cover version is also available as an option, offering uniform illumination and a wider beam angle (UGR<25).

Besides its elegant appearance, the detail-oriented design makes it a preferred choice among designers, electricians, and end users. All profile connection joints and end caps (with NO visible screws) are designed with anti-leakage measures to ensure optimal and clean light performance. Each profile is equipped with quick-connectors for fast and easy installation and maintenance.

Mounting options include pendant direct, pendant direct & indirect, surface-mounted, and trim-recessed installations. The LED driver—available in ON-OFF or DALI dimming versions—is integrated into the aluminium channel. Other dimming driver options are also available upon request.

Its elegant appearance and precision design make SPACE 60 EVO an ideal profile system for office lighting or any profile-based general lighting application.

## Quick Connector for Fast Installation

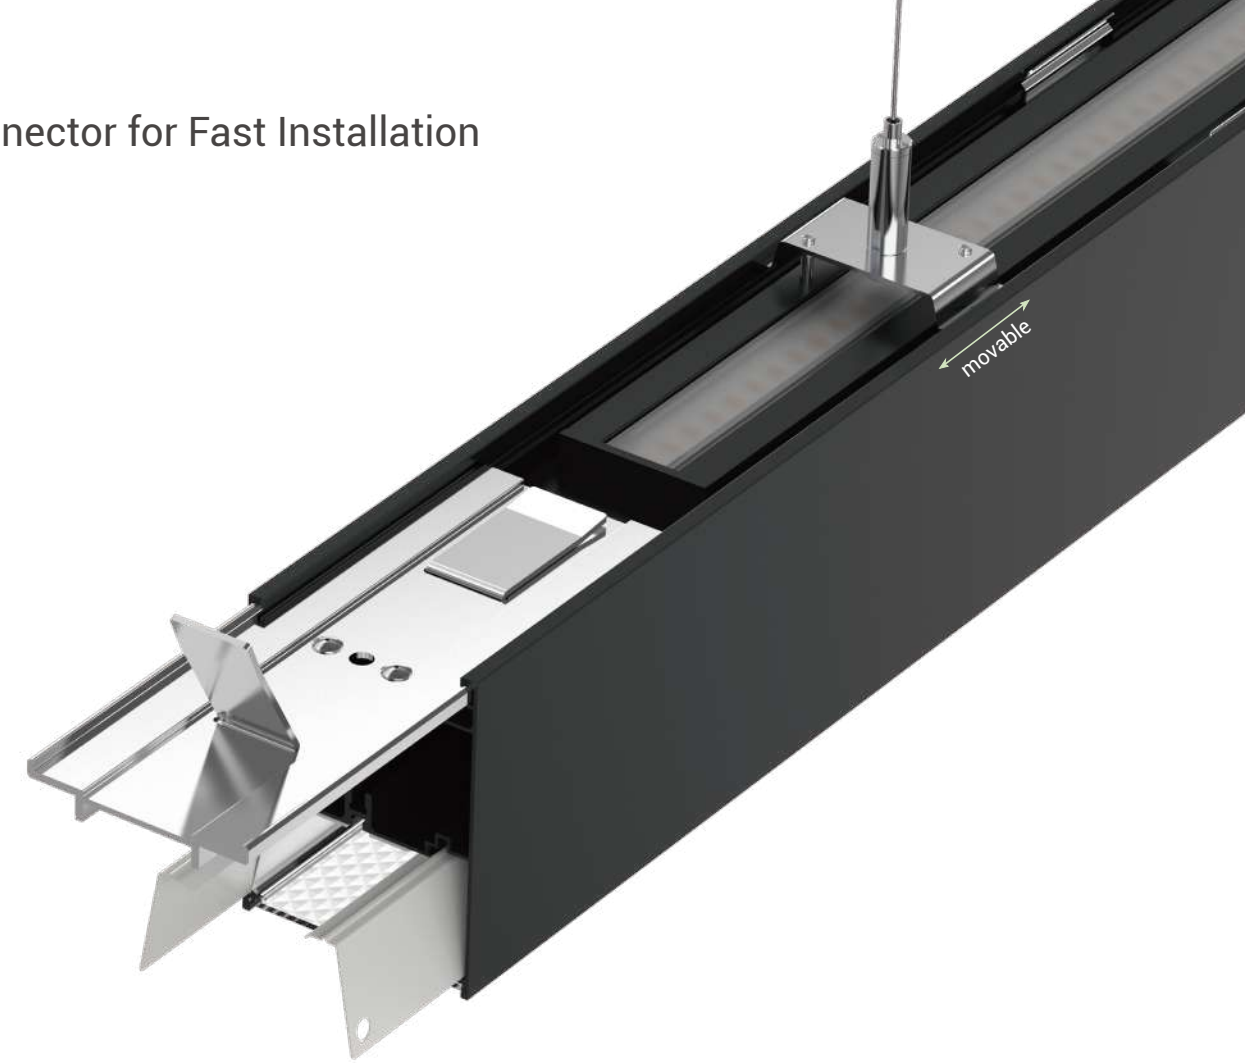


## Product Features:




Seamless joints with no light leakage



Customizable shape modules

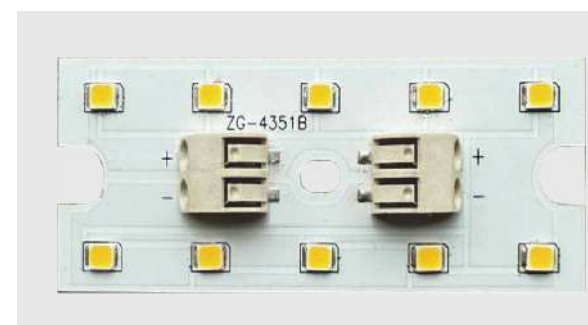


Custom lengths available in 70mm increments

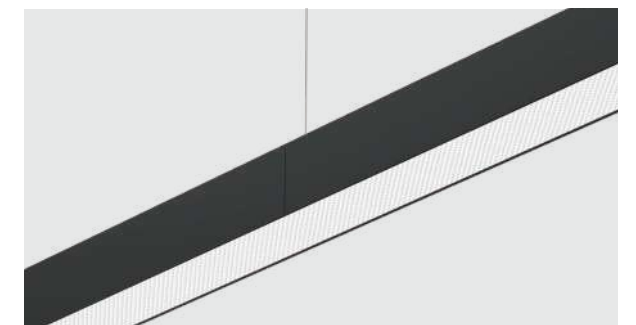

Microprismatic diffuser for visual comfort (UGR<19)




Pendant & Surface Mounted

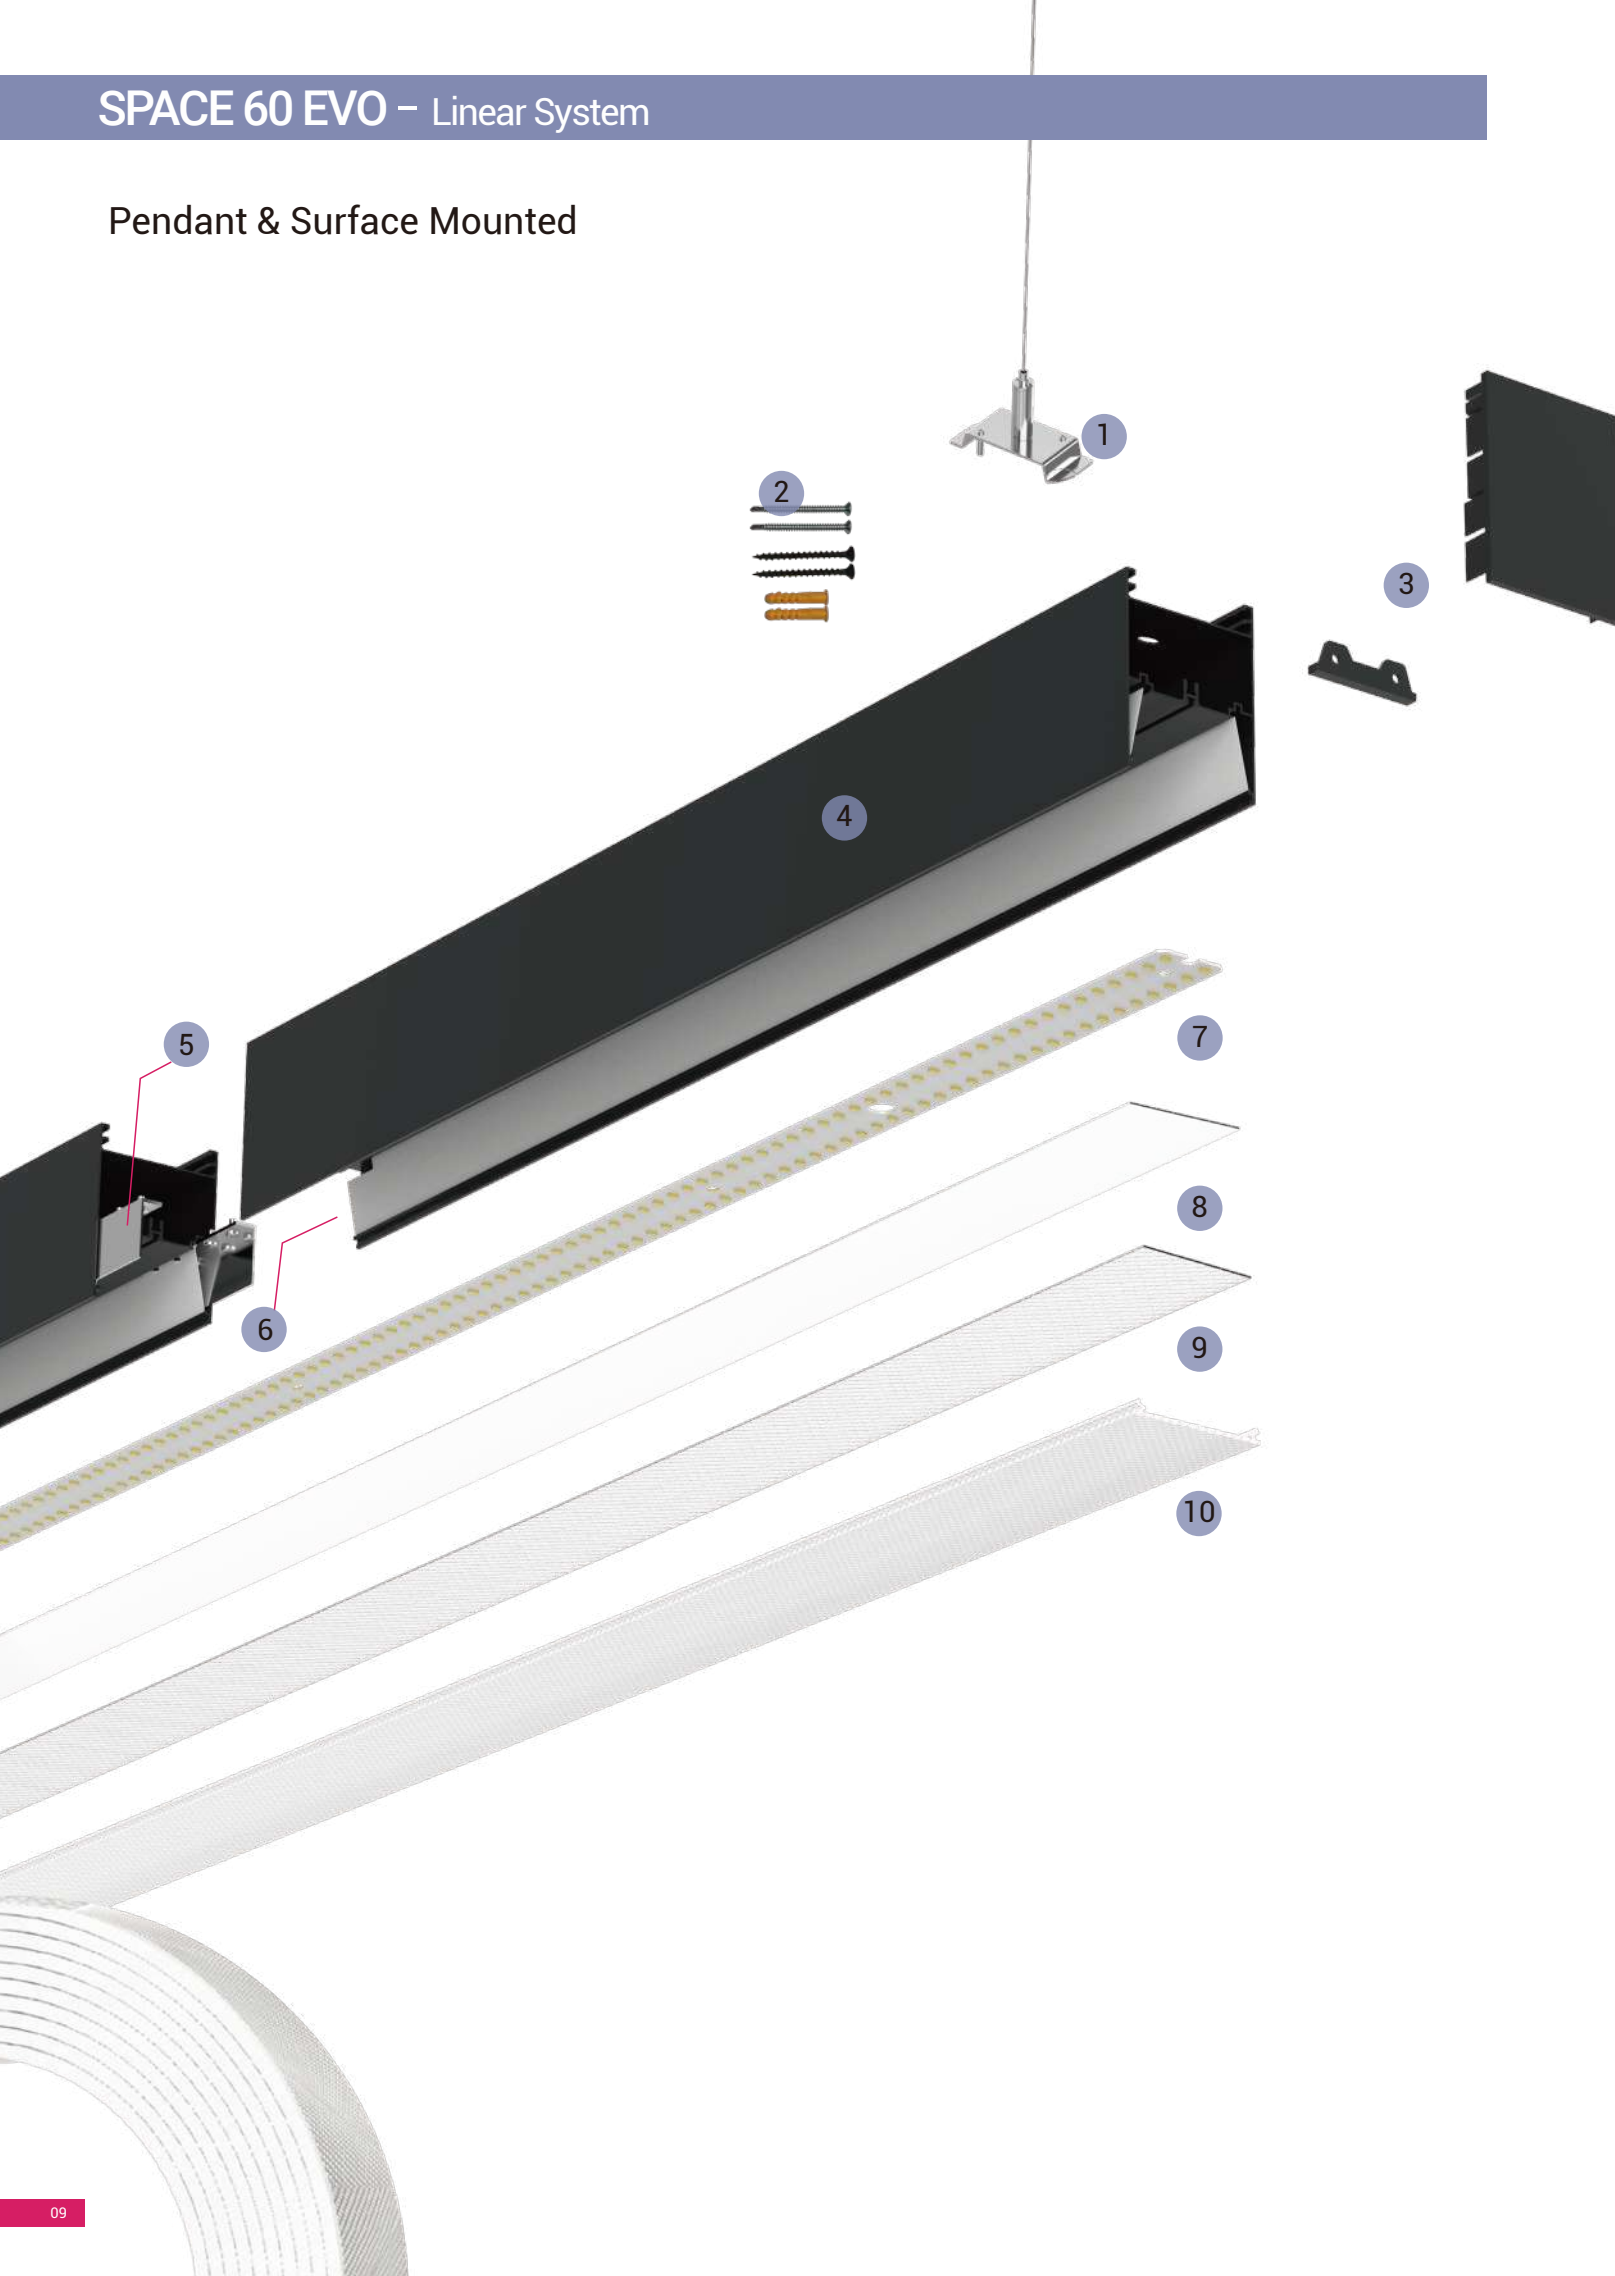

## Construction

- 1 Pendant Insallation Steel Wire Kit
- 2 Surface Mounted Installation Brackets
- 3 End Cap Set (no light leakage, no visible screw)
- 4 Profile Channel without Trim
- 5 Linear Connector
- 6 Light Leakage Prevention Cover
- 7 LED Module
- 8 Opal Diffuser Film
- 9 Microprismatic Film
- 10 Flexible Microprismatic Cover (UGR<19)/ Flexible Opal Diffuser  
30 meters per run, in-field cuttable

## Trim Recessed

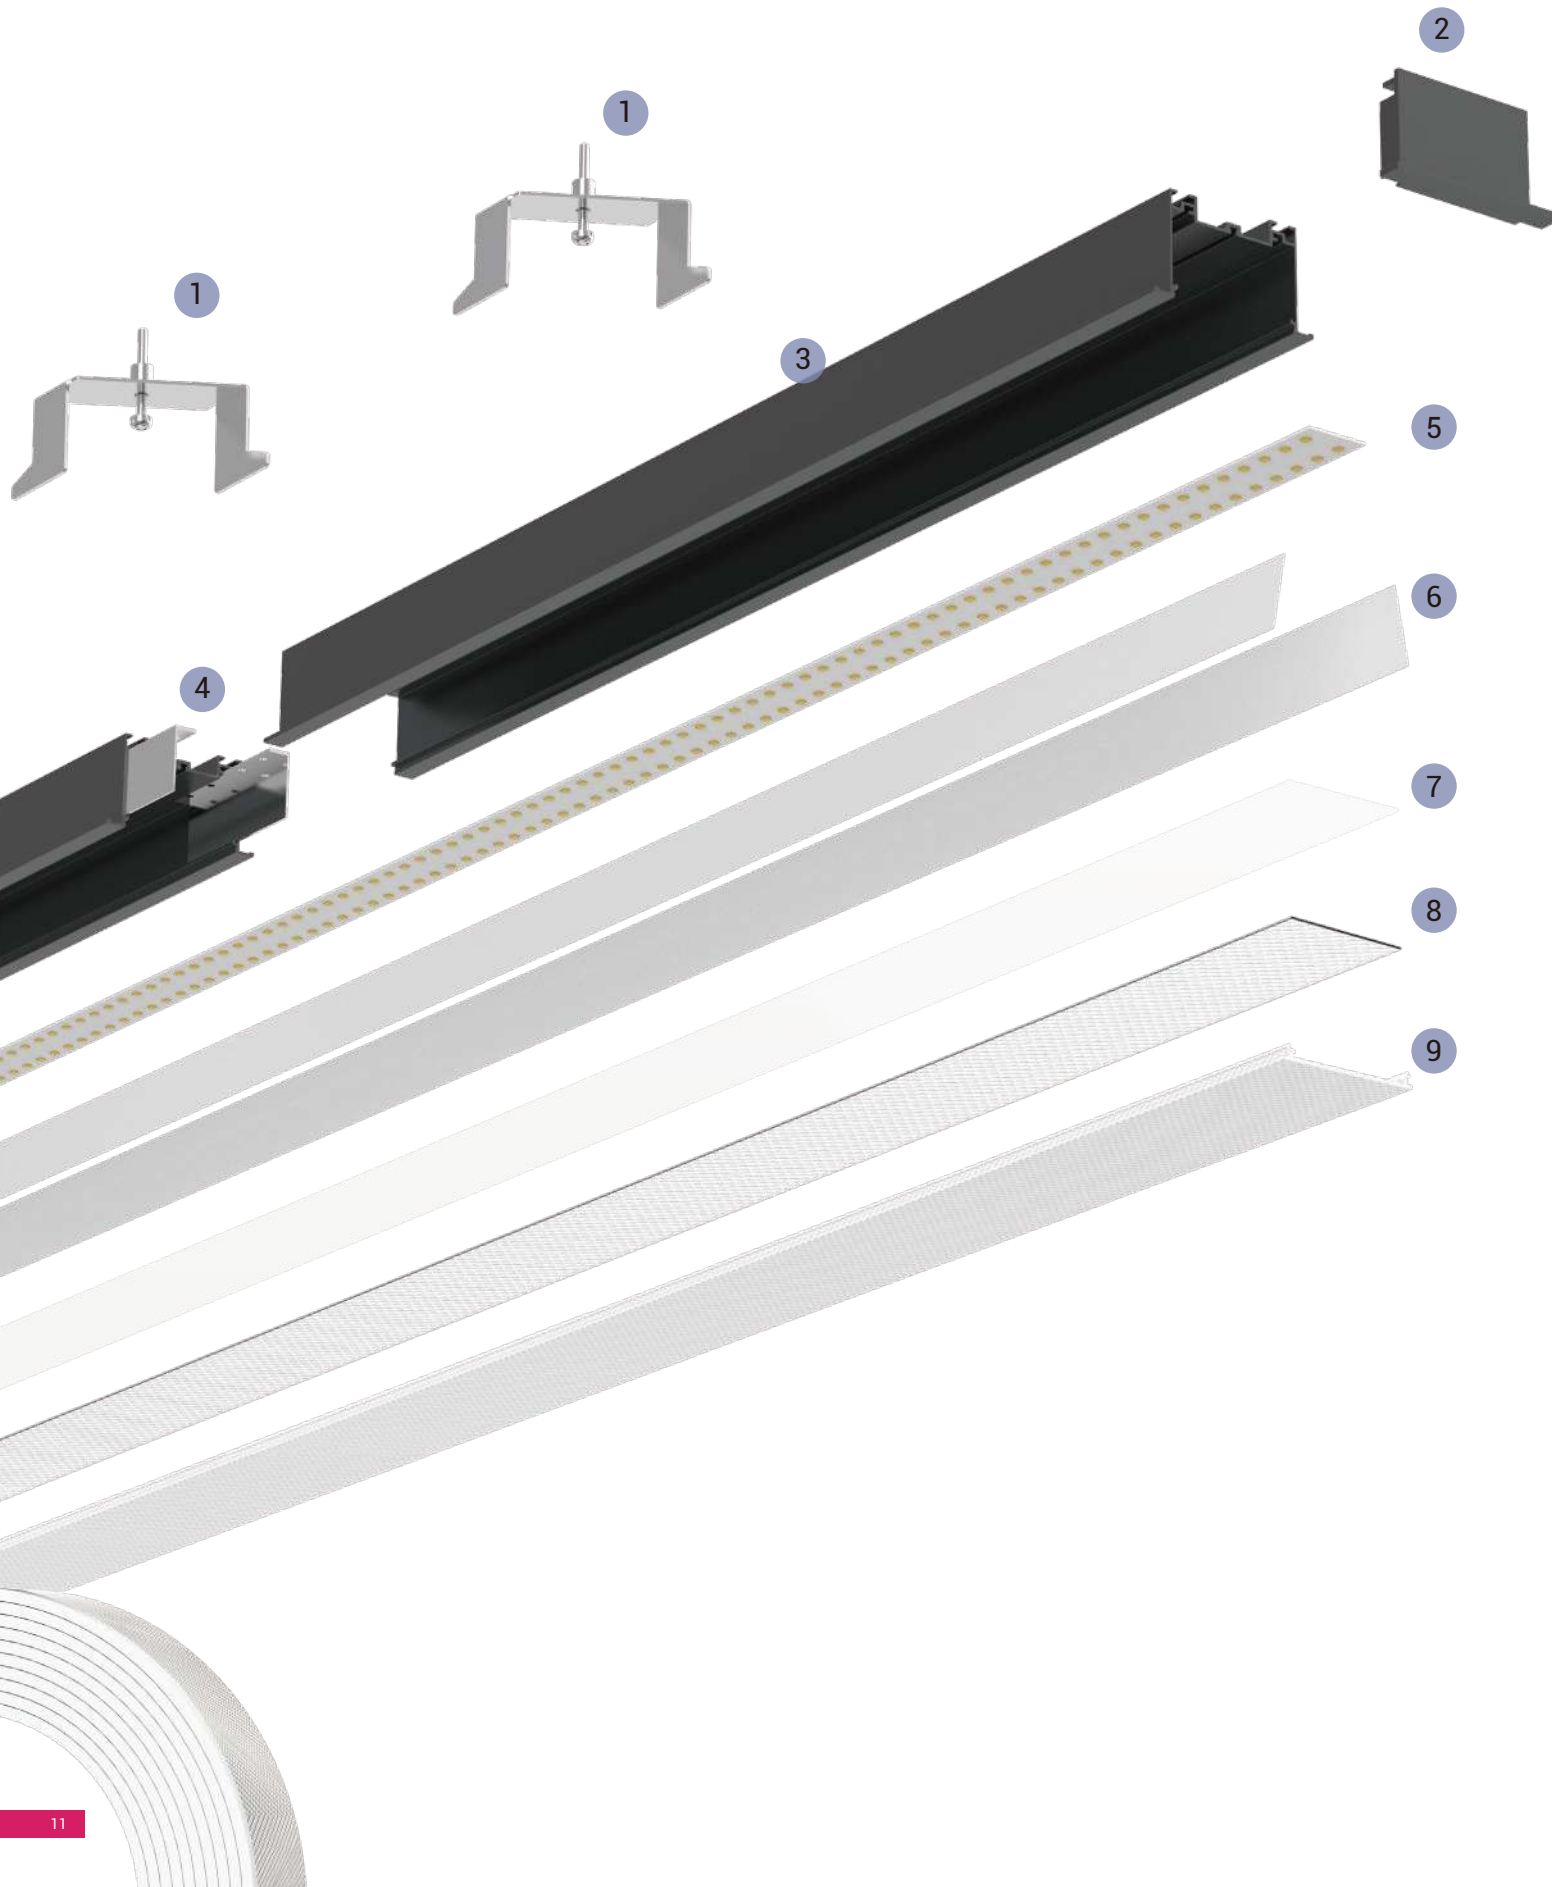

## Construction

- 1 Trim Recessed Mounting Kit
- 2 End Cap with Trim
- 3 Profile Channel with Trim
- 4 Linear Connector
- 5 LED Module
- 6 Light Reflection Film
- 7 Opal Diffuser Film
- 8 Microprismatic Film
- 9 Flexible Microprismatic Cover (UGR<19)/ Flexible Opal Diffuser  
30 meters per run, in-field cuttable








SPACE 60 EVO – Pendant Direct & Indirect Linear System




Quick Info

- General Lighting, Pendant Direct & Indirect
- Lumileds LED: 17W, 37W, 44W, 57W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓ 105° ↑
- Lumen Output: Up to 6850lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim


Light Distribution

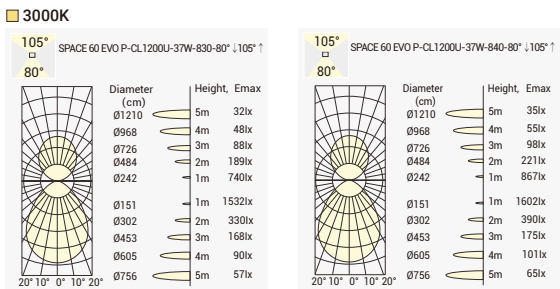

Module Lengths:



Customized Lengths Available:

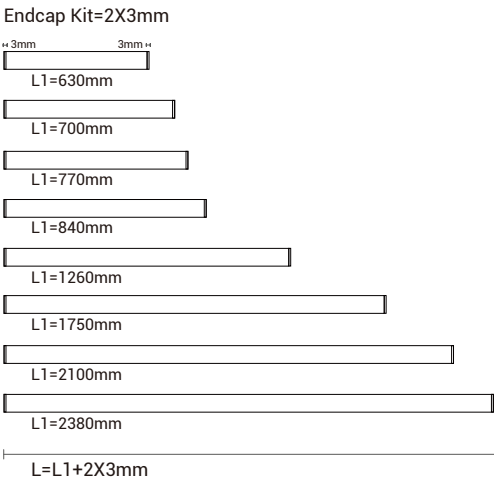

Customized Output:  
Direct Lighting: 22W/m @840, 110 lm/W  
Direct & Indirect Lighting: 33W/m @840, 120 lm/W

Order Info

| LED Power | System Power | LED Voltage | LED Current | Length | Color | CRI | CCT   | Beam         | System Output     | Code                     |
|-----------|--------------|-------------|-------------|--------|-------|-----|-------|--------------|-------------------|--------------------------|
| 15W       | 17W          | 28V         | 500mA       | 560mm  | White | 80  | 4000K | 80° ↓ 105° ↑ | 1350lm ↓ 700lm ↑  | SV60CL056M-8408017F-WN-U |
| 34W       | 37W          | 28V         | 1200mA      | 1196mm | White | 80  | 4000K | 80° ↓ 105° ↑ | 2900lm ↓ 1550lm ↑ | SV60CL119P-8408037F-WN-U |
| 41W       | 44W          | 28V         | 1550mA      | 1476mm | White | 80  | 4000K | 80° ↓ 105° ↑ | 3300lm ↓ 2000lm ↑ | SV60CL147P-8408044F-WN-U |
| 52W       | 57W          | 28V         | 1850mA      | 1826mm | White | 80  | 4000K | 80° ↓ 105° ↑ | 4300lm ↓ 2550lm ↑ | SV60CL182P-8408057F-WN-U |

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

| Model          | CRI/ CCT     | Beam Angle   | Power | Control   | Finish | Reflector Color | Accessory |
|----------------|--------------|--------------|-------|-----------|--------|-----------------|-----------|
| SV60CL056M     | 830          | 80           | 17    | F         | W      | N               | U         |
| Pendant 560mm  | CRI80/ 3000K | 80° ↓        | 17W   | On-Off    | White  | None            | Uplight   |
| SV60CL119P     | 840          | 80           | 37    | A         | B      |                 |           |
| Pendant 1196mm | CRI80/ 4000K | 80° ↓ 105° ↑ | 37W   | 1-10V Dim | Black  |                 |           |
| SV60CL147P     | 930          |              | 44    | D         |        |                 |           |
| Pendant 1476mm | CRI90/ 3000K |              | 44W   | DALI Dim  |        |                 |           |
| SV60CL182P     | 940          |              | 57    |           |        |                 |           |
| Pendant 1826mm | CRI90/ 4000K |              | 57W   |           |        |                 |           |






SPACE 60 EVO – Pendant Direct Linear System



- Quick Info**
- General Lighting, Pendant Direct & Indirect
  - Lumileds LED: 13W, 27W, 32W, 40W; CRI>80, CRI>90
  - CCT: 3000K, 4000K Available as Standard
  - Beam Angle: 80° ↓
  - Lumen Output: Up to 4400lm System Luminous Flux
  - LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution

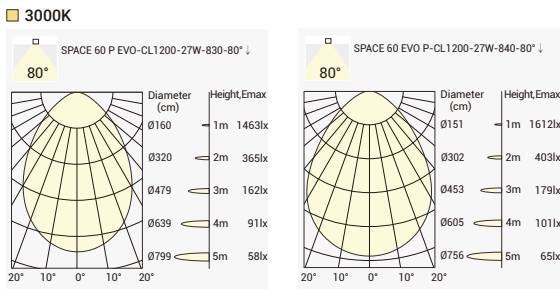

Order Info


| LED Power | System Power | LED Voltage | LED Current | Length | Color | CRI | CCT   | Beam  | System Output | Code                   |
|-----------|--------------|-------------|-------------|--------|-------|-----|-------|-------|---------------|------------------------|
| 11W       | 13W          | 28V         | 400mA       | 560mm  | White | 80  | 4000K | 80° ↓ | 1450lm ↓      | SV60CL056M-8408013F-WN |
| 24W       | 27W          | 28V         | 850mA       | 1196mm | White | 80  | 4000K | 80° ↓ | 3000lm ↓      | SV60CL119P-8408027F-WN |
| 29W       | 32W          | 28V         | 1050mA      | 1476mm | White | 80  | 4000K | 80° ↓ | 3550lm ↓      | SV60CL147P-8408032F-WN |
| 36W       | 40W          | 28V         | 1300mA      | 1826mm | White | 80  | 4000K | 80° ↓ | 4400lm ↓      | SV60CL182P-8408040F-WN |

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)


Coding

| SV60           | -            | ***        | **    | **        | *      | -               | *         | * | - | * |
|----------------|--------------|------------|-------|-----------|--------|-----------------|-----------|---|---|---|
| Model          | CRI/ CCT     | Beam Angle | Power | Control   | Finish | Reflector Color | Accessory |   |   |   |
| SV60CL056M     | 830          | 80         | 13    | F         | W      | N               |           |   |   |   |
| Pendant 560mm  | CRI80/ 3000K | 80° ↓      | 13W   | On-Off    | White  | None            |           |   |   |   |
| SV60CL119P     | 840          |            | 27    | A         | B      |                 |           |   |   |   |
| Pendant 1196mm | CRI80/ 4000K |            | 27W   | 1-10V Dim | Black  |                 |           |   |   |   |
| SV60CL147P     | 930          |            | 32    | D         |        |                 |           |   |   |   |
| Pendant 1476mm | CRI90/ 3000K |            | 32W   | DALI Dim  |        |                 |           |   |   |   |
| SV60CL182P     | 940          |            | 40    |           |        |                 |           |   |   |   |
| Pendant 1826mm | CRI90/ 4000K |            | 40W   |           |        |                 |           |   |   |   |

Module Lengths:



Customized Lengths Available:

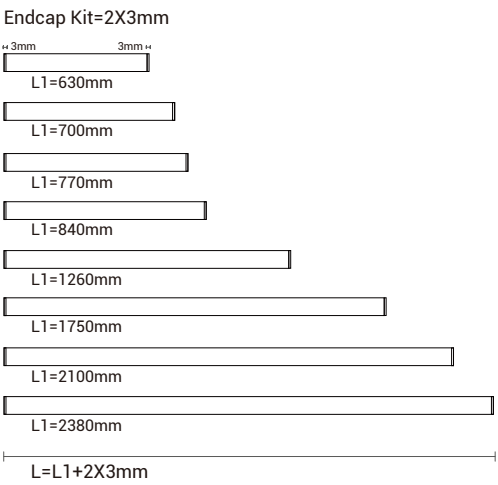


Customized Output:  
Direct & Indirect Lighting: 33W/m @840, 120 lm/W

SPACE 60 EVO – Surface Mounted Linear System



- Quick Info**
- General Lighting, Pendant Direct & Indirect
  - Lumileds LED: 13W, 27W, 32W, 40W; CRI>80, CRI>90
  - CCT: 3000K, 4000K Available as Standard
  - Beam Angle: 80° ↓
  - Lumen Output: Up to 4400lm System Luminous Flux
  - LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution

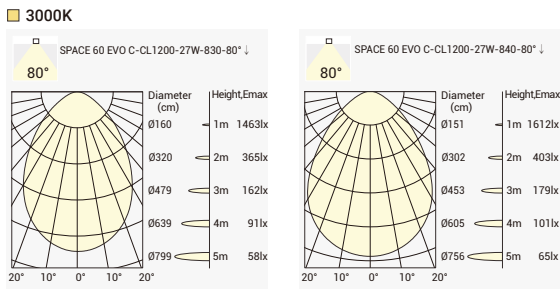

Order Info


| LED Power | System Power | LED Voltage | LED Current | Length | Color | CRI | CCT   | Beam  | System Output | Code                   |
|-----------|--------------|-------------|-------------|--------|-------|-----|-------|-------|---------------|------------------------|
| 11W       | 13W          | 28V         | 400mA       | 560mm  | White | 80  | 4000K | 80° ↓ | 1450lm ↓      | SV60CL056M-8408013F-WN |
| 24W       | 27W          | 28V         | 850mA       | 1196mm | White | 80  | 4000K | 80° ↓ | 3000lm ↓      | SV60CL119P-8408027F-WN |
| 29W       | 32W          | 28V         | 1050mA      | 1476mm | White | 80  | 4000K | 80° ↓ | 3550lm ↓      | SV60CL147P-8408032F-WN |
| 36W       | 40W          | 28V         | 1300mA      | 1826mm | White | 80  | 4000K | 80° ↓ | 4400lm ↓      | SV60CL182P-8408040F-WN |

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)


Coding

| SV60                   | -            | ***        | **    | **        | *      | -               | *         | * | - | * |
|------------------------|--------------|------------|-------|-----------|--------|-----------------|-----------|---|---|---|
| Model                  | CRI/ CCT     | Beam Angle | Power | Control   | Finish | Reflector Color | Accessory |   |   |   |
| SV60CL056M             | 830          | 80         | 13    | F         | W      | N               |           |   |   |   |
| 560mm Module           | CRI80/ 3000K | 80° ↓      | 13W   | On-Off    | White  | None            |           |   |   |   |
| SV60CL119P             | 840          |            | 27    | A         | B      |                 |           |   |   |   |
| Surface Mounted 1196mm | CRI80/ 4000K |            | 27W   | 1-10V Dim | Black  |                 |           |   |   |   |
| SV60CL147P             | 930          |            | 32    | D         |        |                 |           |   |   |   |
| Surface Mounted 1476mm | CRI90/ 3000K |            | 32W   | DALI Dim  |        |                 |           |   |   |   |
| SV60CL182P             | 940          |            | 40    |           |        |                 |           |   |   |   |
| Surface Mounted 1826mm | CRI90/ 4000K |            | 40W   |           |        |                 |           |   |   |   |

Module Lengths:




Customized Lengths Available:

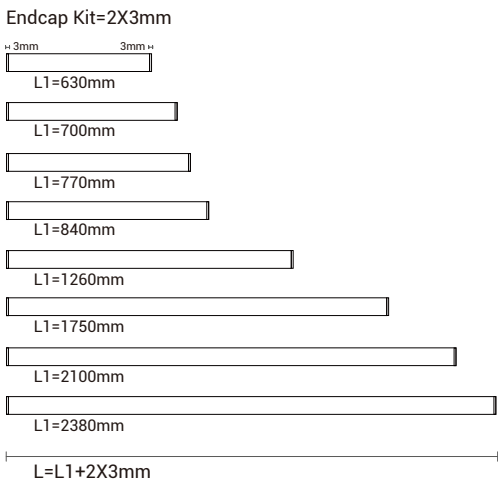

Customized Output:  
Direct & Indirect Lighting: 33W/m @840, 120 lm/W


SPACE 60 EVO – Trim Recessed Linear System

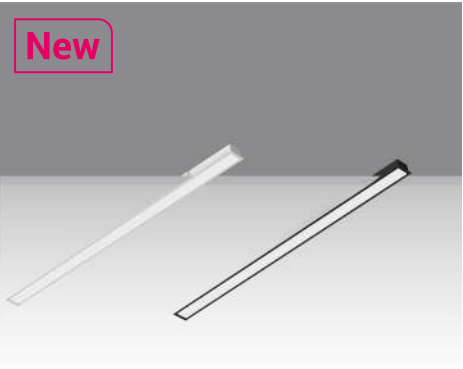


Quick Info

- General Light Version also Available
- Lumileds LED: 13W, 27W, 32W, 40W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 4400lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim


Light Distribution

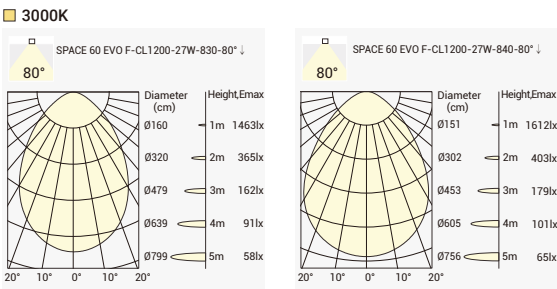

Module Lengths for Trim Recessed:




Customized Lengths Available Trim Recessed:  
Endcap Kit thickness(2x2.5mm)+flange width(2x7.5mm)=2x10mm

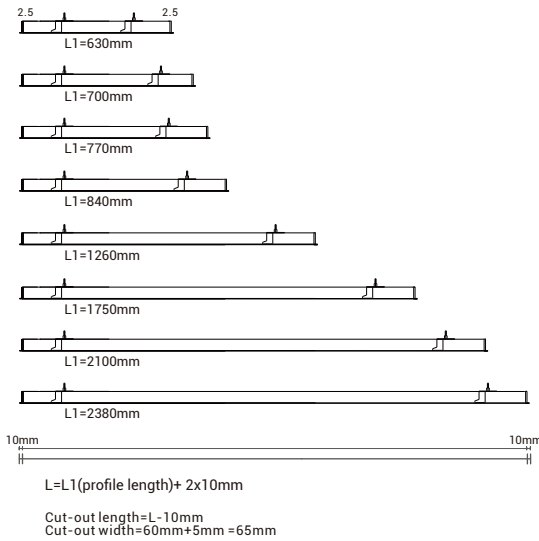

Customized Output:  
Direct Lighting: 22W/m @840, 110 lm/W


SPACE 60 EVO – Corner Modules for Trim Recessed Linear System

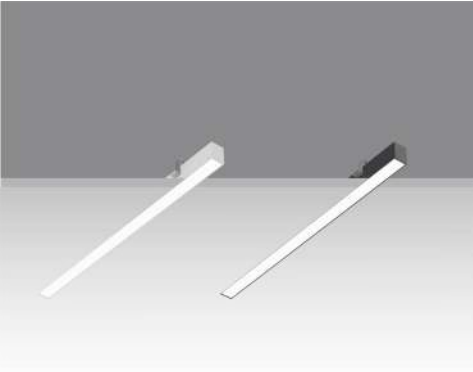


Quick Info

- General Light Version also Available
- Lumileds LED: 12W
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 1350lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution

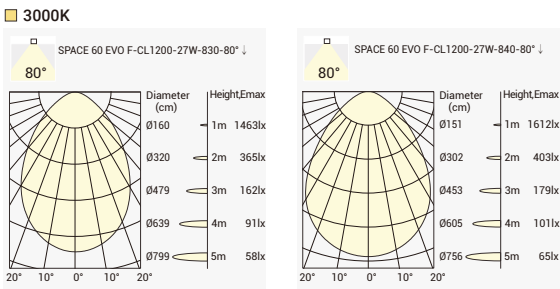

Corner Modules:

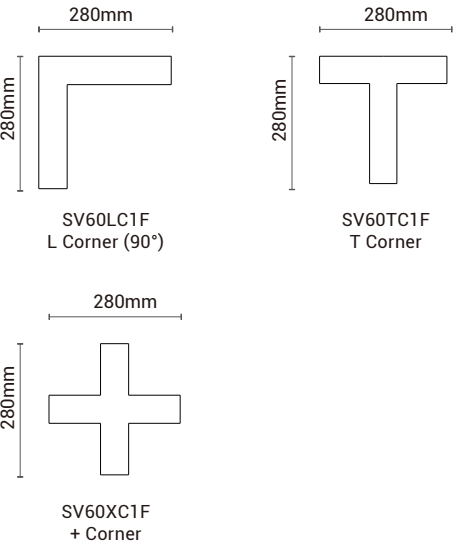

Order Info

| LED Power | System Power | LED Voltage | LED Current | Length    | Color | CRI | CCT   | Beam  | System Output | Code                   |
|-----------|--------------|-------------|-------------|-----------|-------|-----|-------|-------|---------------|------------------------|
| 10W       | 12W          | 28V         | 350mA       | 280*280mm | White | 80  | 4000K | 80° ↓ | 1350lm        | SV60CLLC1F-8408012F-WN |
| 10W       | 12W          | 28V         | 350mA       | 280*280mm | White | 80  | 4000K | 80° ↓ | 1350lm        | SV60CLTC1F-8408012F-WN |
| 10W       | 12W          | 28V         | 350mA       | 280*280mm | White | 80  | 4000K | 80° ↓ | 1350lm        | SV60CLXC1F-8408012F-WN |

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

| SV60                               | -                   | ***         | **        | **             | *          | -               | *         | * | - | * |
|------------------------------------|---------------------|-------------|-----------|----------------|------------|-----------------|-----------|---|---|---|
| Model                              | CRI/ CCT            | Beam Angle  | Power     | Control        | Finish     | Reflector Color | Accessory |   |   |   |
| SV60CLLC1F<br>SV60LC1F<br>L Corner | 830<br>CRI80/ 3000K | 80<br>80° ↓ | 12<br>12W | F<br>On-Off    | W<br>White | N<br>None       |           |   |   |   |
| SV60CLTC1F<br>SV60TC1F<br>T Corner | 840<br>CRI80/ 4000K |             |           | A<br>1-10V Dim | B<br>Black |                 |           |   |   |   |
| SV60CLXC1F<br>SV60XC1F<br>+ Corner | 930<br>CRI90/ 3000K |             |           | D<br>DALI Dim  |            |                 |           |   |   |   |
|                                    | 940<br>CRI90/ 4000K |             |           |                |            |                 |           |   |   |   |

|  |                |                                                                                                                            |
|--|----------------|----------------------------------------------------------------------------------------------------------------------------|
|  | SV60-LFK       | Trim Recessed Linear Connector Kit                                                                                         |
|  | SV60-FRK       | Trim Recessed Mounting kit                                                                                                 |
|  | SV60 -EFK      | SPACE EVO Trim Recessed Endcap Kit<br>White/ Black Two unit for two sides                                                  |
|  | SV60 -FMPC-30M | Flexible Microprismatic Cover, in 30 Meters per Roll<br>With an anti-glare film and a diffusion film in 30 Meters per Roll |
|  | SV60 -FOPC-30M | Flexible Opal Cover, in 30 Meters per Roll                                                                                 |





SPACE 60 EVO Curve – Pendant Direct&Indirect linear system



105°  
80°

3000K  
4000K

CRI >80

CRI >90

UGR<19

IP20

CE

CB

UK  
CA


LUMILEDS  
50,000h@L80B10

5  
YEARS  
GUARANTEE

Quick Info

- General Lighting, Pendant Direct & Indirect
- Lumileds LED: 33W, 34W, 42W, 51W, 56W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓ 105° ↑
- Lumen Output: Up to 6750lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution

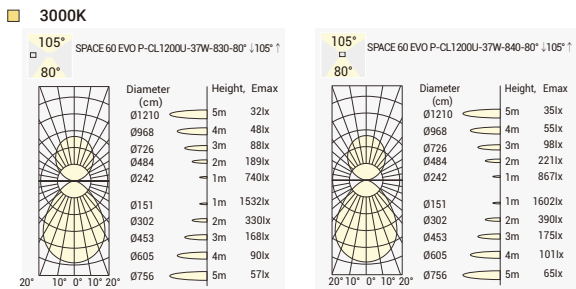

Order Info

| LED Power | System Power | LED Voltage | LED Current | Length | Color    | CRI   | CCT          | Beam              | System Output       | Code      |
|-----------|--------------|-------------|-------------|--------|----------|-------|--------------|-------------------|---------------------|-----------|
| 31W       | 34W          | 28V         | 1100mA      | 1036mm | White 80 | 4000K | 80° ↓ 105° ↑ | 2550lm ↓ 1550lm ↑ | SV60CLC066P-8408034 | F-WN-U-CM |
| 46W       | 51W          | 28V         | 1650mA      | 1507mm | White 80 | 4000K | 80° ↓ 105° ↑ | 3750lm ↓ 2400lm ↑ | SV60CLC096P-8408051 | F-WN-U-CM |
| 31W       | 34W          | 28V         | 1100mA      | 989mm  | White 80 | 4000K | 80° ↓ 105° ↑ | 2550lm ↓ 1550lm ↑ | SV60CLC126P-8408034 | F-WN-U-CM |
| 38W       | 42W          | 28V         | 1350mA      | 1225mm | White 80 | 4000K | 80° ↓ 105° ↑ | 3100lm ↓ 1950lm ↑ | SV60CLC156P-8408042 | F-WN-U-CM |
| 46W       | 51W          | 28V         | 1650mA      | 1460mm | White 80 | 4000K | 80° ↓ 105° ↑ | 3750lm ↓ 2400lm ↑ | SV60CLC186P-8408051 | F-WN-U-CM |
| 50W       | 56W          | 28V         | 1800mA      | 1617mm | White 80 | 4000K | 80° ↓ 105° ↑ | 3750lm ↓ 3000lm ↑ | SV60CLC206P-8408056 | F-WN-U-CM |
| 29W       | 33W          | 28V         | 1050mA      | 966mm  | White 80 | 4000K | 80° ↓ 105° ↑ | 2450lm ↓ 1550lm ↑ | SV60CLC246P-8408033 | F-WN-U-CM |
| 38W       | 42W          | 28V         | 1350mA      | 1201mm | White 80 | 4000K | 80° ↓ 105° ↑ | 3100lm ↓ 1950lm ↑ | SV60CLC306P-8408042 | F-WN-U-CM |

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

| SV60                           | -                   | ***          | **        | **             | *          | -               | *                                             | * | - | * |
|--------------------------------|---------------------|--------------|-----------|----------------|------------|-----------------|-----------------------------------------------|---|---|---|
| Model                          | CRI/ CCT            | Beam Angle   | Power     | Control        | Finish     | Reflector Color | Accessory                                     |   |   |   |
| SV60CLC066P<br>Pendant D600mm  | 830<br>CRI80/ 3000K | 80° ↓ 105° ↑ | 33W       | F<br>On-Off    | W<br>White | N<br>None       | U<br>With Uplight, Extrusion Cover            |   |   |   |
| SV60CLC096P<br>Pendant D900mm  | 840<br>CRI80/ 4000K |              | 34<br>34W | A<br>1-10V Dim | B<br>Black |                 |                                               |   |   |   |
| SV60CLC126P<br>Pendant D1200mm | 930<br>CRI90/ 3000K |              | 42<br>42W | D<br>DALI Dim  |            |                 | U<br>Uplight, Extrusion Cover, Middle Section |   |   |   |
| SV60CLC156P<br>Pendant D1500mm | 940<br>CRI90/ 4000K |              | 51<br>51W |                |            |                 |                                               |   |   |   |
| SV60CLC186P<br>Pendant D1800mm |                     |              | 56<br>56W |                |            |                 |                                               |   |   |   |
| SV60CLC206P<br>Pendant D2000mm |                     |              |           |                |            |                 |                                               |   |   |   |
| SV60CLC246P<br>Pendant D2400mm |                     |              |           |                |            |                 |                                               |   |   |   |
| SV60CLC306P<br>Pendant D3000mm |                     |              |           |                |            |                 |                                               |   |   |   |

SPACE 60 EVO Curve – Pendant Direct linear system



80°

4000K

>80

>90

UGR<19

IP20

CE

CB

UK  
CA


LUMILEDS  
50,000h@L80B10

5  
YEARS  
GUARANTEE

Quick Info

- General Lighting, Pendant Direct & Indirect
- Lumileds LED: 22W, 23W, 28W, 34W, 37W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓ 105° ↑
- Lumen Output: Up to 4100lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution

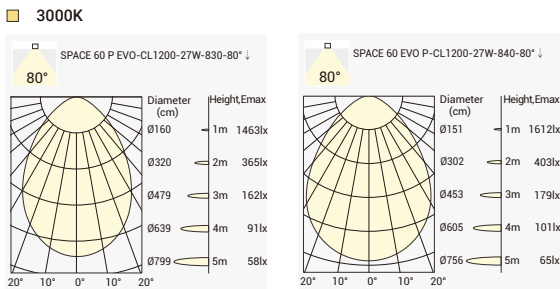

Order Info

| LED Power | System Power | LED Voltage | LED Current | Length | Color    | CRI   | CCT | Beam   | System Output       | Code    |
|-----------|--------------|-------------|-------------|--------|----------|-------|-----|--------|---------------------|---------|
| 21W       | 23W          | 28V         | 750mA       | 1036mm | White 80 | 4000K | 80° | 2550lm | SV60CLC066P-8408023 | F-WN-CM |
| 31W       | 34W          | 28V         | 1100mA      | 1507mm | White 80 | 4000K | 80° | 3750lm | SV60CLC096P-8408034 | F-WN-CM |
| 21W       | 23W          | 28V         | 750mA       | 989mm  | White 80 | 4000K | 80° | 2550lm | SV60CLC126P-8408023 | F-WN-CM |
| 25W       | 28W          | 28V         | 900mA       | 1225mm | White 80 | 4000K | 80° | 3100lm | SV60CLC156P-8408028 | F-WN-CM |
| 31W       | 34W          | 28V         | 1100mA      | 1460mm | White 80 | 4000K | 80° | 3750lm | SV60CLC186P-8408034 | F-WN-CM |
| 34W       | 37W          | 28V         | 1200mA      | 1617mm | White 80 | 4000K | 80° | 4100lm | SV60CLC206P-8408037 | F-WN-CM |
| 20W       | 22W          | 28V         | 700mA       | 966mm  | White 80 | 4000K | 80° | 2450lm | SV60CLC246P-8408022 | F-WN-CM |
| 25W       | 28W          | 28V         | 900mA       | 1201mm | White 80 | 4000K | 80° | 3100lm | SV60CLC306P-8408028 | F-WN-CM |

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

| SV60                           | -                   | ***          | **        | **             | *          | -               | *                                             | * | - | * |
|--------------------------------|---------------------|--------------|-----------|----------------|------------|-----------------|-----------------------------------------------|---|---|---|
| Model                          | CRI/ CCT            | Beam Angle   | Power     | Control        | Finish     | Reflector Color | Accessory                                     |   |   |   |
| SV60CLC066P<br>Pendant D600mm  | 830<br>CRI80/ 3000K | 80° ↓ 105° ↑ | 22<br>22W | F<br>On-Off    | W<br>White | N<br>None       | U<br>With Uplight, Extrusion Cover            |   |   |   |
| SV60CLC096P<br>Pendant D900mm  | 840<br>CRI80/ 4000K |              | 23<br>23W | A<br>1-10V Dim | B<br>Black |                 |                                               |   |   |   |
| SV60CLC126P<br>Pendant D1200mm | 930<br>CRI90/ 3000K |              | 28<br>28W | D<br>DALI Dim  |            |                 | U<br>Uplight, Extrusion Cover, Middle Section |   |   |   |
| SV60CLC156P<br>Pendant D1500mm | 940<br>CRI90/ 4000K |              | 34<br>34W |                |            |                 |                                               |   |   |   |
| SV60CLC186P<br>Pendant D1800mm |                     |              | 37<br>37W |                |            |                 |                                               |   |   |   |
| SV60CLC206P<br>Pendant D2000mm |                     |              |           |                |            |                 |                                               |   |   |   |
| SV60CLC246P<br>Pendant D2400mm |                     |              |           |                |            |                 |                                               |   |   |   |
| SV60CLC306P<br>Pendant D3000mm |                     |              |           |                |            |                 |                                               |   |   |   |

SPACE 60 EVO Curve – Surface Mounted Linear System



105°  
80°

3000K

4000K

CRI >80

CRI >90

UGR<19

IP20

CE

CB

UK CA

LUMILEDS

50,000h@L80B10

5 YEARS

GUARANTEE

Quick Info

- General Lighting, Pendant Direct & Indirect
- Lumileds LED: 22W, 23W, 28W, 34W, 37W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓ 105° ↑
- Lumen Output: Up to 4100lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution

3000K

SPACE 60 EVO C-CL1200-27W-830-80° ↓

80°

Diameter (cm)

Height,Emax

Ø160

1m

1463lx

Ø320

2m

365lx

Ø479

3m

162lx

Ø639

4m

91lx

Ø799

5m

58lx

SPACE 60 EVO C-CL1200-27W-840-80° ↓

80°

Diameter (cm)

Height,Emax

Ø151

1m

1612lx

Ø302

2m

403lx

Ø453

3m

179lx

Ø605

4m

101lx

Ø756

5m

65lx

Order Info

| LED Power | System Power | LED Voltage | LED Current | Length | Color    | CRI   | CCT | Beam   | System Output              | Code |
|-----------|--------------|-------------|-------------|--------|----------|-------|-----|--------|----------------------------|------|
| 21W       | 23W          | 28V         | 750mA       | 1036mm | White 80 | 4000K | 80° | 2550lm | SV60CLC066C-8408023F-WN-CM |      |
| 31W       | 34W          | 28V         | 1100mA      | 1507mm | White 80 | 4000K | 80° | 3750lm | SV60CLC096C-8408034F-WN-CM |      |
| 21W       | 23W          | 28V         | 750mA       | 989mm  | White 80 | 4000K | 80° | 2550lm | SV60CLC126C-8408023F-WN-CM |      |
| 25W       | 28W          | 28V         | 900mA       | 1225mm | White 80 | 4000K | 80° | 3100lm | SV60CLC156C-8408028F-WN-CM |      |
| 31W       | 34W          | 28V         | 1100mA      | 1460mm | White 80 | 4000K | 80° | 3750lm | SV60CLC186C-8408034F-WN-CM |      |
| 34W       | 37W          | 28V         | 1200mA      | 1617mm | White 80 | 4000K | 80° | 4100lm | SV60CLC206C-8408037F-WN-CM |      |
| 20W       | 22W          | 28V         | 700mA       | 966mm  | White 80 | 4000K | 80° | 2450lm | SV60CLC246C-8408022F-WN-CM |      |
| 25W       | 28W          | 28V         | 900mA       | 1201mm | White 80 | 4000K | 80° | 3100lm | SV60CLC306C-8408028F-WN-CM |      |

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

| SV60            | -            | ***          | **    | **        | *      | -               | *                                        | * | - | * |
|-----------------|--------------|--------------|-------|-----------|--------|-----------------|------------------------------------------|---|---|---|
| Model           | CRI/ CCT     | Beam Angle   | Power | Control   | Finish | Reflector Color | Accessory                                |   |   |   |
| SV60CLC066C     | 830          | 80           | 22    | F         | W      | N               | U                                        |   |   |   |
| Surface D600mm  | CRI80/ 3000K | 80° ↓ 105° ↑ | 22W   | On-Off    | White  | None            | With Uplight, Extrusion Cover            |   |   |   |
| SV60CLC096C     | 840          |              | 23    | A         | B      |                 |                                          |   |   |   |
| Surface D900mm  | CRI80/ 4000K |              | 23W   | 1-10V Dim | Black  |                 |                                          |   |   |   |
| SV60CLC126C     | 930          |              | 28    | D         |        |                 | U                                        |   |   |   |
| Surface D1200mm | CRI90/ 3000K |              | 28W   | DALI Dim  |        |                 | Uplight, Extrusion Cover, Middle Section |   |   |   |
| SV60CLC156C     | 940          |              | 34    |           |        |                 |                                          |   |   |   |
| Surface D1500mm | CRI90/ 4000K |              | 34W   |           |        |                 |                                          |   |   |   |
| SV60CLC186C     |              |              | 37    |           |        |                 |                                          |   |   |   |
| Surface D1800mm |              |              | 37W   |           |        |                 |                                          |   |   |   |
| SV60CLC206C     |              |              |       |           |        |                 |                                          |   |   |   |
| Surface D2000mm |              |              |       |           |        |                 |                                          |   |   |   |
| SV60CLC246C     |              |              |       |           |        |                 |                                          |   |   |   |
| Surface D2400mm |              |              |       |           |        |                 |                                          |   |   |   |
| SV60CLC306C     |              |              |       |           |        |                 |                                          |   |   |   |
| Surface D3000mm |              |              |       |           |        |                 |                                          |   |   |   |

SPACE 60 EVO Curve – Trim Recessed Linear System

80°

4000K

>80

>90

UGR<19

IP20

CE

CB

UK CA

LUMILEDS

50,000h@L80B10

5 YEARS

GUARANTEE

Quick Info

- General Lighting, Pendant Direct & Indirect
- Lumileds LED: 22W, 23W, 28W, 34W, 37W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓ 105° ↑
- Lumen Output: Up to 4100lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution

3000K

SPACE 60 EVO F-CL1200-27W-830-80° ↓

80°

Diameter (cm)

Height,Emax

Ø160

1m

1463lx

Ø320

2m

365lx

Ø479

3m

162lx

Ø639

4m

91lx

Ø799

5m

58lx

SPACE 60 EVO F-CL1200-27W-840-80° ↓

80°

Diameter (cm)

Height,Emax

Ø151

1m

1612lx

Ø302

2m

403lx

Ø453

3m

179lx

Ø605

4m

101lx

Ø756

5m

65lx

Order Info

| LED Power | System Power | LED Voltage | LED Current | Length | Color    | CRI   | CCT | Beam   | System Output              | Code |
|-----------|--------------|-------------|-------------|--------|----------|-------|-----|--------|----------------------------|------|
| 21W       | 23W          | 28V         | 750mA       | 1036mm | White 80 | 4000K | 80° | 2550lm | SV60CLC066F-8408023F-WN-CM |      |
| 31W       | 34W          | 28V         | 1100mA      | 1507mm | White 80 | 4000K | 80° | 3750lm | SV60CLC096F-8408034F-WN-CM |      |
| 21W       | 23W          | 28V         | 750mA       | 989mm  | White 80 | 4000K | 80° | 2550lm | SV60CLC126F-8408023F-WN-CM |      |
| 25W       | 28W          | 28V         | 900mA       | 1225mm | White 80 | 4000K | 80° | 3100lm | SV60CLC156F-8408028F-WN-CM |      |
| 31W       | 34W          | 28V         | 1100mA      | 1460mm | White 80 | 4000K | 80° | 3750lm | SV60CLC186F-8408034F-WN-CM |      |
| 34W       | 37W          | 28V         | 1200mA      | 1617mm | White 80 | 4000K | 80° | 4100lm | SV60CLC206F-8408037F-WN-CM |      |
| 20W       | 22W          | 28V         | 700mA       | 966mm  | White 80 | 4000K | 80° | 2450lm | SV60CLC246F-8408022F-WN-CM |      |
| 25W       | 28W          | 28V         | 900mA       | 1201mm | White 80 | 4000K | 80° | 3100lm | SV60CLC306F-8408028F-WN-CM |      |

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)



Coding

| SV60                  | -            | ***          | **    | **        | *      | -               | *                                        | * | - | * |
|-----------------------|--------------|--------------|-------|-----------|--------|-----------------|------------------------------------------|---|---|---|
| Model                 | CRI/ CCT     | Beam Angle   | Power | Control   | Finish | Reflector Color | Accessory                                |   |   |   |
| SV60CLC066F           | 830          | 80           | 22    | F         | W      | N               | U                                        |   |   |   |
| Trim Recessed D600mm  | CRI80/ 3000K | 80° ↓ 105° ↑ | 22W   | On-Off    | White  | None            | With Uplight, Extrusion Cover            |   |   |   |
| SV60CLC096F           | 840          |              | 23    | A         | B      |                 |                                          |   |   |   |
| Trim Recessed D900mm  | CRI80/ 4000K |              | 23W   | 1-10V Dim | Black  |                 |                                          |   |   |   |
| SV60CLC126F           | 930          |              | 28    | D         |        |                 | U                                        |   |   |   |
| Trim Recessed D1200mm | CRI90/ 3000K |              | 28W   | DALI Dim  |        |                 | Uplight, Extrusion Cover, Middle Section |   |   |   |
| SV60CLC156F           | 940          |              | 34    |           |        |                 |                                          |   |   |   |
| Trim Recessed D1500mm | CRI90/ 4000K |              | 34W   |           |        |                 |                                          |   |   |   |
| SV60CLC186F           |              |              | 37    |           |        |                 |                                          |   |   |   |
| Trim Recessed D1800mm |              |              | 37W   |           |        |                 |                                          |   |   |   |
| SV60CLC206F           |              |              |       |           |        |                 |                                          |   |   |   |
| Trim Recessed D2000mm |              |              |       |           |        |                 |                                          |   |   |   |
| SV60CLC246F           |              |              |       |           |        |                 |                                          |   |   |   |
| Trim Recessed D2400mm |              |              |       |           |        |                 |                                          |   |   |   |
| SV60CLC306F           |              |              |       |           |        |                 |                                          |   |   |   |
| Trim Recessed D3000mm |              |              |       |           |        |                 |                                          |   |   |   |

25

www.nekolighting.com 26

SPACE 60 EVO – Corner Modules for Pendant & Surface Mounted Linear System

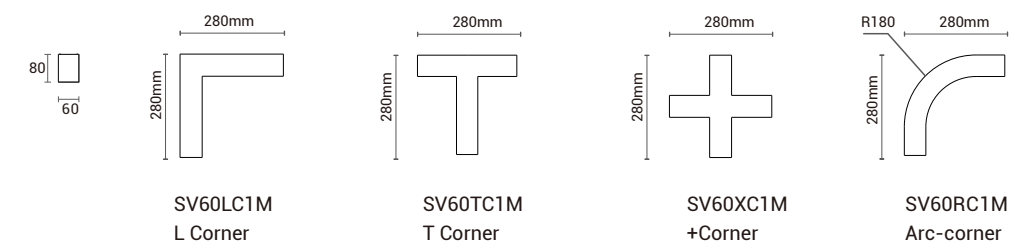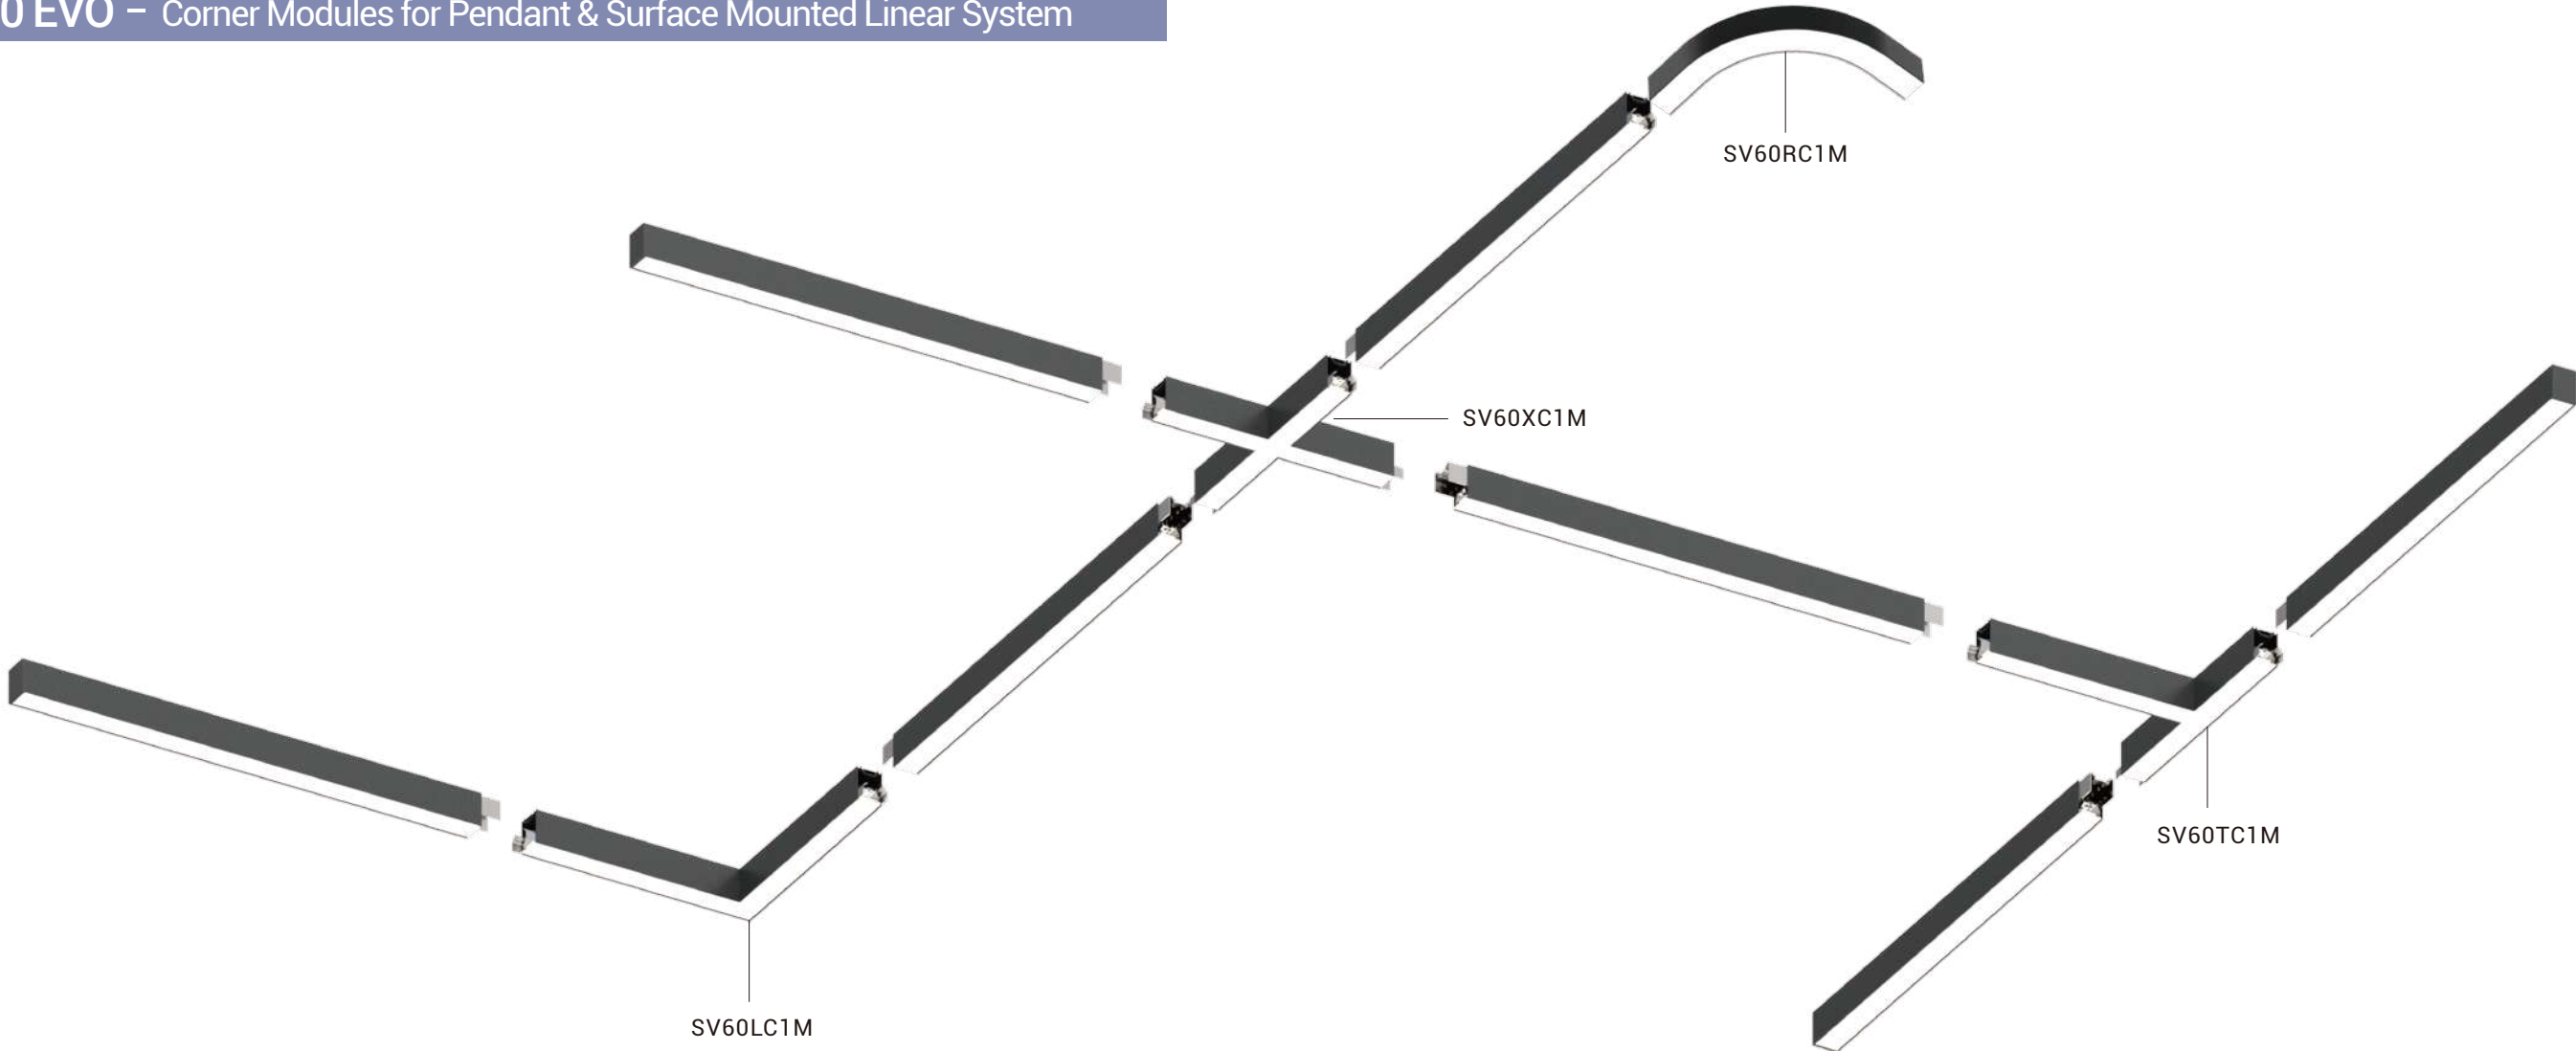

| LED Power | System Power | LED Voltage | LED Current | Length    | Color | CRI | CCT   | Beam | System Output | Code                   |
|-----------|--------------|-------------|-------------|-----------|-------|-----|-------|------|---------------|------------------------|
| 10W       | 12W          | 28V         | 350mA       | 280x280mm | White | 80  | 4000K | 80°  | 1350lm        | SV60CLLC1M-8408012F-WN |
| 10W       | 12W          | 28V         | 350mA       | 280x280mm | White | 80  | 4000K | 80°  | 1350lm        | SV60CLTC1M-8408012F-WN |
| 10W       | 12W          | 28V         | 350mA       | 280x280mm | White | 80  | 4000K | 80°  | 1350lm        | SV60CLXC1M-8408012F-WN |
| 10W       | 12W          | 28V         | 350mA       | 280x280mm | White | 80  | 4000K | 80°  | 1350lm        | SV60CLRC1M-8408012F-WN |

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

|  |               |                                                                                                                         |
|--|---------------|-------------------------------------------------------------------------------------------------------------------------|
|  | SV60-PK       | Pendant Installation Kit (with Ceiling Box)                                                                             |
|  | SV60-PWK      | Pendant Steel Wire Kit (no Ceiling Box)                                                                                 |
|  | SV60-SMK      | Surface Mounted Kit                                                                                                     |
|  | SV60-LCK      | Linear Connector Kit                                                                                                    |
|  | SV60-ECK      | SPACE 60 EVO Surface Mounted&Pendant Endcap Kit White/ Black Two unit for two sides                                     |
|  | SV60-FCK      | 2.5-meter three-core input wire&Quick-connect for ON/OFF                                                                |
|  | SV60-DCK      | 2.5-meter five-core input wire&Quick-connect for Dimming control                                                        |
|  | SV60-FMPC-30M | Flexible Microprismatic Cover, in 30 Meters per Roll With an anti-glare film and a diffusion film in 30 Meters per Roll |
|  | SV60-FOPC-30M | Flexible Opal Cover, in 30 Meters per Roll                                                                              |


Coding

| Model      | CRI/ CCT     | Beam Angle | Power | Control   | Finish | Reflector Color | Accessory |
|------------|--------------|------------|-------|-----------|--------|-----------------|-----------|
| SV60CLLC1M | 830          | 80         | 12    | F         | W      | N               |           |
| SV60LC1M   | CRI80/ 3000K | 80° ↓      | 12W   | On-Off    | White  | None            |           |
| SV60CLTC1M | 840          |            |       | A         | B      |                 |           |
| SV60TC1M   | CRI80/ 4000K |            |       | 1-10V Dim | Black  |                 |           |
| SV60CLXC1M | 930          |            |       | D         |        |                 |           |
| SV60XC1M   | CRI90/ 3000K |            |       | DALI Dim  |        |                 |           |
| SV60CLRC1M | 940          |            |       |           |        |                 |           |
| SV60RC1M   | CRI90/ 4000K |            |       |           |        |                 |           |
| SV60LC1M   |              |            |       |           |        |                 |           |
| SV60RC1M   |              |            |       |           |        |                 |           |
| SV60LC1M   |              |            |       |           |        |                 |           |
| SV60RC1M   |              |            |       |           |        |                 |           |




Modules & Installation Kits for  
Pendant & Surface-Mounted Linear System


Non-standard Lengths

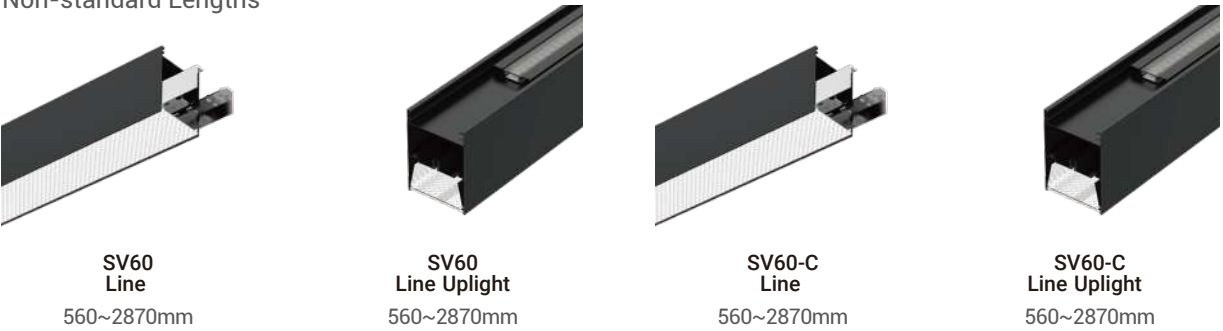



L / T / X / Arc Corners

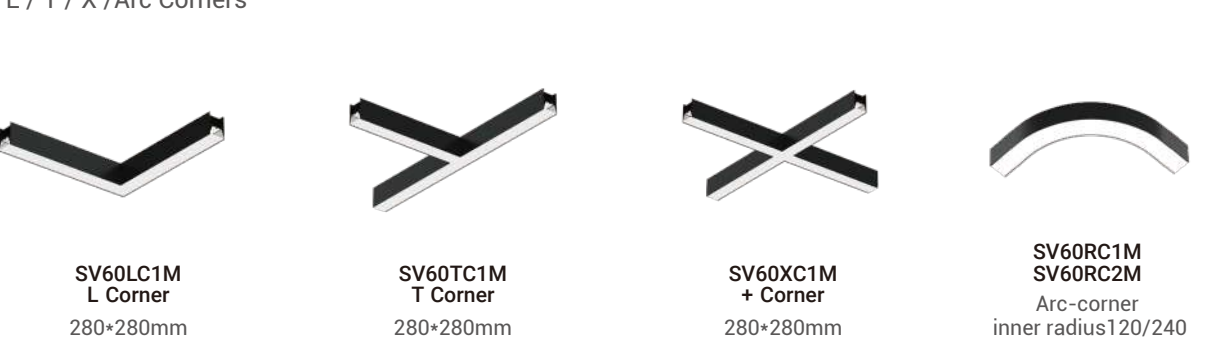

Installation Kits

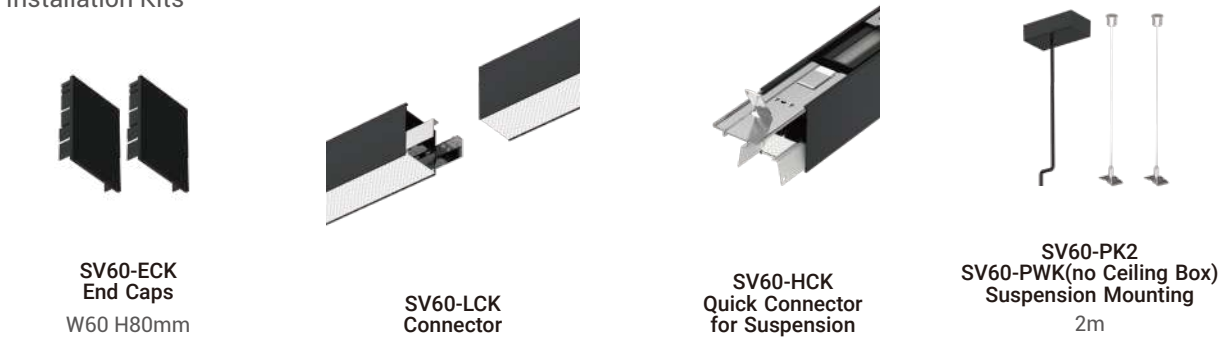

Installation Kits

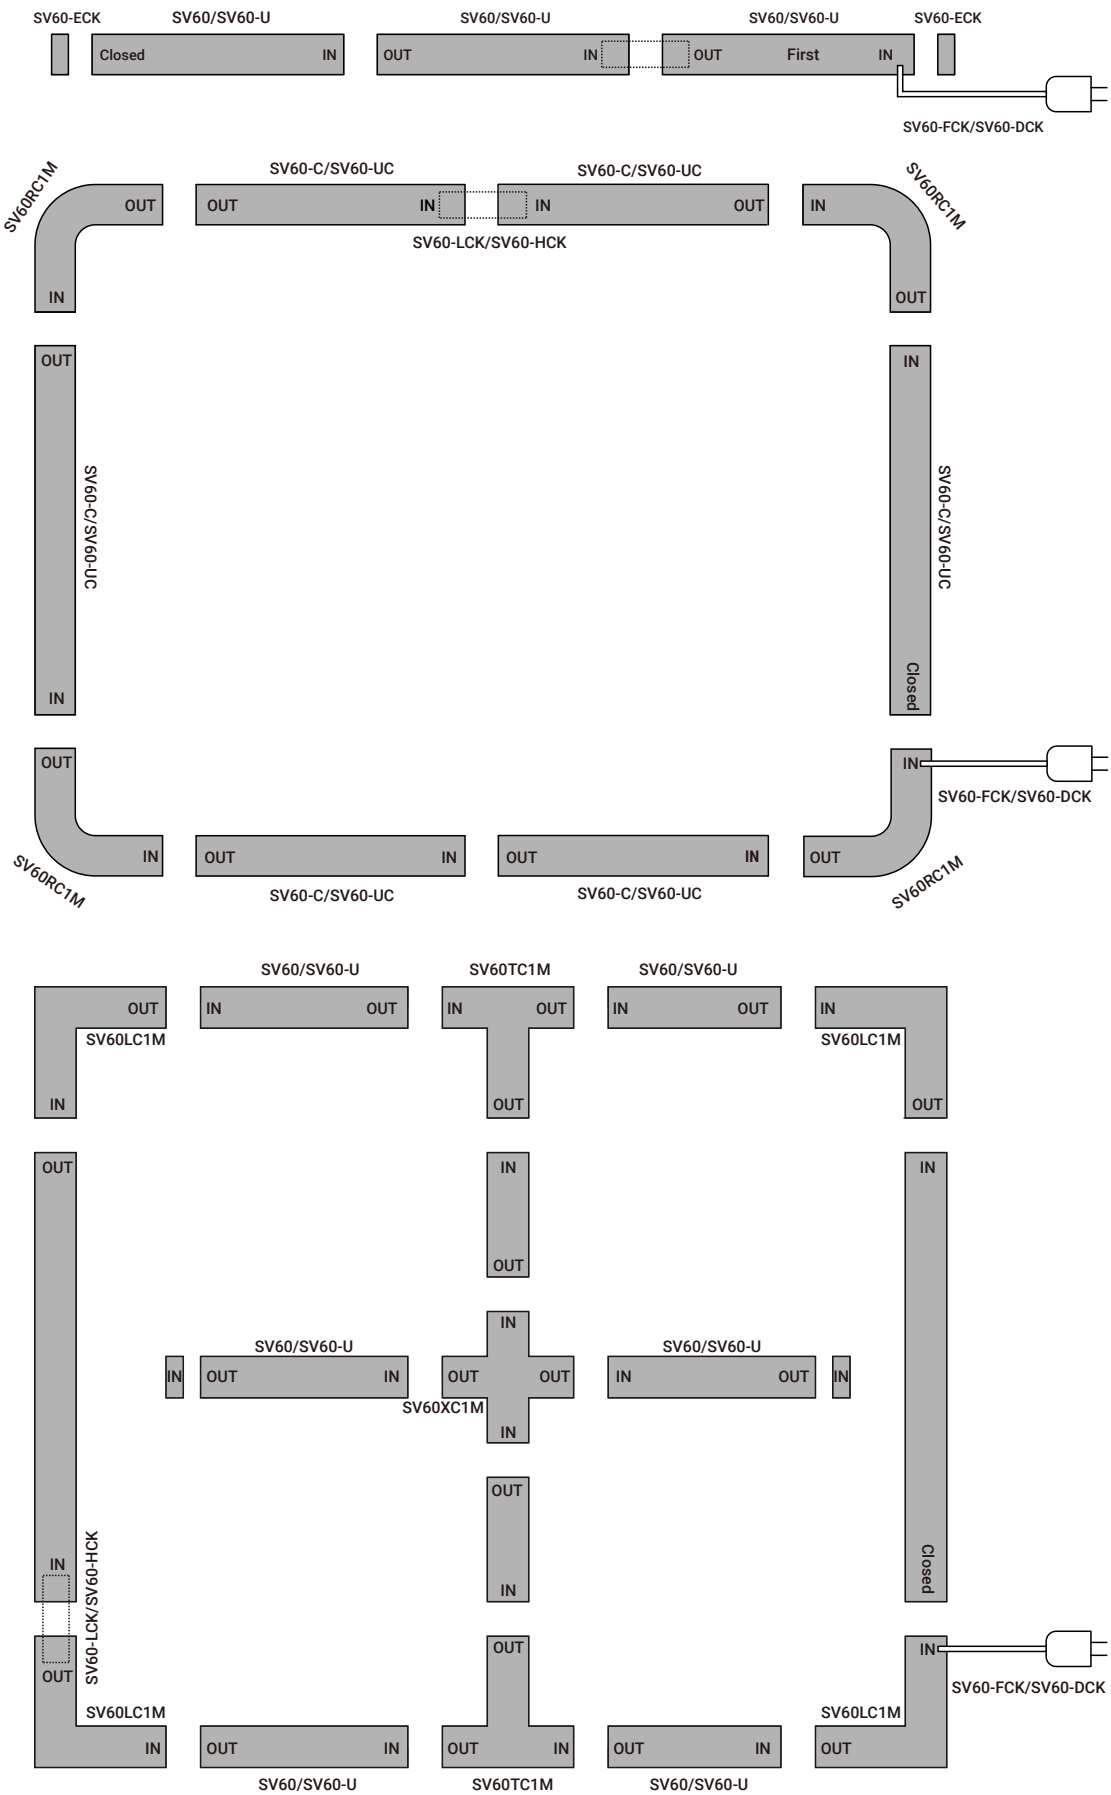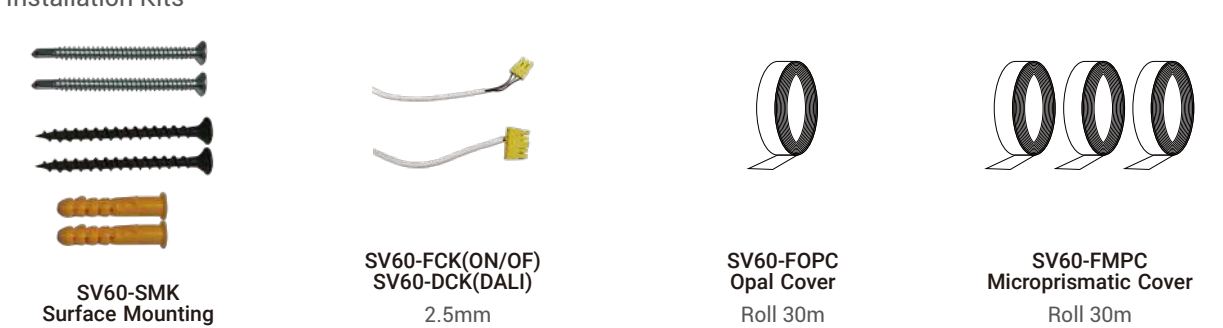

Modules & Installation Kits for  
Trim Recessed Linear System

Non-standard Lengths



SV60-F  
Line  
560~2870mm



SV60-F-C  
Line  
560~2870mm



SV60-LFK

L / T / X /Arc Corners



SV60LC1F  
L Corner (90°)  
280\*280mm



SV60TC1F  
T Corner  
280\*280mm



SV60XC1F  
+ Corner  
280\*280mm


Installation Kits




SV60-FRK  
Trim Recessed



SV60-EFK  
End Caps  
45\*45mm



SV60-FOPC  
Opal Cover  
Roll 30m



SV60-FMPC  
Microprismatic Cover  
Roll 30m

