



IP67

**Metaliron grey with triple layer coating for high corrosion and UV resistance**

- Chemical conversion coating on the aluminium surface followed by the first layer of anodising
- The second layer of epoxy paint
- The third polyester powder
- Salt spray test passed over 1000hours

**Optional accessory**



Honeycomb


Bevel Snoot

Straight Snoot

**Accessory**



Stake for NEPTUNE series projectors



NEPTUNE XSU CV



NEPTUNE SU CV



NEPTUNE MU CV



NEPTUNE LU CV

# NEPTUNE XSU CV – Projector Light



New



## Quick Info

- OSRAM LED: 3W, CRI>80, 2700K, 3000K
- Beam Angle: 12°, 18°, 30°, 50°
- Lumen Output: Up to 150lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Remote 24VDC LED Driver to be Ordered Separately

## Light Distribution

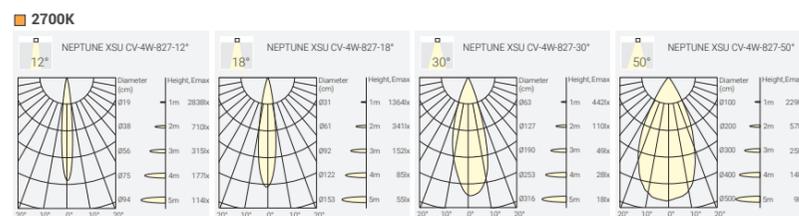

## Finish



## Accessory: Stake for NEPTUNE series projectors



## Optional Accessory



Honeycomb



# NEPTUNE SU CV – Projector Light



New



## Quick Info

- OSRAM LED: 4W, CRI>80, 2700K, 3000K
- Beam Angle: 8°, 15°, 30°, 40°
- Lumen Output: Up to 420lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Remote 24VDC LED Driver to be Ordered Separately

## Light Distribution

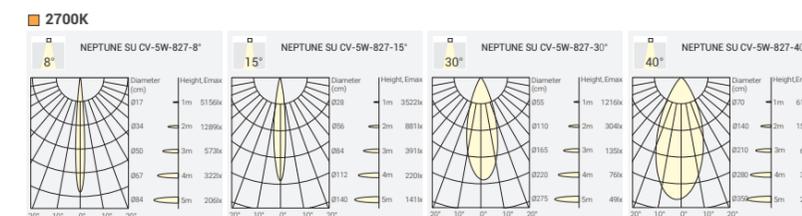

## Finish



## Accessory: Stake for NEPTUNE series projectors



## Optional Accessory



Honeycomb Bevel Snoot Straight Snoot

## Order Info

| LED Power | System Power | Voltage | CRI | CCT   | Beam | System Output | Model                                   |
|-----------|--------------|---------|-----|-------|------|---------------|---|
| 3W        | 4W           | 24VDC   | 80  | 2700K | 12°  | 140lm         | NEPTUNE XSU-4W-827-12° NU1C-8271204N-DN |
|           |              |         |     |       | 18°  | 140lm         | NEPTUNE XSU-4W-827-18° NU1C-8271804N-DN |
|           |              |         |     |       | 30°  | 140lm         | NEPTUNE XSU-4W-827-30° NU1C-8273004N-DN |
|           |              |         |     |       | 50°  | 140lm         | NEPTUNE XSU-4W-827-50° NU1C-8275004N-DN |
|           |              |         |     |       | 12°  | 150lm         | NEPTUNE XSU-4W-830-12° NU1C-8301204N-DN |
|           |              |         |     |       | 18°  | 150lm         | NEPTUNE XSU-4W-830-18° NU1C-8301804N-DN |
|           |              |         |     |       | 30°  | 150lm         | NEPTUNE XSU-4W-830-30° NU1C-8303004N-DN |
|           |              |         |     |       | 50°  | 150lm         | NEPTUNE XSU-4W-830-50° NU1C-8305004N-DN |

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver Remote 24VDC LED Driver to be Ordered Separately

## Order Info

| LED Power | System Power | Voltage | CRI | CCT   | Beam | System Output | Model                 | Code             |
|-----------|--------------|---------|-----|-------|------|---------------|-----------------------|------------------|
| 4W        | 5W           | 24VDC   | 80  | 2700K | 8°   | 260lm         | NEPTUNE SU-5W-827-8°  | NU2C-8270805N-DN |
|           |              |         |     |       | 15°  | 380lm         | NEPTUNE SU-5W-827-15° | NU2C-8271505N-DN |
|           |              |         |     |       | 30°  | 380lm         | NEPTUNE SU-5W-827-30° | NU2C-8273005N-DN |
|           |              |         |     |       | 40°  | 300lm         | NEPTUNE SU-5W-827-40° | NU2C-8274005N-DN |
|           |              |         |     |       | 15°  | 420lm         | NEPTUNE SU-5W-830-15° | NU2C-8301505N-DN |
|           |              |         |     |       | 30°  | 420lm         | NEPTUNE SU-5W-830-30° | NU2C-8303005N-DN |
|           |              |         |     |       | 40°  | 350lm         | NEPTUNE SU-5W-830-40° | NU2C-8304005N-DN |

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver Remote 24VDC LED Driver to be Ordered Separately

## Coding

| Model          | CRI/ CCT      | Beam Angle | Power | Control | Finish    | Reflector Color | Accessory |
|----------------|---------------|------------|-------|---------|-----------|-----------------|-----------|
| NU1C           | 827           | 12°        | 04    | N       | D         | N               |           |
| NEPTUNE XSU CV | CRI>80/ 2700K | 12°        | 4W    | None    | Dark-Grey | None            |           |
|                | 830           | 18°        |       |         | G         |                 |           |
|                | CRI>80/ 3000K | 18°        |       |         | Green     |                 |           |
|                |               | 30°        |       |         | R         |                 |           |
|                |               | 30°        |       |         | Rust      |                 |           |
|                |               | 50°        |       |         |           |                 |           |
|                |               | 50°        |       |         |           |                 |           |

## Coding

| Model         | CRI/ CCT      | Beam Angle | Power | Control | Finish    | Reflector Color | Accessory |
|---------------|---------------|------------|-------|---------|-----------|-----------------|-----------|
| NU2C          | 827           | 08         | 05    | N       | D         | N               |           |
| NEPTUNE SU CV | CRI>80/ 2700K | 8°         | 5W    | None    | Dark-Grey | None            |           |
|               | 830           | 15°        |       |         | G         |                 |           |
|               | CRI>80/ 3000K | 15°        |       |         | Green     |                 |           |
|               |               | 40°        |       |         | R         |                 |           |
|               |               | 40°        |       |         | Rust      |                 |           |

# NEPTUNE MU CV – Projector Light



New



### Quick Info

- CREE LED: 11W, CRI>80, 2700K, 3000K
- Beam Angle: 10°, 20°, 30°, 50°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Remote 24VDC LED Driver to be Ordered Separately

### Light Distribution

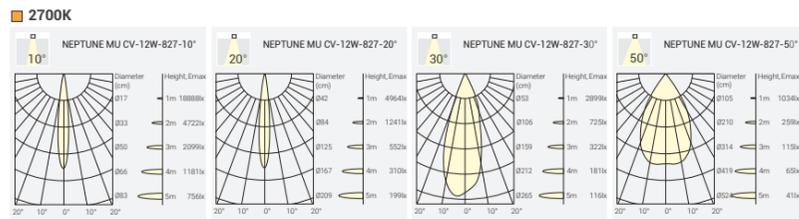

### Finish



Accessory: Stake for NEPTUNE series projectors



### Order Info

| LED Power | System Power | Voltage | CRI | CCT   | Beam | System Output | Model                  | Code             |
|-----------|--------------|---------|-----|-------|------|---------------|------------------------|------------------|
| 11W       | 12W          | 24VDC   | 80  | 2700K | 10°  | 800lm         | NEPTUNE MU-12W-827-10° | NU3C-8271012N-DN |
|           |              |         |     |       | 20°  | 850lm         | NEPTUNE MU-12W-827-20° | NU3C-8272012N-DN |
|           |              |         |     |       | 30°  | 850lm         | NEPTUNE MU-12W-827-30° | NU3C-8273012N-DN |
|           |              |         |     |       | 50°  | 800lm         | NEPTUNE MU-12W-827-50° | NU3C-8275012N-DN |
|           |              |         |     |       | 10°  | 850lm         | NEPTUNE MU-12W-830-10° | NU3C-8301012N-DN |
|           |              |         |     |       | 20°  | 950lm         | NEPTUNE MU-12W-830-20° | NU3C-8302012N-DN |
|           |              |         |     |       | 30°  | 950lm         | NEPTUNE MU-12W-830-30° | NU3C-8303012N-DN |
|           |              |         |     |       | 50°  | 850lm         | NEPTUNE MU-12W-830-50° | NU3C-8305012N-DN |

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver Remote 24VDC LED Driver to be Ordered Separately

### Coding

| Model                 | CRI/ CCT             | Beam Angle | Power | Control | Finish         | Reflector Color | Accessory |
|-----------------------|----------------------|------------|-------|---------|----------------|-----------------|-----------|
| NU3C<br>NEPTUNE MU CV | 827<br>CRI>80/ 2700K | 10°        | 12W   | N       | D<br>Dark-Grey | N<br>None       |           |
|                       | 830<br>CRI>80/ 3000K | 20°        |       |         | G<br>Green     |                 |           |
|                       |                      | 30°        |       |         | R<br>Rust      |                 |           |
|                       |                      | 50°        |       |         |                |                 |           |

### Optional Accessory



Honeycomb Bevel Snoot Straight Snoot


# NEPTUNE LU CV – Projector Light

New



### Quick Info

- CREE LED: 16W, CRI>80, 2700K, 3000K
- Beam Angle: 10°, 10°, 30°, 50°
- Lumen Output: Up to 1600lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Remote 24VDC LED Driver to be Ordered Separately




### Finish



Accessory: Stake for NEPTUNE series projectors



### Light Distribution

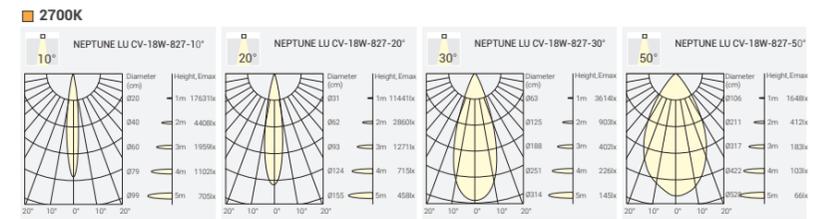

### Order Info

| LED Power | System Power | Voltage | CRI | CCT   | Beam | System Output | Model                  | Code             |
|-----------|--------------|---------|-----|-------|------|---------------|------------------------|------------------|
| 16W       | 18W          | 24VDC   | 80  | 2700K | 10°  | 1400lm        | NEPTUNE LU-18W-827-10° | NU4C-8271018N-DN |
|           |              |         |     |       | 20°  | 1450lm        | NEPTUNE LU-18W-827-20° | NU4C-8272018N-DN |
|           |              |         |     |       | 30°  | 1450lm        | NEPTUNE LU-18W-827-30° | NU4C-8273018N-DN |
|           |              |         |     |       | 50°  | 1400lm        | NEPTUNE LU-18W-827-50° | NU4C-8275018N-DN |
|           |              |         |     |       | 10°  | 1500lm        | NEPTUNE LU-18W-830-10° | NU4C-8301018N-DN |
|           |              |         |     |       | 20°  | 1600lm        | NEPTUNE LU-18W-830-20° | NU4C-8302018N-DN |
|           |              |         |     |       | 30°  | 1600lm        | NEPTUNE LU-18W-830-30° | NU4C-8303018N-DN |
|           |              |         |     |       | 50°  | 1500lm        | NEPTUNE LU-18W-830-50° | NU4C-8305018N-DN |

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver Remote 24VDC LED Driver to be Ordered Separately

### Coding

| Model                 | CRI/ CCT             | Beam Angle | Power | Control | Finish         | Reflector Color | Accessory |
|-----------------------|----------------------|------------|-------|---------|----------------|-----------------|-----------|
| NU4C<br>NEPTUNE LU CV | 827<br>CRI>80/ 2700K | 10°        | 18W   | N       | D<br>Dark-Grey | N<br>None       |           |
|                       | 830<br>CRI>80/ 3000K | 20°        |       |         | G<br>Green     |                 |           |
|                       |                      | 30°        |       |         | R<br>Rust      |                 |           |
|                       |                      | 50°        |       |         |                |                 |           |

### Optional Accessory



Honeycomb

## NEPTUNE Base Version

Standard 24VDC Version



LED Driver Integrated Version Optional

### Installation Possibilities:

- 1 -Rear Cable
- 2 -Metal Tube
- 3 -PVC Pipe
- 4 -Direct Cable
- 5 -Corrugated Tube
- 6 -Spike Mounted



New

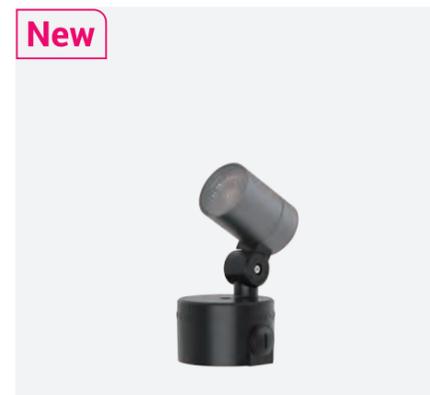

### Finish



Accessory: Stake for NEPTUNE series projectors



### Optional Accessory




Honeycomb Bevel Snoot Straight Snoot



### Quick Info

- CREE LED: 4W, CRI>80, 2700K, 3000K
- Beam Angle: 15°, 30°, 40°
- Lumen Output: Up to 420lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input

### Light Distribution

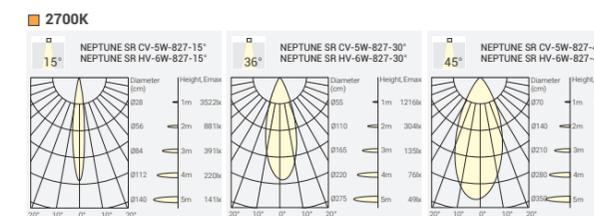

### Order Info

24VDC Version

| LED Power | System Power | Voltage | CCT | Beam  | System Output | Model | Code                     |                  |
|-----------|--------------|---------|-----|-------|---------------|-------|--------------------------|------------------|
| 4W        | 5W           | 24VDC   | 80  | 2700K | 15°           | 380lm | NEPTUNE SR CV-5W-827-15° | NR1C-8271505F-DN |
|           |              |         |     |       | 30°           | 380lm | NEPTUNE SR CV-5W-827-30° | NR1C-8273005F-DN |
|           |              |         |     |       | 40°           | 300lm | NEPTUNE SR CV-5W-827-40° | NR1C-8274005F-DN |
|           |              |         |     |       | 15°           | 420lm | NEPTUNE SR CV-5W-830-15° | NR1C-8301505F-DN |
|           |              |         |     |       | 30°           | 420lm | NEPTUNE SR CV-5W-830-30° | NR1C-8303005F-DN |
|           |              |         |     |       | 40°           | 350lm | NEPTUNE SR CV-5W-830-40° | NR1C-8304005F-DN |

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver to be Ordered Separately

LED Driver Integrated Version

| LED Power | System Power | Input      | CRI | CCT   | Beam | System Output | Model                    | Code             |
|-----------|--------------|------------|-----|-------|------|---------------|--------------------------|------------------|
| 4W        | 6W           | 220-240VAC | 80  | 2700K | 15°  | 380lm         | NEPTUNE SR HV-6W-827-15° | NR1H-8271506F-DN |
|           |              |            |     |       | 30°  | 380lm         | NEPTUNE SR HV-6W-827-30° | NR1H-8273006F-DN |
|           |              |            |     |       | 40°  | 300lm         | NEPTUNE SR HV-6W-827-40° | NR1H-8274006F-DN |
|           |              |            |     |       | 15°  | 420lm         | NEPTUNE SR HV-6W-830-15° | NR1H-8301506F-DN |
|           |              |            |     |       | 30°  | 420lm         | NEPTUNE SR HV-6W-830-30° | NR1H-8303006F-DN |
|           |              |            |     |       | 40°  | 350lm         | NEPTUNE SR HV-6W-830-40° | NR1H-8304006F-DN |

Code Remark: F=(ON-OFF) Remark: On-Off LED Driver Integrated, 220~240VAC Input

### Coding

| Model         | CRI/ CCT      | Beam Angle | Power | Control | Finish    | Reflector Color | Accessory |
|---------------|---------------|------------|-------|---------|-----------|-----------------|-----------|
| NR1H          | 827           | 15°        | 05    | F       | D         | N               |           |
| NEPTUNE SR CV | CRI>80/ 2700K | 15°        | 5W    | ON-OFF  | Dark-Grey | None            |           |
|               | 830           | 30°        | 06    |         | G         |                 |           |
|               | CRI>80/ 3000K | 30°        | 6W    |         | Green     |                 |           |
|               |               | 40°        |       |         | R         |                 |           |
|               |               | 40°        |       |         | Rust      |                 |           |


# NEPTUNE MR – Projector Light

New




### Quick Info

- CREE LED: 11W, CRI>80, 2700K, 3000K
- Beam Angle: 10°, 20°, 30°, 50°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input



### Light Distribution

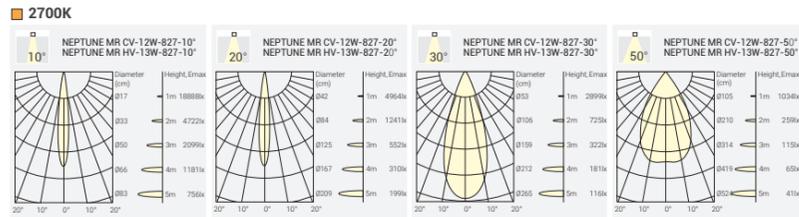

### Finish



Accessory: Stake for NEPTUNE series projectors



### Order Info

| LED Power | System Power | Voltage | CRI | CCT   | Beam  | System Output | Model                     | Code                      |                  |
|-----------|--------------|---------|-----|-------|-------|---------------|---------------------------|---------------------------|------------------|
| 11W       | 12W          | 24VDC   | 80  | 2700K | 10°   | 800lm         | NEPTUNE MR CV-12W-827-10° | NR2C-8271012F-DN          |                  |
|           |              |         |     |       | 20°   | 850lm         | NEPTUNE MR CV-12W-827-20° | NR2C-8272012F-DN          |                  |
|           |              |         |     |       | 30°   | 850lm         | NEPTUNE MR CV-12W-827-30° | NR2C-8273012F-DN          |                  |
|           |              |         |     |       | 50°   | 800lm         | NEPTUNE MR CV-12W-827-50° | NR2C-8275012F-DN          |                  |
|           |              |         |     |       | 3000K | 10°           | 850lm                     | NEPTUNE MR CV-12W-830-10° | NR2C-8301012F-DN |
|           |              |         |     |       |       | 20°           | 950lm                     | NEPTUNE MR CV-12W-830-20° | NR2C-8302012F-DN |
|           |              |         |     |       |       | 30°           | 950lm                     | NEPTUNE MR CV-12W-830-30° | NR2C-8303012F-DN |
|           |              |         |     |       |       | 50°           | 850lm                     | NEPTUNE MR CV-12W-830-50° | NR2C-8305012F-DN |

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver Remote 24VDC LED Driver to be Ordered Separately

### LED Driver Integrated Version

| LED Power | System Power | Input      | CRI | CCT   | Beam  | System Output | Model                     | Code                      |                  |
|-----------|--------------|------------|-----|-------|-------|---------------|---------------------------|---------------------------|------------------|
| 11W       | 13W          | 220-240VAC | 80  | 2700K | 10°   | 800lm         | NEPTUNE MR HV-13W-827-10° | NR2H-8271013F-DN          |                  |
|           |              |            |     |       | 20°   | 850lm         | NEPTUNE MR HV-13W-827-20° | NR2H-8272013F-DN          |                  |
|           |              |            |     |       | 30°   | 850lm         | NEPTUNE MR HV-13W-827-30° | NR2H-8273013F-DN          |                  |
|           |              |            |     |       | 50°   | 800lm         | NEPTUNE MR HV-13W-827-50° | NR2H-8275013F-DN          |                  |
|           |              |            |     |       | 3000K | 10°           | 850lm                     | NEPTUNE MR HV-13W-830-10° | NR2H-8301013F-DN |
|           |              |            |     |       |       | 20°           | 950lm                     | NEPTUNE MR HV-13W-830-20° | NR2H-8302013F-DN |
|           |              |            |     |       |       | 30°           | 950lm                     | NEPTUNE MR HV-13W-830-30° | NR2H-8303013F-DN |
|           |              |            |     |       |       | 50°           | 850lm                     | NEPTUNE MR HV-13W-830-50° | NR2H-8305013F-DN |

Code Remark: F=(ON-OFF) Remark: On-Off LED Driver Integrated, 220~240VAC Input

### Coding

| Model         | CRI/ CCT      | Beam Angle | Power | Control | Finish    | Reflector Color | Accessory |
|---------------|---------------|------------|-------|---------|-----------|-----------------|-----------|
| NR2H          | 827           | 10         | 12    | F       | D         | N               |           |
| NEPTUNE MR HV | CRI>80/ 2700K | 10°        | 12W   | ON-OFF  | Dark-Grey | None            |           |
|               | 830           | 20         | 13    |         | G         |                 |           |
|               | CRI>80/ 3000K | 20°        | 13W   |         | Green     |                 |           |
|               |               | 30         |       |         | R         |                 |           |
|               |               | 30°        |       |         | Rust      |                 |           |
|               |               | 50         |       |         |           |                 |           |
|               |               | 50°        |       |         |           |                 |           |

### Optional Accessory



Honeycomb Bevel Snoot Straight Snoot


# NEPTUNE LR – Projector Light

New




### Quick Info

- CREE LED: 16W, CRI>80, 2700K, 3000K
- Beam Angle: 10°, 20°, 30°, 50°
- Lumen Output: Up to 1600lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input



### Light Distribution

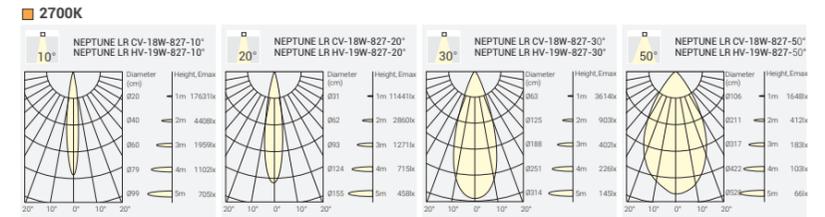

### Finish



Accessory: Stake for NEPTUNE series projectors



### Order Info

| LED Power | System Power | Voltage | CRI | CCT   | Beam  | System Output | Model                     | Code                      |                  |
|-----------|--------------|---------|-----|-------|-------|---------------|---------------------------|---------------------------|------------------|
| 16W       | 18W          | 24VDC   | 80  | 2700K | 10°   | 1400lm        | NEPTUNE LR CV-18W-827-10° | NR3C-8271018F-DN          |                  |
|           |              |         |     |       | 20°   | 1450lm        | NEPTUNE LR CV-18W-827-20° | NR3C-8272018F-DN          |                  |
|           |              |         |     |       | 30°   | 1450lm        | NEPTUNE LR CV-18W-827-30° | NR3C-8273018F-DN          |                  |
|           |              |         |     |       | 50°   | 1400lm        | NEPTUNE LR CV-18W-827-50° | NR3C-8275018F-DN          |                  |
|           |              |         |     |       | 3000K | 10°           | 1500lm                    | NEPTUNE LR CV-18W-830-10° | NR3C-8301018F-DN |
|           |              |         |     |       |       | 20°           | 1600lm                    | NEPTUNE LR CV-18W-830-20° | NR3C-8302018F-DN |
|           |              |         |     |       |       | 30°           | 1600lm                    | NEPTUNE LR CV-18W-830-30° | NR3C-8303018F-DN |
|           |              |         |     |       |       | 50°           | 1500lm                    | NEPTUNE LR CV-18W-830-50° | NR3C-8305018F-DN |

Remark: Compatible with On-Off/ Phase Dim/ 1-10V Dim/ DALI Dim Remote 24VDC LED Driver Remote 24VDC LED Driver to be Ordered Separately

### LED Driver Integrated Version

| LED Power | System Power | Input      | CRI | CCT   | Beam  | System Output | Model                     | Code                      |                  |
|-----------|--------------|------------|-----|-------|-------|---------------|---------------------------|---------------------------|------------------|
| 16W       | 19W          | 220-240VAC | 80  | 2700K | 10°   | 1400lm        | NEPTUNE LR HV-19W-827-10° | NR3H-8271019F-DN          |                  |
|           |              |            |     |       | 20°   | 1450lm        | NEPTUNE LR HV-19W-827-20° | NR3H-8272019F-DN          |                  |
|           |              |            |     |       | 30°   | 1450lm        | NEPTUNE LR HV-19W-827-30° | NR3H-8273019F-DN          |                  |
|           |              |            |     |       | 50°   | 1400lm        | NEPTUNE LR HV-19W-827-50° | NR3H-8275019F-DN          |                  |
|           |              |            |     |       | 3000K | 10°           | 1500lm                    | NEPTUNE LR HV-19W-830-10° | NR3H-8301019F-DN |
|           |              |            |     |       |       | 20°           | 1600lm                    | NEPTUNE LR HV-19W-830-20° | NR3H-8302019F-DN |
|           |              |            |     |       |       | 30°           | 1600lm                    | NEPTUNE LR HV-19W-830-30° | NR3H-8303019F-DN |
|           |              |            |     |       |       | 50°           | 1500lm                    | NEPTUNE LR HV-19W-830-50° | NR3H-8305019F-DN |

Code Remark: F=(ON-OFF) Remark: On-Off LED Driver Integrated, 220~240VAC Input

### Coding

| Model         | CRI/ CCT      | Beam Angle | Power | Control | Finish    | Reflector Color | Accessory |
|---------------|---------------|------------|-------|---------|-----------|-----------------|-----------|
| NR23H         | 827           | 10         | 18    | F       | D         | N               |           |
| NEPTUNE LR HV | CRI>80/ 2700K | 10°        | 18W   | ON-OFF  | Dark-Grey | None            |           |
|               | 830           | 20         | 19    |         | G         |                 |           |
|               | CRI>80/ 3000K | 20°        | 19W   |         | Green     |                 |           |
|               |               | 30         |       |         | R         |                 |           |
|               |               | 30°        |       |         | Rust      |                 |           |
|               |               | 50         |       |         |           |                 |           |
|               |               | 50°        |       |         |           |                 |           |