


# MODULINE 07

The ultra-slim 24V modular linear system.

Epitomizing minimalist elegance, boasting an ultra-slim track with a 7mm width aperture.


Its seamless integration into any environment ensures a natural and effortless aesthetic, ideal for residential, retail, or any setting where sleek design reigns supreme.

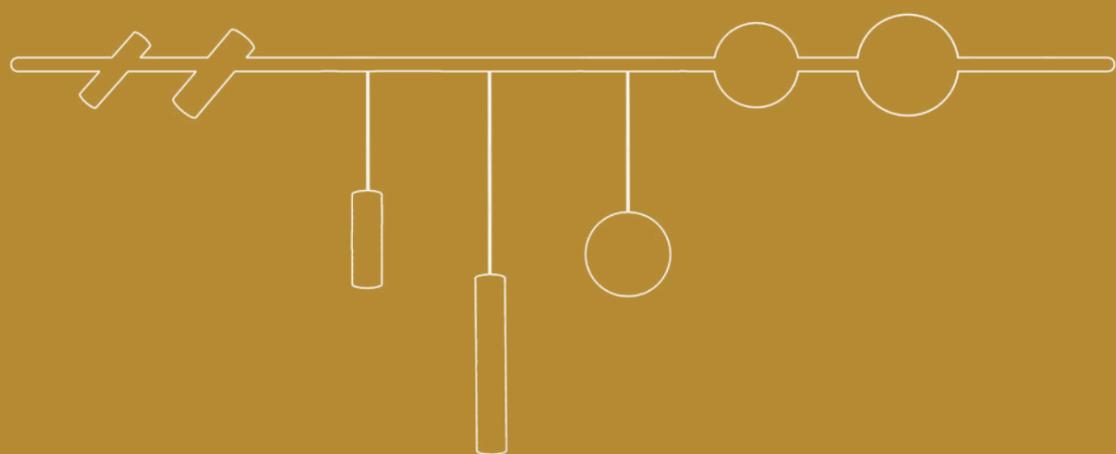


New



Trimless Recessed

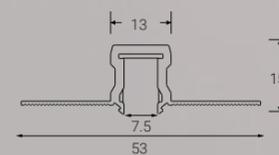

Surface Mounted





Pendant Direct & Indirect\_Square





New

*\*Max. 3000mm for delivery  
\*Max. 120W each circuit*

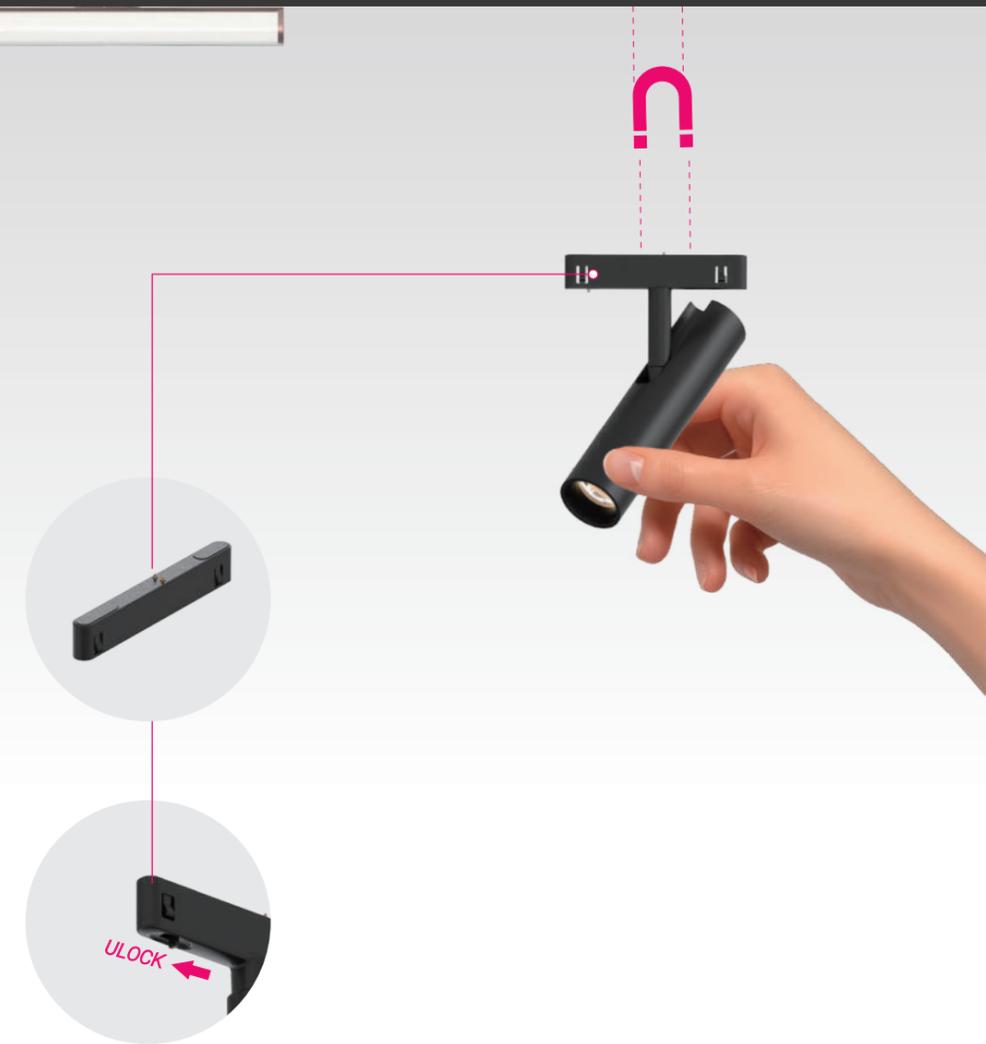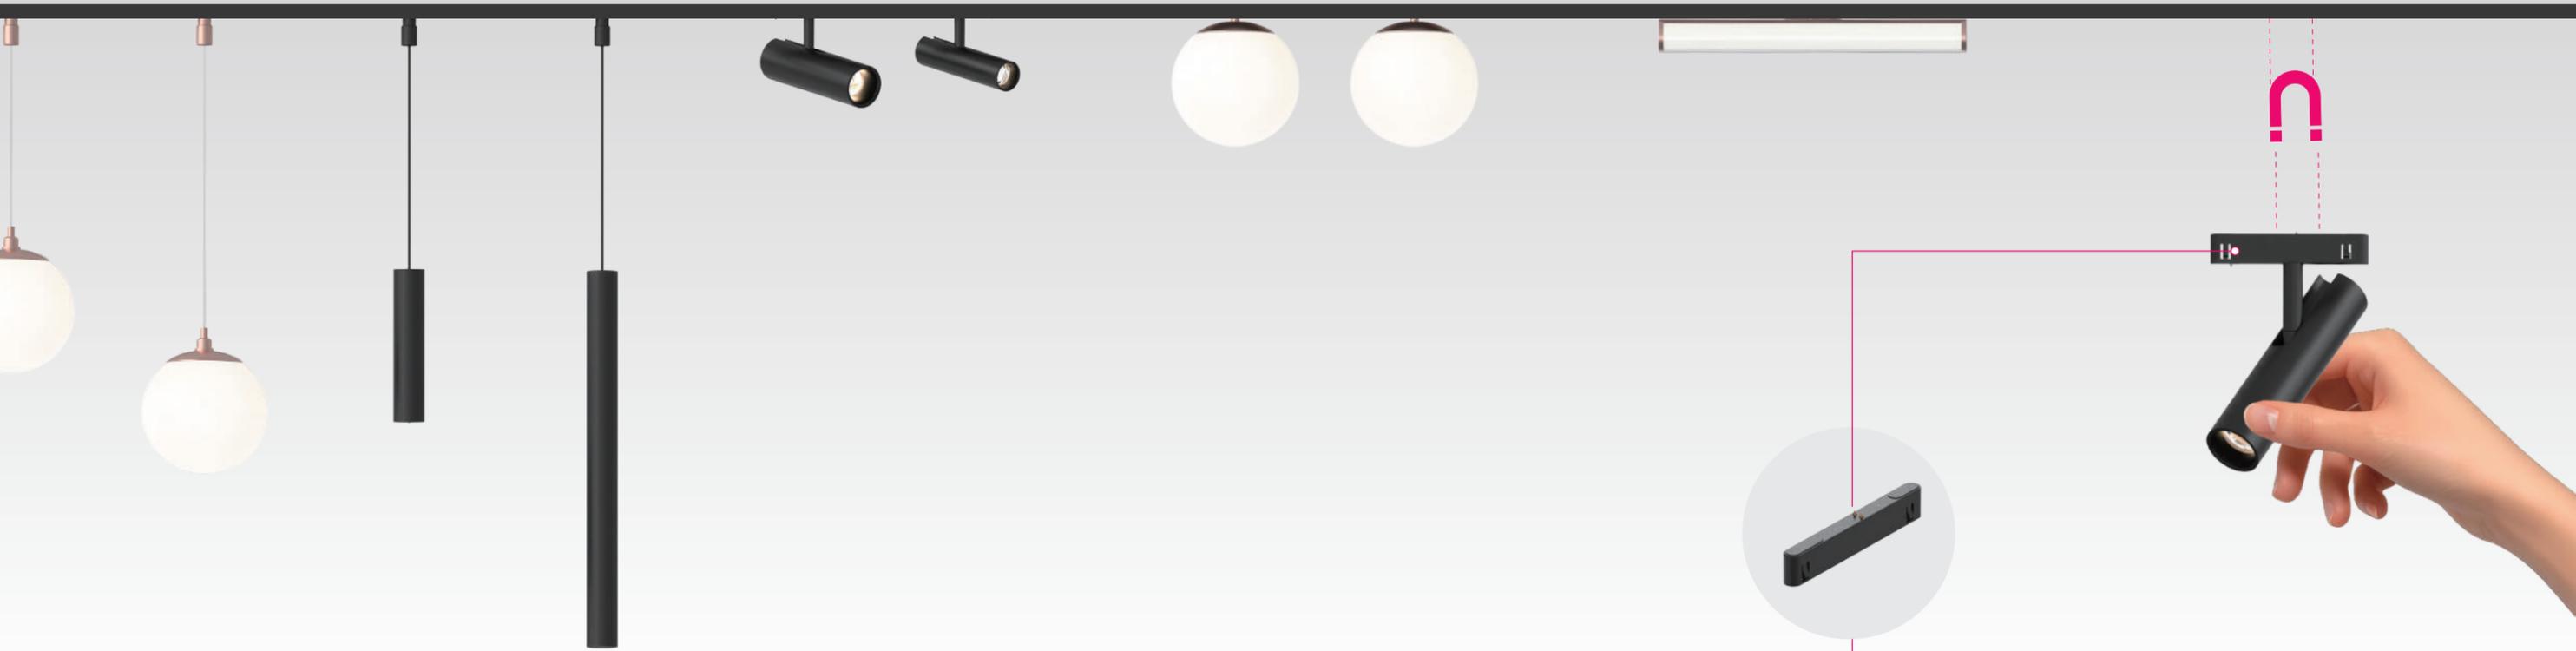

New

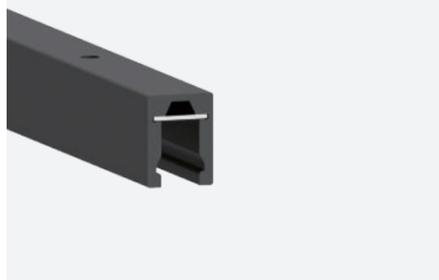

## Surface-mounted Track



### Order Info

Length	Description	Code/ Model (Black)	Code/ Model (White)
1000mm	Surface Mounted Track Rail	ML07-SM1000-B	ML07-SM1000-W
2000mm	Surface Mounted Track Rail	ML07-SM2000-B	ML07-SM2000-W
3000mm	Surface Mounted Track Rail	ML07-SM3000-B	ML07-SM3000-W

### Accessories



New

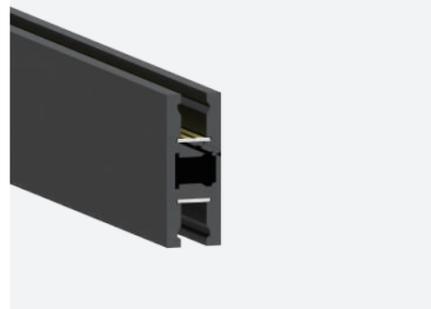

## Pendant Direct & Indirect\_SquareTrack


### Order Info

Length	Description	Code/ Model (Black)	Code/ Model (White)
1000mm	Pendant H Track Rail	ML07-HR1000-B	ML07-HR1000-W
2000mm	Pendant H Track Rail	ML07-HR2000-B	ML07-HR2000-W
3000mm	Pendant H Track Rail	ML07-HR3000-B	ML07-HR3000-W

### Accessories



New

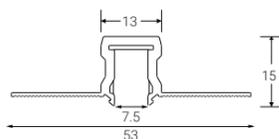

## Trimless-recessed Track

### Order Info


Length	Description	Code/ Model (Black)	Code/ Model (White)
1000mm	Trimless-recessed Track Rail	ML07-TR1000-B	ML07-TR1000-W
2000mm	Trimless-recessed Track Rail	ML07-TR2000-B	ML07-TR2000-W
3000mm	Trimless-recessed Track Rail	ML07-TR3000-B	ML07-TR3000-W

### Accessories




# MODULINE 07 – ML07-RS25 Spotlight Inset

New

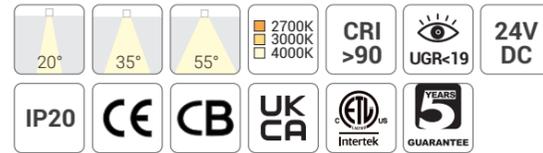


## Quick Info

- System: 5.5W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 220lm System Luminous Flux
- IP Class: IP20
- Compatible with 24V LED Driver (ON-OFF/ Phase Dim/ 1-10V Dim/ DALI Dim)(Group Control)



## Light Distribution

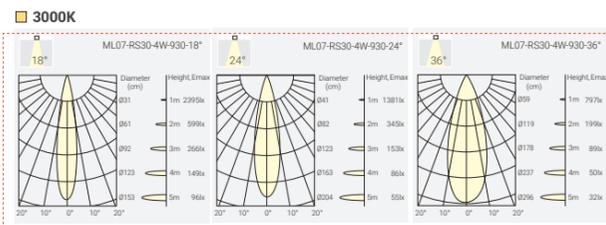

## Finish




## Order Info (ML07-RS25 in Black Hosing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
4.5W	5.5W	24V	90	2700K	20°	500lm	180lm	MSR1-9272006N-BB
					35°	500lm	180lm	MSR1-9273506N-BB
					55°	500lm	180lm	MSR1-9275506N-BB
				3000K	20°	550lm	200lm	MSR1-9302006N-BB
					35°	550lm	200lm	MSR1-9303506N-BB
					55°	550lm	200lm	MSR1-9305506N-BB
				4000K	20°	600lm	220lm	MSR1-9402006N-BB
					35°	600lm	220lm	MSR1-9403506N-BB
					55°	600lm	220lm	MSR1-9405506N-BB

Compatible with 24V LED Driver (ON-OFF/ Phase Dim/ 1-10V Dim/ DALI Dim)(Group Control)

## Optional accessory




Code for MSR1-9302006F with Honeycomb  
MSR1-9302006F-H

## Coding

MSR1	-	***	**	**	*	-	*	*	-	*
Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory			
MSR1 ML07-RS25 Single Spot	927 CRI>90/ 2700K	20 20°	06 5.5W	N None Compatible with 24V LED Driver (GroupControl)	W White  B Black	B Black	H Honeycomb			
	930 CRI>90/ 3000K	35 35°								
	940 CRI>90/ 4000K	55 55°								


# MODULINE 07 – ML07-RS35 Spotlight Inset

New

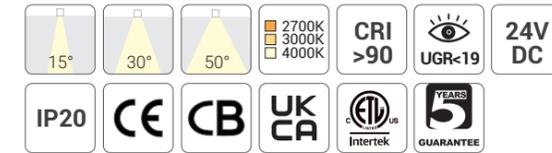


## Quick Info

- System: 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 50°
- Lumen Output: Up to 370lm System Luminous Flux
- IP Class: IP20
- Compatible with 24V LED Driver (ON-OFF/ Phase Dim/ 1-10V Dim/ DALI Dim)(Group Control)



## Light Distribution

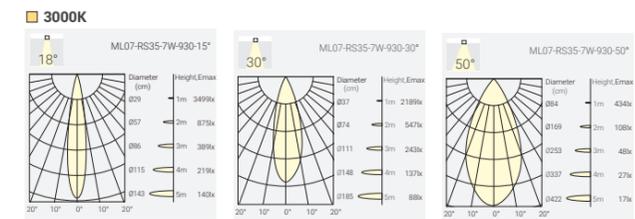

## Finish




## Order Info (ML07-RS35 in Black Hosing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	24V	90	2700K	15°	650lm	330lm	MSR2-9271506N-BB
					30°	650lm	330lm	MSR2-9273006N-BB
					50°	650lm	250lm	MSR2-9275006N-BB
				3000K	15°	700lm	350lm	MSR2-9301506N-BB
					30°	700lm	350lm	MSR2-9303006N-BB
					50°	700lm	260lm	MSR2-9305006N-BB
				4000K	15°	750lm	370lm	MSR2-9401506N-BB
					30°	750lm	370lm	MSR2-9403006N-BB
					50°	750lm	270lm	MSR2-9405006N-BB

Compatible with 24V LED Driver (ON-OFF/ Phase Dim/ 1-10V Dim/ DALI Dim)(Group Control)

## Optional accessory




Code for MSR1-9301507F with Honeycomb  
MSR1-9301507F-H

## Coding

MSR2	-	***	**	**	*	-	*	*	-	*
Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory			
MSR2 ML07-RS35 Single Spot	927 CRI>90/ 2700K	15 15°	07 7W	N None Compatible with 24V LED Driver (GroupControl)	W White  B Black	B Black	H Honeycomb			
	930 CRI>90/ 3000K	30 30°								
	940 CRI>90/ 4000K	50 50°								

# MODULINE 07 – ML07-PS25 Spot Inset



New

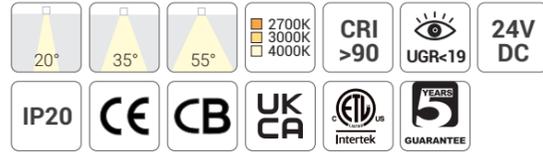


### Quick Info

- System: 5.5W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 220lm System Luminous Flux
- IP Class: IP20
- Compatible with 24V LED Driver (ON-OFF/ Phase Dim/ 1-10V Dim/ DALI Dim)(Group Control)

### Light Distribution

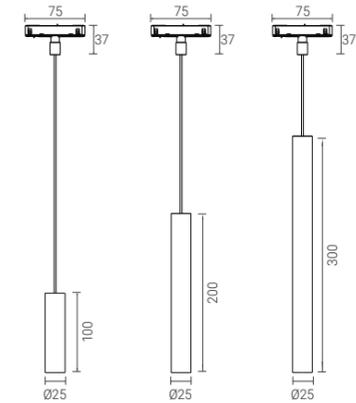

### Finish

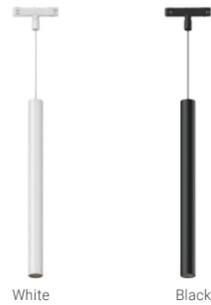

### Order Info (ML07-PS25 in Black Hosing & Black Reflector as an Example)


LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
4.5W	5.5W	24V	90	2700K	20°	500lm	180lm	MSP1-9272006N-BB
					35°	500lm	180lm	MSP1-9273506N-BB
					55°	500lm	180lm	MSP1-9275506N-BB
				3000K	20°	550lm	200lm	MSP1-9302006N-BB
					35°	550lm	200lm	MSP1-9303506N-BB
					55°	550lm	200lm	MSP1-9305506N-BB
				4000K	20°	600lm	220lm	MSP1-9402006N-BB
					35°	600lm	220lm	MSP1-9403506N-BB
					55°	600lm	220lm	MSP1-9405506N-BB

Compatible with 24V LED Driver (ON-OFF/ Phase Dim/ 1-10V Dim/ DALI Dim)(Group Control)

### Coding

MSR1	---	***	**	**	*	-	*	-	*	
Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory			
MSR1 ML07-PS25-1 100mm Tube	927 CRI>90/ 2700K	20	06	N No Driver	W White	B Black	H Honeycomb			
ML07-PS25-2 200mm Tube	930 CRI>90/ 3000K	35			B Black					
ML07-PS25-2 300mm Tube	940 CRI>90/ 4000K	55								


### Optional accessory



Code for MSP1-9302006F with Honeycomb  
MSP1-9302006F-H

# MODULINE 07 – ML07-RB100 & RB120 Decorative Ball Inset



New

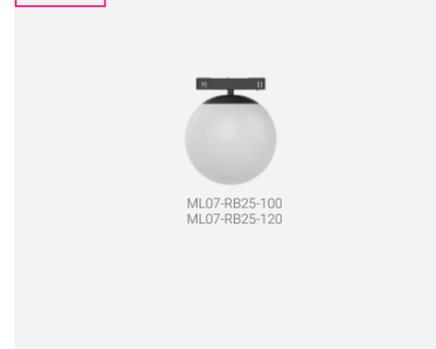

### Quick Info

- System: 4.5W, 6W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 220°
- Lumen Output: Up to 350lm 450lm System Luminous Flux
- IP Class: IP20
- Compatible with 24V LED Driver (ON-OFF/ Phase Dim/ 1-10V Dim/ DALI Dim)(Group Control)

### Light Distribution

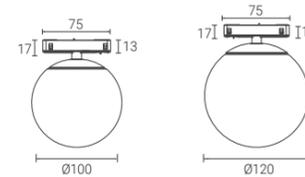

### Finish



### Order Info (ML07-RB100&RB120 in Black Hosing as an Example)


LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code	
3.5W	4.5W	24V	90	2700K	220°	600lm	300lm	MSRB-927B205N-BN	
					3000K	220°	650lm	330lm	MSRB-930B205N-BN
					4000K	220°	650lm	250lm	MSRB-940B205N-BN
5W	6W	24V	90	2700K	220°	750lm	350lm	MSRB-927B206N-BN	
					3000K	220°	800lm	400lm	MSRB-930B206N-BN
					4000K	220°	850lm	450lm	MSRB-940B206N-BN

Compatible with 24V LED Driver (ON-OFF/ Phase Dim/ 1-10V Dim/ DALI Dim)(Group Control)

### Coding

MSRB	---	***	**	**	*	-	*	-	*	
Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory			
MSRB ML07-RB100-4.5W	927 CRI>90/ 2700K	B2 220°	05 4.5W	F On-Off	W White	N None				
MSRB ML07-RB120-6W	930 CRI>90/ 3000K		06 6W	A 1-10V Dim	B Black					
	940 CRI>90/ 4000K			D DALI Dim	C Champagne Gold					
				C No Driver Compatible with 24V LED Driver (GroupControl)						

### Optional accessory



Code for MSRB-930B205N with Honeycomb  
MSRB-930B205N-H

# MODULINE 07 – ML07-PB100 & PB120 Pendant Light Inset



New



### Quick Info

- System: 4.5W, 6W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 220°
- Lumen Output: Up to 350lm or 450lm System Luminous Flux
- IP Class: IP20
- Compatible with 24V LED Driver (ON-OFF/ Phase Dim/ 1-10V Dim/ DALI Dim)(Group Control)

### Light Distribution

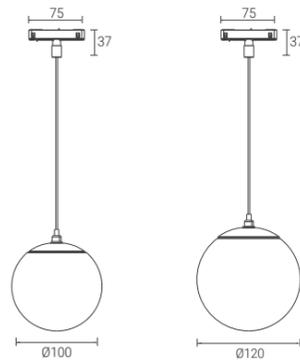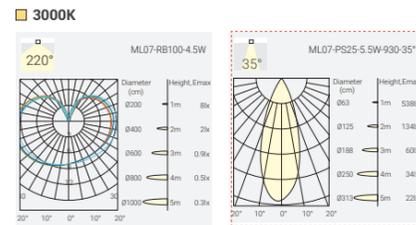

### Finish



### Order Info (ML07-PB100 & PB120 in Black Hosing as an Example)


LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
3.5W	4.5W	24V	90	2700K	220°	600lm	300lm	MSPB-927B205N-BN
				3000K	220°	650lm	330lm	MSPB-930B205N-BN
				4000K	220°	650lm	250lm	MSPB-940B205N-BN
5W	6W	24V	90	2700K	220°	750lm	350lm	MSPB-927B206N-BN
				3000K	220°	800lm	400lm	MSPB-930B206N-BN
				4000K	220°	850lm	450lm	MSPB-940B206N-BN

Compatible with 24V LED Driver (ON-OFF/ Phase Dim/ 1-10V Dim/ DALI Dim)(Group Control)

### Coding

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MSPB ML07-PB100-4.5W	927 CRI>90/ 2700K	B2 220°	05 4.5W	F On-Off	W White	N None	
MSPB ML07-PB120-6W	930 CRI>90/ 3000K		06 6W	A 1-10V Dim	B Black		
	940 CRI>90/ 4000K			D DALI Dim	C Champagne Gold		
				N No Driver Compatible with 24V LED Driver (GroupControl)			

### Optional accessory



Code for MSPB-9302006F with Honeycomb  
MSPB-9302006F-H

# MODULINE 07 – ML07 General Light Inset


New



### Quick Info

- System: 5W/M, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 160°
- Lumen Output: Up to 350lm 360lm System Luminous Flux
- IP Class: IP20
- Compatible with 24V LED Driver (ON-OFF/ Phase Dim/ 1-10V Dim/ DALI Dim)(Group Control)

### Light Distribution



### Finish



### Order Info (ML07-GL1000 in Black Adapter as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
4W	5W	24V	90	2700K	160°	650lm	320lm	MSG1-927A605N-BN
				3000K	160°	700lm	340lm	MSG1-930A605N-BN
				4000K	160°	750lm	360lm	MSG1-940A605N-BN

Compatible with 24V LED Driver (ON-OFF/ Phase Dim/ 1-10V Dim/ DALI Dim)(Group Control)

### Optional accessory




Code for MSG1-930A605N with Honeycomb  
MSG1-930A605N-H

### Coding

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MSG1 ML07-GL1000	927 CRI>90/ 2700K	A6 160°	05 5W	N No Driver Compatible with 24V LED Driver (GroupControl)	W White	N None	
MSG2 ML07-GL2000	930 CRI>90/ 3000K		10 10W		B Black		
MSG3 ML07-GL3000	940 CRI>90/ 4000K		15 15W				


New

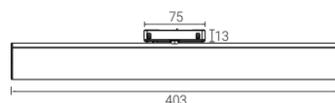

### Quick Info

- System: 6W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 150°
- Lumen Output: Up to 400lm System Luminous Flux
- IP Class: IP20
- Compatible with 24V LED Driver (ON-OFF/ Phase Dim/ 1-10V Dim/ DALI Dim)(Group Control)

### Light Distribution



### Finish



### Order Info (ML07-LT400 in Black Hosing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
5W	6W	24V	90	2700K	150°	950lm	360lm	MSLT-927A505N-BN
				3000K	150°	1000lm	380lm	MSLT-930A505N-BN
				4000K	150°	1100lm	400lm	MSLT-940A505N-BN

Compatible with 24V LED Driver (ON-OFF/ Phase Dim/ 1-10V Dim/ DALI Dim)(Group Control)

### Optional accessory



### Coding

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
<b>MSLT</b> ML07-LT400	<b>927</b> CRI>90/ 2700K	<b>A5</b> 150°	<b>06</b> 6W	<b>F</b> On-Off	<b>W</b> White	<b>B</b> Black	<b>H</b> Honeycomb
	<b>930</b> CRI>90/ 3000K			<b>A</b> 1-10V Dim	<b>B</b> Black		
	<b>940</b> CRI>90/ 4000K			<b>D</b> DALI Dim	<b>C</b> Champagne Gold		
				<b>N</b> No Driver Compatible with 24V LED Driver (GroupControl)			

