


SPACE 60 EVO Hex Acoustic – Pendant Direct Linear System



Quick Info

- General Lighting, Pendant Direct
- LED: 50W, 63W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 95° ↓
- Lumen Output: Up to 9100lm System Luminous Flux
- LED Driver: ON-OFF, 1-10V Dim, DALI Dim

Light Distribution

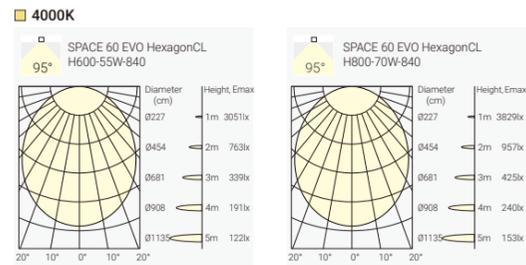

Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
50W	55W	33V	1550mA	600mm	White	80	4000K	95° ↓	7150lm	SV60CLH060P-84095055F-WN-AC
63W	70W	33V	1900mA	800mm	White	80	4000K	95° ↓	9100lm	SV60CLH080P-84095070F-WN-AC

Code Remark: F=F(ON-OFF) A=A(1-10V Dim) D=D(DALI Dim)

Coding

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Acoustic
SV60CLH060P Pendant 600mm	830 CRI>80/ 3000K	95° ↓	055 55W	F On-Off	W White	N None	
SV60CLH080P Pendant 800mm	840 CRI>80/ 4000K		070 70W	A 1-10V Dim D DALI Dim	B Black		

Acoustic colours



Luminaire colours

