


Low Voltage Track System Module ML26-AL280-9W-927-35

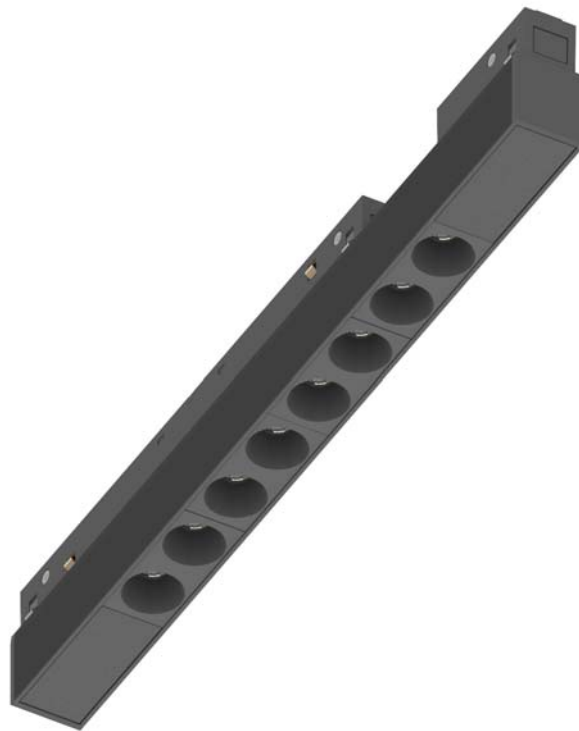

Light Output Ratio:	100.0%	
Luminaire Power:	9.072 W	
SHR Nominal:	0.50	Calculated using the TM5
SHR Maximum:	0.60	fine grid method.

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: Jason  
Test Date: 2020-05-04


γ Range: 0 - 90DEG  
γ Interval: 0.5DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity: 58%  
Test Distance: 5.850m [K=1.0000]  
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:48.00V I:0.1890A P:9.072W PF:1.000 Freq:0Hz Lamp Flux:656.136x1 lm		
NAME: ML26-AL280-9W-927-35	TYPE:Low Voltage Track System Module	
SPEC.:2700K	DIM.: L284mm*W22*H43mm	
MFR.: NEKO LIGHTING AG		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 72.33 lm/W			
MODEL	OSRAM-2700K	I <sub>max</sub> (cd)	1571	S/MH(C0/180)	0.59
NOMINAL POWER(W)	9	LOR(%)	100.0	S/MH(C90/270)	0.53
RATED VOLTAGE(V)	48	TOTAL FLUX(lm)	656.14	η UP,DN(C0-180)	0.0,52.2
NOMINAL FLUX(lm)	656.136	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,47.8
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	48	η down(%)	100.0	CIBSE SHR MAX	0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

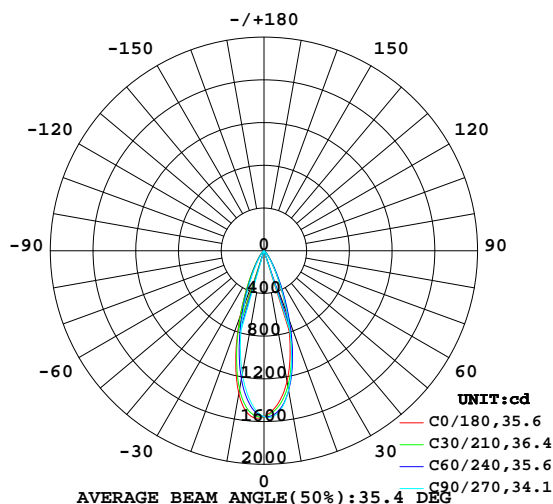

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

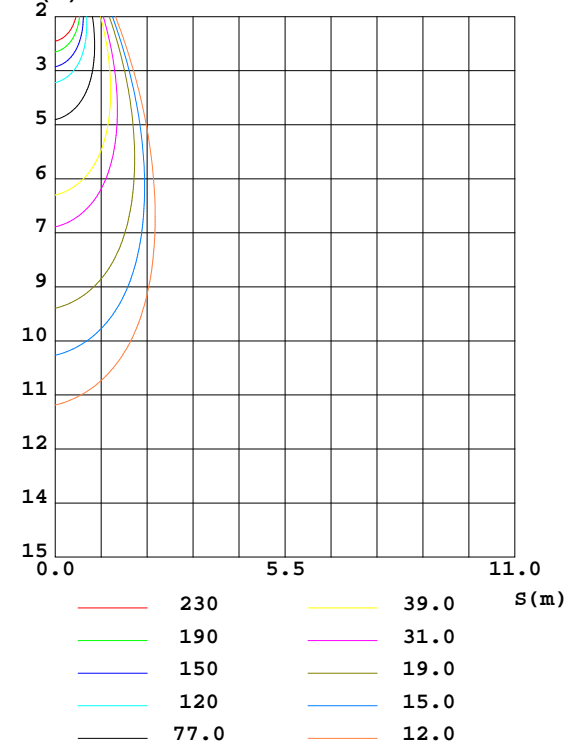

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:Jason  
 Test Date:2020-05-04

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity:58%  
 Test Distance:5.850m [K=1.0000]  
 Remarks:

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	1243	1303	1326	1356	1360	1247	1171	1208	0- 10	135.2	135.2	20.6,20.6
20	627.7	692.4	646.4	681.3	653.9	594.3	537.4	615.3	10- 20	262.9	398.0	60.7,60.7
30	189.5	219.5	188.8	217.4	193.7	178.0	153.2	186.3	20- 30	169.1	567.1	86.4,86.4
40	53.62	60.55	40.63	63.69	56.91	51.09	35.25	51.16	30- 40	64.53	631.6	96.3,96.3
50	14.74	16.05	4.498	13.88	11.20	11.74	4.450	13.62	40- 50	20.75	652.4	99.4,99.4
60	0.2449	1.006	0.1201	0.1867	0.0659	0.1759	0.1090	0.5627	50- 60	3.573	656.0	100,100
70	0.0682	0.0436	0.0699	0.0371	0.0330	0.0589	0.0479	0.0612	60- 70	0.0918	656.0	100,100
80	0.0484	0.0349	0.0459	0.0371	0.0330	0.0524	0.0393	0.0394	70- 80	0.0488	656.1	100,100
90	0.0396	0.0349	0.0371	0.0371	0.0308	0.0327	0.0436	0.0284	80- 90	0.0411	656.1	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 645.27 lm

%lum = 98.3%

%lamp = 98.3%

Conical surface Flux(120deg): 655.95 lm

%lum = 100.0%


%lamp = 100.0%

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Jason  
Test Date:2020-05-04

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 0.5DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:58%  
Test Distance:5.850m [K=1.0000]  
Remarks:

### LUMINANCE LIMITATION CURVES

Test:U:48.00V I:0.1890A P:9.072W PF:1.000 Freq:0Hz Lamp Flux:656.136x1 lm		
NAME: ML26-AL280-9W-927-35	TYPE:Low Voltage Track System Module	
SPEC.:2700K	DIM.: L284mm*W22*H43mm	
MFR.: NEKO LIGHTING AG		

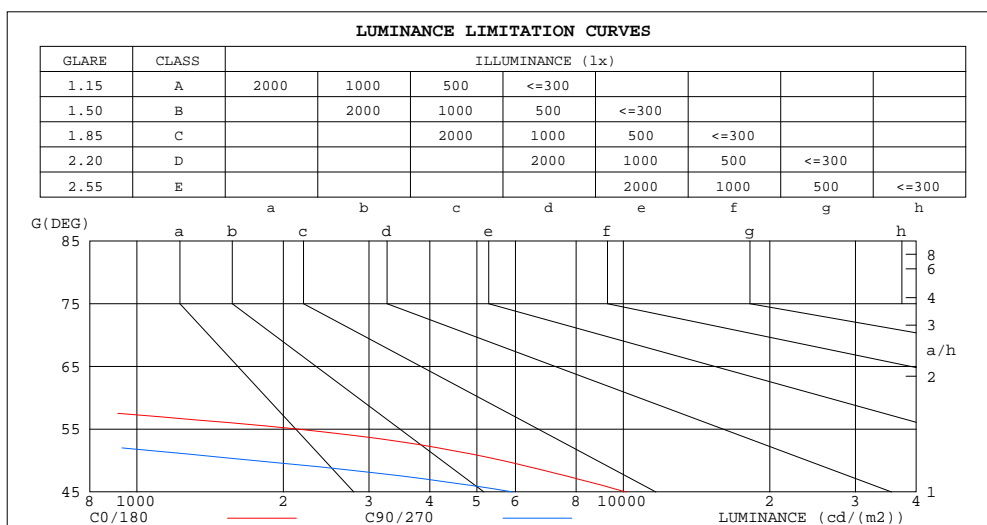

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	124	112
80	68	65
75	54	52
70	49	51
65	52	54
60	120	59
55	2137	98
50	5630	1732
45	10124	5922


C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Jason  
Test Date:2020-05-04

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 0.5DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:58%  
Test Distance:5.850m [K=1.0000]  
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:48.00V I:0.1890A P:9.072W PF:1.000 Freq:0Hz Lamp Flux:656.136x1 lm		
NAME: ML26-AL280-9W-927-35	TYPE:Low Voltage Track System Module	
SPEC.:2700K	DIM.: L284mm*W22*H43mm	
MFR.: NEKO LIGHTING AG		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95
2.0	1.06	1.02	.99	1.04	1.01	.98	1.01	.98	.96	.98	.96	.94	.95	.93	.92	.90
3.0	.00	.96	.92	.99	.95	.92	.96	.93	.90	.94	.91	.89	.91	.89	.87	.86
4.0	.95	.90	.87	.94	.89	.86	.92	.88	.85	.90	.87	.84	.88	.85	.83	.82
5.0	.90	.85	.82	.89	.85	.81	.88	.84	.81	.86	.83	.80	.84	.82	.79	.78
6.0	.86	.81	.77	.85	.80	.77	.84	.80	.77	.82	.79	.76	.81	.78	.76	.74
7.0	.82	.77	.73	.81	.77	.73	.80	.76	.73	.79	.75	.73	.78	.75	.72	.71
8.0	.79	.74	.70	.78	.73	.70	.77	.73	.70	.76	.72	.69	.75	.72	.69	.68
9.0	.75	.70	.67	.75	.70	.67	.74	.70	.67	.73	.69	.66	.72	.69	.66	.65
10.0	.72	.67	.64	.72	.67	.64	.71	.67	.64	.70	.67	.64	.70	.66	.64	.63

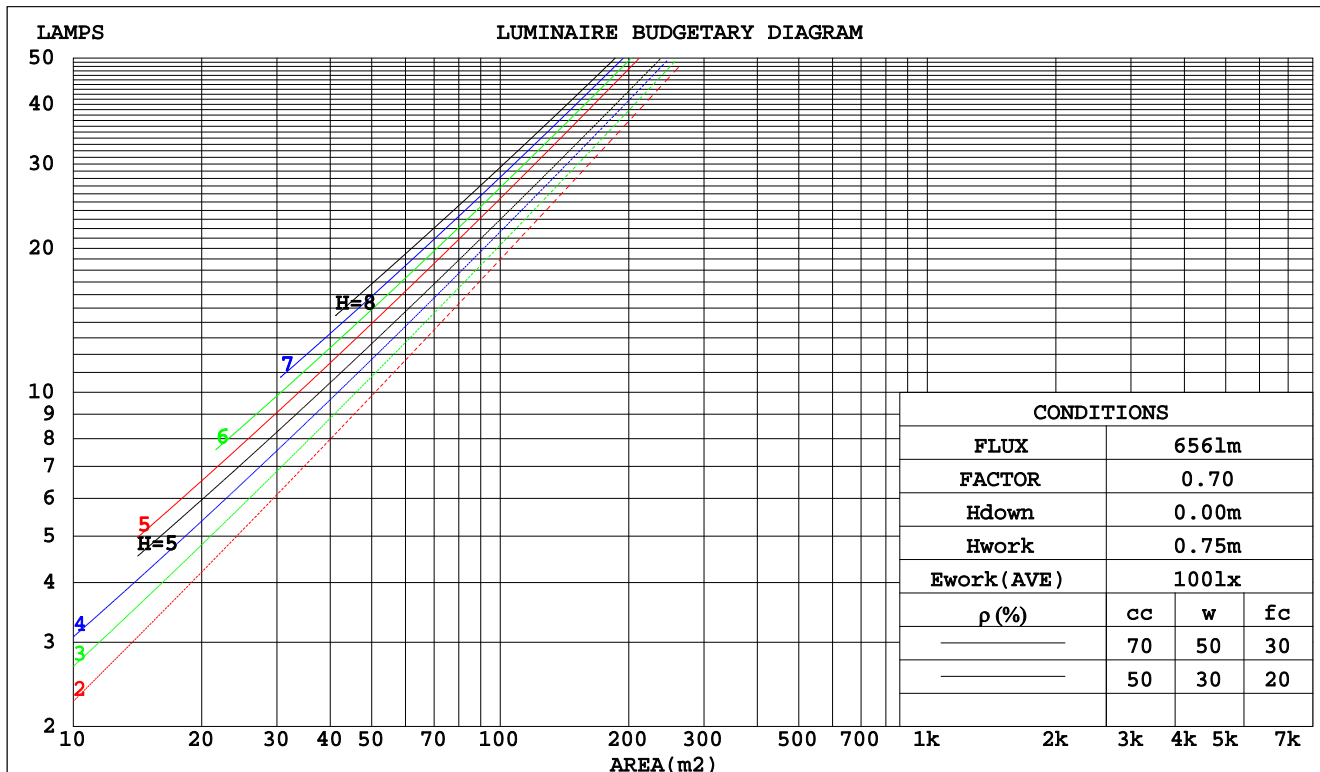

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Jason  
Test Date:2020-05-04

γ Range: 0 - 90DEG  
γ Interval: 0.5DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:58%  
Test Distance:5.850m [K=1.0000]  
Remarks:

## WEC AND CCEC

Test:U:48.00V I:0.1890A P:9.072W PF:1.000 Freq:0Hz Lamp Flux:656.136x1 lm		
NAME: ML26-AL280-9W-927-35	TYPE:Low Voltage Track System Module	
SPEC.:2700K	DIM.: L284mm*W22*H43mm	
MFR.: NEKO LIGHTING AG		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.156	.088	.028	.149	.085	.027	.136	.078	.025	.125	.072	.023	.114	.066	.021		
2.0	.147	.080	.025	.141	.078	.024	.131	.073	.023	.121	.068	.021	.112	.064	.020		
3.0	.139	.074	.022	.134	.072	.022	.125	.068	.021	.117	.064	.020	.110	.061	.019		
4.0	.131	.068	.020	.127	.067	.020	.120	.064	.019	.113	.061	.018	.107	.058	.018		
5.0	.125	.064	.018	.121	.062	.018	.115	.060	.018	.109	.057	.017	.103	.055	.017		
6.0	.119	.060	.017	.116	.059	.017	.110	.057	.016	.105	.055	.016	.100	.053	.016		
7.0	.114	.056	.016	.111	.055	.016	.106	.054	.015	.101	.052	.015	.097	.050	.015		
8.0	.109	.053	.015	.106	.052	.015	.102	.051	.015	.098	.050	.014	.094	.048	.014		
9.0	.104	.050	.014	.102	.050	.014	.098	.049	.014	.095	.047	.014	.091	.046	.013		
10.0	.100	.048	.013	.098	.047	.013	.095	.046	.013	.091	.045	.013	.088	.044	.013		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.170	.158	.147	.145	.135	.126	.099	.093	.087	.057	.054	.051	.018	.017	.016	
2.0	.153	.133	.116	.131	.114	.100	.090	.079	.070	.052	.046	.041	.017	.015	.013	
3.0	.139	.113	.093	.119	.098	.081	.082	.068	.056	.047	.040	.033	.015	.013	.011	
4.0	.128	.098	.076	.110	.085	.066	.075	.059	.046	.044	.035	.027	.014	.011	.009	
5.0	.118	.086	.063	.102	.075	.055	.070	.052	.039	.041	.031	.023	.013	.010	.008	
6.0	.110	.077	.053	.095	.066	.046	.065	.047	.033	.038	.027	.019	.012	.009	.006	
7.0	.103	.069	.045	.089	.060	.039	.061	.042	.028	.036	.025	.016	.012	.008	.005	
8.0	.097	.062	.039	.084	.054	.034	.058	.038	.024	.034	.022	.014	.011	.007	.005	
9.0	.092	.057	.033	.079	.049	.029	.055	.035	.021	.032	.021	.012	.010	.007	.004	
10.0	.087	.052	.029	.075	.046	.026	.052	.032	.018	.030	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Jason  
Test Date:2020-05-04

γ Range: 0 - 90DEG  
γ Interval: 0.5DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:58%  
Test Distance:5.850m [K=1.0000]  
Remarks:

## UGR(Unified Glare Rating) Table

Test:U:48.00V I:0.1890A P:9.072W PF:1.000 Freq:0Hz Lamp Flux:656.136x1 lm										
NAME: ML26-AL280-9W-927-35					TYPE:Low Voltage Track System Module					
SPEC.:2700K					DIM.: L284mm*W22*H43mm					
MFR.: NEKO LIGHTING AG										
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.4	16.2	15.7	16.4	16.6	14.7	15.5	14.9	15.7	15.8
3H	15.3	16.0	15.5	16.2	16.4	14.6	15.3	14.8	15.5	15.7
4H	15.2	15.9	15.5	16.1	16.3	14.5	15.2	14.8	15.4	15.6
6H	15.1	15.8	15.4	16.0	16.2	14.4	15.1	14.7	15.3	15.5
8H	15.1	15.7	15.4	15.9	16.2	14.4	15.0	14.7	15.2	15.5
12H	15.0	15.6	15.3	15.9	16.2	14.3	14.9	14.6	15.2	15.4
4H 2H	15.2	15.9	15.5	16.1	16.3	14.5	15.2	14.8	15.4	15.6
3H	15.0	15.6	15.3	15.9	16.2	14.3	14.9	14.6	15.2	15.5
4H	14.9	15.5	15.3	15.8	16.1	14.2	14.8	14.6	15.1	15.4
6H	14.8	15.3	15.2	15.6	16.0	14.1	14.6	14.5	15.0	15.3
8H	14.8	15.2	15.2	15.6	15.9	14.1	14.5	14.5	14.9	15.2
12H	14.7	15.1	15.1	15.5	15.9	14.0	14.4	14.4	14.8	15.2
8H 4H	14.8	15.2	15.2	15.6	15.9	14.1	14.5	14.5	14.9	15.2
6H	14.7	15.0	15.1	15.4	15.8	14.0	14.3	14.4	14.7	15.2
8H	14.6	14.9	15.1	15.4	15.8	13.9	14.2	14.4	14.7	15.1
12H	14.6	14.8	15.0	15.3	15.7	13.9	14.1	14.3	14.6	15.1
12H 4H	14.7	15.1	15.1	15.5	15.9	14.0	14.4	14.4	14.8	15.2
6H	14.6	14.9	15.1	15.4	15.8	13.9	14.2	14.4	14.7	15.1
8H	14.6	14.8	15.0	15.3	15.7	13.9	14.1	14.3	14.6	15.1
Variations with the observer position at spacings:										
S = 1.0H	+ 2.6 / -14.0					+ 2.8 / -26.4				
1.5H	+ 4.0 / - 6.7					+ 4.8 / -12.7				
2.0H	+ 5.6 / -24.0					+ 6.1 / -20.5				

CIE Pub.117, 656.1 lm Total Lamp Luminous Flux Correct ( $8\log(F/F_0) = -1.5$ )

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Jason  
Test Date:2020-05-04

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 0.5DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:58%  
Test Distance:5.850m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

Test:U:48.00V I:0.1890A P:9.072W PF:1.000 Freq:0Hz Lamp Flux:656.136x1 lm		
NAME: ML26-AL280-9W-927-35	TYPE:Low Voltage Track System Module	
SPEC.:2700K	DIM.: L284mm*W22*H43mm	
MFR.: NEKO LIGHTING AG		

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	89	83	80	89	83	79	88	83	79	76
0.80	96	91	87	96	91	87	95	90	87	83
1.00	101	95	92	100	95	92	98	95	91	87
1.25	104	100	96	103	99	96	101	98	95	91
1.50	107	103	99	106	102	99	104	100	98	94
2.00	109	105	102	108	104	102	105	102	100	95
2.50	111	107	105	109	106	104	106	104	102	96
3.00	112	109	107	111	108	105	107	105	103	97
4.00	114	112	110	112	110	108	109	107	105	98
5.00	115	113	112	113	111	110	109	108	107	99
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		


C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:Jason  
 Test Date:2020-05-04

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity:58%  
 Test Distance:5.850m [K=1.0000]  
 Remarks:



ISOCANDELA DIAGRAM

Test:U:48.00V I:0.1890A P:9.072W PF:1.000 Freq:0Hz Lamp Flux:656.136x1 lm		
NAME: ML26-AL280-9W-927-35	TYPE:Low Voltage Track System Module	
SPEC.:2700K	DIM.: L284mm*W22*H43mm	
MFR.: NEKO LIGHTING AG		

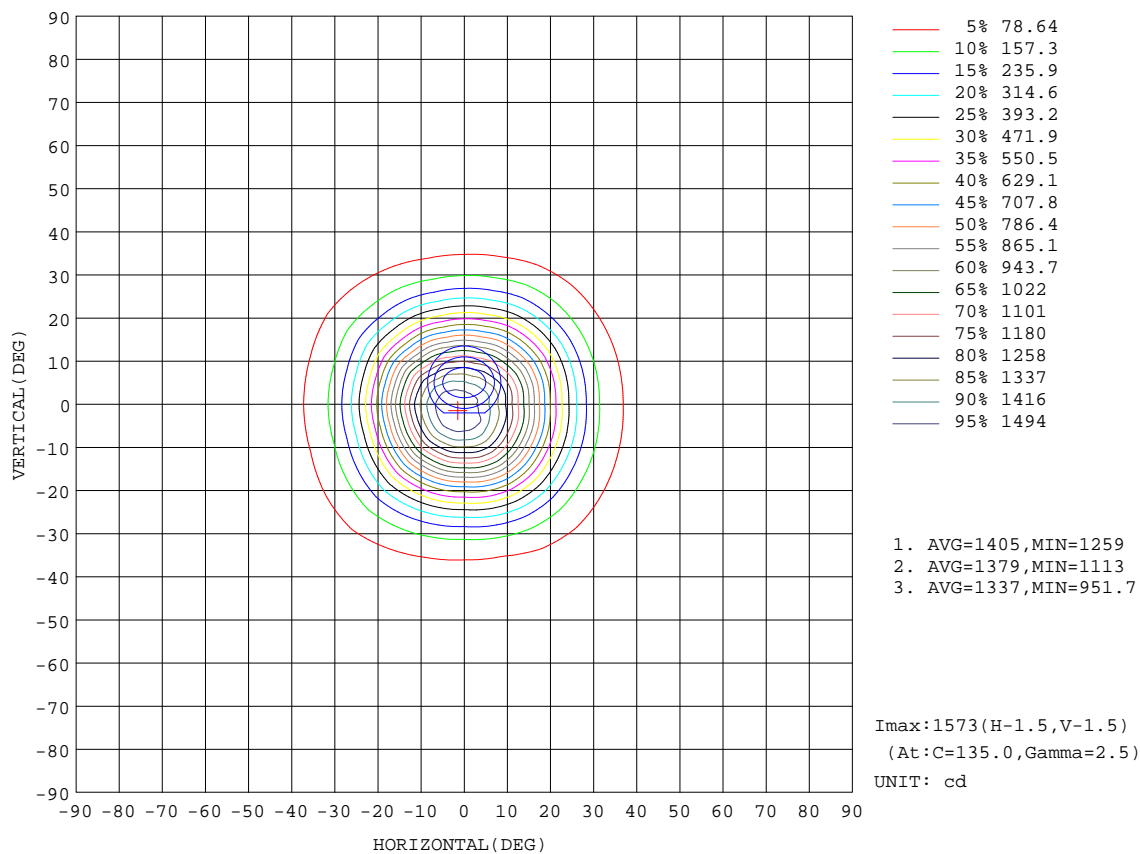


C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Jason  
Test Date:2020-05-04

γ Range: 0 - 90DEG  
γ Interval: 0.5DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:58%  
Test Distance:5.850m [K=1.0000]  
Remarks:

AAI Figure

Test:U:48.00V I:0.1890A P:9.072W PF:1.000 Freq:0Hz Lamp Flux:656.136x1 lm		
NAME: ML26-AL280-9W-927-35	TYPE:Low Voltage Track System Module	
SPEC.:2700K	DIM.: L284mm*W22*H43mm	
MFR.: NEKO LIGHTING AG		

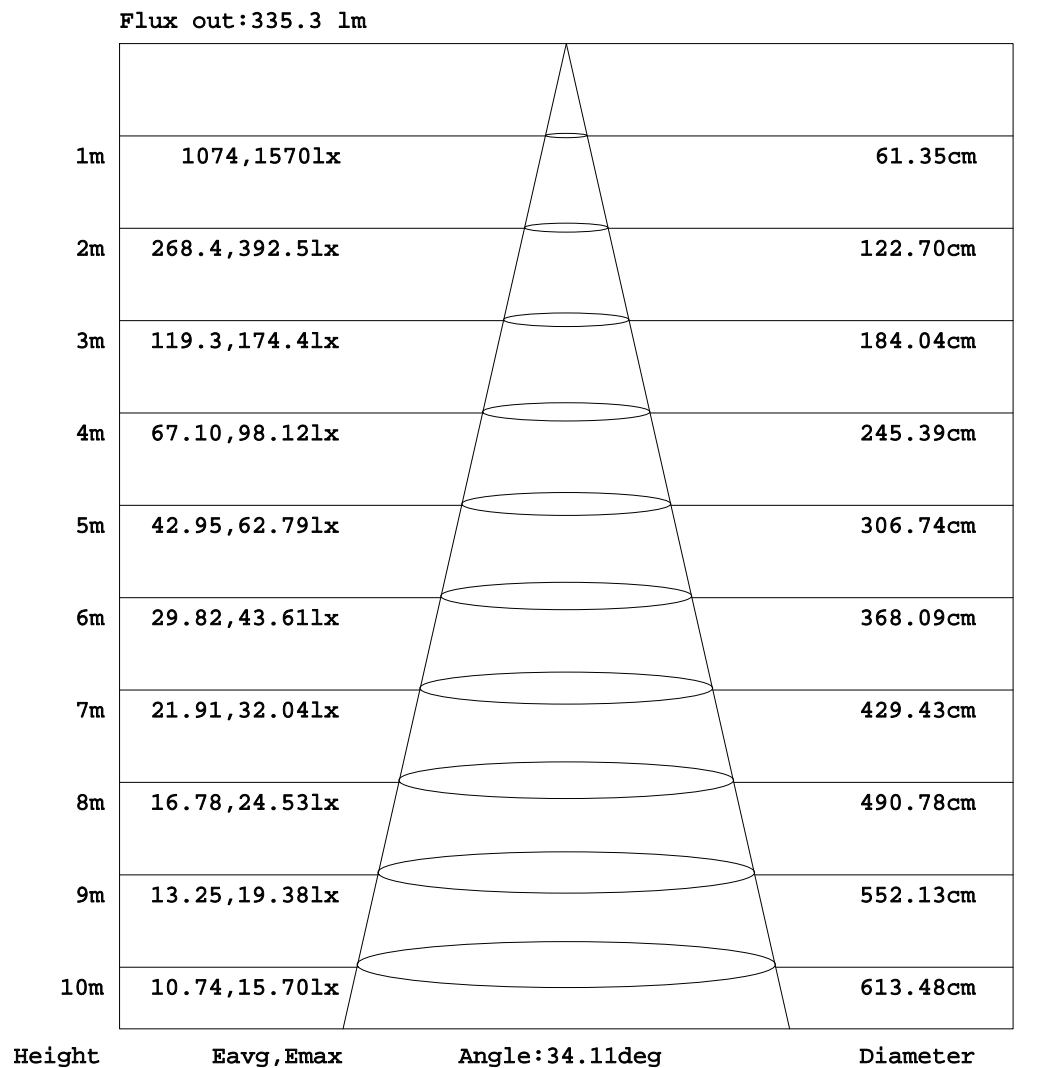


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Jason  
Test Date:2020-05-04

γ Range: 0 - 90DEG  
γ Interval: 0.5DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:58%  
Test Distance:5.850m [K=1.0000]  
Remarks:

ISOLUX DIAGRAM

Test:U:48.00V I:0.1890A P:9.072W PF:1.000 Freq:0Hz Lamp Flux:656.136x1 lm		
NAME: ML26-AL280-9W-927-35	TYPE:Low Voltage Track System Module	
SPEC.:2700K	DIM.: L284mm*W22*H43mm	
MFR.: NEKO LIGHTING AG		

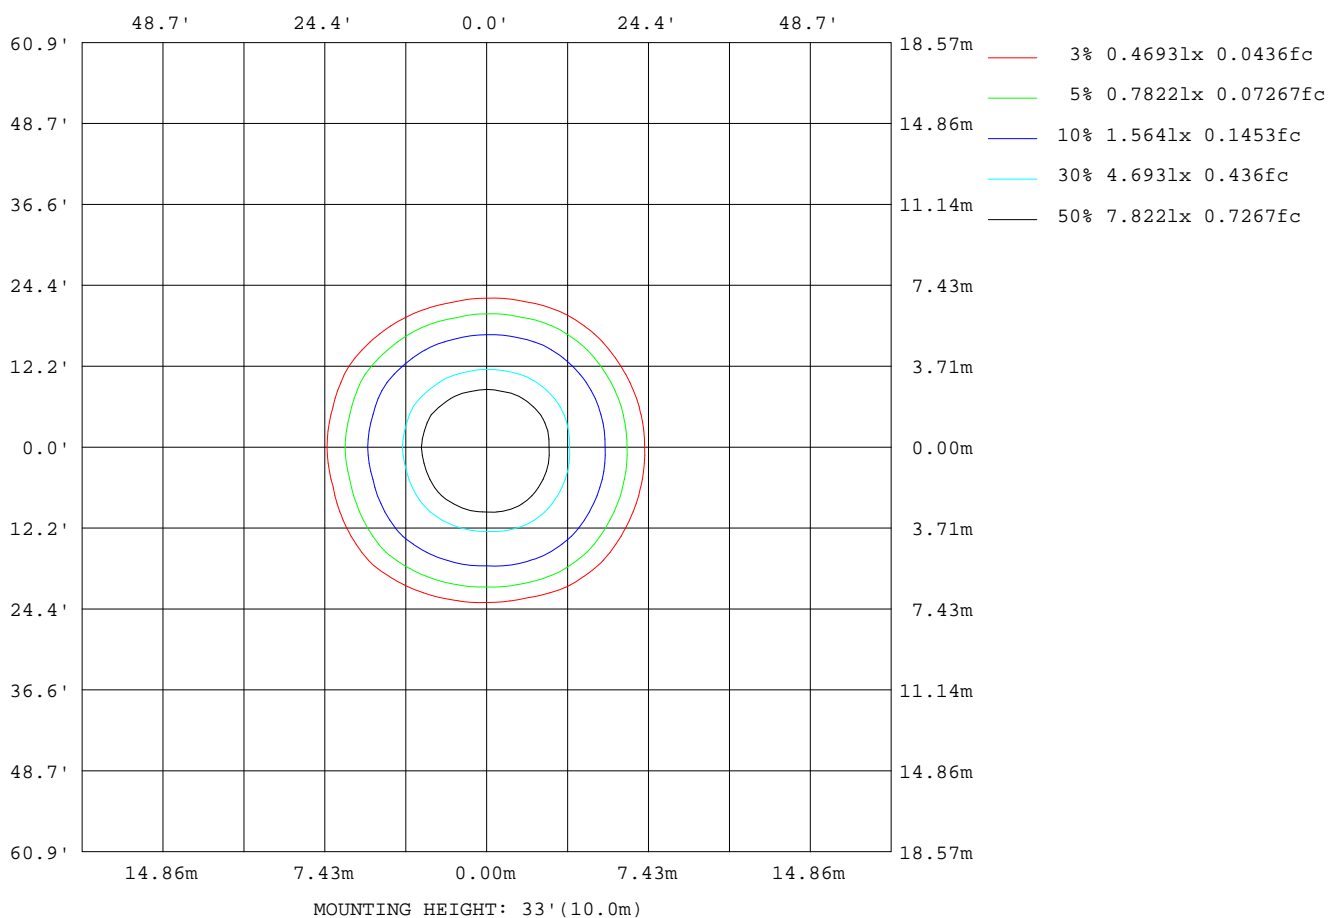

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Jason  
Test Date:2020-05-04

γ Range: 0 - 90DEG  
γ Interval: 0.5DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:58%  
Test Distance:5.850m [K=1.0000]  
Remarks:

### LED Avg.L Report

Test:U:48.00V I:0.1890A P:9.072W PF:1.000 Freq:0Hz Lamp Flux:656.136x1 lm		
NAME: ML26-AL280-9W-927-35	TYPE:Low Voltage Track System Module	
SPEC.:2700K	DIM.: L284mm*W22*H43mm	
MFR.: NEKO LIGHTING AG		


AvgL	cd/m2
L_0~180(65)av	41
L_0~180(75)av	43
L_0~180(85)av	106
L_90~270(65)av	47
L_90~270(75)av	45
L_90~270(85)av	118
L_45(65)av	39
L_45(75)av	42
L_45(85)av	104

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Jason  
Test Date:2020-05-04

γ Range: 0 - 90DEG  
γ Interval: 0.5DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:58%  
Test Distance:5.850m [K=1.0000]  
Remarks:

### Planar Illuminance Curve

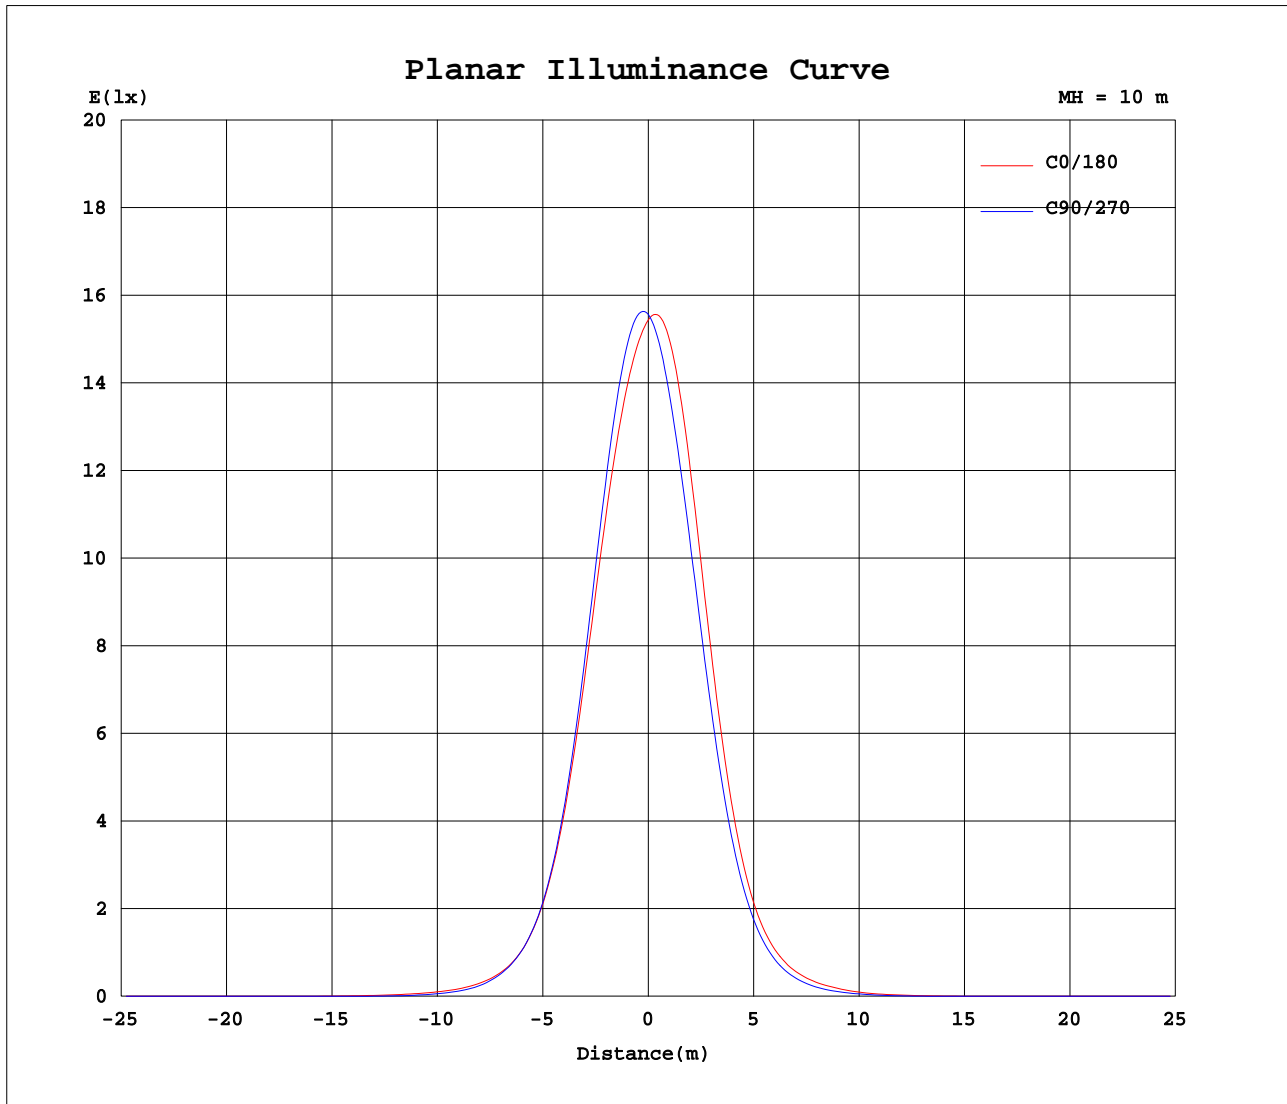

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: Jason  
Test Date: 2020-05-04

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 0.5DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity: 58%  
Test Distance: 5.850m [K=1.0000]  
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:58%
Test Distance:5.850m [K=1.0000]
Remarks:

```

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:58%
Test Distance:5.850m [K=1.0000]
Remarks:

```