

LED Recessed Ground Light EYE S-3025



Light Output Ratio:	100.0%	
Luminaire Power:	1.948 W	
SHR Nominal:	0.00	Calculated using the TM5
SHR Maximum:	1.00	fine grid method.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Cao Chengpei
Test Date: 2019-01-12


γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.288
Humidity: 53.0%
Test Distance: 5.850m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:24.00V I:0.0812A P:1.948W PF:1.000 Freq:0Hz Lamp Flux:139.25lx1 lm		
NAME: EYE S-3025	TYPE: Recessed Ground Light	SERIAL No.:
SPEC.: 3000K	DIM.: L55mm*W55mm*H70mm	
MFR.: NEKO LIGHTING AG		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 71.50 lm/W			
MODEL	CREE-3000K	I _{max} (cd)	549.9	S/MH(C0/180)	0.44
NOMINAL POWER(W)	2.0	LOR(%)	100.0	S/MH(C90/270)	0.37
RATED VOLTAGE(V)	24.0	TOTAL FLUX(lm)	139.25	η UP,DN(C0-180)	0.0,54.0
NOMINAL FLUX(lm)	139.251	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,46.0
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	24.0	η down(%)	100.0	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

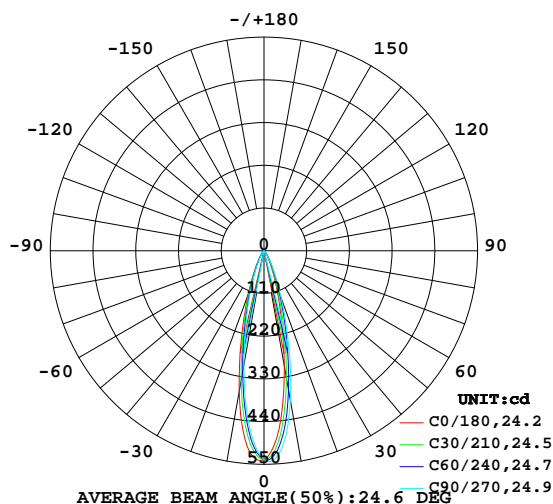

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

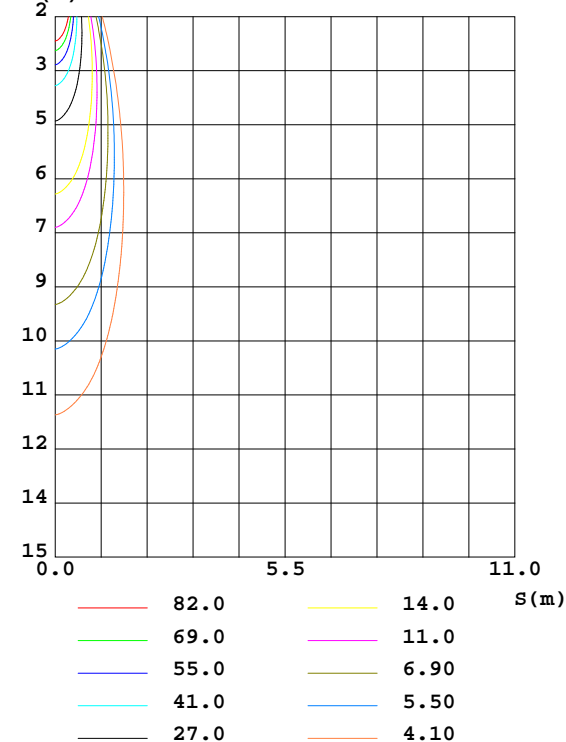

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Cao Chengpei
Test Date:2019-01-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.288
Humidity:53.0%
Test Distance:5.850m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	301.3	351.0	391.9	408.9	368.3	326.5	299.3	289.5	0- 10	41.31	41.31	29.7,29.7
20	85.40	111.3	128.9	142.3	120.4	98.59	92.29	86.36	10- 20	56.20	97.51	70,70
30	22.31	30.15	31.29	35.39	31.02	23.96	23.74	22.11	20- 30	26.48	124.0	89,89
40	6.737	9.153	8.222	8.301	8.292	6.834	6.963	6.513	30- 40	9.506	133.5	95.9,95.9
50	2.435	3.003	2.847	2.883	2.682	2.409	2.590	2.342	40- 50	3.645	137.1	98.5,98.5
60	0.7503	0.8873	0.9801	1.008	1.011	0.9689	0.9730	0.8458	50- 60	1.506	138.6	99.6,99.6
70	0.2445	0.1970	0.1407	0.2261	0.3167	0.2545	0.1545	0.2378	60- 70	0.5087	139.2	99.9,99.9
80	0.0355	0.0021	0.0086	0.0022	0.0416	0.0190	0.0021	0.0175	70- 80	0.0893	139.2	100,100
90	0.0021	0.0021	0.0042	0.0022	0.0021	0.0021	0.0021	0.0022	80- 90	0.0053	139.3	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 135.71 lm

%lum = 97.5%

%lamp = 97.5%

Conical surface Flux(120deg): 138.65 lm

%lum = 99.6%


%lamp = 99.6%

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Cao Chengpei
Test Date:2019-01-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.288
Humidity:53.0%
Test Distance:5.850m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.0812A P:1.948W PF:1.000 Freq:0Hz Lamp Flux:139.25lx1 lm		
NAME: EYE S-3025	TYPE: Recessed Ground Light	SERIAL No.:
SPEC.: 3000K	DIM.: L55mm*W55mm*H70mm	
MFR.: NEKO LIGHTING AG		

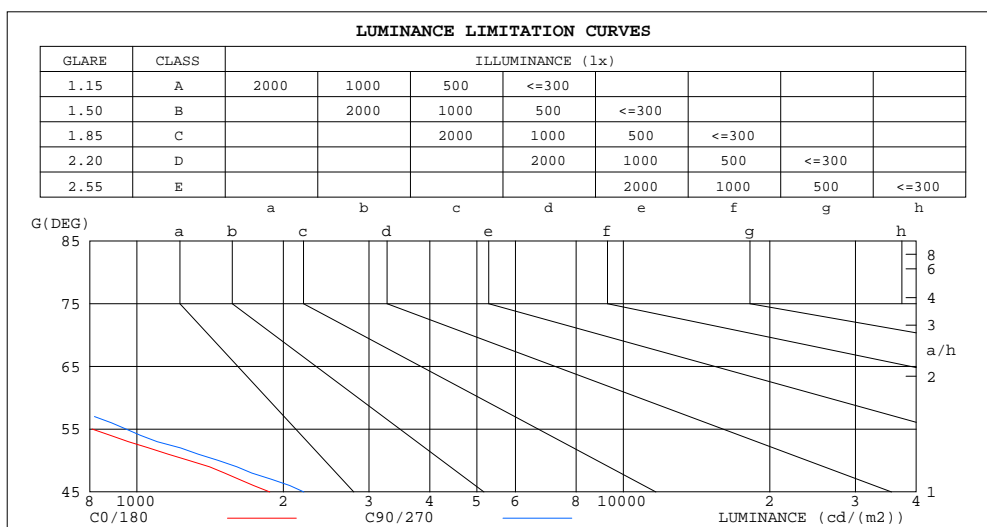

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	49	16
80	69	16
75	142	35
70	241	136
65	354	349
60	507	650
55	809	950
50	1278	1469
45	1875	2205


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Cao Chengpei
Test Date: 2019-01-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.288
Humidity: 53.0%
Test Distance: 5.850m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.0812A P:1.948W PF:1.000 Freq:0Hz Lamp Flux:139.25lx1 lm		
NAME: EYE S-3025	TYPE: Recessed Ground Light	SERIAL No.:
SPEC.: 3000K	DIM.: L55mm*W55mm*H70mm	
MFR.: NEKO LIGHTING AG		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.10	1.08	1.10	1.08	1.07	1.06	1.05	1.03	1.03	1.01	1.00	.99	.98	.97	.96
2.0	1.06	1.03	1.00	1.05	1.02	.99	1.02	.99	.97	.99	.97	.95	.96	.94	.93	.92
3.0	1.01	.97	.94	.90	.96	.93	.97	.94	.92	.95	.93	.90	.93	.91	.89	.88
4.0	.97	.92	.89	.96	.91	.88	.93	.90	.87	.92	.89	.86	.90	.87	.85	.84
5.0	.92	.88	.85	.92	.87	.84	.90	.86	.83	.88	.85	.83	.87	.84	.82	.81
6.0	.89	.84	.81	.88	.84	.81	.87	.83	.80	.85	.82	.79	.84	.81	.79	.78
7.0	.85	.81	.77	.85	.80	.77	.84	.80	.77	.83	.79	.77	.82	.78	.76	.75
8.0	.82	.78	.75	.82	.77	.74	.81	.77	.74	.80	.76	.74	.79	.76	.74	.72
9.0	.79	.75	.72	.79	.75	.72	.78	.74	.72	.77	.74	.71	.77	.73	.71	.70
10.0	.77	.72	.69	.76	.72	.69	.76	.72	.69	.75	.72	.69	.74	.71	.69	.68

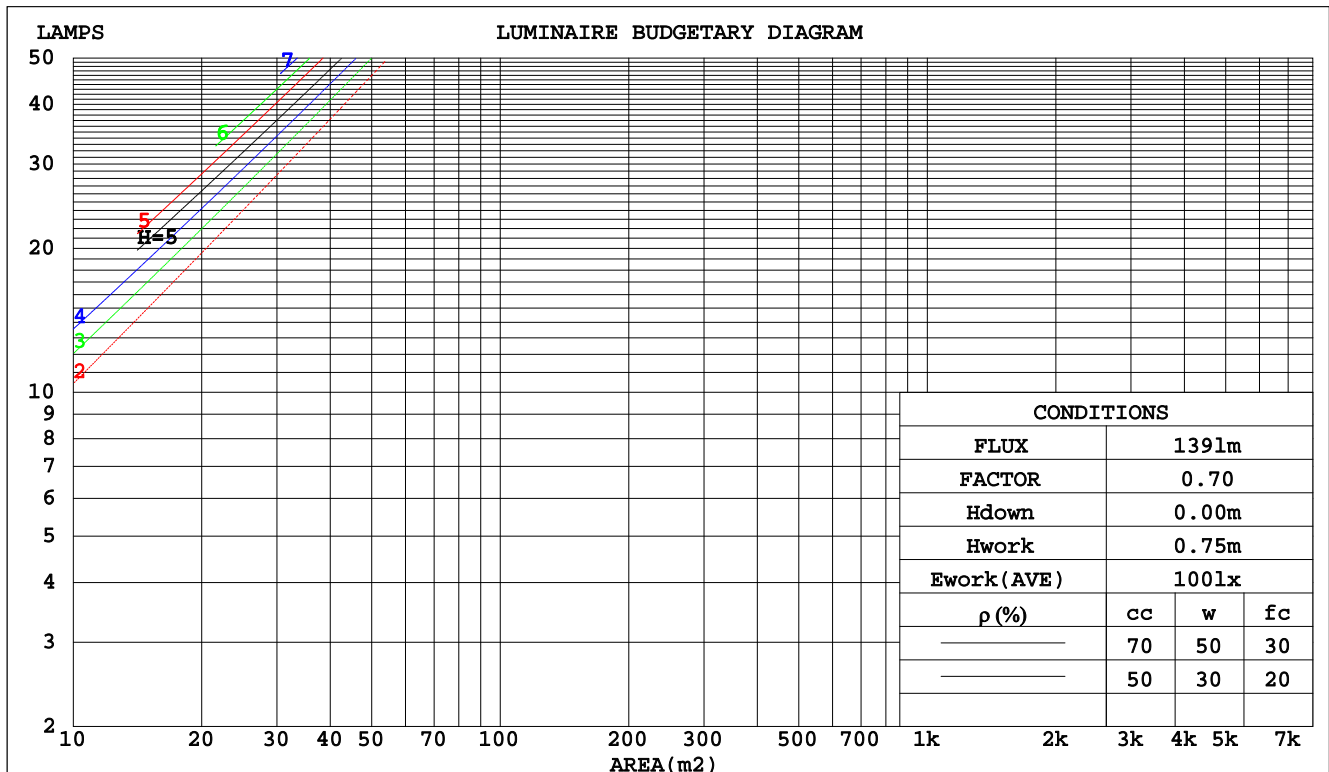

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Cao Chengpei
Test Date: 2019-01-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.288
Humidity: 53.0%
Test Distance: 5.850m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:24.00V I:0.0812A P:1.948W PF:1.000 Freq:0Hz Lamp Flux:139.25lx1 lm		
NAME: EYE S-3025	TYPE: Recessed Ground Light	SERIAL No.:
SPEC.: 3000K	DIM.: L55mm*W55mm*H70mm	
MFR.: NEKO LIGHTING AG		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.148	.084	.027	.141	.080	.026	.129	.074	.024	.117	.068	.022	.107	.062	.020	
2.0	.138	.076	.023	.133	.073	.023	.123	.068	.021	.113	.063	.020	.104	.059	.019	
3.0	.130	.069	.021	.125	.067	.020	.117	.063	.019	.109	.060	.018	.101	.056	.017	
4.0	.122	.064	.019	.119	.062	.018	.111	.059	.018	.104	.056	.017	.098	.053	.016	
5.0	.116	.059	.017	.112	.058	.017	.106	.055	.016	.100	.053	.016	.095	.051	.015	
6.0	.110	.055	.016	.107	.054	.016	.101	.052	.015	.096	.050	.015	.092	.048	.014	
7.0	.104	.052	.015	.102	.051	.014	.097	.049	.014	.093	.048	.014	.088	.046	.014	
8.0	.100	.049	.014	.097	.048	.014	.093	.047	.013	.089	.045	.013	.086	.044	.013	
9.0	.095	.046	.013	.093	.045	.013	.090	.044	.013	.086	.043	.012	.083	.042	.012	
10.0	.091	.044	.012	.089	.043	.012	.086	.042	.012	.083	.041	.012	.080	.040	.012	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.169	.158	.147	.145	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.016		
2.0	.152	.133	.117	.130	.114	.101	.089	.079	.070	.051	.046	.041	.016	.015	.013		
3.0	.138	.113	.094	.118	.098	.082	.081	.068	.057	.047	.040	.034	.015	.013	.011		
4.0	.126	.098	.077	.108	.085	.067	.074	.059	.047	.043	.035	.028	.014	.011	.009		
5.0	.116	.086	.064	.099	.074	.056	.068	.052	.039	.040	.031	.023	.013	.010	.008		
6.0	.107	.076	.054	.092	.066	.047	.063	.046	.033	.037	.027	.020	.012	.009	.007		
7.0	.100	.068	.046	.086	.059	.040	.059	.041	.028	.034	.024	.017	.011	.008	.006		
8.0	.093	.062	.040	.080	.053	.035	.056	.037	.025	.032	.022	.015	.010	.007	.005		
9.0	.088	.056	.035	.076	.049	.030	.052	.034	.021	.031	.020	.013	.010	.007	.004		
10.0	.083	.051	.030	.072	.045	.026	.050	.031	.019	.029	.019	.011	.009	.006	.004		

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Cao Chengpei
Test Date: 2019-01-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.288
Humidity: 53.0%
Test Distance: 5.850m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.0812A P:1.948W PF:1.000 Freq:0Hz Lamp Flux:139.25lx1 lm										
NAME: EYE S-3025					TYPE: Recessed Ground Light			SERIAL No.:		
SPEC.: 3000K					DIM.: L55mm*W55mm*H70mm					
MFR.: NEKO LIGHTING AG										
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	12.9	13.6	13.1	13.8	13.9	15.4	16.2	15.7	16.3	16.5
3H	12.8	13.5	13.1	13.7	13.9	15.3	16.0	15.6	16.2	16.4
4H	12.8	13.4	13.0	13.6	13.8	15.2	15.9	15.5	16.1	16.3
6H	12.7	13.3	13.0	13.5	13.8	15.2	15.8	15.4	16.0	16.2
8H	12.7	13.2	13.0	13.5	13.7	15.1	15.7	15.4	15.9	16.2
12H	12.6	13.2	12.9	13.4	13.7	15.1	15.6	15.4	15.9	16.2
4H 2H	12.8	13.5	13.1	13.7	13.9	15.3	15.9	15.5	16.1	16.3
3H	12.8	13.3	13.1	13.6	13.9	15.1	15.7	15.5	16.0	16.2
4H	12.7	13.2	13.1	13.5	13.8	15.0	15.6	15.4	15.9	16.2
6H	12.6	13.1	13.0	13.4	13.7	14.9	15.4	15.3	15.7	16.1
8H	12.6	13.0	13.0	13.3	13.7	14.9	15.3	15.3	15.7	16.0
12H	12.5	12.9	12.9	13.3	13.7	14.8	15.2	15.2	15.6	16.0
8H 4H	12.6	13.0	13.0	13.3	13.7	14.9	15.3	15.3	15.7	16.0
6H	12.5	12.8	12.9	13.2	13.6	14.8	15.1	15.2	15.5	15.9
8H	12.4	12.7	12.8	13.1	13.6	14.7	15.0	15.2	15.5	15.9
12H	12.3	12.6	12.8	13.0	13.5	14.7	14.9	15.1	15.4	15.8
12H 4H	12.5	12.9	12.9	13.3	13.7	14.8	15.2	15.2	15.6	16.0
6H	12.4	12.7	12.8	13.1	13.6	14.7	15.0	15.2	15.5	15.9
8H	12.3	12.6	12.8	13.0	13.5	14.7	14.9	15.1	15.4	15.8
Variations with the observer position at spacings:										
S = 1.0H	+ 2.6 / - 4.5					+ 2.6 / - 6.2				
1.5H	+ 3.6 / - 3.3					+ 3.7 / - 3.5				
2.0H	+ 4.0 / - 4.0					+ 4.7 / - 5.8				

CIE Pub.117, 139.3 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = -6.8$)

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Cao Chengpei
Test Date: 2019-01-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.288
Humidity: 53.0%
Test Distance: 5.850m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.00V I:0.0812A P:1.948W PF:1.000 Freq:0Hz Lamp Flux:139.25lx1 lm		
NAME: EYE S-3025	TYPE: Recessed Ground Light	SERIAL No.:
SPEC.: 3000K	DIM.: L55mm*W55mm*H70mm	
MFR.: NEKO LIGHTING AG		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	79	88	83	79	88	82	79	76
0.80	96	91	87	96	90	87	94	90	87	83
1.00	100	95	92	100	95	91	98	94	91	87
1.25	104	99	96	103	99	96	101	97	95	91
1.50	107	102	99	106	102	99	103	100	98	93
2.00	109	105	102	108	104	101	105	102	100	95
2.50	111	107	104	109	106	103	106	104	102	96
3.00	112	109	106	110	108	105	107	105	103	97
4.00	114	112	109	112	110	108	109	107	105	98
5.00	115	113	112	113	111	110	109	108	107	99
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Cao Chengpei
 Test Date: 2019-01-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.288
 Humidity: 53.0%
 Test Distance: 5.850m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.0812A P:1.948W PF:1.000 Freq:0Hz Lamp Flux:139.25lx1 lm		
NAME: EYE S-3025	TYPE: Recessed Ground Light	SERIAL No.:
SPEC.: 3000K	DIM.: L55mm*W55mm*H70mm	
MFR.: NEKO LIGHTING AG		

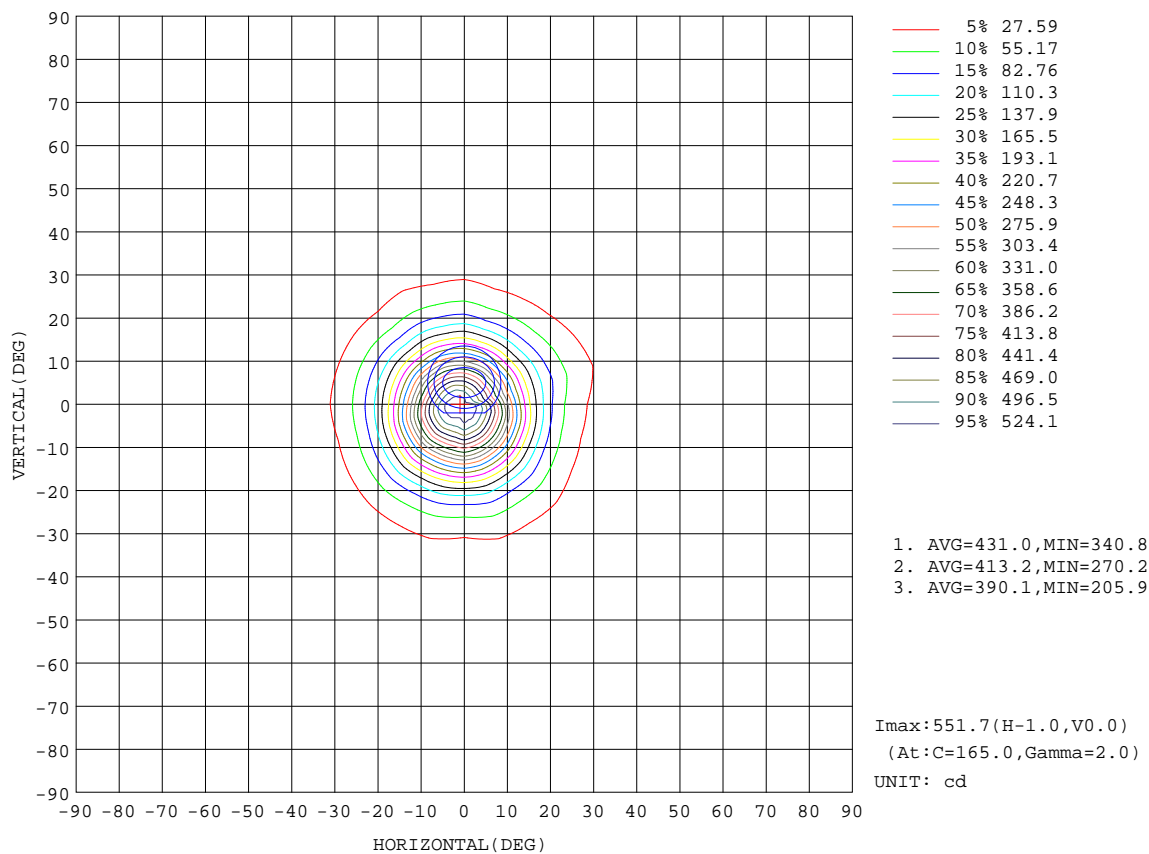


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Cao Chengpei
Test Date: 2019-01-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.288
Humidity: 53.0%
Test Distance: 5.850m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.0812A P:1.948W PF:1.000 Freq:0Hz Lamp Flux:139.25lx1 lm		
NAME: EYE S-3025	TYPE: Recessed Ground Light	SERIAL No.:
SPEC.: 3000K	DIM.: L55mm*W55mm*H70mm	
MFR.: NEKO LIGHTING AG		

Flux out: 60.74 lm

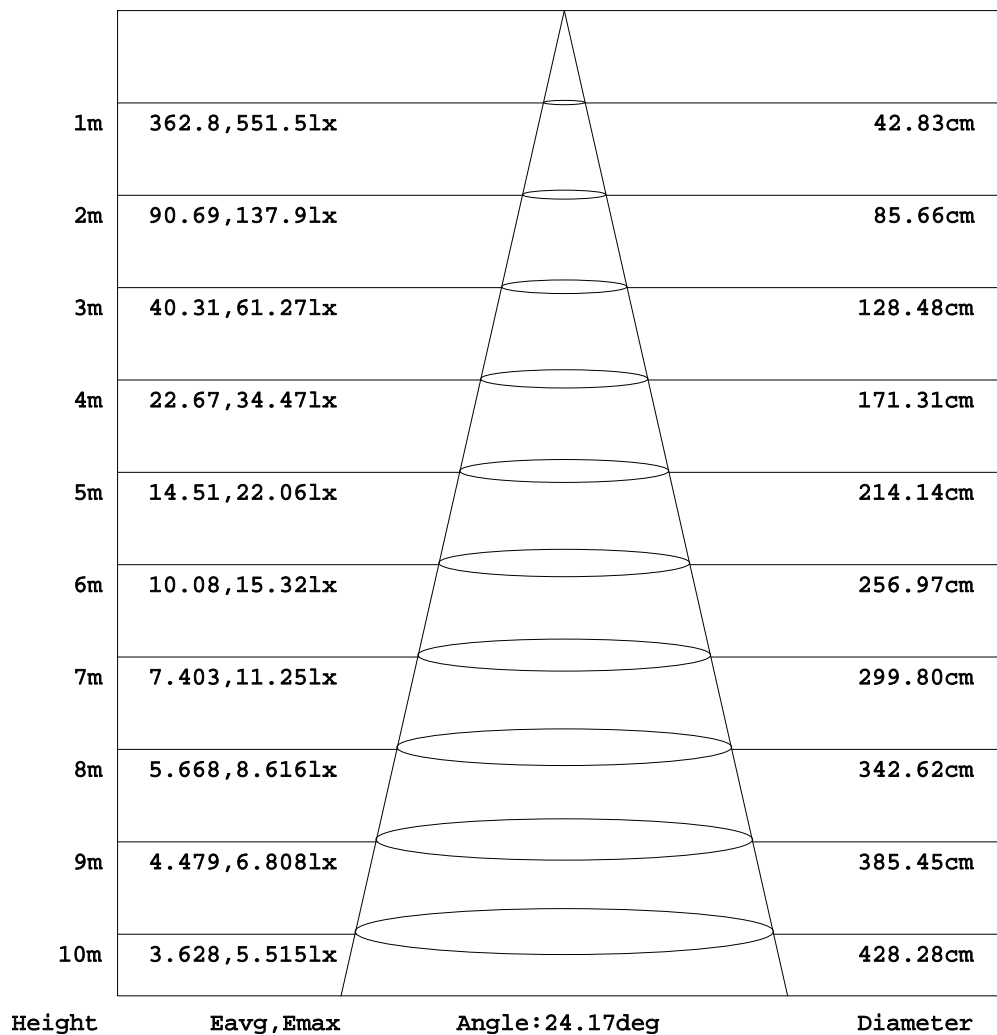


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Cao Chengpei
Test Date: 2019-01-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.288
Humidity: 53.0%
Test Distance: 5.850m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.0812A P:1.948W PF:1.000 Freq:0Hz Lamp Flux:139.25lx 1m		
NAME: EYE S-3025	TYPE: Recessed Ground Light	SERIAL No.:
SPEC.: 3000K	DIM.: L55mm*W55mm*H70mm	
MFR.: NEKO LIGHTING AG		

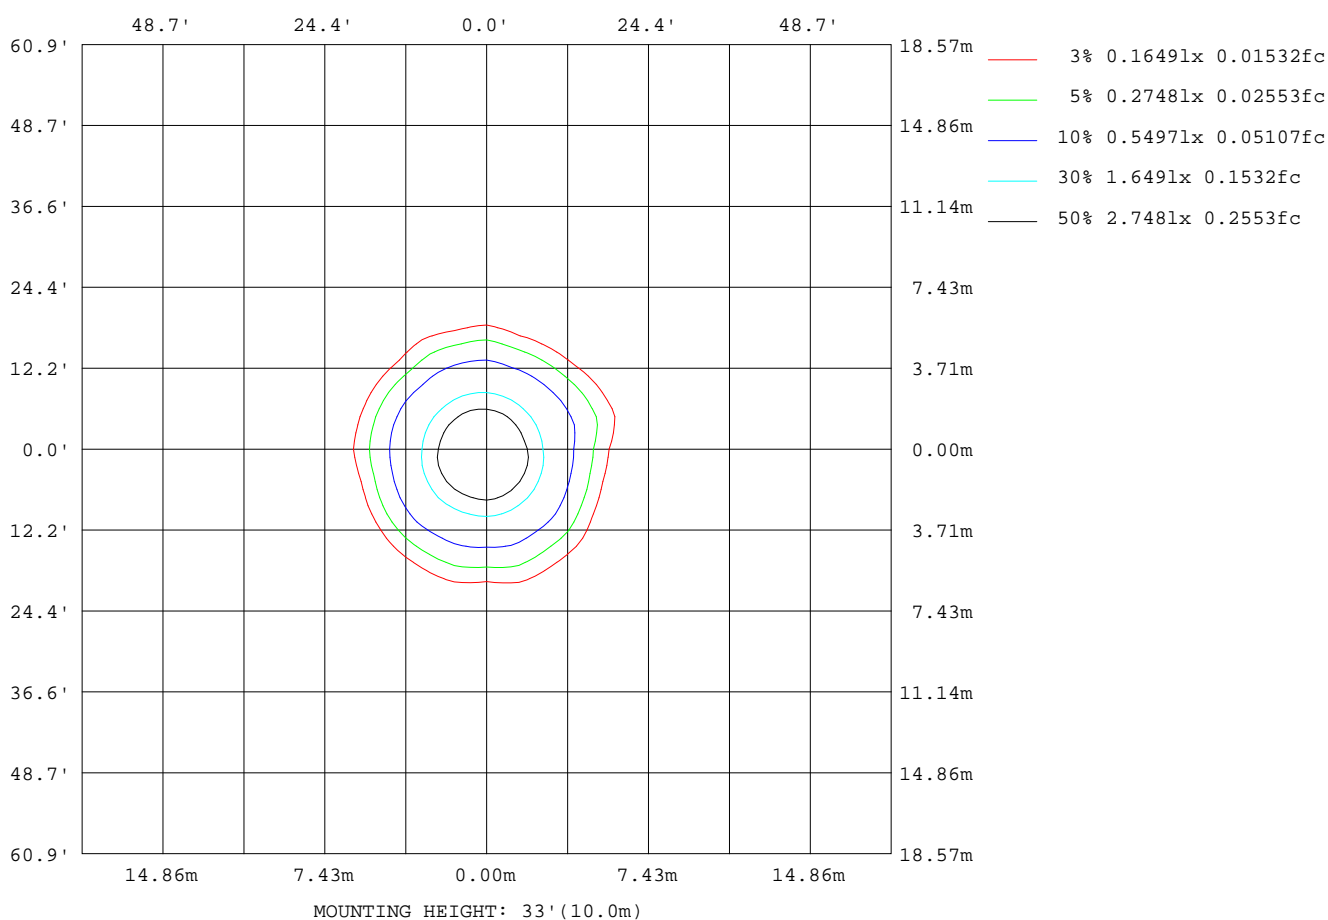

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Cao Chengpei
Test Date: 2019-01-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.288
Humidity: 53.0%
Test Distance: 5.850m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:24.00V I:0.0812A P:1.948W PF:1.000 Freq:0Hz Lamp Flux:139.25lx1 lm		
NAME: EYE S-3025	TYPE: Recessed Ground Light	SERIAL No.:
SPEC.: 3000K	DIM.: L55mm*W55mm*H70mm	
MFR.: NEKO LIGHTING AG		


AvgL	cd/m2
L_0~180(65)av	394
L_0~180(75)av	168
L_0~180(85)av	28
L_90~270(65)av	348
L_90~270(75)av	35
L_90~270(85)av	12
L_45(65)av	397
L_45(75)av	57
L_45(85)av	8

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Cao Chengpei
Test Date: 2019-01-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.288
Humidity: 53.0%
Test Distance: 5.850m [K=1.0000]
Remarks:

Planar Illuminance Curve

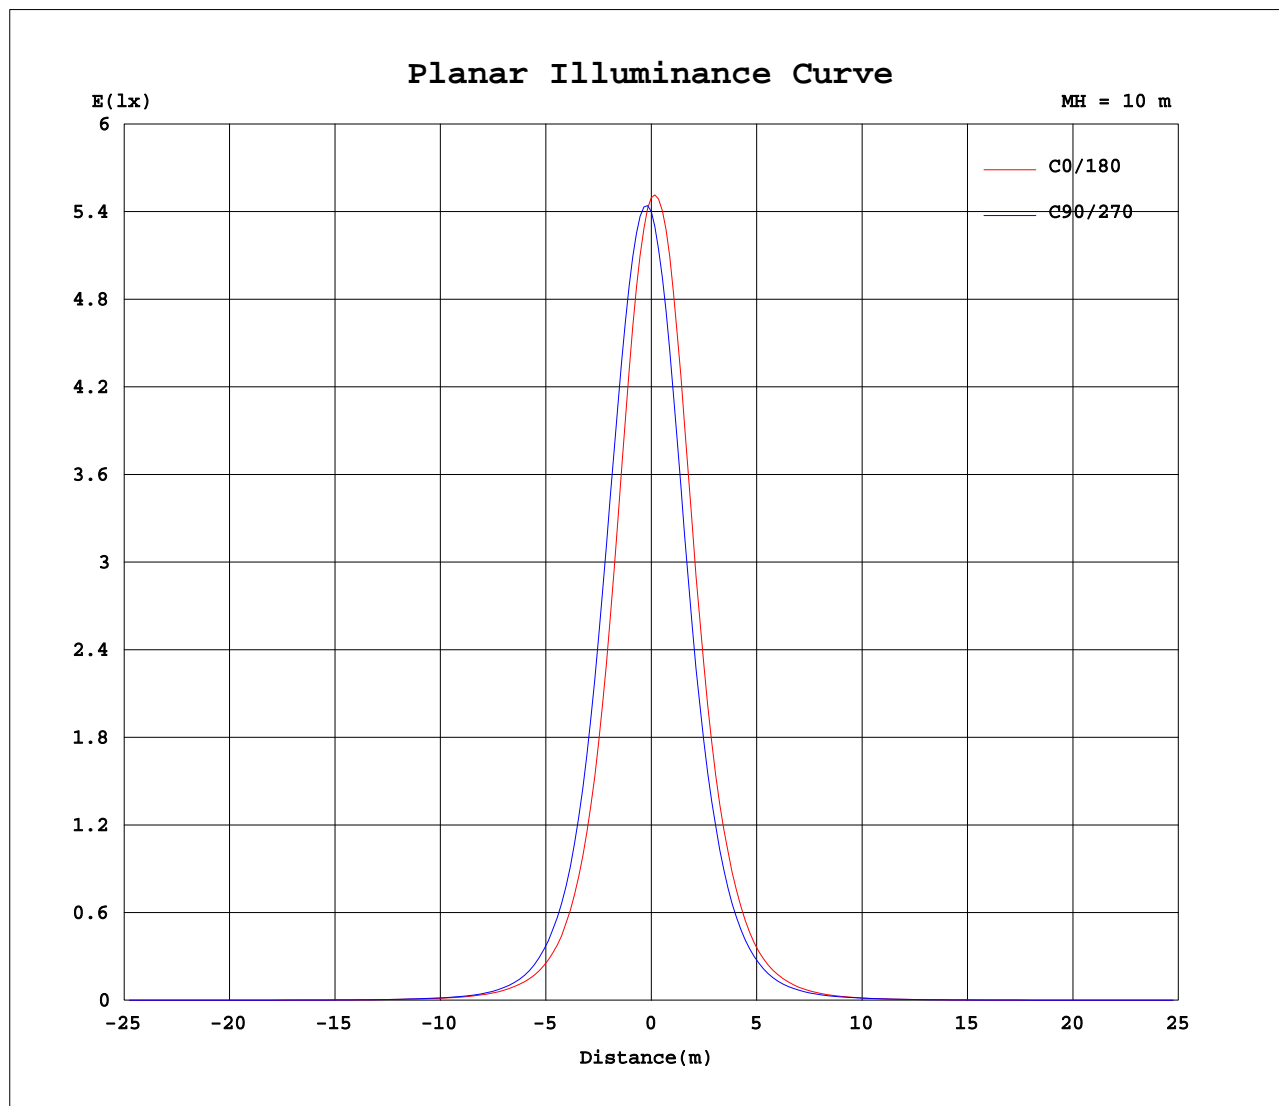

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Cao Chengpei
Test Date: 2019-01-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.288
Humidity: 53.0%
Test Distance: 5.850m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.288
Humidity:53.0%
Test Distance:5.850m [K=1.0000]
Remarks:

```

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.288
Humidity:53.0%
Test Distance:5.850m [K=1.0000]
Remarks:

```